

► Code Number

0375267

► Description

Eight input/output field-programmable control module to control lavatories, water closets, showers or combination fixtures.

► Specifications

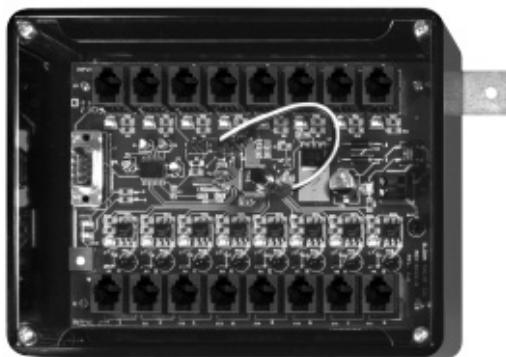
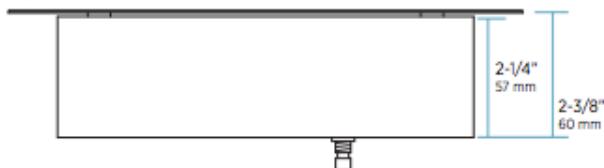
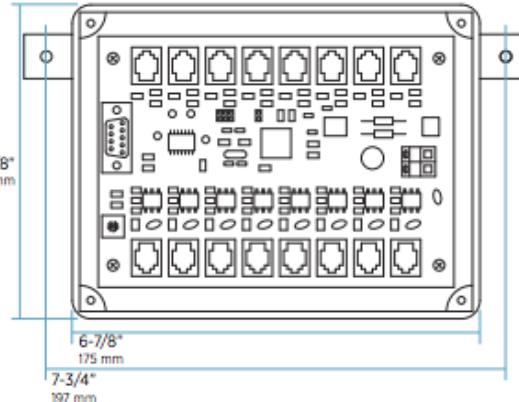
- Operating temperature: 0°C to 85°C
- Input (push button) voltage: 5 VDC
- Output (solenoid) voltage: 24 VAC
- PC Board conformably coated to resist moisture and dust
- RJ-11, 6 position, 4 pin connections for push buttons and solenoids
- Diagnostic LED at each input and output connection
- Potentiometer on PC Board allows for adjustment of run-times or lock-out times depending on program variation
- Includes mounting hardware
- Serial port for Handheld connection
- Easy access Reset Button
- Available in five pre-programmed configurations
- 24 VAC – 50/60 Hz operating voltage
- Can be installed up to 200 feet away from 24 VAC power supply

► Program Configurations

Pre-tempered Showers with adjustable runtime. Factory set for 3-minute runtime.

► Accessories (Sold Separately)

PWT Handheld Software (not included)

**► ROUGH-IN****► Compliance & Certifications**

This space for Architect/Engineer Approval