





Pendular

- Excellent Precision & Versatile Material Spread Action Such as High-Moisture (up to 30%) & Powdered Fertilizer
- Category 1 & 2 Hitch
- Stainless Steel Bottom
- Strong Tubular Frame & Heavy Polyethylene Hopper

SQTF SERIES

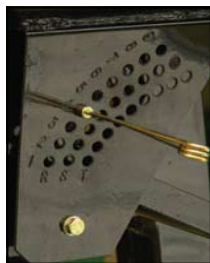

Easily Change the Discharge Rate



3 Possible Spread Patterns




Optional Equipment



Salt & Sand Chute
Specifically Designed For Salt & Sand




Rubber Chute Insert
For Damp Material

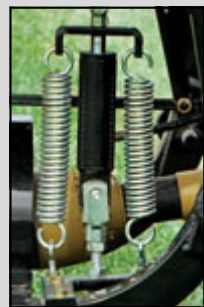

Hydraulic Lever Control
Control Spreader Gate From the Tractor Seat



Agitator Extension
Helps Maintain Consistent Flow By Breaking Down Clumps & Minimizing Compaction

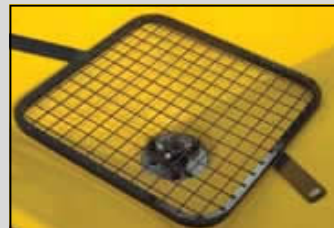

Grate Filter
Helps Against Clods & Undesirable Particles From Entering the Discharge Chute

Model	SQTF-600	SQTF-800	SQTF-1000
Max. Capacity	1,402 lbs.	2,169 lbs.	2,645 lbs.
Unit Dimensions (HxWxL)	38" x 59" x 59"	43" x 59" x 59"	47" x 59" x 59"
Spread Swath (Granulated)	39' - 46'	39' - 46'	39' - 46'
Spread Swath (Powdered)	16' - 19'	16' - 19'	16' - 19'
Weight	322 lbs.	340 lbs.	344 lbs.

SPREADERS



No Matter what your spreading needs are, Tar River Implements has you covered! We offer several options for a variety of applications from spreading seed and fertilizer around your lawn or food plot with an ATV to precise spreading on blueberry farms and vineyards. These spreaders are designed and engineered to help you maximize efficiency and productivity!



Distributed By:

Belco Resources Equipment
P.O. Box 8164
Rocky Mount, NC 27804
Tel: 252-442-0700
Web: www.br-equipment.com
Email: sales@brglimited.com




Authorized Dealer:



Pull-Type

- Adjustable Towing Hitch
- High Floatation Tires
- Powder-coated Steel Frame and Hopper
- Heavy-Duty Steel Gears in Gearbox
- Simple & Adjustable Left - Center - Right Spread Pattern
- Optional Deflector Shield

**PTS
SERIES**

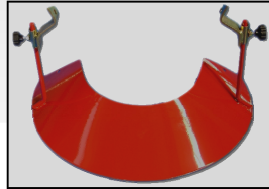

Model	PTS-100	PTS-160
Max. Capacity	275 lbs.	413 lbs.
Height	40"	44"
Spread Swath	20'	20'
Weight	125 lbs.	132 lbs.



Three-Point Hitch

- Durable "No-Rust" Poly Hopper
- Category. 1 Hitch
- Simple & Adjustable Left - Center - Right Spread Pattern
- Galvanized Spin Disc with Multi-Position Adjustable Fins
- Standard Agitator Ensures Maximum Spreading Action
- Optional Blender Auger (SBL-001) for SSP-400

**SSP
SERIES**



Standard Agitator



Optional Blender Auger


Model	SSP-250	SSP-400
Max. Capacity	575 lbs.	860 lbs.
Height	39"	44"
Spread Swath	49'	49'
Weight	123 lbs.	128 lbs.



Compact SIDE-SHOT

- Designed for spreading fertilizer and salt
- Category 1 & 2 Hitch
- Stainless Steel Bottom
- Material shoots out of both left and right sides
- Standard Grate Filter & Hydraulic Lever Control for Spreader Gate

**SR
SERIES**

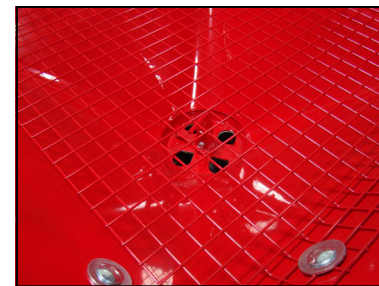

Standard Grate Filter



Standard Hydraulic Lever Control for Spreader Gate

Model	SR-600	SR-800
Max. Capacity	1,719 lbs.	2,204 lbs.
Height x Width	38" x 51"	40" x 55"
Spread Swath	26' - 59'	26' - 59'
Weight	229 lbs.	264 lbs.



More Great TAR RIVER Products

- Gear Drive Rotary Tillers
- Rotary Cutters
- Finishing Mowers
- Fertilizer Spreaders
- Wood Chippers
- Loader Attachments