




Thermaflex®

S-LP-10 Non-Insulated Flexible Air Connector for All Pressure Systems

CODES/STANDARDS		Listed and labeled by Underwriters' Laboratories, Inc., as a Class I Air Duct, Standard 181. It complies with the latest NFPA Bulletins 90A and 90B. Meets FHA and other U.S. government agency standards. Flame spread: not over 25. Smoke developed: not over 50.										
FABRIC TYPE		Coated fiberglass woven fabric.										
TEMPERATURE RANGE		-20° F to 250° F.										
SIZES, ID		2	3	4	5	6	7	8	9	10	12	14
LENGTH (feet)		25 ft.										
INSIDE BEND RADIUS (inches)		2	3	4	5	6	7	8	9	10	12	14
STEEL WIRE		Coated spring steel wire helix										
RATED VELOCITY		5000 fpm										
MAX RATED PRESSURE (inches water column)	POSITIVE	All Sizes - 10" w.g.										
	NEGATIVE	All Sizes - 1" w.g.										

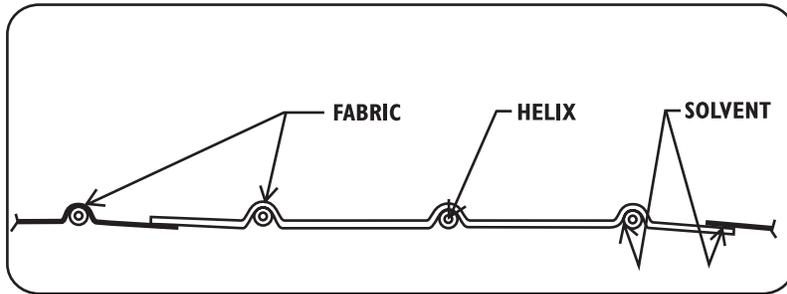

JOB _____	
LOCATION _____	P.O. NO. _____
ENGINEER _____	JOB NO. _____
CONTRACTOR _____ Certified Correct	REPRESENTATIVE _____ Approved for Construction
BY _____	BY _____
TITLE _____	TITLE _____
DATE _____	DATE _____

THERMAFLEX®

A Division of Flex-Tek Group, a subsidiary of Smiths Group plc.

NATIONAL SALES HEADQUARTERS
P.O. Box 927 (381 Carwellyn Rd.)
Abbeville, SC 29620
800-459-4822

CANADA
4610 Eastgate Pkwy, Unit 3
Mississauga, Ontario L4W 3W6
905-602-9660

