

Tech Data

Viega PureFlow® Press Stop Valves



Description

Viega zero lead stop valves are available in straight and angled configurations. The valve bodies are manufactured from Eco Brass® and feature Teflon® seals with EPDM and FKM stem seals.

Features

- Plated Brass Ball
- PTFE Seals
- Nickel Plated Brass Stem
- EPDM & FKM Stem Seals

Ratings

- Temperature Range: 0°F - 180°F
- Max. Operating Pressure: 160 psi



This document is subject to updates. For the most current Viega technical literature please visit www.viega.us.



Viega products are designed to be installed by licensed and trained plumbing and mechanical professionals who are familiar with Viega products and their installation. **Installation by non-professionals may void Viega LLC's warranty.**



Zero lead identifies Viega products meeting the lead free requirements of NSF 61-G through testing under NSF/ANSI 372 (0.25% or less maximum weighted average lead content.)

Approvals



■ cCSAus



■ UPC®


- NSF / ANSI 61-G
- NSF / ANSI 372
- ASTM F877

Component

Material


Component	Material
Body	Chrome Plated Brass
Ball	Plated Brass
Seat	PTFE
Stem	Nickel Plated Brass
Stem Seals	EPDM & FKM
Handle	Nickel Plated Zinc

Viega PureFlow Press Stop Valve Straight Zero Lead Chrome Plated Brass P x CTS 1/4 Turn - Model 2842.3ZL

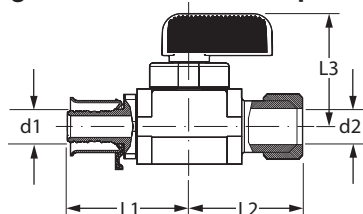

Part No.	Size (in) 1 x 2	L1 (in)	L2 (in)	L3 (in)
94023	3/8 x 1/4 CTS (3/8 OD) Comp	2.53	1.20	1.20
94031	1/2 x 1/4 CTS (1/2 OD) Comp	2.51	1.20	1.20

Viega PureFlow Press Stop Valve Angled Zero Lead Chrome Plated Brass P x CTS 1/4 Turn - Model 2842.4ZL



Part No.	Size (in) 1 x 2	L1 (in)	L2 (in)	L3 (in)
93515	3/8 x 1/4 CTS (3/8 OD) Comp	2.51	1.03	1.20
93511	1/2 x 1/4 CTS (1/2 OD) Comp	2.51	1.03	1.20



Viega LLC

585 Interlocken Blvd.
Broomfield, CO 80021

Phone (800) 976-9819
www.viega.us

TD-PF 1119 PureFlow Press Stop Valves

viega