




Z1201-N_4-XB

BARIATRIC CARRIER - 1000 lbs [454 kg]
 EZCARRY® ADJUSTABLE HORIZONTAL HIGH PERFORMANCE
 SIPHON JET NO-HUB WATER CLOSET CARRIER SYSTEM

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

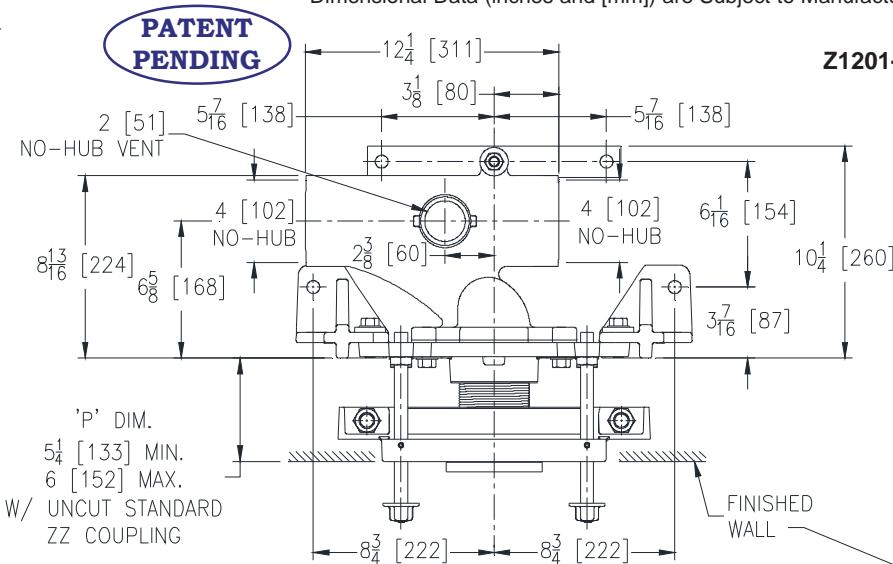


Z1201-NR4-XB Illustrated

Product Number	Approx. Wt. lbs [kg]
Z1201-NL4-XB	100 [45]
Z1201-NR4-XB	

Note:

1. Cut ZZ coupling, Min. 'P' Dim. Obtainable = 3 [76]
2. Feet bolted to floor using min. 1/2 [13] dia. anchors.
3. Rear anchor assembly required for secure installation.
4. Floor anchors must each be able to withstand a pull-out force of 748 lbs [339 kg].
5. Pull-out forces are calculated values with standard coupling assembly. No safety factor has been applied. See Form # C38 for more information.

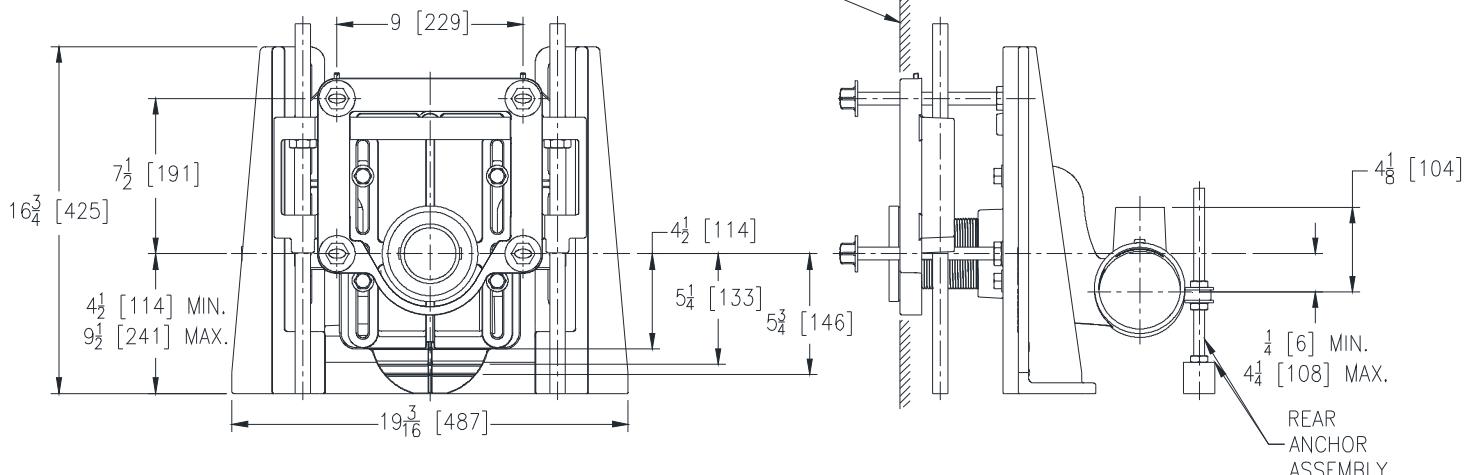

ENGINEERING SPECIFICATION: ZURN Z1201-N_4-XB

EZCarry® Bariatric horizontal siphon jet water closet carrier system, with high performance Dura-Coated cast iron main fitting with hydro-mechanically optimized sweep, 4" [102 mm] no-hub connections, and extended 2" [51 mm] vent. Corrosion resistant, adjustable 3" [76mm] X 6" [102mm] cast iron coupling, designed to increase flow velocity and line carry, and labor saving "Neo-Seal" bonded gasket optimizes flow performance while reducing installation steps. Complete system includes an adjustable, gasketed faceplate; floor mounted foot supports; rigid support frame assembly; extra-heavy-duty 1/2" [13 mm] rear anchor tie down; fixture bolts, trim, and stud protectors. EZCarry® XB system complies with all applicable requirements of ASME A112.6.1M up to a 1000 lbs [454 kg] maximum static load.

OPTIONS (Check/specify appropriate options)

Z1201-NL4-XB 4 [102] No-Hub Left Hand Inlet with Flow to Right
 Z1201-NR4-XB 4 [102] No-Hub Right Hand Inlet with Flow to Left

PREFIXES

Z D.C.C.I. System with Zurn ZZ Adjustable Coupling*

SUFFIXES

<input type="checkbox"/> -CC Corrosion Resistant Cast Iron Coupling (2-1/4 to 12 [57 to 305])	<input type="checkbox"/> -JC 2 [51] Auxiliary Inlet with 1/8 [3] Bend
<input type="checkbox"/> -G Galvanized Cast Iron	<input type="checkbox"/> -VP Vandal-Proof Trim
	<input type="checkbox"/> -50 Flush Valve Supply Support for Water Closets

* Regularly furnished unless otherwise specified.

Zurn Industries, LLC | Specification Drainage Operation

1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929

In Canada | Zurn Industries Limited

3544 Nashua Drive, Mississauga, Ontario L4V 1L2 · Ph. 905-405-8272, Fax 905-405-1292

www.zurn.com

Rev. b

Date: 7/12/16

C.N. No. 134761

Prod. | Dwg. No. Z1201-N_4-XB