

HI-UNI 12K, SEER2 21, -20C, 230V

Hisense
COMFORT

Submittal Data: IDU: AST-12UW3SXG**01B ODU: AUW-12U3SS
Smart 1:1 Universal 12,000 BTU/H, Wall-Mounted Heat Pump System

Job Name:	Location:		
Purchaser:	Submitted by:		
Submitted to:	Reference:	Approval:	Construction:
Engineer:	Date:	Application:	

Key Features:

- 1: Energy star compliance.
- 2: Integrated Wi-Fi plus the ConnectLife smart app with Alexa and Google Assistant control put easy operation right at your fingertips.
- 3: Low temp heating: -13°F (-25°C)* for 3 hours. Low temp cooling: 5°F (-15°C).
- 4: Longer lineset availability.
- 5: Anti corrosion heat exchanger for Hassle-free operation.
- 6: Outdoor condenser base pan electric heater.
- 7: Easy installation with left and right hand condensate drain connection.
- 8: Hisense "I feel" sequence available with remote controller.
- 9: Washable High Definition Filter.
- 10: Auto restart in power loss.
- 11: Indoor Self-Cleaning with "Hisense Frost Clean" technology.
- 12: Optional wired room controller.
- 13: Fan finger guard protection.

Contact your local Hisense Partner for complete list of accessories

Images provided for reference purposes only



Performance & Efficiency:

Cooling at 95°F	Rated Cooling Capacity	Btu/h	12,000
	Minimum Cooling Capacity	Btu/h	4,685
	Maximum Cooling Capacity	Btu/h	14,115
	Rated Input-Cooling	Kw	0.92
	SEER2	Btu/w	21.50
	EER2	Btu/w	13.10
Heating at 47°F	Rated Heating Capacity	Btu/h	12,000
	Minimum Heating Capacity	Btu/h	4,893
	Maximum Heating Capacity	Btu/h	12,000
	Rated Input-Heating	Kw	1.08
	HSPF2	Btu/w	9.00
	COP (47F)		3.24
Heating at -8.3 °C (17°F AHRI)	Rated Heating Capacity	Btu/h	8,000
	Max Heating Capacity	Btu/h	10,086
Heating at -15 °C (5 °F)	Rated Heating Capacity	Btu/h	8,500
	Max Heating Capacity	Btu/h	8,500
	COP Maximum (5F)		1.89
Heating at -30 °C (-22 °F)	Max Heating Capacity	Btu/h	7,172

Outdoor Operating Temperature Range:

Working Temperature Range - Cooling	(°C/°F)	-15°C-48°C; (5°F-118°F)
Working Temperature Range - Heating	(°C/°F)	-20°C-24°C; (-4°F-75°F)

Electrical:

Power Supply		208 - 230v/1Ph/60Hz
Required Voltage Range	VAC	187 - 253
Min.Circuit Ampacity	A	12
Max Fuse Size/Fusible Max.	A	15
Rated Current	Cooling (A)	4
	Heating (A)	5

Indoor Unit Specifications:

Power Supply	VAC	Powered by outdoor unit
Fan Motor Output	W	25
Fan Motor Speed (H/M/L)	RPM	1150/990/800
Moisture Removal	L/H.r	1.2
Air Circulation (Ultra\High\Medium\Low)	m3/h	670/620/530/430
Sound Pressure (Highest/H/M/L/Silence)	dB (A)	42/39/32/29/26
Net Dimensions WxHxD	mm	860 × 285 × 216
	in.	33-7/8 × 11-1/4 × 8-1/2
	mm	930 × 380 × 285
Package Dimensions WxHxD	in.	36-5/8 × 15 × 11-2/8
	Kg	8.5 / 11.0
Net/Gross Weight	Lbs	18.7 / 24.3
Liquid Pipe	in.	1/4
Gas Pipe	in.	3/8

Hisense
COMFORT

Submittal Data: IDU: AST-12UW3SXG**01B ODU: AUW-12U3SS
Smart 1:1 Universal 12,000 BTU/H, Wall-Mounted Heat Pump System

Outdoor Unit Specifications:

Refrigerant Type		R410A
Refrigerant R410a charge volume	g/oz	1300/45.9
Refrigerant pre-charge	ft.	25
Additional charge per ft.	oz	1.23
Liquid Pipe	in.	1/4
Gas Pipe	in.	3/8
Maximum Piping Length	ft.	82
Maximum Height Difference	ft.	49
Fan Motor Input	W	30
Fan Motor Speed	RPM	880
Sound pressure	dB (A)	52
Net Dimensions WxHxD	mm	810 × 580 × 280
	in.	31-7/8 × 22-7/8 × 11
Package Dimensions WxHxD	mm	940 × 640 × 420
	in.	37 × 25-1/4 × 16-1/2
Net/Gross Weight	kg	34/38
	lbs.	75/83.8

Model No.

RCH-RTY5-0


YXE-C01U1

Description:

Remote Controller **(Included)**

Wired Controller **(Optional)**

Indoor Unit Outline and Dimensions:

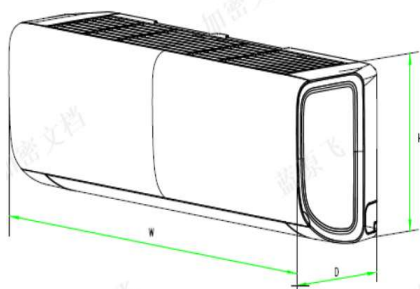

Net Dimensions W x H x D

mm

860 × 285 × 216

in.

33-7/8 × 11-1/4 × 8-1/2

Outdoor Unit Outline and Dimensions:

