


Brass Ball Valve, FNPT x MNPT w/Lever Handle 1000 CWP

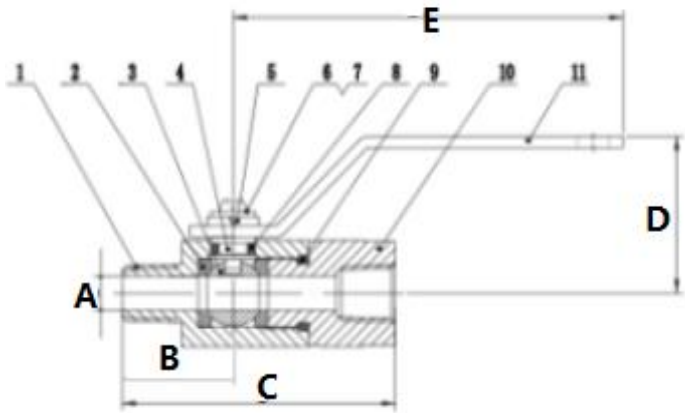

- 1000PSI CWP
- Full port
- Suitable for Vacuum Service to 29.9"Hg
- Temperature Range: -4°F to 250°F
- 2-pc, Heavy duty construction
- Brass body and cap
- PTFE ball seat
- Viton stem sealing
- Chrome Plated Brass ball
- Lever Metal Handle
- F×M NPT Connection
- ISO Registered Factory
- MSS SP-110 Approved
- RoHS Compliant

Part No.	Description	Size	A (In)	B (In)	C (In)	D (In)	E (In)	Carton Qty	Wt. (Lbs.)
46900	1/8 MxF BV	1/8"	0.24	0.77	1.98	1.11	2.00	100	0.37
46903	1/4 MxF BV	1/4"	0.24	0.83	2.14	1.11	2.00	100	0.41

Part No.	Description	Material
1	Body	Brass
2	Seat	PTFE
3	Ball	Brass
4	Stem	Brass
5	Spring Washer	Steel
6	Flat Washer	Steel
7	Nut	Steel
8	Stem Seal	Viton
9	Seal	Viton
10	Cap	Brass
11	Handle	Metal

Weights Are ± 3%

"This drawing contains proprietary and confidential information of Midland Metal Mfg., Co. and shall not be reproduced, copied, loaned, or submitted to outside parties for examination without our consent"				Date:		UNIT:	INCH	Material:	
				Drawn:		Scale:	1=1	Part Title:	
4				Checked:		PROJECT		PART NO.	46903
3				Approved:					
2				MIDLAND METAL MFG. CO. KANSAS CITY, MO				DWG. NO.	
1									
NO.	PCA	Date	Revision	TOLERANCES ARE: DECIMALS. .X:±0.03 .XX:±0.01 .XXX:±0.005 ANGLES:±1° FRACTIONS ± 1/8					