

CRIMPLOK

SELF LOCKING CAM & GROOVE



STAINLESS STEEL &
ALUMINUM

UNIVERSAL FITTINGS

CRIMPLOK KING NIPPLES



CRIMPLOK FERRULES - PLATED STEEL - STAINLESS STEEL ALUMINUM




SOLID

DEPENDABLE

SAFE

FEATURES AND BENEFITS

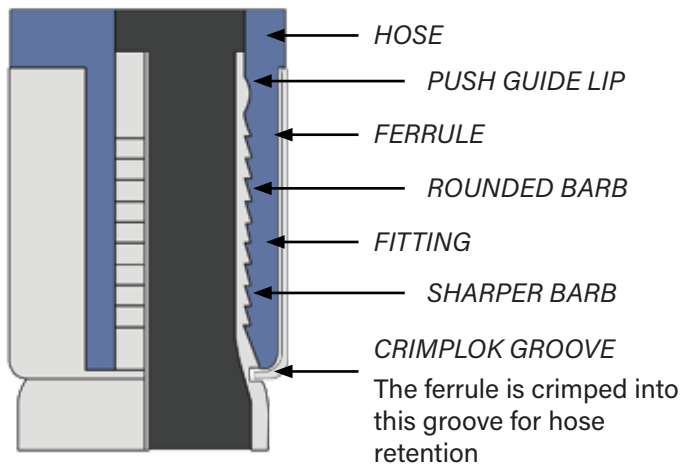

Crimplok is the best way to ensure a perfect hose connection every time!

- All fittings have a Crimplok groove for the ferrule end the Lok into for a strong permanent seal.
- Serrations on the couplings and fittings are not as sharp at the top, but become sharper towards the Crimplok groove.
- The length of the barb and sleeve/ ferrule are matched for a safer, cleaner connection.
- Crimplok connections do not have sharp clamp buckles or edges
- Interchangeable with most market systems

CRIMPLOK

HOSE ACCESSORIES

ALUMINUM SELF LOCKING CAM & GROOVE

- Automatic Self-Locking Arms Prevent Accidental Disconnection
- Machined multi-serrated shank with interlocking groove
- Aluminum with Brass Self Locking Arms
- 316 Stainless with Investment Cast Self-Locking Arms
- Available in sizes 2" through 6"
- 2" @250 psi 3" & 4" @150 psi 6" @75 psi
- 6" @150 psi 4 arms
- Configurations
 - Dust Cap
 - Part B
 - Part C
 - Part D

Sample item code	Description
CDCSL-XXX-A1	X" DUST CAP ALUMINUM CRIMPLOK SELF LOCKING
CGBSL-XXX-A1	X" PART B ALUMINUM CRIMPLOK SELF LOCKING
CGCSL-XXXCR-A1	X" PART C ALUMINUM CRIMPLOK SELF LOCKING
CGDSL-XXX-A1	X" PART D ALUMINUM PRIMPLOK SELF LOCKING

Designed for use with Buchanan Crimp Sleeves and Interlocking Ferrules

FEMALE COUPLER X MALE NPT TYPE B



CGBSL

PART#	SIZE	
CGBSL-200-A1	2"	
CGBSL-300-A1	3"	
CGBSL-400-A1	4"	
CGBSL-600-A1	6"	

FEMALE COUPLER X FEMALE NPT TYPE D



CGDSL

PART#	SIZE	
CGDSL-200-A1	2"	
CGDSL-300-A1	3"	
CGDSL-400-A1	4"	
CGDSL-600-A1	6"	

FEMALE COUPLER X HOSE SHANK TYPE C



CGCSL

PART#	SIZE	
CGCSL-200CR-A1	2"	
CGCSL-300CR-A1	3"	
CGCSL-400CR-A1	4"	
CGCSL-600CR-A1	6"	
CGCSL-600CR-A4	6" w/4 arms	

DUST CAP TYPE DC



CDCSL

PART#	SIZE	
CDCSL-200-A1	2"	
CDCSL-300-A1	3"	
CDCSL-400-A1	4"	
CDCSL-600-A1	6"	

STAINLESS STEEL SELF LOCKING CAM & GROOVE

- Automatic Self-Locking Arms Prevent Accidental Disconnection
- Machined multi-serrated shank with interlocking groove
- Aluminum with Brass Self Locking Arms
- 316 Stainless with Investment Cast Self-Locking Arms
- Available in sizes 2" through 6"
- 2" @250 psi 3" & 4" @150 psi 6" @75 psi
- 6" @150 psi 4 arms
- Configurations
 - Dust Cap
 - Part B
 - Part C
 - Part D

Sample item code	Description
CDCL-XXX-SS1	X" DUST CAP STAINLESS CRIMPLOK 316 SELF LOCKING
CGBSL-XXX-SS1	X" PART B STAINLESS CRIMPLOK 316 SELF LOCKING
CGCSL-XXXCR-SS1	X" PART C STAINLESS 316 CRIMPLOK SELF LOCKING
CGDSL-XXX-SS1	X" PART D STAINLESS CRIMPLOK 316 SELF LOCKING

Designed for use with Buchanan Crimp Sleeves and Interlocking Ferrules

FEMALE COUPLER X MALE NPT
TYPE B



CGBSL

PART#	SIZE
CGBSL-200-SS1	2"
CGBSL-300-SS1	3"
CGBSL-400-SS1	4"
CGBSL-600-SS1	6"

FEMALE COUPLER X FEMALE NPT
TYPE D



CGDSL

PART#	SIZE
CGDSL-200-SS1	2"
CGDSL-300-SS1	3"
CGDSL-400-SS1	4"
CGDSL-600-SS1	5"

FEMALE COUPLER X HOSE SHANK
TYPE C



CGCSL

PART#	SIZE
CGCSL-200CR-SS1	2"
CGCSL-300CR-SS1	3"
CGCSL-400CR-SS1	4"
CGCSL-600CR-SS1	6"

DUST CAP
TYPE DC



CDCSL

PART#	SIZE
CDCSL-200-SS1	2"
CDCSL-300-SS1	3"
CDCSL-400-SS1	4"
CDCSL-600-SS1	5"

CRIMPLOK

HOSE ACCESSORIES

CRIMPLOK ALUMINUM CAM & GROOVE COUPLINGS

TYPE C



PART#	SIZE	
CGC-150CR-A1	1-1/2"	
CGC-200CR-A1	2"	
CGC-250CR-A1	2-1/2"	
CGC-300CR-A1	3"	
CGC-400CR-A1	4"	
CGC-600CR-A1	6"	
CGC-800CS-A1	8"	

TYPE E



PART#	SIZE	
CGE-150CR-A1	1-1/2"	
CGE-200CR-A1	2"	
CGE-250CR-A1	2-1/2"	
CGE-300CR-A1	3"	
CGE-400CR-A1	4"	
CGE-600CR-A1	6"	
CGE-800CS-A1	8"	

Project Information: For use with
CRIMPLOK Ferrules CF-XXXXX-SP

CRIMPLOK STAINLESS CAM & GROOVE COUPLINGS

TYPE C



TYPE E



TYPE C

PART#	SIZE	
CGC-100CR-SS1	1"	
CGC-150CR-SS1	1-1/2"	
CGC-200CR-SS1	2"	
CGC-300CR-SS1	3"	
CGC-400CR-SS1	4"	

TYPE E

PART#	SIZE	
CGE-100CR-SS1	1"	
CGE-150CR-SS1	1-1/2"	
CGE-200CR-SS1	2"	
CGE-300CR-SS1	3"	
CGE-400CR-SS1	4"	

Project Information: For use with
CRIMPLOK Ferrules CF-XXXXX-SS304

CRIMPLOK CRIMP UNIVERSAL FITTINGS

PART#	SIZE	MAX OPERATING PSI 70F	
FHE-075-MP	3/4	150	
HE-050CF-SP	1/2	150	
HE-075CF-SP	3/4	150	
HE-075CR-SP	3/4	150	
HE-100CF-SP	1	150	
HE-100CR-SP	1	150	
HE-101CF-SP	1	150	

HIGH PRESSURE FEMALE STEM

PART#	SIZE	
GJS-050CR-DP	1/2	
GJS-075CR-DP	3/4	
GJS-100CR-DP	1	
GJS-125CR-DP	1-1/4	
GJS-150CR-DP	1-1/2	
GJS-200CR-DP	2	
GJS-250CR-DP	2-1/2	
GJS-300CR-DP	3	
GJS-400CR-DP	4	

HIGH PRESSURE FEMALE STEM

PART#	SIZE	
GJM-050CR-DP	1/2	
GJM-075CR-DP	3/4	
GJM-100CR-DP	1	
GJM-125CR-DP	1-1/4	
GJM-150CR-DP	1-1/2	
GJM-200CR-DP	2	
GJM-250CR-DP	2-1/2	
GJM-300CR-DP	3	
GJM-400CR-DP	4	

CRIMPLOK KING NIPPLES

HOSE ACCESSORIES

CRIMPLOK CRIMP COMBINATION NIPPLES PLATED STEEL



PART#	SIZE
*CNT-100CR-SP	1"
*CNT-125CR-SP	1-1/4"
*CNT-150CR-SP	1-1/2"
*CNT-200CR-SP	2"
*CNT-250CR-SP	2-1/2"
*CNT-300CR-SP	3"
*CNT-400CR-SP	4"
*CNT-600CR-SP	6"

Project Information: For use with CRIMPLOK Ferrules CF-XXXXX-SP

CRIMPLOK CRIMP COMBINATION NIPPLES STAINLESS



PART#	SIZE
*CNT-100CR-SS316	1"
CNT-125CR-SS316	1-1/4"
*CNT-150CR-SS316	1-1/2"
*CNT-200CR-SS316	2"
*CNT-250CR-SS316	2-1/2"
*CNT-300CR-SS316	3"
*CNT-400CR-SS316	4"
*CNT-600CR-SS316	6"

Project Information: For use with CRIMPLOK Ferrules CF-XXXXX-SS304

CRIMPLOK COMBINATION NIPPLE PLATED LONG NPT



PART#	SIZE
*CNL-200CR-SP	2"
*CNL-250CR-SP	2-1/2"
*CNL-300CR-SP	3"
*CNL-400CR-SP	4"

Project Information: For use with CRIMPLOK Long Ferrules CF-XXXXXL-SP

CRIMPLOK HD COMBINATION NIPPLE PLATED



PART#	SIZE
*CNT-400CS-SP	4"
*CNT-600CS-SP	6"
*CNT-800CS-SP	8"

Project Information: For use with CRIMPLOK Sleeves CSL-XXXXX-SP

CRIMPLOK HD COMBINATION NIPPLE UNPLATED



PART#	SIZE
*CNT-400CS-S	4"
*CNT-600CS-S	6"
CNT-800CS-S	8"

Project Information: For use with CRIMPLOK Sleeves CSL-XXXXX-SP

CRIMPLOK HD COMBINATION NIPPLE VICTAULIC PLATED



PART#	SIZE
*CNG-400CS-SP	4"
*CNG-600CS-SP	6"
*CNG-800CS-SP	8"

Project Information: For use with CRIMPLOK Sleeves CSL-XXXXX-SP

CRIMPLOK HD COMBINATION NIPPLE VICTAULIC UNPLATED



PART#	SIZE
*CNG-400CS-S	4"
*CNG-600CS-S	6"
*CNG-800CS-S	8"

Project Information: For use with CRIMPLOK Sleeves CSL-XXXXX-SP

CRIMPLOK KING NIPPLES

HOSE ACCESSORIES

**CRIMPLOK CRIMP VICTAULIC
COMBINATION NIPPLES PLATED STEEL**

PART#	SIZE	
*CNG-200CR-SP	2"	
*CNG-300CR-SP	3"	
*CNG-400CR-SP	4"	
*CNG-600CR-SP	6"	

Project Information: For use with
CRIMPLOK Ferrules CF-XXXX-SP

**CRIMPLOK CRIMP VICTAULIC
COMBINATION NIPPLES STAINLESS**

PART#	SIZE	
CNG-200CR-SS316	2"	
CNG-250CR-SS316	2-1/2"	
CNG-300CR-SS316	3"	
CNG-400CR-SS316	4"	

Project Information: For use with
CRIMPLOK Ferrules CF-XXXX-SS304

**CRIMPLOK FIXED FLANGE NIPPLE
STEEL 125 - 150#**

PART#	SIZE	
*CNFL-200CR-S	2"	
*CNFL-300CR-S	3"	
*CNFL-400CR-S	4"	
*CNFL-600CR-S	6"	

Project Information: For use with
CRIMPLOK Ferrules CF-XXXX-SP
Stainless Steel available - add S316 to part #

**CRIMPLOK CRIMP TURNBACK
COMBINATION NIPPLES STEEL**

PART#	SIZE	
*CNTB-200CR-S	2"	
*CNTB-300CR-S	3"	
*CNTB-400CR-S	4"	
*CNTB-600CR-S	6"	

Project Information: For use with
CRIMPLOK Ferrules CF-XXXX-SP

**CRIMPLOK CRIMP TURN BACK
NIPPLES STAINLESS**

PART#	SIZE	
*CNTB-200CR-SS316	2"	
*CNTB-300CR-SS316	3"	
*CNTB-400CR-SS316	4"	
*CNTB-600CR-SS316	6"	

Project Information: For use with
CRIMPLOK Ferrules CF-XXXX-SS304

**CRIMPLOK CRIMP SQUARE CUT
COMBINATION NIPPLES UNPLATED**

PART#	SIZE	
*CNSC-300CR-SP	3"	
*CNSC-400CR-SP	4"	

Project Information: For use with
CRIMPLOK Ferrules CF-XXXX-SP

**CRIMPLOK FIXED FLANGE NIPPLE
STAINLESS STEEL 125 - 150#**

PART#	SIZE	
*CNFL-200CR-SS316	2"	
*CNFL-300CR-SS316	3"	
*CNFL-400CR-SS316	4"	
*CNFL-600CR-SS316	6"	

Project Information: For use with
CRIMPLOK Ferrules CF-XXXX-SP

CRIMPLOK FERRULES PLATED

HOSE ACCESSORIES



CRIMPLOK FERRULES STEEL PLATED FOR 3/4" HOSE - LD FOR UNIVERSAL

PART#	SIZE	CAMPBELL PART	FERRULE ID"	FERRULE LENGTH"	WALL THICKNESS
CFT-08106T-SP	3/4	FLPS075112	1.1875"	2.14"	0.04
CFT-08107T-SP	3/4	FLPS075114	1.2188"	2.14"	0.04
CFT-08108T-SP	3/4	FLPS075116	1.2500"	2.14"	0.04
CFT-08109T-SP	3/4	FLPS075118	1.2812"	2.14"	0.04

Project Information: For use with CRIMPLOK Universal Crimp fittings (HE-XXXCR-SP). Ferrule thickness is .040"

CRIMPLOK FERRULES STEEL PLATED FOR 3/4" HOSE - HD FOR UNIVERSAL

PART#	SIZE	CAMPBELL PART	FERRULE ID"	FERRULE LENGTH"	WALL THICKNESS
CF-05101S-SP	1/2	FPS050104S	1.0625"	1.41"	0.06

Project Information: For use with CRIMPLOK crimp ground joints (GJM/GJS-XXXCR-SP) I.D Tolerance = +/-0.012

CRIMPLOK FERRULES STEEL PLATED FOR 3/4" HOSE

PART#	SIZE	CAMPBELL PART	FERRULE ID"	FERRULE LENGTH"	WALL THICKNESS
CF-08105-SP	3/4	FPS075120	1.3125"	2.14"	0.06

Project Information: For use with CRIMPLOK Universal Crimp fittings (HE-XXXCR-SP). Ferrule thickness is .040"

CRIMPLOK FERRULES STEEL PLATED FOR 1" HOSE - LD FOR UNIVERSAL

PART#	SIZE	CAMPBELL PART	FERRULE ID"	FERRULE LENGTH"	WALL THICKNESS
CFT-10114T-SP	1	FLPS100128	1.4375"	2.29"	0.04
CFT-10115T-SP	1	FLPS100130	1.4687"	2.29"	0.04
CFT-10117T-SP	1	FLPS100134	1.5000"	2.29"	0.04
CFT-10118T-SP	1	FLPS100136	1.5312"	2.29"	0.04

Project Information: For use with CRIMPLOK Universal Crimp fittings (HE-XXXCR-SP). Ferrule thickness is .040"

CRIMPLOK FERRULES STEEL PLATED FOR 1" HOSE

PART#	SIZE	CAMPBELL PART	FERRULE ID"	FERRULE LENGTH"	WALL THICKNESS
CF-10109-SP	1	FPS100136	1.5625"	2.29"	0.06
CF-10110-SP	1	FPS100140	1.6250"	2.29"	0.06
CF-10111-SP	1	FPS100144	1.6875"	2.29"	0.06

Project Information: For use with CRIMPLOK crimp cam and groove fitting (CGC/CGE-XXXCR-A1) and CRIMPLOK crimp combination nipples (CNT-XXXCR-SP) I.D. Tolerance = +/-0.012"

CRIMPLOK FERRULES STEEL PLATED FOR 1-1/4" HOSE

PART#	SIZE	CAMPBELL PART	FERRULE ID"	FERRULE LENGTH"	WALL THICKNESS
CF-13113-SP	1-1/4	FPS125152	1.8125"	2.32"	0.06
CF-13114-SP	1-1/4	FPS125156	1.8750"	2.32"	0.06

Project Information: For use with CRIMPLOK crimp cam and groove fitting (CGC/CGE-XXXCR-A1) and CRIMPLOK crimp combination nipples (CNT-XXXCR-SP) I.D. Tolerance = +/-0.012"

CRIMPLOK FERRULES PLATED

HOSE ACCESSORIES

**CRIMPLOK FERRULES STEEL PLATED FOR 1-1/2" HOSE**

PART#	SIZE	CAMPBELL PART	FERRULE ID"	FERRULE LENGTH"	WALL THICKNESS
CF-15115-SP	1-1/2	FPS150160	1.9375"	2.36"	0.06
CF-15201-SP	1-1/2	FPS150204	2.0625"	2.36"	0.06
CF-15202-SP	1-1/2	FPS150208	2.1250"	2.36"	0.06
CF-15203-SP	1-1/2	FPS150212	2.1875"	2.36"	0.06
CF-15205-SP	1-1/2	FPS150220	2.3125	2.36"	0.06

Project Information: For use with CRIMPLOK crimp cam and groove fitting (CGE/CGE-XXXCR-A1) and CRIMPLOK crimp combination nipples (CNT-XXXCR-SP) I.D. Tolerance = +/-0.012"

CRIMPLOK FERRULES STEEL PLATED FOR 1-1/2" HOSE - LONG

PART#	SIZE	CAMPBELL PART	FERRULE ID"	FERRULE LENGTH"	WALL THICKNESS
CF-15202L-SP	1-1/2	FPS150208L	2.1250"	2.91	0.06

Project Information: For use with CRIMPLOK ground joint fittings (GJM/GJS-XXXCR-SP) and CRIMPLOK long crimp combination nipples (CNL-XXXCR-SP) I.D. Tolerance = +/-0.012"

CRIMPLOK FERRULES STEEL PLATED FOR 2" HOSE

PART#	SIZE	CAMPBELL PART	FERRULE ID"	FERRULE LENGTH"	WALL THICKNESS
CF-20208-SP	2	FPS200232	2.5000"	2.79"	0.06
CF-20209-SP	2	FPS200236	2.5625"	2.79"	0.06
CF-20210-SP	2	FPS200240	2.6250"	2.79"	0.06
CF-20211-SP	2	FPS200244	2.6875"	2.79"	0.06
CF-20212-SP	2	FPS200248	2.7500"	2.79"	0.06
CF-20213-SP	2	FPS200252	2.8125"	2.79"	0.06
CF-20214-SP	2	FPS200256	2.8750"	2.79"	0.06
CF-20215-SP	2	FPS200260	2.9375"	2.79"	0.06

Project Information: For use with CRIMPLOK crimp cam and groove fitting (CGE/CGE-XXXCR-A1) and CRIMPLOK crimp combination nipples (CNT-XXXCR-SP) I.D. Tolerance = +/-0.012"

CRIMPLOK FERRULES STEEL PLATED FOR 2" HOSE - LONG

PART#	SIZE	CAMPBELL PART	FERRULE ID"	FERRULE LENGTH"	WALL THICKNESS
CF-20209L-SP	2	FPS200236L	2.5625"	3.41"	0.06
CF-20211L-SP	2	FPS200244L	2.6875"	3.41"	0.06
CF-20212L-SP	2	FPS200248L	2.7500"	3.41"	0.06
CF-20213L-SP	2	FPS200252L	2.8125"	3.41"	0.06

Project Information: For use with CRIMPLOK ground joint fittings (GJM/GJS-XXXCR-SP) and CRIMPLOK long crimp combination nipples (CNL-XXXCR-SP) I.D. Tolerance = +/-0.012"



USE OUR TEXT LINE [855-609-3729](tel:855-609-3729) TO COMMUNICATE WITH MIDLAND MORE CONVENIENTLY

CRIMPLOK FERRULES PLATED

HOSE ACCESSORIES

CRIMPLOK FERRULES STEEL PLATED FOR 2-1/2" HOSE

PART#	SIZE	CAMPBELL PART	FERRULE ID"	FERRULE LENGTH"	WALL THICKNESS
CF-25303-SP	2-1/2	FPS250312	3.1875"	3.11"	0.06

Project Information: For use with CRIMPLOK crimp cam and groove fitting (CGE/CGE-XXXCR-A1) and CRIMPLOK crimp combination nipples (CNT-XXXCR-SP) I.D. Tolerance = +/-0.012"

CRIMPLOK FERRULES STEEL PLATED FOR 2-1/2" HOSE - LONG

PART#	SIZE	CAMPBELL PART	FERRULE ID"	FERRULE LENGTH"	WALL THICKNESS
CF-25303L-SP	2-1/2	FPS250312L	3.1875"	3.88"	0.06

Project Information: For use with CRIMPLOK ground joint fittings (GJM/GJS-XXXCR-SP) and CRIMPLOK long crimp combination nipples (CNL-XXXCR-SP) I.D. Tolerance = +/-0.012"

CRIMPLOK FERRULES STEEL PLATED FOR 3" HOSE

PART#	SIZE	CAMPBELL PART	FERRULE ID"	FERRULE LENGTH"	WALL THICKNESS
CF-30309-SP	3	FPS300336	3.5625"	3.94"	0.09
CF-30310-SP	3	FPS300340	3.6250"	3.94"	0.09
CF-30311-SP	3	FPS300344	3.6875"	3.94"	0.09
CF-30312-SP	3	FPS300348	3.7500"	3.94"	0.09
CF-30313-SP	3	FPS300352	3.8125"	3.94"	0.09
CF-30314-SP	3	FPS300356	3.8750"	3.94"	0.09
CF-30315-SP	3	FPS300360	3.9375"	3.94"	0.09
CF-30400-SP	3	FPS300400	4.000"	3.94"	0.09

Project Information: For use with CRIMPLOK crimp cam and groove fitting (CGE/CGE-XXXCR-A1) and CRIMPLOK crimp combination nipples (CNT-XXXCR-SP) I.D. Tolerance = +/-0.012"

CRIMPLOK FERRULES STEEL PLATED FOR 3" HOSE - LONG

PART#	SIZE	CAMPBELL PART	FERRULE ID"	FERRULE LENGTH"	WALL THICKNESS
CF-30310L-SP	3	FPS300340L	3.6250"	4.36"	0.09
CF-30311L-SP	3	FPS300344L	3.6875"	4.36"	0.09
CF-30312L-SP	3	FPS300348L	3.7500"	4.36"	0.09
CF-30313L-SP	3	FPS300352L	3.8125"	4.36"	0.09
CF-30314L-SP	3	FPS300356L	3.8750"	4.36"	0.09
CF-30315L-SP	3	FPS300360L	3.9375"	4.36"	0.09
CF-30400L-SP	3	FPS300400L	4.000"	4.36"	0.09

Project Information: For use with CRIMPLOK crimp cam and groove fitting (CGE/CGE-XXXCR-A1) and CRIMPLOK crimp combination nipples (CNT-XXXCR-SP) I.D. Tolerance = +/-0.012"



GO ONLINE TO UPLOAD YOUR LOGO TO UTILIZE ALL OF OUR CUSTOMIZABLE TOOLS!

CRIMPLOK FERRULES PLATED

HOSE ACCESSORIES

**CRIMPLOK FERRULES STEEL PLATED FOR 4" HOSE**

PART#	SIZE	CAMPBELL PART	FERRULE ID"	FERRULE LENGTH"	WALL THICKNESS
CF-40409-SP	4	FPS400436	4.5625"	4.19"	0.09
CF-40410-SP	4	FPS400440	4.6250"	4.19"	0.09
CF-40411-SP	4	FPS400444	4.6875"	4.19"	0.09
CF-40412-SP	4	FPS400448	4.7500"	4.19"	0.09
CF-40413-SP	4	FPS400452	4.8125"	4.19"	0.09
CF-40414-SP	4	FPS400456	4.8750"	4.19"	0.09
CF-40415-SP	4	FPS400460	4.9375"	4.19"	0.09
CF-40500-SP	4	FPS400500	5.000"	4.19"	0.09
CF-40501-SP	4	FPS400504	5.0625"	4.19"	0.09

Project Information: For use with CRIMPLOK crimp cam and groove fitting (CGE/CGE-XXXCR-A1) and CRIMPLOK crimp combination nipples (CNT-XXXCR-SP) I.D. Tolerance = +/-0.012"

CRIMPLOK FERRULES STEEL PLATED FOR 4" HOSE - LONG

PART#	SIZE	CAMPBELL PART	FERRULE ID"	FERRULE LENGTH"	WALL THICKNESS
CF-40410L-SP	4	FPS400440L	4.6250"	5.20"	0.09
CF-40411L-SP	4	FPS400444L	4.6875"	5.20"	0.09
CF-40412L-SP	4	FPS400448L	4.7500"	5.20"	0.09
CF-40413L-SP	4	FPS400452L	4.8125"	5.20"	0.09
CF-40414L-SP	4	FPS400456L	4.8750"	5.20"	0.09
CF-40415L-SP	4	FPS400460L	4.9375"	5.20"	0.09
CF-40500L-SP	4	FPS400500L	5.000"	5.20"	0.09
CF-40501L-SP	4	FPS400504L	5.0625"	5.20"	0.09

Project Information: For use with CRIMPLOK ground joint fittings (GJM/GJS-XXXCR-SP) and CRIMPLOK long crimp combination nipples (CNL-XXXCR-SP) I.D. Tolerance = +/-0.012"

CRIMPLOK FERRULES STEEL PLATED FOR 6" HOSE

PART#	SIZE	CAMPBELL PART	FERRULE ID"	FERRULE LENGTH"	WALL THICKNESS
CF-60610-SP	6	FPS600640	6.6250"	5.67"	0.12
CF-60612-SP	6	FPS600648	6.7500"	5.67"	0.12
CF-60614-SP	6	FPS600656	6.8750"	5.67"	0.12
CF-60702-SP	6	FPS600708	7.1250"	5.67"	0.12
CF-60704-SP	6	FPS600716	7.2500"	5.67"	0.12

Project Information: For use with CRIMPLOK ground joint fittings (GJM/GJS-XXXCR-SP) and CRIMPLOK long crimp combination nipples (CNL-XXXCR-SP) I.D. Tolerance = +/-0.012"



HELP US HELP YOU! GO ONLINE TO UPDATE YOUR CUSTOMER PROFILE SO THAT WE CAN UPDATE ALL THE APPROPRIATE DEPARTMENTS AND PERSONNEL AT YOUR COMPANY ON NEW CATALOGS, PRICING UPDATES, NEW MARKETING TOOLS, AND OTHER IMPORTANT INFORMATION. THANK YOU!

CRIMPLOK FERRULES STAINLESS

HOSE ACCESSORIES



CRIMPLOK FERRULES STAINLESS 304 FOR 1/2" HOSE

PART#	SIZE	CAMPBELL PART	FERRULE ID"	FERRULE LENGTH"	WALL THICKNESS
CF-05101-SS304	1/2	FSS050104	1.0625"	2.14"	0.06
CF-05102-SS304	1/2	FSS050108	1.1250"	2.14"	0.06

Project Information: For use with CRIMPLOK crimp ground joints (GJM/GJS-XXXCR-SP) I.D. Tolerance = +/-0.012"

CRIMPLOK FERRULES STAINLESS 304 FOR 3/4" HOSE

PART#	SIZE	CAMPBELL PART	FERRULE ID"	FERRULE LENGTH"	WALL THICKNESS
CF-08105-SS304	3/4	FSS075120	1.3125"	2.14"	0.06
CF-08106-SS304	3/4	FSS075124	1.3750"	2.14"	0.06
CF-08108-SS304	3/4	FSS075132	1.5000"	2.14"	0.06

Project Information: For use with CRIMPLOK crimp ground joints (GJM/GJS-XXXCR-SP) I.D. Tolerance = +/-0.012"

CRIMPLOK FERRULES STAINLESS 304 FOR 3/4" HOSE - LD FOR UNIVERSAL

PART#	SIZE	CAMPBELL PART	FERRULE ID"	FERRULE LENGTH"	WALL THICKNESS
CFT-08104T-SS304	3/4	FLSS075108	1.1250"	2.14"	0.04
CFT-08106T-SS304	3/4	FLSS075112	1.1875"	2.14"	0.04
CFT-08107T-SS304	3/4	FLSS075114	1.2188"	2.14"	0.04
CFT-08108T-SS304	3/4	FLSS075116	1.2500"	2.14"	0.04
CFT-08109T-SS304	3/4	FLSS075118	1.2812"	2.14"	0.04

Project Information: For use with CRIMPLOK Universal crimp fittings (HE-XXXCR-SP) Ferrule thickness is .040"

CRIMPLOK FERRULES STAINLESS 304 FOR 1" HOSE

PART#	SIZE	CAMPBELL PART	FERRULE ID"	FERRULE LENGTH"	WALL THICKNESS
CF-10108-SS304	1	FSS100132	1.5000"	2.29"	0.06
CF-10109-SS304	1	FSS100136	1.5625"	2.29"	0.06
CF-10110-SS304	1	FSS100140	1.6250"	2.29"	0.06
CF-10111-SS304	1	FSS100144	1.6875"	2.29"	0.06

Project Information: For use with CRIMPLOK crimp cam and groove fitting (CGE/CGE-XXXCR-A1) and CRIMPLOK crimp combination nipples (CNT-XXXCR-SP) I.D. Tolerance = +/-0.012"

CRIMPLOK FERRULES STAINLESS 304 FOR 1" HOSE - LD FOR UNIVERSAL

PART#	SIZE	CAMPBELL PART	FERRULE ID"	FERRULE LENGTH"	WALL THICKNESS
CFT-10117T-SS304	1	FLSS100134	1.5312"	2.29"	0.04

Project Information: For use with CRIMPLOK Universal crimp fittings (HE-XXXCR-SP) Ferrule thickness is .040"



SEE WEBSITE TO DOWNLOAD YOUR MOST UPDATED PRICING

CRIMPLOK FERRULES STAINLESS

HOSE ACCESSORIES

**CRIMPLOK FERRULES STAINLESS 304 FOR 1-1/4" HOSE**

PART#	SIZE	CAMPBELL PART	FERRULE ID"	FERRULE LENGTH"	WALL THICKNESS
CF-13114-SS304	1-1/4	FSS125156	1.8750"	2.32"	0.06
CF-13115-SS304	1-1/4	FSS125160	1.9375"	2.32"	0.06

Project Information: For use with CRIMPLOK crimp cam and groove fitting (CGE/CGE-XXXCR-A1) and CRIMPLOK crimp combination nipples (CNT-XXXCR-SP) I.D. Tolerance = +/-0.012"

CRIMPLOK FERRULES STAINLESS 304 FOR 1-1/2" HOSE

PART#	SIZE	CAMPBELL PART	FERRULE ID"	FERRULE LENGTH"	WALL THICKNESS
CF-15115-SS304	1-1/2	FSS150160	1.9375"	2.36"	0.06
CF-15200-SS304	1-1/2	FSS150200	2.000"	2.36"	0.06
CF-15201-SS304	1-1/2	FSS150204	2.0625"	2.36"	0.06
CF-15202-SS304	1-1/2	FSS150208	2.1250"	2.36"	0.06
CF-15203-SS304	1-1/2	FSS150212	2.1875"	2.36"	0.06
CF-15204-SS304	1-1/2	FSS150216	2.2500"	2.36"	0.06
CF-15205-SS304	1-1/2	FSS150220	2.3125"	2.36"	0.06

Project Information: For use with CRIMPLOK crimp cam and groove fitting (CGE/CGE-XXXCR-A1) and CRIMPLOK crimp combination nipples (CNT-XXXCR-SS316) I.D. Tolerance = +/-0.012"

CRIMPLOK FERRULES STAINLESS 304 FOR 1-1/2" HOSE

PART#	SIZE	CAMPBELL PART	FERRULE ID"	FERRULE LENGTH"	WALL THICKNESS
CF-20208-SS304	2	FSS200232	2.5000"	2.79"	0.06
CF-20209-SS304	2	FSS200236	2.5625"	2.79"	0.06
CF-20210-SS304	2	FSS200240	2.6250"	2.79"	0.06
CF-20211-SS304	2	FSS200244	2.6875"	2.79"	0.06
CF-20212-SS304	2	FSS200248	2.7500"	2.79"	0.06
CF-20213-SS304	2	FSS200252	2.8125"	2.79"	0.06
CF-20214-SS304	2	FSS200256	2.8750"	2.79"	0.06

Project Information: For use with CRIMPLOK crimp cam and groove fitting (CGE/CGE-XXXCR-A1) and CRIMPLOK crimp combination nipples (CNT-XXXCR-SS316) I.D. Tolerance = +/-0.012"

CRIMPLOK FERRULES STAINLESS 304 FOR 3" HOSE

PART#	SIZE	CAMPBELL PART	FERRULE ID"	FERRULE LENGTH"	WALL THICKNESS
CF-30309-SS304	3	FSS300336	3.5625"	3.94"	0.10
CF-30310-SS304	3	FSS300340	3.6250"	3.94"	0.10
CF-30311-SS304	3	FSS300344	3.6875"	3.94"	0.10
CF-30312-SS304	3	FSS300348	3.7500"	3.94"	0.10
CF-30313-SS304	3	FSS300352	3.8125"	3.94"	0.10
CF-30314-SS304	3	FSS300356	3.8750"	3.94"	0.10
CF-30315-SS304	3	FSS300360	3.9375"	3.94"	0.10
CF-30400-SS304	3	FSS300400	4.000"	3.94"	0.10

Project Information: For use with CRIMPLOK crimp cam and groove fitting (CGE/CGE-XXXCR-A1) and CRIMPLOK crimp combination nipples (CNT-XXXCR-SS316) I.D. Tolerance = +/-0.012"

CRIMPLOK SLEEVES ALUMINUM

HOSE ACCESSORIES

CRIMPLOK FERRULES STAINLESS 304 FOR 4" HOSE

PART#	SIZE	CAMPBELL PART	FERRULE ID"	FERRULE LENGTH"	WALL THICKNESS
CF-40410-SS304	4	FSS400440	4.6250"	4.19"	0.10
CF-40411-SS304	4	FSS400444	4.6875"	4.19"	0.10
CF-40412-SS304	4	FSS400448	4.7500"	4.19"	0.10
CF-40413-SS304	4	FSS400452	4.8125"	4.19"	0.10
CF-40414-SS304	4	FSS400456	4.8750"	4.19"	0.10
CF-30500-SS304	4	FSS400500	5.000"	4.19"	0.10

Project Information: For use with crimp cam and groove fitting (CGE/CGE-XXXCR-A1), CRIMPLOK crimp long combination nipples (CNL-XXXCR-SP) and CRIMPLOK (CNT/G-XXXCS-S/P) I.D. Tolerance = +/-0.012"



CRIMPLOK SLEEVES ALUMINUM FOR 2" HOSE

PART#	SIZE	CAMPBELL PART	SLEEVE ID"	SLEEVE LENGTH"	WALL THICKNESS
CSL-20209-A	2	SAL200236	2.5625"	2.79"	0.12

Project Information: For use with cam and groove fitting (CGE/CGE-XXXCR-A1), CRIMPLOK crimp long combination nipples (CNL-XXXCR-SP) and CRIMPLOK (CNT/G-XXXCS-S/P) I.D. Tolerance = +/-0.012"

CRIMPLOK SLEEVES ALUMINUM FOR 2" HOSE

PART#	SIZE	CAMPBELL PART	SLEEVE ID"	SLEEVE LENGTH"	WALL THICKNESS
CSL-20210-A	2	SAL200240	2.6250"	2.79"	0.12
CSL-20211-A	2	SAL200244	2.6875"	2.79"	0.12

Project Information: For use with cam and groove fitting (CGE/CGE-XXXCR-A1), CRIMPLOK crimp long combination nipples (CNL-XXXCR-SP) and CRIMPLOK (CNT/G-XXXCS-S/P) I.D. Tolerance = +/-0.012"

CRIMPLOK SLEEVES ALUMINUM FOR 3" HOSE

PART#	SIZE	CAMPBELL PART	SLEEVE ID"	SLEEVE LENGTH"	WALL THICKNESS
CSL-30310-A	3	SAL300340	3.6250"	3.94"	0.12
CSL-30313-A	3	SAL300352	3.8125"	3.94"	0.12
CSL-30314-A	3	SAL300356	3.8750"	3.94"	0.12
CSL-30315-A	3	SAL300360	3.9375"	3.94"	0.12

Project Information: For use with cam and groove fitting (CGE/CGE-XXX-A1), CRIMPLOK crimp long combination nipples (CNL-XXXCR-SP) and CRIMPLOK (CNT/G-XXXCS-S/P) I.D. Tolerance = +/-0.012"

CRIMPLOK SLEEVES ALUMINUM FOR 4" HOSE

PART#	SIZE	CAMPBELL PART	SLEEVE ID"	SLEEVE LENGTH"	WALL THICKNESS
CSL-40411-A	4	SAL400444	4.6875"	4.19"	0.12
CSL-40412-A	4	SAL400448	4.7500"	4.19"	0.12
CSL-40413-A	4	SAL400452	4.8125"	4.19"	0.12
CSL-40414-A	4	SAL400456	4.8750"	4.19"	0.12

Project Information: For use with cam and groove fitting (CGE/CGE-XXX-A1), CRIMPLOK crimp long combination nipples (CNL-XXXCR-SP) and CRIMPLOK (CNT/G-XXXCS-S/P) I.D. Tolerance = +/-0.012"

CRIMPLOK SLEEVES PLATED

HOSE ACCESSORIES

**CRIMPLOK SLEEVES ALUMINUM FOR 2" HOSE**

PART#	SIZE	CAMPBELL PART	SLEEVE ID"	SLEEVE LENGTH"	WALL THICKNESS
CSL-08106-SP	3/4	SPS075124	1.3750"	2.14"	0.06

Project Information: For use with cam and groove fitting (CGE/CGE-XXXCR-A1), CRIMPLOK crimp long combination nipples (CNL-XXXCR-SP) and CRIMPLOK (CNT/G-XXXCS-S/P) I.D. Tolerance = +/-0.012"

CRIMPLOK SLEEVES STEEL PLATED FOR 3/4" HOSE - SHORT

PART#	SIZE	CAMPBELL PART	SLEEVE ID"	SLEEVE LENGTH"	WALL THICKNESS
CSL-05100S-SP	1/2	SPS050100S	1.0000"	0.91"	0.06
CSL-08102S-SP	3/4	SPS075108S	1.1250"	1.10"	0.06
CSL-08105S-SP	3/4	SPS075120S	1.3125"	1.10"	0.06

Project Information: For use with regular combination nipples (CNT-XXX-S/SP) and short shank fittings (PL-XXX-AD) I.D. Tolerance = +/-0.012"

CRIMPLOK SLEEVES STEEL PLATED FOR 1" HOSE

PART#	SIZE	CAMPBELL PART	SLEEVE ID"	SLEEVE LENGTH"	WALL THICKNESS
CSL-10107-SP	1	SPS100128	1.4375"	2.29"	0.06
CSL-10108-SP	1	SPS100132	1.5000"	2.29"	0.06
CSL-10109-SP	1	SPS100136	1.5625"	2.29"	0.06
CSL-10110-SP	1	SPS100140	1.6250"	2.29"	0.06
CSL-10111-SP	1	SPS100144	1.6875"	2.29"	0.06
CSL-10112-SP	1	SPS100148	1.7500"	2.29"	0.06

Project Information: For use with cam and groove fitting (CGE/CGE-XXXCR-A1), CRIMPLOK crimp long combination nipples (CNL-XXXCR-SP) and CRIMPLOK (CNT/G-XXXCS-S/P) I.D. Tolerance = +/-0.012"

CRIMPLOK SLEEVES STEEL PLATED FOR 1" HOSE - SHORT

PART#	SIZE	CAMPBELL PART	SLEEVE ID"	SLEEVE LENGTH"	WALL THICKNESS
CSL-10107S-SP	1	SPS100128S	1.4375"	2.26"	0.06
CSL-10108S-SP	1	SPS100132S	1.5000"	2.26"	0.06
CSL-10109S-SP	1	SPS100136S	1.5625"	2.26"	0.06
CSL-10111S-SP	1	SPS100144S	1.6875"	2.26"	0.06

Project Information: For use with regular combination nipples (CNT-XXX-S/SP) and short shank fittings (PL-XXX-AD) I.D. Tolerance = +/-0.012"

CRIMPLOK SLEEVES STEEL PLATED FOR 1-1/4" HOSE - SHORT

PART#	SIZE	CAMPBELL PART	SLEEVE ID"	SLEEVE LENGTH"	WALL THICKNESS
CSL-13113S-SP	1-1/4	SPS125152S	1.8125"	1.26"	0.06
CSL-13114S-SP	1-1/4	SPS125156S	1.8750"	1.26"	0.06

Project Information: For use with regular combination nipples (CNT-XXX-S/SP) and short shank fittings (PL-XXX-AD) I.D. Tolerance = +/-0.012"

CRIMPLOK SLEEVES PLATED

HOSE ACCESSORIES

CRIMPLOK SLEEVES STEEL PLATED FOR 1-1/2" HOSE

PART#	SIZE	CAMPBELL PART	SLEEVE ID"	SLEEVE LENGTH"	WALL THICKNESS
CSL-15112-SP	1-1/2	SPS150148	1.7500"	2.36"	0.06
CSL-15115-SP	1-1/2	SPS150160	1.9375"	2.36"	0.06
CSL-15200-SP	1-1/2	SPS150200	2.0000"	2.36"	0.06
CSL-15201-SP	1-1/2	SPS150204	2.0625"	2.36"	0.06
CSL-15202-SP	1-1/2	SPS150208	2.1250"	2.36"	0.06
CSL-15203-SP	1-1/2	SPS150212	2.1875"	2.36"	0.06
CSL-15204-SP	1-1/2	SPS150216	2.2500"	2.36"	0.06
CSL-15205-SP	1-1/2	SPS150220	2.3125"	2.36"	0.06
CSL-15206-SP	1-1/2	SPS150224	2.3750"	2.36"	0.06

Project Information: For use with cam and groove fitting (CGE/CGE-XXXCR-A1), CRIMPLOK crimp long combination nipples (CNL-XXXCR-SP) and CRIMPLOK (CNT/G-XXXCS-S/P) I.D. Tolerance = +/-0.012"

CRIMPLOK SLEEVES STEEL PLATED FOR 1-1/2" HOSE - SHORT

PART#	SIZE	CAMPBELL PART	SLEEVE ID"	SLEEVE LENGTH"	WALL THICKNESS
CSL-15202S-SP	1-1/2	SPS150208S	2.1250"	1.46"	0.06

Project Information: For use with regular combination nipples (CNT-XXX-S/SP) and short shank fittings (PL-XXX-AD) I.D. Tolerance = +/-0.012"

CRIMPLOK SLEEVES STEEL PLATED FOR 2" HOSE

PART#	SIZE	CAMPBELL PART	SLEEVE ID"	SLEEVE LENGTH"	WALL THICKNESS
CSL-20204-SP	2	SPS200216	2.2500"	2.79"	0.06
CSL-20206-SP	2	SPS200224	2.3750"	2.79"	0.06
CSL-20207-SP	2	SPS200228	2.4375"	2.79"	0.06
CSL-20208-SP	2	SPS200232	2.5000"	2.79"	0.06
CSL-20209-SP	2	SPS200236	2.5625"	2.79"	0.06
CSL-20210-SP	2	SPS200240	2.6250"	2.79"	0.06
CSL-20211-SP	2	SPS200244	2.6875"	2.79"	0.06
CSL-20212-SP	2	SPS200248	2.7500"	2.79"	0.06
CSL-20213-SP	2	SPS200252	2.8125"	2.79"	0.06
CSL-20214-SP	2	SPS200256	2.8750"	2.79"	0.06
CSL-20215-SP	2	SPS200260	2.9375"	2.79"	0.06
CSL-20300-SP	2	SPS200300	3.0000"	2.79"	0.06

Project Information: For use with cam and groove fitting (CGE/CGE-XXX-A1), CRIMPLOK crimp long combination nipples (CNL-XXXCR-SP) and CRIMPLOK (CNT/G-XXXCS-S/P) I.D. Tolerance = +/-0.012"

CRIMPLOK SLEEVES STEEL PLATED FOR 2" HOSE - SHORT

PART#	SIZE	CAMPBELL PART	SLEEVE ID"	SLEEVE LENGTH"	WALL THICKNESS
CSL-20206S-SP	2	SPS200224S	2.3750"	1.81"	0.06
CSL-20207S-SP	2	SPS200228S	2.4375"	1.81"	0.06
CSL-20209S-SP	2	SPS200236S	2.5625"	1.81"	0.06
CSL-20210S-SP	2	SPS200240S	2.6250"	1.81"	0.06
CSL-20211S-SP	2	SPS200244S	2.6875"	1.81"	0.06

Project Information: For use with regular combination nipples (CNT-XXX-S/SP) and short shank fittings (PL-XXX-AD) I.D. Tolerance = +/-0.012"



USE OUR APP WITH YOUR FREE BIN LABELS TO MANAGE YOUR CUSTOMERS INVENTORY MORE EFFICIENTLY

CRIMPLOK SLEEVES PLATED

HOSE ACCESSORIES

**CRIMPLOK SLEEVES ALUMINUM FOR 2-1/2" HOSE**

PART#	SIZE	CAMPBELL PART	SLEEVE ID"	SLEEVE LENGTH"	WALL THICKNESS
CSL-25302-SP	2-1/2	SPS250308	3.1250"	3.11"	0.06
CSL-25306-SP	2-1/2	SPS250324	3.3750"	3.11"	0.06

Project Information: For use with cam and groove fitting (CGE/CGE-XXXCR-A1), CRIMPLOK crimp long combination nipples (CNL-XXXCR-SP) and CRIMPLOK (CNT/G-XXXCS-S/P) I.D. Tolerance = +/-0.012"

CRIMPLOK SLEEVES STEEL PLATED FOR 3" HOSE

PART#	SIZE	CAMPBELL PART	SLEEVE ID"	SLEEVE LENGTH"	WALL THICKNESS
CSL-30304-SP	3	SPS300316	3.2500"	3.94"	0.09
CSL-30306-SP	3	SPS300324	3.3750"	3.94"	0.09
CSL-30307-SP	3	SPS300328	3.4375"	3.94"	0.09
CSL-30308-SP	3	SPS300332	3.5000"	3.94"	0.09
CSL-30309-SP	3	SPS300336	3.5625"	3.94"	0.09
CSL-30310-SP	3	SPS300340	3.6250"	3.94"	0.09
CSL-30311-SP	3	SPS300344	3.6875"	3.94"	0.09
CSL-30312-SP	3	SPS300348	3.7500"	3.94"	0.09
CSL-30313-SP	3	SPS300352	3.8125"	3.94"	0.09
CSL-30314-SP	3	SPS300356	3.8750"	3.94"	0.09
CSL-30400-SP	3	SPS300400	4.0000"	3.94"	0.09

Project Information: For use with cam and groove fitting (CGE/CGE-XXXCR-A1), CRIMPLOK crimp long combination nipples (CNL-XXXCR-SP) and CRIMPLOK (CNT/G-XXXCS-S/P) I.D. Tolerance = +/-0.012"

CRIMPLOK SLEEVES STEEL PLATED FOR 3" HOSE - SHORT

PART#	SIZE	CAMPBELL PART	SLEEVE ID"	SLEEVE LENGTH"	WALL THICKNESS
CSL-30306S-SP	3	SPS300324S	3.3750"	2.44"	0.09
CSL-30308S-SP	3	SPS300332S	3.5000"	2.44"	0.09
CSL-30309S-SP	3	SPS300336S	3.5625"	2.44"	0.09
CSL-30310S-SP	3	SPS300340S	3.6250"	2.44"	0.09
CSL-30311S-SP	3	SPS300344S	3.6875"	2.44"	0.09
CSL-30312S-SP	3	SPS300348S	3.7500"	2.44"	0.09
CSL-30313S-SP	3	SPS300352S	3.8125"	2.44"	0.09
CSL-30314S-SP	3	SPS300356S	3.8750"	2.44"	0.09

Project Information: For use with regular combination nipples (CNT-XXX-S/SP) and short shank fittings (PL-XXX-AD) I.D. Tolerance = +/-0.012"



VIEW PRICING AND AVAILABLE STOCK ONLINE

CRIMPLOK SLEEVES PLATED

HOSE ACCESSORIES

CRIMPLOK SLEEVES STEEL PLATED FOR 4" HOSE

PART#	SIZE	CAMPBELL PART	SLEEVE ID"	SLEEVE LENGTH"	WALL THICKNESS
CSL-40406-SP	4	SPS400424	4.3750"	4.19"	0.09
CSL-40408-SP	4	SPS400432	4.5000"	4.19"	0.09
CSL-40409-SP	4	SPS400436	4.5625"	4.19"	0.09
CSL-40410-SP	4	SPS400440	4.6250"	4.19"	0.09
CSL-40411-SP	4	SPS400444	4.6875"	4.19"	0.09
CSL-40412-SP	4	SPS400448	4.7500"	4.19"	0.09
CSL-40413-SP	4	SPS400452	4.8125"	4.19"	0.09
CSL-40414-SP	4	SPS400456	4.8750"	4.19"	0.09
CSL-40415-SP	4	SPS400460	4.9375"	4.19"	0.09
CSL-40500-SP	4	SPS400500	5.0000"	4.19"	0.09

Project Information: For use with cam and groove fitting (CGE/CGE-XXXCR-A1), CRIMPLOK crimp long combination nipples (CNL-XXXCR-SP) and CRIMPLOK (CNT/G-XXXCS-S/P) I.D. Tolerance = +/-0.012"

CRIMPLOK SLEEVES STEEL PLATED FOR 4" HOSE - SHORT

PART#	SIZE	CAMPBELL PART	SLEEVE ID"	SLEEVE LENGTH"	WALL THICKNESS
CSL-40410S-SP	4	SPS400440S	4.6250"	3.31"	0.09
CSL-40411S-SP	4	SPS400444S	4.6875"	3.31"	0.09
CSL-40412S-SP	4	SPS400448S	4.7500"	3.31"	0.09
CSL-40413S-SP	4	SPS400452S	4.8125"	3.31"	0.09
CSL-40414S-SP	4	SPS400456S	4.9375"	3.31"	0.09
CSL-40500S-SP	4	SPS400500S	5.0000"	3.31"	0.09

Project Information: For use with regular combination nipples (CNT-XXX-S/SP) and short shank fittings (PL-XXX-AD) I.D. Tolerance = +/-0.012"

CRIMPLOK SLEEVES STEEL PLATED FOR 6" HOSE

PART#	SIZE	CAMPBELL PART	SLEEVE ID"	SLEEVE LENGTH"	WALL THICKNESS
CSL-60604-SP	6	SPS600616	6.2500"	5.67"	0.12
CSL-60606-SP	6	SPS600624	6.3750"	5.67"	0.12
CSL-60608-SP	6	SPS600632	6.5000"	5.67"	0.12
CSL-60610-SP	6	SPS600640	6.6250"	5.67"	0.12
CSL-60612-SP	6	SPS600648	6.7500"	5.67"	0.12
CSL-60614-SP	6	SPS600656	6.8750"	5.67"	0.12
CSL-60700-SP	6	SPS600700	7.0000"	5.67"	0.12
CSL-60702-SP	6	SPS600708	7.1250"	5.67"	0.12
CSL-60704-SP	6	SPS600716	7.2500"	5.67"	0.12

Project Information: For use with cam and groove fitting (CGE/CGE-XXXCR-A1), CRIMPLOK crimp long combination nipples (CNL-XXXCR-SP) and CRIMPLOK (CNT/G-XXXCS-S/P) I.D. Tolerance = +/-0.012"

CRIMPLOK SLEEVES STEEL PLATED FOR 8" HOSE

PART#	SIZE	CAMPBELL PART	SLEEVE ID"	SLEEVE LENGTH"	WALL THICKNESS
CSL-80812-SP	8	SPS800848	8.7500"	6.50"	0.12
CSL-80900-SP	8	SPS800900	9.0000"	6.50"	0.12
CSL-80904-SP	8	SPS800916	9.2500"	6.50"	0.12
CSL-80908-SP	8	SPS800932	9.5000"	6.50"	0.12

Project Information: For use with cam and groove fitting (CGE/CGE-XXXCR-A1), CRIMPLOK crimp long combination nipples (CNL-XXXCR-SP) and CRIMPLOK (CNT/G-XXXCS-S/P) I.D. Tolerance = +/-0.012"

CRIMPLOK SLEEVES STAINLESS

HOSE ACCESSORIES

CRIMPLOK SLEEVES STEEL PLATED FOR 10" HOSE

PART#	SIZE	CAMPBELL PART	SLEEVE ID"	SLEEVE LENGTH"	WALL THICKNESS
CSL-100108-SP	10	SPS100132	10.5000"	7.25"	0.12
CSL-100114-SP	10	SPS100156	10.8750"	7.25"	0.12

Project Information: For use with cam and groove fitting (CGE/CGE-XXXCR-A1), CRIMPLOK crimp long combination nipples (CNL-XXXCR-SP) and CRIMPLOK (CNT/G-XXXCS-S/P) I.D. Tolerance = +/-0.012"

**CRIMPLOK SLEEVES STAINLESS 304 FOR 1/2" HOSE - SHORT**

PART#	SIZE	CAMPBELL PART	SLEEVE ID"	SLEEVE LENGTH"	WALL THICKNESS
CSL-05100S-SS304	1/2	SSS050100S	1.000"	0.91"	0.06

Project Information: For use with regular combination nipples (CNT-XXX-SS/SS316) I.D. Tolerance = +/-0.012"

CRIMPLOK SLEEVES STAINLESS 304 FOR 3/4" HOSE

PART#	SIZE	CAMPBELL PART	SLEEVE ID"	SLEEVE LENGTH"	WALL THICKNESS
CSL-08104-SS304	3/4	SSS075116	1.2500"	2.14"	0.06

Project Information: For use with cam and groove fitting (CGE/CGE-XXX-SS1), CRIMPLOK crimp long combination nipples (CNL-XXXCR-SP) and CRIMPLOK (CNT/G-XXXCS-S/P) I.D. Tolerance = +/-0.012"

CRIMPLOK SLEEVES STAINLESS 304 FOR 3/4" HOSE - SHORT

PART#	SIZE	CAMPBELL PART	SLEEVE ID"	SLEEVE LENGTH"	WALL THICKNESS
CSL-08104S-SS304	3/4	SSS075116S	1.2500"	1.10"	0.06

Project Information: For use with regular combination nipples (CNT-XXX-SS/SS316) I.D. Tolerance = +/-0.012"

CRIMPLOK SLEEVES STAINLESS 304 FOR 1" HOSE

PART#	SIZE	CAMPBELL PART	SLEEVE ID"	SLEEVE LENGTH"	WALL THICKNESS
CSL-10108-SS304	1	SSS100132	1.5000"	2.29"	0.06
CSL-10110-SS304	1	SSS100140	1.6250"	2.29"	0.06
CSL-10112-SS304	1	SSS100148	1.7500"	2.29"	0.06

Project Information: For use with cam and groove fitting (CGE/CGE-XXX-SS1) I.D. Tolerance = +/-0.012"

CRIMPLOK SLEEVES STAINLESS 304 FOR 1" HOSE - SHORT

PART#	SIZE	CAMPBELL PART	SLEEVE ID"	SLEEVE LENGTH"	WALL THICKNESS
CSL-10109S-SS304	1	SSS100136S	1.5625"	1.26"	0.06
CSL-10110S-SS304	1	SSS100140S	1.6250"	1.26"	0.06

Project Information: For use with regular combination nipples (CNT-XXX-SS/SS316) I.D. Tolerance = +/-0.012"

CRIMPLOK SLEEVES STAINLESS

HOSE ACCESSORIES

CRIMPLOK SLEEVES STAINLESS 304 FOR 1-1/4" HOSE

PART#	SIZE	CAMPBELL PART	SLEEVE ID"	SLEEVE LENGTH"	WALL THICKNESS
CSL-13114-SS304	1-1/4	SSS125156	1.8750"	2.32"	0.06

Project Information: For use with cam and groove fitting (CGE/CGE-XXX-SS1) I.D. Tolerance = +/-0.012"

CRIMPLOK SLEEVES STAINLESS 304 FOR 1-1/4" HOSE - SHORT

PART#	SIZE	CAMPBELL PART	SLEEVE ID"	SLEEVE LENGTH"	WALL THICKNESS
CSL-13113S-SS304	1-1/4	SSS125152S	1.8125"	1.26"	0.06

Project Information: For use with regular combination nipples (CNT-XXX-SS/SS316) I.D. Tolerance = +/-0.012"

CRIMPLOK SLEEVES STAINLESS 304 FOR 1-1/2" HOSE

PART#	SIZE	CAMPBELL PART	SLEEVE ID"	SLEEVE LENGTH"	WALL THICKNESS
CSL-15201-SS304	1-1/2	SSS150204	2.0625"	2.36"	0.06

Project Information: For use with cam and groove fitting (CGE/CGE-XXX-SS1) I.D. Tolerance = +/-0.012"

CRIMPLOK SLEEVES STAINLESS 304 FOR 2" HOSE

PART#	SIZE	CAMPBELL PART	SLEEVE ID"	SLEEVE LENGTH"	WALL THICKNESS
CSL-20206-SS304	2	SSS200224	2.3750"	2.79"	0.06
CSL-20207-SS304	2	SSS200228	2.4375"	2.79"	0.06
CSL-20208-SS304	2	SSS200232	2.5000"	2.79"	0.06
CSL-20209-SS304	2	SSS200236	2.5625"	2.79"	0.06
CSL-20210-SS304	2	SSS200240	2.6250"	2.79"	0.06
CSL-20211-SS304	2	SSS200244	2.6875"	2.79"	0.06
CSL-20212-SS304	2	SSS200248	2.7500"	2.79"	0.06
CSL-20214-SS304	2	SSS200256	2.8750"	2.79"	0.06

Project Information: For use with cam and groove fitting (CGE/CGE-XXX-SS1) I.D. Tolerance = +/-0.012"

CRIMPLOK SLEEVES STAINLESS 304 FOR 3" HOSE

PART#	SIZE	CAMPBELL PART	SLEEVE ID"	SLEEVE LENGTH"	WALL THICKNESS
CSL-30309-SS304	3	SSS300336	3.5625"	3.94"	0.10
CSL-30310-SS304	3	SSS300340	3.6250"	3.94"	0.10
CSL-30311-SS304	3	SSS300344	3.6875"	3.94"	0.10
CSL-30312-SS304	3	SSS300348	3.7500"	3.94"	0.10
CSL-30313-SS304	3	SSS300352	3.8125"	3.94"	0.10
CSL-30314-SS304	3	SSS300356	3.8750"	3.94"	0.10

Project Information: For use with cam and groove fitting (CGE/CGE-XXX-SS1) I.D. Tolerance = +/-0.012"



GO ONLINE TO VIEW OPEN ORDERS, ORDER HISTORY, AND TRACKING INFORMATION ON ALL SHIPMENTS