



# PRODUCT CATALOG

**DEWALT**<sup>®</sup>  
GUARANTEED TOUGH.<sup>®</sup>

# TABLE OF CONTENTS

## CORDLESS POWER TOOLS

12V & 20V MAX* Chargers	23
12V MAX* Combo Kits	22
18V Combo Kits	20
20V MAX* Combo Kits	19
36V Combo Kits	19
Adhesive Dispensers	16
Band Saws	16
Batteries & Chargers	23
Bi-Metal Cordless Bandsaw Blades	16
Charger/Radio	22
Circular Saws	13
Concrete Vibrator	14
Cut-Off Tools	15
Cut-Out Tool	12
Drill/Drivers	5
Flashlights	17
Floodlights	17
Hammerdrills	4
Heated Gear	18
Impact Drivers	7
Impact Wrenches	8
Instruments	17
Jig Saws	13
Metal Cutting Saws	13
Nailers	15
Reciprocating Saws	14
Right Angle Drills	10
Rotary Lasers	18
Screwdrivers	10
SDS Rotary Hammers	12
Shears	15
Vacuums	18
Work Lights	17

## CORDED POWER TOOLS

Air Distribution	47
Angle Grinders - Small, Medium & Large	39
Band Saws	41
Biscuits	42
Chipping Hammers	36
Chop Saws	41
Circular Saws	28
Compressors	46
Cut-Off Machines	41
Cut-Out Tool	32
Demolition Hammers	36
Die Grinders	40
Drills - VSR, Electronic Clutch & Specialty	33
Dust Extraction for Grinders	37
Dust Extraction for Large Rotary Hammers	37
Dust Extractor Attachments & Connectors	38
Dust Extractor Vacuums	38
Flooring Tool	45
Grinder Accessories	40
Grinders - Bench & Straight	40
Hammerdrills	34
Hand Planers	44
Handheld Tile Saw	29
Heat Guns	44
Impact Wrenches	32
Jig Saws	28
Laminate Trimmers	42
Measurer	44, 108
Miter Saw Stands	30
Miter Saws	30
Multi-Cutter® Saw	41
Multi-Tool	28
Nailers (Pneumatic)	45
Nibblers	41
Pavement Breaker	36
Plate Joiner & Plate Joiner Blade	42
Polishers	40
Random Orbital Sanders	42
Reciprocating Saws	28
Routers & Router Accessories	43
Sanding Pads	42
Screwdrivers	31
Scroll Saws	28
SDS MAX Rotary Hammers	35
SDS Rotary Hammers	34
Shears	41
Spline Rotary Hammers	35
Staplers	46
Table Saws	29
Thickness Planers	44
Tile Saws	29
Track Saws	29

## HAND TOOLS

Clamps - Bar Clamps (Small, Medium & Large)	119
Clamps - Bar Clamps (Rapid Return)	119
Cutting Tools - 5-in-1 Hacksaw & Blades	117
Cutting Tools - Flush Cut Saw	117
Cutting Tools - Jab Saws (Folding & Standard)	117
Cutting Tools - Multi-Purpose Saw	117
Cutting Tools - Panel Saws	118
Cutting Tools - Knives & Blades	115-116
Glue Gun & Riveter	114
Hammers	120
Hex Keys (Folding Locking)	123
Hex Keys (Ratcheting T Handle)	123
Laser Distance Measurers	108
Laser Levels	106-107
Laser Level Accessories	109-110
Marking & Layout - Chalk, Chalk Reels / Kits	104
Marking & Layout - Premium Rafting Square	104
Marking & Layout - Levels	105
Measuring Tools - Short Tapes & Long Tapes	103
Multi Tools	119
Nail Sets	121
Optical Levels	107
Pliers	122-123
Pry Bars	121
Screwdriver & Screwdriver Sets	112
Staplers & Staples	113-114
Wood Chisel & Side Strike Chisel	120
Wrenches	123

## ACCESSORIES

Adapter - Backing Flange & Spindle	72
Bandsaw Blades - Bi-Metal Portable	100
Belts	63
Cartridge Roll Mandrels	72
Cartridge Rolls - Aluminum Oxide (High Performance)	64
Construction Saw Blades	75
Diamonds - Cup Grinding Wheels (Extended Performance)	68
Diamonds - Blades	68
Drilling - Concrete & Masonry	79
Drilling - Impact Ready®	86
Drilling - Industrial Metal	89
Drilling - Metal & Wood	90
Drilling - Step Bits	92
Drilling - Wood	92
Fastening - Impact Ready®	84
Fastening	94
Fiber Disc Backing Pads	72
Fiber Discs	59
Flap Wheels	60
Hand Pad Handle	72
Hole Saws - Bi-Metal, Mandrels & Sets	99-100
Hook & Loop Backing Pads - Disc	72
Jig Saw Blades	100
Mandrels - Quick Change	72
Metal Cutting Saw Blades	76
Non-Woven Discs, Flap Discs & Hand Pads	67
Paper Discs - 5" & 6" Hook & Loop Random Orbit Discs	64
Power Strip Discs	66
Polishing	70
Precision Saw Blades - PrecisionFraming™ & PrecisionTrim™	74
Quick Change - Drill Drive, Rapid Load® & Sets	96
Quick Change Discs	63
Reciprocating Saw Blades	97
Rolls - Paper Rolls Aluminum Oxide	64
Sheets - Waterproof Sheets Silicon Carbide	65
Shop Rolls	65
Steel Circular Saw Blades	78
Type 1 Bonded Abrasives - Cutting Wheels	51
Type 1 Bonded Abrasives - High Speed Wheels	53
Type 11 Bonded Abrasives - Cup Wheels	57
Type 27 Bonded Abrasives - Cutting Wheels	54
Type 27 Bonded Abrasives - Grinding Wheels	54
Type 27 Bonded Abrasives - Masonry Wheels	56
Type 27 Bonded Abrasives - Metal Cutting & Grinding	55
Type 27 Bonded Abrasives - Stainless Wheels	56
Type 27 Flap Discs	58
Type 28 Bonded Abrasives - Grinding Wheels	57
Type 29 Flap Discs	58
Wire Brushes	71
Woodworking Saw Blades	76

## STORAGE

Adjustable Leg Saw Horse	126
Mobile Work Station	125
One Touch Box	126
Tote with Power Tool Case	125
Tote with Removable Organizer	125
ToughSystem®	124
TSTAK®	124
Water Seal Tool Box	126

## AUTOMOTIVE

Air Tools	140
Combination Wrench Sets	129
Drive Sockets	133-138
Drive Socket Sets	130-131
Mechanics Tool Sets	129
Metal Storage	140
Ratchets	129
Reversible Ratcheting Wrench Sets	129
Sockets Accessories	139
Socket Sets	129
Wrenches	132-133

With respect to 8V MAX\* - \* - Maximum initial battery voltage (measured without a workload) is 8 volts. Nominal voltage is 7.2.

With respect to 12V MAX\* - \* - Maximum initial battery voltage (measured without a workload) is 12 volts. Nominal voltage is 10.8.

With respect to 20V MAX\* - \* - Maximum initial battery voltage (measured without a workload) is 20 volts. Nominal voltage is 18.



**CORDLESS POWER TOOLS**

**GUARANTEED TOUGH.®**

The descriptions, specifications and other claims made with respect to the products featured in this catalogue are made as of the date of printing. DeWALT retains the right to discontinue production of or make changes to any of its products without notice. Product packaging and other product literature should be consulted for current descriptions, specifications and other claims relating to DeWALT products. Changes to products shall not obligate DeWALT to make corresponding changes to products previously manufactured or sold.



## HAMMER DRILLS



**36V Lithium Ion 1/2" (13 mm) Hammerdrill/Drill/Driver Kit**



**20V MAX\* XR Lithium Ion Brushless Premium Hammerdrill Kit**



**20V MAX\* XR Lithium Ion Brushless Premium Hammerdrill (Tool Only)**



**20V MAX\* Lithium Ion Premium 3-Speed Hammerdrill Kit**

SPECIFICATIONS	DC901KL	DCD995M2	DCD995B	DCD985M2
Volts	36V	20V MAX*	20V MAX*	20V MAX*
Max Power	750 UWO	650 UWO	650 UWO	535 UWO
# of Speed Settings	3	3	3	3
No Load Speed	-	-	-	-
Max RPM	0-400 / 0-1,200 / 0-1,600 rpm	0-450 / 0-1,300 / 0-2,000 rpm	0-450 / 0-1,300 / 0-2,000 rpm	0-575 / 0-1,350 / 0-2,000 rpm
Max BPM	0-6,800 / 0-20,400 / 0-27,200 bpm	0-7,650 / 0-22,100 / 0-34,000 bpm	0-7,650 / 0-22,100 / 0-34,000 bpm	0-9,775 / 0-22,950 / 0-34,000 bpm
Chuck Size	1/2"	1/2"	1/2"	1/2"
Chuck Type	Metal, self-tightening	Metal, ratcheting	Metal, ratcheting	Metal, ratcheting
Weight	6.7 lbs	4.7 lbs	3.4 lbs (tool only)	5.2 lbs
Charger/Batteries	1-Hour Charger / (2) 36V Lithium Ion	Fast Charger / (2) 20V MAX* XR Lithium Ion (4.0 Ah)	Sold Separately	Fast Charger / (2) 20V MAX* XR Lithium Ion (4.0 Ah)
Includes	360° side handle	360° side handle	360° side handle	360° side handle



**20V MAX\* XR Premium 3-Speed Hammerdrill (Tool Only)**



**18V XRP™ Lithium Ion 1/2" (13 mm) Hammerdrill/Drill/Driver Kit**



**20V MAX\* XR Lithium Ion Brushless Compact Hammerdrill Kit**

SPECIFICATIONS	DCD985B	DCD970KL	DCD795D2
Volts	20V MAX*	18V	20V MAX*
Max Power	535 UWO	450 UWO	360 UWO
# of Speed Settings	3	3	2
No Load Speed	-	-	-
Max RPM	0-575 / 0-1,350 / 0-2,000 rpm	0-500 / 0-1,250 / 0-2,000 rpm	0-600 / 0-2,000 rpm
Max BPM	0-9,775 / 0-22,950 / 0-34,000 bpm	0-8,500 / 0-21,250 / 0-34,000 bpm	0-10,200 / 0-34,000 bpm
Chuck Size	1/2"	1/2"	1/2"
Chuck Type	Metal, ratcheting	Metal, ratcheting	Metal, ratcheting
Weight	3.9 lbs (tool only)	5.2 lbs	3.6 lbs
Charger/Batteries	Sold Separately	1-Hour NiCd/NiMH/Li-Ion charger / (2) 18V XRP™ Lithium Ion	Fast Charger / (2) 20V MAX* XR Lithium Ion (2.0 Ah)
Includes	360° side handle	360° side handle	On-board bit tip holder & belt hook



**20V MAX\* Lithium Ion Compact Hammerdrill Kit**



**18V XRP™ 1/2" (13 mm) Hammerdrill/Drill/Driver Kit**



**18V XRP™ 1/2" (13 mm) Hammerdrill/Drill/Driver Kit**



**18V XRP™ 1/2" (13 mm) Hammerdrill/Drill/Driver (Tool Only)**

SPECIFICATIONS	DCD785C2	DCD959KX	DCD950KX	DCD950B
Volts	20V MAX*	18V	18V	18V
Max Power	350 UWO	420 UWO	450 UWO	450 UWO
# of Speed Settings	2	3	3	3
Max RPM	0-600 / 2,000 rpm	0-450 / 0-1,450 / 0-2,000 rpm	0-500 / 0-1,250 / 0-2,000 rpm	0-500 / 0-1,250 / 0-2,000 rpm
Max BPM	0-10,200 / 0-34,000 bpm	0-7,650 / 0-24,650 / 0-34,000 bpm	0-8,500 / 0-21,250 / 0-34,000 bpm	0-8,500 / 0-21,250 / 0-34,000 bpm
Chuck Size	1/2"	1/2"	1/2"	1/2"
Chuck Type	Ratcheting	Metal, ratcheting	Metal, ratcheting	Metal, ratcheting
Weight	3.5 lbs	6.0 lbs	6.2 lbs	3.9 lbs (tool only)
Charger/Batteries	Fast Charger / (2) 20V MAX* Lithium Ion (1.5 Ah)	1-Hour Charger / (2) 18V XRP™	1-Hour Charger / (2) 18V XRP™	Sold Separately
Includes	On-board bit tip holder & belt hook	360° side handle	360° side handle	360° side handle



**18V Compact Lithium Ion 1/2" (13 mm) Hammerdrill Kit**



**18V Compact 1/2" (13 mm) Hammerdrill (Tool Only)**



**18V Compact 1/2" (13 mm) Hammerdrill Kit**



**14.4V XRP™ 1/2" (13 mm) Hammerdrill/Drill/Driver Kit**

SPECIFICATIONS	DCD775KL	DCD775B	DC725KA	DCD930KX
Volts	18V	18V	18V	14.4V
Max Power	350 UWO	350 UWO	410 UWO	325 UWO
# of Speed Settings	2	2	2	3
Max RPM	0-500 / 0-1,700 rpm	0-500 / 0-1,700 rpm	0-500 / 0-1,700 rpm	0-425 / 0-1,200 / 0-1,800 rpm
Max BPM	0-8,500 / 0-29,000 bpm	0-8,500 / 0-29,000 bpm	0-8,500 / 0-29,000 bpm	0-7,225 / 0-20,400 / 0-30,600 bpm
Chuck Size	1/2"	1/2"	1/2"	1/2"
Chuck Type	Metal, ratcheting	Metal, ratcheting	Metal, ratcheting	Metal, ratcheting
Weight	4.1 lbs (tool only)	3.1 lbs (tool only)	4.9 lbs	5.7 lbs
Charger/Batteries	30-Minute Charger / (2) 18V Compact Lithium Ion	Sold Separately	1-Hour Charger / (2) 18V	1-Hour Charger / (2) 14.4V XRP™
Includes	-	-	-	360° side handle

## DRILL/DRIVERS



SPECIFICATIONS	DCD990M2	DCD980M2	DCD940KX	DCD960KL	DCD790D2
Volts	20V MAX*	20V MAX*	18V	18V	20V MAX*
Max Power	650 UWO	535 UWO	450 UWO	450 UWO	360 UWO
# of Speed Settings	3	3	3	3	2
Max RPM	0-575 / 0-1,350 / 0-2,000 rpm	0-575 / 0-1,350 / 0-2,000 rpm	0-500 / 0-1,250 / 0-2,000 rpm	0-500 / 0-1,250 / 0-2,000 rpm	0-600 / 0-2,000 rpm
Chuck Size	1/2"	1/2"	1/2"	1/2"	1/2"
Chuck Type	Metal, ratcheting	Metal, ratcheting	Metal, ratcheting	Metal, ratcheting	Metal, ratcheting
Weight	4.6 lbs	5.2 lbs	6.2 lbs	5.2 lbs	3.5 lbs
Charger/Batteries	1-Hour Charger / (2) 20V MAX* XR Lithium Ion (4.0 Ah)	1-Hour Charger / (2) 20V MAX* XR Lithium Ion (4.0 Ah)	1-Hour Charger / (2) 18V XRP™	1-Hour NiCd/NiMH/Li-Ion Charger / (2) 18V XRP™ Lithium Ion	1-Hour Charger / (2) 20V MAX* XR Lithium Ion (2.0 Ah)
Includes	On-board bit tip holder & belt hook and 360° side handle	360° side handle	360° side handle	360° side handle	On-board bit tip holder & belt hook



SPECIFICATIONS	DCD790B	DCD780C2	DCD780B	DCD760KL
Volts	20V MAX*	20V MAX*	20V MAX*	18V
Max Power	360 UWO	350 UWO	350 UWO	350 UWO
# of Speed Settings	2	2	2	2
Max RPM	0-600 / 2,000 rpm	0-600 / 2,000 rpm	0-600 / 2,000 rpm	0-500 / 0-1,700 rpm
Chuck Size	1/2"	1/2"	1/2"	1/2"
Chuck Type	Metal, ratcheting	Ratcheting	Ratcheting	Plastic, ratcheting
Weight	2.6 lbs (tool only)	3.4 lbs	2.7 lbs (tool only)	4.0 lbs
Charger/Batteries	Sold Separately	30-Minute Fast Charger / (2) 20V MAX* Lithium Ion (1.5 Ah)	Sold Separately	30-Minute Charger, (2) 18V Compact Lithium Ion
Includes	On-board bit tip holder & belt hook	On-board bit tip holder & belt hook	On-board bit tip holder & belt hook	-



SPECIFICATIONS	DCD760B	DC720KA	DCD920KX	DC730KA
Volts	18V	18V	14.4V	14.4V
Max Power	350 UWO	410 UWO	325 UWO	300 UWO
# of Speed Settings	2	2	3	2
Max RPM	0-500 / 0-1,700 rpm	0-500 / 0-1,700 rpm	0-425 / 0-1,200 / 0-1,800 rpm	0-400 / 0-1,450 rpm
Chuck Size	1/2"	1/2"	1/2"	1/2"
Chuck Type	Plastic, ratcheting	Plastic, ratcheting	Metal, ratcheting	Plastic, ratcheting
Weight	3.0 lbs (tool only)	4.8 lbs	5.7 lbs	4.3 lbs
Charger/Batteries	Sold Separately	1-Hour Charger / (2) 18V	1-Hour Charger / (2) 14.4V XRP™	1-Hour Charger / (2) 14.4V



SPECIFICATIONS	DCD710S2	DCD910KX	DC742KA	DC750KA
Volts	12V MAX*	12V	12V	9.6V
Max Power	189 UWO	285 UWO	200 UWO	130 UWO
Max RPM	0-400 / 0-1,500 rpm	0-425 / 0-1,200 / 0-1,800 rpm	0-400 / 0-1,450 rpm	0-300 / 0-1,100 rpm
Chuck Size	3/8"	1/2"	3/8"	3/8"
Chuck Type	Plastic, ratcheting	Metal, ratcheting	Plastic, ratcheting	Plastic, ratcheting
Weight	2.4 lbs	5.2 lbs	3.8 lbs	3.4 lbs
Charger/Batteries	Fast Charger, (2) 12V MAX* Lithium Ion	1-Hour Charger / (2) 12V XRP™	Fast Charger / (2) 12V	1-Hour Charger / (2) 9.6V
Includes	(1) belt hook	-	-	-

## IMPACT DRIVERS



**20V MAX\* XR Lithium Ion Brushless 1/4" (6.35 mm) 3-Speed Impact Driver**



**20V MAX\* XR Lithium Ion Brushless 1/4" (6.35 mm) 3-Speed Impact Driver**



**20V MAX\* XR Brushless 1/4" (6.35 mm) 3-Speed Impact Driver (Tool Only)**



**20V MAX\* XR Lithium Ion Brushless 1/4" (6.35 mm) Impact Driver Kit**

SPECIFICATIONS	DCF895M2	DCF895D2	DCF895B	DCF886M2
Volts	20V MAX*	20V MAX*	20V MAX*	20V MAX*
Drive Size	1/4" Hex shank push-button release	1/4" Hex shank push-button release	1/4" Hex shank push-button release	1/4" Hex shank quick release
No Load Speed	0 - 2,850 / 1,900 / 950 rpm	0 - 2,850 / 1,900 / 950 rpm	0 - 2,850 / 1,900 / 950 rpm	0 - 2,800 rpm
Impacts/Min	0 - 3,300 / 2,400 / 1,300 ipm	0 - 3,300 / 2,400 / 1,300 ipm	0 - 3,300 / 2,400 / 1,300 ipm	0 - 3,200 ipm
Max Torque (in-lbs)	1,500 / 900 / 500 in-lbs	1,500 / 900 / 500 in-lbs	1,500 / 900 / 500 in-lbs	1,500 in-lbs
Max Torque (ft-lbs)	125 ft-lbs	125 ft-lbs	125 ft-lbs	125 ft-lbs
Tool Length	5-1/4"	5-1/4"	5-1/4"	5.5"
LEDs	3	3	3	3
Weight	3.6 lbs	3.0 lbs	2.2 lbs (tool only)	3.4 lbs
Charger/Batteries	Fast Charger / (2) 20V MAX* XR Lithium Ion (4.0 Ah)	Fast Charger / (2) 20V MAX* XR Lithium Ion (2.0 Ah)	Sold Separately	Fast Charger / (2) 20V MAX* XR Lithium Ion (4.0 Ah)
Includes	Belt hook and accessory storage	Belt hook and accessory storage	Belt hook and accessory storage	Belt hook



**20V MAX\* XR Lithium Ion Brushless 1/4" (6.35 mm) Impact Driver Kit**



**20V MAX\* XR Brushless 1/4" (6.35 mm) Impact Driver (Tool Only)**



**20V MAX\* Lithium Ion 1/4" (6.35 mm) Impact Driver Kit**



**20V MAX\* Lithium Ion 1/4" (6.35 mm) Impact Driver Kit**

SPECIFICATIONS	DCF886D2	DCF886B	DCF885M2	DCF885C2
Volts	20V MAX*	20V MAX*	20V MAX*	20V MAX*
Drive Size	1/4" Hex shank quick release	1/4" Hex shank quick release	1/4" Hex shank quick release	1/4" Hex shank quick release
No Load Speed	0 - 2,800 rpm	0 - 2,800 rpm	2,800 rpm	2,800 rpm
Impacts/Min	0 - 3,200 ipm	0 - 3,200 ipm	3,200 ipm	3,200 ipm
Max Torque (in-lbs)	1,500 in-lbs	1,500 in-lbs	1,400 in-lbs	1,400 in-lbs
Max Torque (ft-lbs)	125 ft-lbs	125 ft-lbs	117 ft-lbs	117 ft-lbs
Tool Length	5.5"	5.5"	5.5"	5.5"
LEDs	3	3	3	3
Weight	2.9 lbs	2.1 lbs (tool only)	3.4 lbs	2.8 lbs
Charger/Batteries	Fast Charger / (2) 20V MAX* XR Lithium Ion (2.0 Ah)	Sold Separately	Fast Charger / (2) 20V MAX* XR Lithium Ion (4.0 Ah)	Fast Charger / (2) 20V MAX* XR Lithium Ion (1.5 Ah)
Includes	Belt hook	Belt hook	Belt hook	Belt hook



**20V MAX\* 1/4" (6.35 mm) Impact Driver (Tool Only)**



**18V XRP™ Lithium Ion 1/4" (6.35 mm) Impact Driver Kit**



**18V XRP™ 1/4" (6.35 mm) Impact Driver Kit**

SPECIFICATIONS	DCF885B	DC827KL	DC825KA
Volts	20V MAX*	18V	18V
Drive Size	1/4" Hex shank quick release	1/4" Hex shank quick release	1/4" Hex shank quick release
No Load Speed	2,800 rpm	0-2,400 rpm	0-2,400 rpm
Impacts/Min	3,200 ipm	0-2,700 ipm	0-2,700 ipm
Max Torque (in-lbs)	1,400 in-lbs	1,330 in-lbs	1,330 in-lbs
Max Torque (ft-lbs)	117 ft-lbs	111 ft-lbs	111 ft-lbs
Tool Length	5.5"	5-3/4"	5-3/4"
LEDs	3	1	1
Weight	2.0 lbs (tool only)	3.2 lbs	4.6 lbs
Charger/Batteries	Sold Separately	1-Hour NiCd/NiMH/Li-Ion Charger / (2) 18V XRP™ Lithium Ion	1-Hour Charger / (2) 18V XRP™
Includes	Belt hook	-	-

## IMPACT DRIVERS



**18V 1/4" (6.35 mm) Impact Driver (Tool Only)**



**14.4V XRP™ 1/4" (6.35 mm) Impact Driver Kit**



**12V MAX\* Lithium Ion 1/4" (6.35 mm) Impact Driver Kit**



**12V XRP™ 1/4" (6.35 mm) Impact Driver Kit**

SPECIFICATIONS	DC825B	DC835KA	DCF815S2	DC845KA
Volts	18V	14.4V	12V MAX*	12V
Drive Size	1/4" Hex shank quick release	1/4" Hex shank quick release	1-Handed loading, 1/4" hex chuck	1/4" Hex shank quick release
No Load Speed	0-2,400 rpm	0-2,400 rpm	0-2,450 rpm	0-2,400 rpm
Impacts/Min	0-2,700 ipm	0-2,700 ipm	0-3,400 ipm	0-2,700 ipm
Max Torque (in-lbs)	1,330 in-lbs	1,240 in-lbs	950 in-lbs	1,150 in-lbs
Max Torque (ft-lbs)	111 ft-lbs	103 ft-lbs	79 ft-lbs	96 ft-lbs
Tool Length	5-3/4"	5-3/4"	6-1/4"	5-3/4"
LEDs	1	1	3	1
Weight	2.2 lbs (tool only)	3.9 lbs	2.3 lbs	3.6 lbs
Charger/Batteries	Sold Separately	1-Hour Charger / (2) 14.4V XRP™	Fast Charger / (2) 12V MAX* Lithium Ion	1-Hour Charger / (2) 12V XRP™
Includes	-	-	(1) Belt hook	-

## IMPACT WRENCHES



**36V Lithium Ion 1/2" (13 mm) Impact Wrench Kit**



**20V MAX\* Lithium Ion 1/2" (13 mm) Impact Wrench Kit with Detent Pin Anvil**



**20V MAX\* 1/2" (13 mm) Impact Wrench with Detent Pin Anvil (Tool Only)**



**20V MAX\* Lithium Ion 1/2" (13 mm) Impact Wrench Kit with Hog Ring Anvil**

SPECIFICATIONS	DC800KL	DCF889M2	DCF889B	DCF889HM2
Volts	36V	20V MAX*	20V MAX*	20V MAX*
Drive Size	1/2" Square w/ detent pin anvil	1/2" Square w/ detent pin anvil	1/2" Square w/ detent pin anvil	1/2" Square w/ hog ring anvil
Max Torque (in-lbs)	3,900 in-lbs	4,800 in-lbs	4,800 in-lbs	4,800 in-lbs
Max Torque (ft-lbs)	325 ft-lbs	400 ft-lbs	400 ft-lbs	400 ft-lbs
No Load Speed	1,400 rpm	0-1,500 rpm	0-1,500 rpm	0-1,500 rpm
Impacts/Minute	2,500 ipm	0-2,300 ipm	0-2,300 ipm	0-2,300 ipm
Switch	Rocker	Variable Speed	Variable Speed	Variable Speed
Weight	7.5 lbs	6.7 lbs	5.3 lbs (tool only)	6.7 lbs
Tool Length	10-3/4"	10-3/4"	10-3/4"	10-3/4"
Charger/Batteries	1-Hour Charger / (2) 36V Lithium Ion	Fast Charger / (2) 20V MAX* XR Lithium Ion (4.0 Ah)	Sold Separately	Fast Charger / (2) 20V MAX* XR Lithium Ion (4.0 Ah)



**18V XRP™ Lithium Ion 1/2" (13 mm) Impact Wrench Kit**



**18V XRP™ 1/2" (13 mm) High Torque Impact Wrench Kit with Detent Pin Anvil**



**18V 1/2" (13 mm) High Torque Impact Wrench with Detent Pin Anvil (Tool Only)**



**18V XRP™ 1/2" (13 mm) High Torque Impact Wrench Kit with Hog Ring Anvil**

SPECIFICATIONS	DCF059KL	DW059K-2	DW059B	DW059HK-2
Volts	18V	18V	18V	18V
Drive Size	1/2" Square w/ detent pin anvil	1/2" Square w/ detent pin anvil	1/2" Square w/ detent pin anvil	1/2" Square w/ hog ring anvil
Max Torque (in-lbs)	3,600 in-lbs	3,600 in-lbs	3,600 in-lbs	3,600 in-lbs
Max Torque (ft-lbs)	300 ft-lbs	300 ft-lbs	300 ft-lbs	300 ft-lbs
No Load Speed	0-1,650 rpm	1,650 rpm	1,650 rpm	1,650 rpm
Impacts/Minute	0-2,600 ipm	2,600 ipm	2,600 ipm	2,600 ipm
Switch	Rocker	Rocker	Rocker	Rocker
Weight	6.1 lbs	7.5 lbs	5.3 lbs (tool only)	7.5 lbs
Tool Length	10-3/4"	10-3/4"	10-3/4"	10-3/4"
Charger/Batteries	1-Hour NiCd/NiMH/Li-Ion Charger / (2) 18V XRP™ Lithium Ion	1-Hour Charger / (2) 18V XRP™	Sold Separately	1-Hour Charger / (2) 18V XRP™

## IMPACT WRENCHES



**18V 1/2" (13 mm) High Torque Impact Wrench with Hog Ring Anvil (Tool Only)**



**18V XRP™ 1/2" (13 mm) Impact Wrench Kit with Detent Pin Anvil**



**18V 1/2" (13 mm) Impact Wrench with Detent Pin Anvil (Tool Only)**



**20V MAX\* Lithium Ion 1/2" (13 mm) Impact Wrench Kit with Detent Pin**

SPECIFICATIONS	DW059HB	DC821KA	DC821B	DCF880M2
Volts	18V	18V	18V	20V MAX*
Drive Size	1/2" Square w/ hog ring anvil	1/2" Square w/ detent pin anvil	1/2" Square w/ detent pin anvil	1/2" Square w/ detent pin anvil
Max Torque (in-lbs)	3,600 in-lbs	1,920 in-lbs	1,920 in-lbs	1,800 in-lbs
Max Torque (ft-lbs)	300 ft-lbs	160 ft-lbs	160 ft-lbs	150 ft-lbs
No Load Speed	1,650 rpm	0-2,100 rpm	0-2,100 rpm	0-2,300 rpm
Impacts/Minute	2,600 ipm	0-3,000 ipm	0-3,000 ipm	0-2,700 ipm
LEDs	-	-	-	3
Weight	5.3 lbs (tool only)	5.3 lbs	2.9 lbs (tool only)	3.4 lbs
Tool Length	10-3/4"	7-5/8"	7-5/8"	5.7"
Charger/Batteries	Sold Separately	1-Hour Charger / (2) 18V XRP™	Sold Separately	Fast Charger / (2) 20V MAX* XR Lithium Ion (4.0 Ah)



**20V MAX\* 1/2" (13 mm) Impact Wrench with Detent Pin (Tool Only)**



**20V MAX\* Lithium Ion 1/2" (13 mm) Impact Wrench Kit with Hog Ring Anvil**



**20V MAX\* Lithium Ion 3/8" (9.5 mm) Impact Wrench with Hog Ring Kit**



**20V MAX\* 3/8" (9.5 mm) Impact Wrench with Hog Ring (Tool Only)**

SPECIFICATIONS	DCF880B	DCF880HM2	DCF883M2	DCF883B
Volts	20V MAX*	20V MAX*	20V MAX*	20V MAX*
Drive Size	1/2" Square w/ detent pin anvil	1/2" Square w/ hog ring anvil	3/8" Square w/ hog ring anvil	3/8" Square w/ hog ring anvil
Max Torque (in-lbs)	1,800 in-lbs	1,800 in-lbs	1,560 in-lbs	1,560 in-lbs
Max Torque (ft-lbs)	150 ft-lbs	150 ft-lbs	130 ft-lbs	130 ft-lbs
No Load Speed	0-2,300 rpm	0-2,300 rpm	0-2,300 rpm	0-2,300 rpm
Impacts/Minute	0-2,700 ipm	0-2,700 ipm	0-2,700 ipm	0-2,700 ipm
LEDs	3	3	3	3
Weight	2.2 lbs (tool only)	3.4 lbs	3.4 lbs	2.2 lbs (tool only)
Tool Length	5.7"	5.7"	5.7"	5.7"
Charger/Batteries	Sold Separately	Fast Charger / (2) 20V MAX* XR Lithium Ion (4.0 Ah)	Fast Charger / (2) 20V MAX* XR Lithium Ion (4.0 Ah)	Sold Separately

## IMPACT WRENCHES



**18V XRP™ Lithium Ion 1/2" (13 mm) Impact Wrench Kit**



**18V XRP™ 1/2" (13 mm) Impact Wrench Kit**



**18V 1/2" (13 mm) Impact Wrench (Tool Only)**



**18V XRP™ 3/8" (9.5 mm) Impact Wrench Kit**

SPECIFICATIONS	DC822KL	DC820KA	DC820B	DC823KA
Volts	18V	18V	18V	18V
Drive Size	1/2" Square w/ detent pin anvil	1/2" Square w/ detent pin anvil	1/2" Square w/ detent pin anvil	3/8" Square w/ hog ring anvil
Max Torque (in-lbs)	1,740 in-lbs	1,740 in-lbs	1,740 in-lbs	1,500 in-lbs
Max Torque (ft-lbs)	145 ft-lbs	145 ft-lbs	145 ft-lbs	125 ft-lbs
No Load Speed	0 - 2,400 rpm	0 - 2,400 rpm	0 - 2,400 rpm	0 - 2,400 rpm
Impacts/Minute	0 - 2,700 ipm	0 - 2,700 ipm	0 - 2,700 ipm	0 - 2,700 ipm
LEDs	1	1	1	1
Tool Length	5-3/4"	5-3/4"	5-3/4"	5-3/4"
Weight	3.2 lbs	4.6 lbs	2.2 lbs (tool only)	4.6 lbs
Charger/Batteries	1-Hour Charger NiCd/NiMH/Li-Ion Charger / (2) 18V XRP™ Lithium Ion	1-Hour Charger / (2) 18V XRP™	Sold Separately	1-Hour Charger / (2) 18V XRP™



**18V 3/8" (9.5 mm) Impact Wrench (Tool Only)**



**12V MAX\* Lithium Ion 3/8" (9.5 mm) Impact Wrench Kit**

SPECIFICATIONS	DC823B	DCF813S2
Volts	18V	12V MAX*
Drive Size	3/8" square w/ hog ring anvil	3/8" Anvil
Max Torque (in-lbs)	1,500 in-lbs	1,150 in-lbs
Max Torque (ft-lbs)	125 ft-lbs	96 ft-lbs
No Load Speed	0-2,400 rpm	0-2,450 rpm
Impacts/Minute	0-2,700 ipm	0-3,400 ipm
LEDs	1	3
Tool Length	5-3/4"	6-1/4"
Weight	2.2 lbs (tool only)	2.3 lbs
Charger/Batteries	Sold Separately	Fast Charger / (2) 12V MAX* Lithium Ion



## RIGHT ANGLE DRILLS



**20V MAX\* Lithium Ion 3/8" (9.5 mm) Right Angle Drill/Driver Kit**



**20V MAX\* 3/8" (9.5 mm) Right Angle Drill/Driver (Tool Only)**

SPECIFICATIONS	DCD740C1	DCD740B
Volts	20V MAX*	20V MAX*
Max Power	360 UWO	360 UWO
Chuck Size	3/8"	3/8"
# of Speed Settings	2	2
RPM	0-650/0-2,000 rpm	0-650/0-2,000 rpm
Chuck Type	Plastic, ratcheting	Plastic, ratcheting
Weight	3.8 lbs	3.0 lbs (tool only)
Charger/Batteries	Fast Charger / (1) 20V MAX* Lithium Ion (1.5 Ah)	Sold Separately
Includes	Belt hook, 2" Phillips bit tip	Belt hook, 2" Phillips bit tip

## SCREWDRIVERS



**18V XRP™ Light Gauge Steel Framing Screwdriver Kit**

SPECIFICATIONS	DC668KA
Volts	18V
Drive Size	1/4"
No Load Speed	0-900 / 0-2,700 rpm
Max Torque (in-lbs)	180 in-lbs
Capacity (CRS)	12-28 gauge
Weight	5.4 lbs
Charger/Batteries	1-Hour Charger / (2) 18V XRP™
Includes	#2 Phillips screwdriver bit, 5/16" nut driver

(continued on next page)



## SCREWDRIVERS



**18V XRP™ 1/4" (13 mm) Drywall/Deck Screwdriver Kit**



**12V MAX\* Lithium Ion 1/4" (13 mm) Screwdriver Kit**



**7.2V 1/4" (6.35 mm) Two-Position Screwdriver Kit**

SPECIFICATIONS	DC520KA	DCF610S2	DW920K-2
Volts	18V	12V MAX*	7.2V
Drive Size	1/4"	1/4"	1/4" Hex
No Load Speed	0 - 900 / 0 - 2,900 rpm	0 - 1,050 rpm	0 - 500 rpm
Chuck	-	1-Handed Loading, 1/4" Hex Chuck	1/4" Hex chuck
Max Torque (in-lbs)	180 in-lbs	-	80 in-lbs
Max Power	-	160 UW0	-
Capacity (CRS)	12 gauge	-	-
LEDs	-	3	-
Length	-	6-1/4"	-
Weight	5.1 lbs	2.2 lbs	3.5 lbs
Charger/Batteries	1-Hour Charger / (2) 18V XRP™	Fast Charger / (2) 12V MAX* Lithium Ion	1-Hour Charger / (2) 7.2V
Includes	Bit tip / magnetic holder, drywall nosepiece, & TEKS® nosepiece	(1) Belt hook	-

## SCREWDRIVERS



**8V MAX\* Gyroscopic Inline Screwdriver With Accessory Kit**



**8V MAX\* Gyroscopic Screwdriver With Conduit Reamer Kit**



**8V MAX\* Gyroscopic Screwdriver Kit**

SPECIFICATIONS	DCF682N1	DCF681N2	DCF680N2
Volts	8V MAX*	8V MAX*	8V MAX*
Drive Size	1/4" Hex	1/4" Hex	1/4" Hex
No Load Speed	0 - 430 rpm	0 - 430 rpm	0 - 430 rpm
Chuck	1-Handed Loading, 1/4" Hex Chuck	1-Handed Loading, 1/4" Hex Chuck	1-Handed Loading, 1/4" Hex Chuck
Motion Activated	Yes	Yes	Yes
LEDs	1	3	3
Weight	1.1 lbs	1.25 lbs	1.1 lbs
Charger/Batteries	1-Hour Charger / (1) 8V MAX* Compact Battery	1-Hour Charger / (2) 8V MAX* Compact Batteries	1-Hour Charger / (2) 8V MAX* Compact Batteries
Includes	(31) Piece Screwdriving Set	-	-

With respect to 8V MAX\* - \*Maximum initial battery voltage (measured without a workload) is 8 volts. Nominal voltage is 7.2. TEKS® is a registered trademark of Illinois Tool Works, Inc.

## SDS ROTARY HAMMERS



**36V Lithium Ion SDS Rotary Hammer Kit and Dust Extraction System**



**36V Lithium Ion 1" (25 mm) SDS Rotary Hammer Kit**



**20V MAX\* Lithium Ion SDS 3-Mode Rotary Hammer Kit**



**20V MAX\* SDS 3-Mode Rotary Hammer (Tool Only)**

SPECIFICATIONS	DC233KLDH	DC233KL	DCH253M2	DCH253B
Volts	36V	36V	20V MAX*	20V MAX*
Chuck Type	SDS Plus	SDS Plus	SDS Plus	SDS Plus
No Load Speed	0 - 1,150 rpm	0 - 1,150 rpm	0 - 1,200 rpm	0 - 1,200 rpm
Blows/Min	0 - 4,400 bpm	0 - 4,400 bpm	0 - 4,500 bpm	0 - 4,500 bpm
Impact Energy	2.6 J	2.6 J	2.1 J	2.1 J
Vibration Measurement	8.5 m/s <sup>2</sup>	8.5 m/s <sup>2</sup>	6.9 m/s <sup>2</sup>	6.9 m/s <sup>2</sup>
Vibration Control	Yes	Yes - SHOCKS™	Yes - SHOCKS™	Yes - SHOCKS™
Chipping	Yes	Yes	Yes	Yes
Concrete Optimum	5/32" - 5/8"	5/32" - 5/8"	5/32" - 1/2"	5/32" - 1/2"
Weight	7.8 lbs	7.8 lbs	6.4 lbs	5.5 lbs (tool only)
Charger/Batteries	1-Hour Charger / (2) 36V Lithium Ion	1-Hour Charger / (2) 36V Lithium Ion	Fast Charger / (2) 20V MAX* XR Lithium Ion (4.0 Ah)	Sold Separately
Includes	D25302DH dust extraction system, and 360° side handle with depth rod	360° side handle with depth rod	360° side handle with depth rod	360° side handle with depth rod According to EPTA-Procedure 05/2009



**18V XRP™ Lithium Ion 7/8" (22 mm) SDS Rotary Hammer Kit**



**18V XRP™ 7/8" (22 mm) SDS Hammer Kit**



**18V 7/8" (22 mm) SDS Hammer (Tool Only)**

SPECIFICATIONS	DC212KL	DC212KA	DC212B
Volts	18V	18V	18V
Chuck Type	SDS Plus	SDS Plus	SDS Plus
No Load Speed	0 - 1,100 rpm	0 - 1,100 rpm	0 - 1,100 rpm
Blows/Min	0 - 4,100 bpm	0 - 4,100 bpm	0 - 4,100 bpm
Impact Energy	2.0 J	2.0 J	2.0 J
Vibration Measurement	8.0 m/s <sup>2</sup>	8.0 m/s <sup>2</sup>	8.0 m/s <sup>2</sup>
Vibration Control	Yes - SHOCKS™	Yes - SHOCKS™	Yes - SHOCKS™
Chipping	No	No	No
Concrete Optimum	5/32" - 1/2"	5/32" - 1/2"	5/32" - 1/2"
Weight	6.7 lbs	7.6 lbs	5.2 lbs (tool only)
Charger/Batteries	1-Hour Charger / (2) 18V XRP™ Lithium Ion	1-Hour Charger / (2) 18V XRP™	Sold Separately
Includes	360° side handle with depth rod	360° side handle with depth rod	360° side handle with depth rod

According to EPTA-Procedure 05/2009



## CUT-OFF TOOL



**20V MAX\* Cut-Off Tool Kit**



**20V MAX\* Cut-Off Tool (Tool Only)**



**18V Cut-Off Tool Kit**



**18V Cut-Off Tool (Tool Only)**

SPECIFICATIONS	DCS551D2	DCS551B	DCS50KA	DCS50B
Volts	20V MAX*	20V MAX*	18V	18V
No Load Speed	26,000 rpm	26,000 rpm	26,000 rpm	26,000 rpm
Collet Diameter	1/4", 1/8"	1/4", 1/8"	1/4", 1/8"	1/4", 1/8"
Adjustable Guide	Yes	Yes	Yes	Yes
Weight	3.1 lbs	2.2 lbs	4.5 lbs	2.1 lbs (tool only)
Charger/Batteries	1-Hour Charger / (2) 20V MAX* XR Lithium Ion (2.0 Ah)	Sold Separately	1-Hour Charger / (2) 18V XRP™	Sold Separately
Includes	(1) General Purpose Bit, (1) Drywall Cutting Bit, 1/4" & 1/8" Collets	-	(1) General Purpose Bit, (1) Drywall Cutting Bit, 1/4" & 1/8" Collets	(1) General Purpose Bit, (1) Drywall Cutting Bit, 1/4" & 1/8" Collets

## CIRCULAR SAWS



**36V Lithium Ion 7-1/4" (186 mm) Circular Saw Kit**



**20V MAX\* Lithium Ion 6-1/2" (165 mm) Circular Saw Kit**



**20V MAX\* 6-1/2" (165 mm) Circular Saw (Tool Only)**

SPECIFICATIONS	DC300K	DCS391M1	DCS391B
Volts	36V	20V MAX*	20V MAX*
No Load Speed	4,000 rpm	3,700 rpm	3,700 rpm
Blade Diameter	7-1/4"	6-1/2"	6-1/2"
Bevel Capacity	0° - 50°	0° - 50°	0° - 50°
Depth of Cut at 45°	1-5/8"	1-5/8"	1-5/8"
Depth of Cut at 90°	2-7/16"	2-1/4"	2-1/4"
Weight	9.9 lbs	8.3 lbs	7.0 lbs (tool only)
Charger/Batteries	1-Hour Charger / (1) 36V Lithium Ion	Fast Charger, (1) 20V MAX* XR Lithium Ion (4.0 Ah)	Sold Separately
Includes	7-1/4" Carbide tipped blade	Carbide tipped circular saw blade	Carbide tipped circular saw blade



**18V XRP™ Lithium Ion 6-1/2" (165 mm) Circular Saw Kit**



**18V XRP™ 6-1/2" (165 mm) Circular Saw Kit**



**18V 6-1/2" (165 mm) Circular Saw (Tool Only)**

SPECIFICATIONS	DCS390L	DC390K	DC390B
Volts	18V	18V	18V
No Load Speed	3,700 rpm	3,700 rpm	3,700 rpm
Blade Diameter	6-1/2"	6-1/2"	6-1/2"
Bevel Capacity	0° - 50°	0° - 50°	0° - 50°
Depth of Cut at 45°	1 - 5/8"	1 - 5/8"	1 - 5/8"
Depth of Cut at 90°	2-1/4"	2-1/4"	2-1/4"
Weight	7.8 lbs	8.7 lbs	6.3 lbs (tool only)
Charger/Batteries	1-Hour Charger / (1) 18V XRP™ Lithium Ion	1-Hour Charger / (1) 18V XRP™	Sold Separately
Includes	6-1/2" 16 tooth carbide tipped blade, blade wrench	6-1/2" 16 tooth carbide tipped blade, blade wrench	6-1/2" 16 tooth carbide tipped blade, blade wrench

## METAL CUTTING SAWS



**20V MAX\* Lithium Ion 5-1/2" (127 mm) Metal Cutting Circular Saw Kit**



**20V MAX\* 5-1/2" (127 mm) Metal Cutting Circular Saw (Tool Only)**



**18V Lithium Ion 5-1/2" (127 mm) Metal Cutting Circular Saw (Tool Only)**



**18V 5-1/2" (127 mm) Metal Cutting Circular Saw (Tool Only)**

SPECIFICATIONS	DCS373M2	DCS373B	DCS372KA	DCS372B
Volts	20V MAX*	20V MAX*	18V	18V
No Load Speed	3,700 rpm	3,700 rpm	3,700 rpm	3,700 rpm
Blade Diameter	5-1/2"	5-1/2"	5-1/2"	5-1/2"
Depth of Cut at 90°	1-11/16"	1-11/16"	1-11/16"	1-11/16"
Weight	8.3 lbs	7.0 lbs (tool only)	9.2 lbs	6.8 lbs (tool only)
Charger/Batteries	Fast Charger, (2) 20V MAX* XR Lithium Ion (4.0 Ah)	Sold Separately	1-Hour Charger / (2) 18V XRP™	Sold Separately
Includes	5-1/2" carbide tipped blade	5-1/2" carbide tipped blade	5-1/2" carbide saw blade	5-1/2" carbide saw blade

## JIG SAWS



**20V MAX\* Lithium Ion Jig Saw Kit**



**20V MAX\* Jig Saw (Tool Only)**



**18V XRP™ Lithium Ion Jig Saw Kit**



**18V XRP™ Jig Saw Kit w/ Keyless Blade Change**



**18V Jig Saw w/ Keyless Blade Change (Tool Only)**

SPECIFICATIONS	DCS331M1	DCS331B	DCS330L	DC330K	DC330B
Volts	20V MAX*	20V MAX*	18V	18V	18V
Strokes/Min	0 - 3,000 spm	0 - 3,000 spm	0 - 3,000 spm	0 - 3,000 spm	0 - 3,000 spm
Stroke Length	1"	1"	1"	1"	1"
Keyless Blade Clamp	Yes	Yes	Yes	Yes	Yes
Dust Blower	Yes	Yes	Yes	Yes	Yes
Weight	6.8 lbs	5.4 lbs (tool only)	6.6 lbs	7.5 lbs	5.1 lbs (tool only)
Charger/Batteries	Fast Charger, (1) 20V MAX* XR Lithium Ion (4.0 Ah)	Sold Separately	1-Hour Charger / (1) 18V XRP™ Lithium Ion	1-Hour Charger / (1) 18V XRP™	Sold Separately
Includes	Jig saw blade	Jig saw blade	Jig saw blade	Jig saw blade	-

## RECIPROCATING SAWS



**36V Lithium Ion Reciprocating Saw Kit**



**20V MAX\* Lithium Ion Compact Reciprocating Saw Kit**



**20V MAX\* Lithium Ion Compact Reciprocating Saw Kit**



**20V MAX\* Compact Reciprocating Saw (Tool Only)**

SPECIFICATIONS	DC305K	DCS387P1	DCS387D1	DCS387B
Volts	36V	20V MAX*	20V MAX*	20V MAX*
Stroke/Min	0-3,000 spm	0-3,000 spm	0-3,000 spm	0-3,000 spm
Stroke Length	1-1/8"	1-1/8"	1-1/8"	1-1/8"
Keyless Blade Clamp	Yes, 4-position	Yes, 4-position	Yes, 4-position	Yes, 4-position
Adjustable Shoe	Yes	No	No	No
Electric Brake	Yes	Yes	Yes	Yes
Weight	8.4 lbs	6.4 lbs	5.9 lbs	5.0 lbs (tool only)
Charger/Batteries	1-Hour Charger / (1) 36V Lithium Ion	Fast Charger / (1) 20V MAX* XR Lithium Ion (5.0 Ah)	Fast Charger / (1) 20V MAX* XR Lithium Ion (4.0 Ah)	Sold Separately



**20V MAX\* Lithium Ion Reciprocating Saw Kit**



**20V MAX\* Reciprocating Saw (Tool Only)**



**18V XRP™ Lithium Ion Reciprocating Saw Kit**

SPECIFICATIONS	DCS380M1	DCS380B	DCS385L
Volts	20V MAX*	20V MAX*	18V
Stroke/Min	0-3,000 spm	0-3,000 spm	0-3,000 spm
Stroke Length	1-1/8"	1-1/8"	1-1/8"
Keyless Blade Clamp	Yes, 4-position	Yes, 4-position	Yes, 4-position
Adjustable Shoe	Yes	Yes	Yes
Electric Brake	Yes	Yes	Yes
Weight	7.3 lbs	6.0 lbs (tool only)	7.2 lbs
Charger/Batteries	Fast Charger / (1) 20V MAX* XR Lithium Ion (4.0 Ah)	Sold Separately	1-Hour Charger / (1) 18V XRP™ Lithium Ion



**18V XRP™ Reciprocating Saw Kit**



**18V Reciprocating Saw (Tool Only)**



**12V MAX\* Lithium Ion Pivot Reciprocating Saw Kit**

SPECIFICATIONS	DC385K	DC385B	DCS310S1
Volts	18V	18V	12V MAX*
Keyless Blade Clamp	Yes, 4-position	Yes, 4-position	Yes
Stroke/Min	0-3,000 spm	0-3,000 spm	0-2,700 spm
Stroke Length	1-1/8"	1-1/8"	9/16"
Electric Brake	Yes	Yes	Yes
Weight	8.2 lbs	5.8 lbs (tool only)	3.1 lbs
Charger/Batteries	1-Hour Charger / (1) 18V XRP™	Sold Separately	Fast Charger / (1) 12V MAX* Lithium Ion

## CONCRETE VIBRATOR



**18V XRP™ Pencil Vibrator Kit**



**18V Pencil Vibrator (Tool Only)**

SPECIFICATIONS	DC530KA	DC530B
Volts	18V	18V
Vibrator Diameter	1-1/8"	1-1/8"
Shaft Length	4'	4'
Vibrations per Minute	14,000 vpm	14,000 vpm
Weight	9.3 lbs	7.0 lbs (tool only)
Charger/Batteries	1-Hour Charger / (2) 18V XRP™	Sold Separately

## NAILERS



**20V MAX\* XR Lithium Ion Brushless Framing Nailer Kit**



**20V MAX\* XR Brushless Framing Nailer (Tool Only)**



**18V XRP™ 1-1/4" - 2-1/2" (31.7 mm - 63.5 mm) 15 Gauge 34° Angled Finish Nailer Kit**

SPECIFICATIONS	DCN692M1	DCN692B	DC628K
Volts	20V MAX*	20V MAX*	18V
Operating Mode	Bump & Sequential	Bump & Sequential	Bump & Sequential
Nailing Rate	2 nails/sec	2 nails/sec	4-5 nails/sec
Nail Diameter/Type	.113 - .131 gauge	.113 - .131 gauge	15 ga. DA type gauge
Mag. Angle/Capacity	33°/ 55 nails	33°/55 nails	34°/ 110 nails
Nail Length Capacity	2" - 3-1/2"	2" - 3-1/2"	1-1/4" - 2-1/2"
Magazine Loading	Lock & Load	Lock & Load	Rear - load
Integrated Belt Hook	Yes	Yes	Yes
Tool-Free Jam Cleaning	No	No	Yes
Tool-Free Depth Adj.	Yes	Yes	Yes
Weight	9.1 lbs	7.7 lbs (tool only)	8.9 lbs
Charger/Batteries	Fast Charger / (1) 20V MAX* XR Lithium Ion (4.0 Ah)	Sold Separately	1-Hour Charger / (1) 18V XRP™
Includes	No-mar tip	-	No-mar tip, reversible belt hook, DeWALT safety glasses



**18V XRP™ 1-1/4" - 2-1/2" (31.7 mm - 63.5 mm) 16 Gauge 20° Angled Finish Nailer Kit**



**18V XRP™ 1-1/4" - 2-1/2" (31.7 mm - 63.5 mm) 16 Gauge Straight Finish Nailer Kit**



**18V XRP™ 5/8" - 2" (15.8 mm - 50.8 mm) 18 Gauge Straight Brad Nailer Kit**



**18V 5/8" - 2" (15.8 mm - 50.8 mm) 18 Gauge Straight Brad Nailer (Tool Only)**

SPECIFICATIONS	DC618K	DC616K	DC608K	DC608B
Volts	18V	18V	18V	18V
Operating Mode	Bump & Sequential	Bump & Sequential	Bump & Sequential	Bump & Sequential
Nailing Rate	4-5 nails/sec	4-5 nails/sec	4-5 nails/sec	4-5 nails/sec
Nail Diameter/Type	16 gauge	16 gauge	18 gauge	18 gauge
Mag. Angle/Capacity	20°/ 110 nails	Straight/ 110 nails	Straight/ 110 nails	Straight/ 110 nails
Nail Length Capacity	1-1/4" - 2-1/2"	1-1/4" - 2-1/2"	5/8" - 2"	5/8" - 2"
Magazine Loading	Rear - load	Rear - load	Side - load	Side - load
Integrated Belt Hook	Yes	Yes	Yes	Yes
Tool-Free Jam Cleaning	Yes	Yes	Yes	Yes
Tool-Free Depth Adj.	Yes	Yes	Yes	Yes
Weight	8.5 lbs	8.5 lbs	7.4 lbs	7.4 lbs (tool only)
Charger/Batteries	1-Hour Charger / (1) 18V XRP™	1-Hour Charger / (1) 18V XRP™	1-Hour Charger / (1) 18V XRP™	Sold Separately
Includes	No-mar tip, reversible belt hook, DeWALT safety glasses	No-mar tip, reversible belt hook, DeWALT safety glasses	Reversible belt hook, DeWALT safety glasses	Reversible belt hook, DeWALT safety glasses

## SHEARS



**18V 18 Gauge Off-Set Shear (Tool Only)**



**18V 18 Gauge Swivel Head and Shear**



**18V 18 Gauge Swivel Head and Shear (Tool Only)**

SPECIFICATIONS	DC495B	DC490KA	DC490B
Volts	18V	18V	18V
Stroke/Min	0-2,300 spm	0-2,300 spm	0-2,300 spm
Min. Cutting Radius	1"	5.5"	5.5"
Capacity in Steel	18 Gauge	18 Gauge	18 Gauge
Weight	3.7 lbs (tool only)	6.1 lbs	3.7 lbs (tool only)
Charger/Batteries	Sold Separately	1-Hour Charger / (2) 18V XRP™	Sold Separately
Includes	Blade wrench	Blade wrench	Blade wrench

## CUT-OFF TOOLS



**36V Lithium Ion 4-1/2" (114 mm) Cut-Off Tool Kit**



**20V MAX\* Lithium Ion 4-1/4" (114 mm) Cut-Off Tool Kit**



**20V MAX\* 4-1/4" (114 mm) Cut-Off Tool (Tool Only)**

SPECIFICATIONS	DC415KL	DCG412M2	DCG412B
Volts	36V	20V MAX*	20V MAX*
No Load Speed	6,500 rpm	6,500 rpm	6,500 rpm
Spindle Lock	Yes	Yes	Yes
Spindle Thread	5/8" - 11	5/8"	5/8"
Weight	7.2 lbs	6.5 lbs	5.1 lbs (tool only)
Charger/Batteries	1-Hour Charger / (2) 36V Lithium Ion	Fast Charger / (2) 20V MAX* XR Lithium Ion (4.0 Ah)	Sold Separately
Includes	Type 1 guards, Type 27 guard, Wrench, (2) matched flanges, 2-position side handle and 4-1/2" cutting wheel	Type 1 guards, Wrench and 2-position side handle	Type 1 guards, Wrench, and 2-position side handle

(continued on next page)

## CUT-OFF TOOLS

(continued)



18V XRP™ Cut-Off Tool Kit



18V Cut-Off Tool (Tool Only)

SPECIFICATIONS	DC411KA	DC411B
Volts	18V	18V
No Load Speed	6,500 rpm	6,500 rpm
Spindle Lock	Yes	Yes
Spindle Thread	5/8" - 11	5/8" - 11
Weight	7.0 lbs	4.6 lbs (tool only)
Charger/Batteries	1-Hour Charger / (2) 18V XRP™	Sold Separately
Includes	Type 1 guards, Wrench, (2) matched flanges, 2-position side handle and 4-1/2" cutting wheel	Type 1 guards, wrench, (2) matched flanges and 2-position side handle



## BAND SAWS



20V MAX\* Lithium Ion Band Saw



18V XRP™ Lithium Ion Band Saw



18V XRP™ Band Saw



18V Band Saw (Tool Only)

SPECIFICATIONS	DCS371M1	DCS370L	DCS370K	DCS370B
Volts	20V MAX*	18V	18V	18V
Ft/Min	570	570 fpm	570 fpm	570 fpm
Blade Length	32-7/8"	32-7/8"	32-7/8"	32-7/8"
Max Capacity	2-1/2"	2-1/2"	2-1/2"	2-1/2"
Tool Length	15"	15"	15"	15"
Weight	9.4	9.2 lbs	10 lbs	7.7 lbs (tool only)
Charger/Batteries	Fast Charger / (1) 20V MAX* XR Lithium Ion (4.0 Ah)	1-Hour Charger / (1) 18V XRP™ Lithium Ion	1-Hour Charger / (1) 18V XRP™	Sold Separately
Includes	14/18 blade, blade tracking wrench	14/18 blade, blade tracking wrench	14/18 blade, blade tracking wrench	14/18 blade, blade tracking wrench

## BI-METAL CORDLESS BANDSAW BLADES

CAT #	TPI	THICKNESS	LENGTH	HEIGHT	PACK
DW3982C	14	.020"	32-7/8"	1/2"	3
DW3983C	18	.020"	32-7/8"	1/2"	3
DW3984C	24	.020"	32-7/8"	1/2"	3
DW3986C	14/18	.020"	32-7/8"	1/2"	3



18V Adhesive Dispenser - 300 ml (Tool Only)



18V Adhesive Dispenser - 29 oz (Tool Only)



18V Adhesive Dispenser - 10 oz



18V Adhesive Dispenser - 10 oz (Tool Only)

SPECIFICATIONS	DC547B	DC546B	DC545K	DC545B
Volts	18V	18V	18V	18V
Lbs of Force	650	650	650	650
Auto Reverse	Yes	Yes	Yes	Yes
"Set & Forget" Speed Control	Yes	Yes	Yes	Yes
Capacity	300 ml & 600 ml sausage packs	29 oz, & quart size cartridges	10 oz, 1/10 gal, & 300 ml - 310 ml cartridges	10 oz, 1/10 gal, & 300 ml - 310 ml cartridges
Max. Speed	25 in/min	25 in/min	25 in/min	25 in/min
Weight	4.7 lbs (tool only)	5.5 lbs (tool only)	6.8 lbs	4.6 lbs (tool only)
Charger/Batteries	Sold Separately	Sold Separately	1-Hour Charger / (1) 18V	Sold Separately

## WORKLIGHTS



SPECIFICATIONS	DCL060	DCL061	DCL050	DCL040	DW919
Volts	18V or 20V MAX*	18V or 20V MAX* or AC/DC Power	20V MAX*	20V MAX*	18V
Bulb	LED	LED	LED	LED	Xenon bulb
Brightness	1500 lumens	1500 lumens	500 & 250 lumens	110 lumens	-
Run-Time	Up to 2.5 hrs w/4.0 Ah Pack	Up to 2.5 hrs w/4.0 Ah Pack	Up to 3 - 17 hrs.	Up to 11 hrs	Up to 3 hrs
Weight	3.27 lbs (tool only)	3.27 lbs (tool only)	2 lbs (tool only)	1.0 lbs (tool only)	0.5 lbs (tool only)
Charger/Batteries	Sold Separately	Sold Separately	Sold Separately	Sold Separately	Sold Separately



SPECIFICATIONS	DW908	DC527	DC020	DW906
Volts / Power Source	18V	18V	12-18V NiCd/NiMH/Li-Ion Batteries or AC/DC Power	14.4V
Bulb	Xenon bulb	13 Watt fluorescent	38W fluorescent	Xenon bulb
Brightness	-	-	2700 lumens	-
Run-Time	Up to 3 hrs	Up to 3.5 hrs	Up to 1 hr	Up to 3 hrs
Weight	0.5 lbs (tool only)	1.2 lbs (tool only)	6.0 lbs (tool only)	0.5 lbs (tool only)
Charger/Batteries	Sold Separately	Sold Separately	Sold Separately	Sold Separately



SPECIFICATIONS	DCL510	DCL0900	DCL023
Volts / Power Source	12V MAX*	9.6V - 36V	8V MAX*
Bulb	LED	LED	LED
Brightness	130 lumens	110 lumens	80 lumens
Run-Time	Up to 4 hrs	Up to 4 hrs	Up to 5 hrs.
Weight	0.5 lbs (tool only)	0.2 lbs (tool)	0.6 lbs (tool only)
Charger/Batteries	Sold Separately	Sold Separately	Sold Separately

## INSTRUMENTS



SPECIFICATIONS	DCT414S1	DCT416S1
Volts	12V MAX*	12V MAX*
Temperature Range	-20° F to 932° F (-29° C to 500° C)	14° F to 480° F (-10° C to 250° C)
Field of View; Distance, Spot	(D:S) 12:1	(IFOV) 1" @ 39.3" (25 mm @ 1m)
Accuracy	+/-1.5% or +/- 1.5° C, whichever is greater, assumes ambient	Below 200° F, +/-3.6° F, Above 200° F, +/-2%, assumes ambient operating temperature
Charger/Batteries	Fast Charger / (1) 12V MAX* Lithium Ion	Fast Charger / (1) 12V MAX* Lithium Ion
Includes	-	Micro SD card, Report writing software



SPECIFICATIONS	DCT410S1	DCT411S1	DCT412S1
Volts	12V MAX*	12V MAX*	12V MAX*
Camera Head Diameter	17 mm	9 mm	5.8 mm
Cable Length	3' waterproof	3' waterproof	3' waterproof
Screen Size	3.5"	3.5"	3.5"
Resolution	320x480 dpi	320x480 dpi	320x480 dpi
Zoom	3X	3X	3X
Charger/Batteries	Fast Charger / (1) 12V MAX* Lithium Ion	Fast Charger / (1) 12V MAX* Lithium Ion	Fast Charger / (1) 12V MAX* Lithium Ion
Includes	17 mm - 3' camera cable, hook, & magnet	9 mm - 3' camera cable, hook, magnet, & mirror	5.8 mm - 3' camera cable



## HEATED GEAR



Soft Shell Work Jacket



Hooded Work Jacket



TRUE TIMBER® HTC Camo Jacket



TRUE TIMBER® Blaze Camo

SPECIFICATIONS	DCHJ060C1/B*	DCHJ061C1/B*	DCHJ062C1/B*	DCHJ063C1/B*
Color	Black	Black	Camo	Camo
Pockets	5	4	7	7
Heat Zones	4	3	4	4
Water Resistant	Yes	Yes	Yes	Yes
Wind Resistant	Yes	Yes	Yes	Yes
Charger/Batteries	Fast Charger / (1) 20V MAX* Lithium Ion (1.5 Ah)	Fast Charger / (1) 20V MAX* Lithium Ion (1.5 Ah)	Fast Charger / (1) 20V MAX* Lithium Ion (1.5 Ah)	Fast Charger / (1) 20V MAX* Lithium Ion (1.5 Ah)
Includes	DCB091 USB Power Source			



Hooded Jacket



Jacket with Removable Sleeves



Women's Jacket with Removable Hood



Hoodie

SPECIFICATIONS	DCHJ064C1/B*	DCHJ065C1/B*	DCHJ066C1	DCHJ067B*
Color	Khaki	Black	Black	Black
Pockets	4	4	4	3
Heat Zones	3	4	4	3
Water Resistant	Yes	Yes	Yes	No
Wind Resistant	Yes	Yes	Yes	Yes
Charger/Batteries	Fast Charger / (1) 20V MAX* Lithium Ion (1.5 Ah)	Fast Charger / (1) 20V MAX* Lithium Ion (1.5 Ah)	Fast Charger / (1) 20V MAX* Lithium Ion (1.5 Ah)	Sold Separately
Includes	DCB091 USB Power Source	Removable Sleeves and DCB091 USB Power Source	DCB091 USB Power Source and Removable Hood	DCB091 USB Power Source



Hoodie



High Visibility Class III 3-in-1 Hooded Jacket



High Visibility Class III Hoodie

SPECIFICATIONS	DCHJ068B*	DCHJ070C1/B*	DCHJ071B*
Color	Gray	High Visibility	High Visibility
Pockets	3	7	4
Heat Zones	3	3	3
Water Resistant	No	Yes	Yes
Wind Resistant	Yes	Yes	Yes
Charger/Batteries	Sold Separately	Fast Charger / (1) 20V MAX* Lithium Ion (1.5 Ah)	Sold Separately
Includes	DCB091 USB Power Source	DCB091 USB Power Source	DCB091 USB Power Source



\* (B) Units only include DCB091

The camo patterns are used under license from True Timber Outdoors Holding Company, LLC. The True Timber® registered trademark and the HTC and Blaze Camo designs are owned by True Timber Outdoors Holding Company, LLC.

## WHY DeWALT COMBO KITS?

### 1. RIGHT MIX OF TOOLS FOR TRADES AND APPLICATIONS:

DeWALT offers a full range of combination kits to accommodate Professional Users and common applications being performed. Depending on your needs – drilling wood or concrete, fastening, cutting wood or metal, lighting, demolition – DeWALT has a cordless solution.

### 2. VALUE PROPOSITION VERSUS INDIVIDUAL TOOLS:

- Get the cordless tools you need in one kit for easy carry and storage
- All are powered by the same battery pack and charger within voltage family
- Saves money versus buying each tool individually



### 36V COMBO KITS



SPECIFICATIONS	DCX6401
Volts	36V
Hammerdrill/Drill/Driver	DC901
Circular Saw	DC300
Reciprocating Saw	DC305
Flexible Floodlight	DC509
Charger/Batteries	1-Hour Charger / (2) 36V Lithium Ion
Includes	360° side handle, & 7-1/4" carbide tipped blade

### 20V MAX\* COMBO KITS



SPECIFICATIONS	DCK592L2	DCK590L2	DCK492L2	DCK491L2
Volts	20V MAX*	20V MAX*	20V MAX*	20V MAX*
Hammerdrill	DCD985	DCD985	DCD985	DCD985
Circular Saw	DCS391	DCS393 (6-1/2")	DCS380	DCS393 (6-1/2")
Reciprocating Saw	DCS380	DCS381	DCF885	DCS381
Impact Driver	DCF885	DCF885	-	-
LED Worklight	DCL040	DCL040	DCL040	DCL040
Charger/Batteries	Fast Charger / (2) 20V MAX* Lithium Ion (3.0 Ah)	Fast Charger / (2) 20V MAX* Lithium Ion (3.0 Ah)	Fast Charger / (2) 20V MAX* Lithium Ion (3.0 Ah)	Fast Charger / (2) 20V MAX* Lithium Ion (3.0 Ah)
Includes	360° side handle, carbide tipped circular saw blade, & belt hook	360° side handle, carbide tipped circular saw blade, & belt hook	360° side handle & belt hook	360° side handle & carbide tipped circular saw blade

## 20V MAX\* COMBO KITS

(continued)



20V MAX\* Lithium Ion  
4-Tool Combo Kit



20V MAX\* Lithium Ion  
4-Tool Combo Kit



20V MAX\* Lithium Ion  
2-Tool Combo Kit



20V MAX\* Lithium Ion  
2-Tool Combo Kit

SPECIFICATIONS	DCK490L2	DCK298L2	DCK292L2	DCK290L2
Volts	20V MAX*	20V MAX*	20V MAX*	20V MAX*
Hammerdrill	DCD985	-	DCD985	DCD985
Reciprocating Saw	DCS381	DCS380	DCS380	-
Impact Driver	DCF885	DCF885	-	DCF885
Screwdriver	-	-	-	-
LED Worklight	DCL040	-	-	-
Charger/Batteries	Fast Charger / (2) 20V MAX* Lithium Ion (3.0 Ah)	Fast Charger / (2) 20V MAX* Lithium Ion (3.0 Ah)	Fast Charger / (2) 20V MAX* Lithium Ion (3.0 Ah)	Fast Charger / (2) 20V MAX* Lithium Ion (3.0 Ah)
Includes	360° side handle & belt hook	360° side handle	360° side handle	360° side handle and belt hook



20V MAX\* XR Lithium Ion  
Brushless 2-Tool Combo Kit



20V MAX\* XR Lithium Ion  
Brushless 2-Tool Combo Kit

SPECIFICATIONS	DCK286D2	DCK281D2
Volts	20V MAX*	20V MAX*
Hammerdrill	-	-
Drill/Driver	DCD795	DCD790
Impact Driver	DCF886	DCF886
Charger/Batteries	Fast Charger / (2) 20V MAX* XR Lithium Ion (2.0 Ah)	Fast Charger / (2) 20V MAX* XR Lithium Ion (2.0 Ah)
Includes	(2) belt hooks and bit holder	(2) belt hooks and bit holder



20V MAX\* Lithium Ion  
2-Tool Combo Kit



20V MAX\* Lithium Ion  
2-Tool Combo Kit

SPECIFICATIONS	DCK285C2	DCK280C2
Volts	20V MAX*	20V MAX*
Hammerdrill	DCD785	-
Drill/Driver	-	DCD780
Impact Driver	DCF885	DCF885
Charger/Batteries	Fast Charger / (2) 20V MAX* Lithium Ion (1.5 Ah)	Fast Charger / (2) 20V MAX* Lithium Ion (1.5 Ah)
Includes	(2) belt hooks and bit holder	(2) belt hooks and bit holder

## 18V COMBO KITS



18V XRP™ 9-Tool Combo Kit

SPECIFICATIONS	DCK955X
Volts	18V
Hammerdrill/Drill/Driver	DCD950
Circular Saw	DC390 (6-1/2")
Reciprocating Saw	DC385
Cut-Off Tool	DC411
Cut-Out Tool	DC550
Jig Saw	DC330
Impact Driver	DC825
Impact Wrench	DW059
Flexible Floodlight	DW919
Charger/Batteries	1-Hour Charger / (2) 18V XRP™
Includes	360° side handle, carbide tipped circular saw blade, type 1 guard, wrench, (2) matched flanges, 2-position side handle

## 18V COMBO KITS



18V XRP™ Lithium Ion 6-Tool Combo Kit



18V XRP™ 6-Tool Combo Kit



18V XRP™ 5-Tool Combo Kit



18V XRP™ Lithium Ion 4-Tool Combo Kit

SPECIFICATIONS	DCK675L	DCK655X	DCK555X	DCK475L
Volts	18V	18V	18V	18V
Hammerdrill/Drill/Driver	DCD970	DCD950	DCD950	DCD970
Circular Saw	-	DC390 (6-1/2")	DC390 (6-1/2")	-
Reciprocating Saw	DC385	DC385	DC385	DC385
Cut-Off Tool	DC411	DC411	-	-
Cut-Out Tool	-	-	-	-
Jig Saw	-	-	-	-
Impact Driver	DC827	DC825	DC825	DC827
Impact Wrench	DW059	-	-	-
Flexible Floodlight	DW919	DW919	DW919	DW919
Charger/Batteries	1-Hour NiCd/NiMH/Li-Ion Charger / (2) 18V XRP™ Lithium Ion	1-Hour Charger / (2) 18V XRP™	1-Hour Charger / (2) 18V XRP™	1-Hour NiCd/NiMH/Li-Ion Charger / (2) 18V XRP™ Lithium Ion
Includes	360° side handle, type 1 guard, wrench, (2) matched flanges, 2-position side handle	360° side handle, carbide tipped circular saw blade, type 1 guard, wrench, (2) matched flanges, (1) type 1 wheel & 2-position side handle	360° side handle & carbide tipped circular saw blade	360° side handle

## 18V COMBO KITS

(continued)



18V XRP™ Lithium Ion 4-Tool Combo Kit



18V XRP™ 4-Tool Combo Kit



18V XRP™ 4-Tool Combo Kit

SPECIFICATIONS	DCK465L	DCK455X	DCK450X
Volts	18V	18V	18V
Hammerdrill/Drill/Driver	DCD775	DCD950	DCD950
Circular Saw	-	-	DC390 (6-1/2")
Reciprocating Saw	DW938	DC385	DC385
Impact Driver	DC827	DC825	-
Flexible Floodlight	DW908 (Pivot Head Flashlight)	DW919	DW919
Charger/Batteries	1-Hour NiCd/NiMH/Li-Ion Charger / (2) 18V XRP™ Lithium Ion	1-Hour Charger / (2) 18V XRP™	1-Hour Charger / (2) 18V XRP™
Includes	-	360° side handle	360° side handle and carbide tipped circular saw blade



18V XRP™ Lithium Ion 2-Tool Combo Kit



18V XRP™ Lithium Ion 2-Tool Combo Kit



18V XRP™ Lithium Ion 2-Tool Combo Kit



18V XRP™ 2-Tool Combo Kit

SPECIFICATIONS	DCK275L	DCK274L	DCK271L	DCK255X
Volts	18V	18V	18V	18V
Hammerdrill/Drill/Driver	DCD970	DCD775	DCD970	DCD950
Circular Saw	-	-	-	-
Reciprocating Saw	-	-	DC385	-
Impact Driver	DC827	DC827	-	DC825
Flexible Floodlight	-	-	-	-
Charger/Batteries	1-Hour NiCd/NiMH/Li-Ion Charger / (2) 18V XRP™ Lithium Ion	1-Hour NiCd/NiMH/Li-Ion Charger / (2) 18V XRP™ Lithium Ion	1-Hour NiCd/NiMH/Li-Ion Charger, (2) 18V XRP™ Lithium Ion	1-Hour Charger / (2) 18V XRP™
Includes	360° side handle	-	360° side handle	360° side handle



18V XRP™ 2-Tool Combo Kit



18V Compact 4-Tool Combo Kit



18V Compact 4-Tool Combo Kit



18V Compact Lithium Ion 2-Tool Combo Kit

SPECIFICATIONS	DCK251X	DC4CKITA	DCK425C	DCK265L
Volts	18V	18V	18V	18V
Hammerdrill/Drill/Driver	DCD950	-	-	-
Drill/Driver	-	DC720	DC720	DCD760
Circular Saw	-	DCS392	-	-
Reciprocating Saw	DC385	DW938	DW938	-
Impact Driver	-	-	DC825	DCF826
Pivot Head Flashlight	-	DW908	DW908	-
Charger/Batteries	1-Hour Charger / (2) 18V XRP™	1-Hour Charger / (2) 18V	1-Hour Charger / (2) 18V	30-Minute Charger / (2) 18V Compact Lithium Ion
Includes	360° side handle	Carbide tipped circular saw blade	-	-



## 12V MAX\* COMBO KITS



12V MAX\* Lithium Ion 4-Tool Combo Kit



12V MAX\* Lithium Ion 2-Tool Combo Kit



12V MAX\* Lithium Ion Drill/Driver / Impact Driver Combo Kit



12V MAX\* Lithium Ion Screwdriver / Impact Driver Combo Kit

SPECIFICATIONS	DCK413S2	DCK212S2	DCK211S2	DCK210S2
Volts	12V MAX*	12V MAX*	12V MAX*	12V MAX*
Drill/Driver	DCD710	DCD710	DCD710	-
Impact Driver	DCF815	-	DCF815	DCF815
Screwdriver	-	-	-	DCF610
Reciprocating Saw	DCS310	DCS310	-	-
Worklight	DCL510	-	-	-
Charger/Batteries	Fast Charger / (2) 12V MAX* Lithium Ion	Fast Charger / (2) 12V MAX* Lithium Ion	Fast Charger / (2) 12V MAX* Lithium Ion	Fast Charger / (2) 12V MAX* Lithium Ion
Includes	Bit tip, (2) belt hooks, (1) wood cutting recip blade, (1) metal cutting recip blade	Belt hook, (1) wood cutting recip blade, (1) metal cutting recip blade	1 bit tip and (2) belt hooks	2 belt hooks and bit tips

## CHARGER/RADIO



Charger/Radio (Tool Only)



Worksite Charger/Radio (Tool Only)

SPECIFICATIONS	DCR015	DC012
Power Source	12V MAX* and 20V MAX* Battery	7.2V to 18V Battery
AM/FM Digital Tuner	Yes	Yes
Auxiliary Port	Yes	Yes
Charges batteries	Lithium Ion	NiCd & Lithium Ion
Weight	13.2 lbs (tool only)	14.2 lbs (tool only)
	Does not work with 18V batteries and other stem pack batteries	Does not work with 12V MAX*, 20V MAX* or Univolt®
Charger/Batteries	Sold Separately	Sold Separately

## RADIO



Worksite Radio (Tool Only)

SPECIFICATIONS	DCR018
Power Source	12V MAX* and 20V MAX* & 18V Battery
AM/FM Digital Tuner	Yes
Auxiliary Port	Yes
Weight	6 lbs (tool only)
	Runs off AC or battery power only, radio does not charge batteries

## RADIO ACCESSORIES



Bluetooth® Radio Adaptor

SPECIFICATIONS	DCR002
Power Source	Internal Battery
	Stream music wirelessly from any Bluetooth® Device to most radios with an aux-in port up to 100 ft.

## BATTERY ACCESSORIES



12V MAX\*/20V MAX\* USB Power Source

SPECIFICATIONS	DCB090
Power Source	12V MAX* and 20V MAX*
State of Charge Indicator	Yes
USB	2
Weight	0.5 lbs

## VACUUMS



18V XRP™ 1/2 Gallon Wet/Dry Portable Vac



18V 1/2 Gallon Wet/Dry Portable Vac (Tool Only)



18/20V MAX\* Wet-Dry Vacuum (Tool Only)



18/20V MAX\* Cordless/Corded Wet-Dry Vacuum (Tool Only)

SPECIFICATIONS	DC515K	DC515B	DCV580	DCV581H
Tank Size	1/2 gallon	1/2 gallon	2 gallon	2 gallon
Hose Diameter	1-1/4"	1-1/4"	1-1/4"	1-1/4"
Hose Length	2.5'	2.5'	5.0'	5.0'
Volts / Power Source	18V	18V	18V or 20V MAX*	18V or 20V MAX* or DC Power
Blower	No	No	Yes	Yes
Weight	6.0 lbs	3.6 lbs (tool only)	10 lbs (tool only)	10.5 lbs (tool only)
Charger/Batteries	1-Hour Charger / (1) 18V XRP™	Sold Separately	Sold Separately	Sold Separately
Filter Type	High Efficiency Gore® HEPA	High Efficiency Gore® HEPA	High Efficiency	HEPA Rated Filter
Includes	-	-	Crevice Tool Attachment and Wide Nozzle Tool Attachment	Crevice Tool Attachment and Wide Nozzle Tool Attachment

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by DEWALT is under license. Other trademarks and trade names are those of their respective owners. Gore® is a registered trademark of W.L. Gore & Associates, Inc.



**DCB205**  
20V MAX\* Premium XR  
Lithium Ion Battery

**DCB204**  
20V MAX\* Premium XR  
Lithium Ion Battery

**DCB203**  
20V MAX\* XR Lithium Ion Compact  
Battery

**DCB200**  
20V MAX\* Lithium Ion  
Battery



**DCB201**  
20V MAX\* Lithium Ion  
Compact Battery

**DCB120**  
12V MAX\* Lithium Ion  
Battery

**DCB127**  
12V MAX\* Lithium Ion  
Battery

**DCB080**  
8V MAX\* Lithium Ion  
Battery

## 8V MAX\* 12V MAX\* & 20V MAX\* CHARGERS



**DCB095**  
8V MAX\*  
Lithium Ion Battery Charger

**DCB101**  
12V MAX\* - 20V MAX\*  
Lithium Ion Battery Charger

**DCR015**  
12V MAX\* - 20V MAX\*  
Lithium Ion Charger/Radio

**DCB119**  
12V MAX\* - 20V MAX\*  
Lithium Ion Battery Charger

**DCB102**  
12V MAX\* - 20V MAX\*  
Dual Port Charger

**DCB103**  
12V MAX\* - 20V MAX\* & 7.2V - 18V  
Dual System, Dual Port Charger

SPECIFICATIONS	DCB095	DCB101	DCR015	DCB119	DCB102	DCB103
DCB080	8V MAX*	60	X	X	X	X
DCB120	12V MAX*	X	30	45	45	45
DCB200	20V MAX*	X	60	90	90	90
DCB201	20V MAX*	X	30	45	30	30
DCB203	20V MAX*	X	35	60	35	35
DCB204	20V MAX*	X	70	120	70	70
DCB205	20V MAX*	X	70	120	70	70

X=Not Compatible



**DCB361**  
36V Lithium Ion  
Battery

**DW0242**  
24V XR+™ Pack Fan Cooled Extended  
Run-Time Battery

**DC9096**  
18V XRP™ Battery

**DC9180**  
18V XRP™ Lithium Ion Battery

**DC9091**  
14.4V XRP™ Battery

**DC9071**  
12V XRP™ Battery

**DW9061**  
9.6V Extended  
Run-Time Battery

**DW9057**  
7.2V Compact  
Battery

## CHARGERS



**DW0246**  
1-Hour Fan  
Cooled Charger

**DW0249**  
1-Hour Fan Cooled  
Vehicle Charger

**DC9000**  
1-Hour  
Charger

**DC9310**  
NiCd/NiMH/Li-Ion  
1-Hour Charger

**DC9319**  
1-Hour  
Vehicle Charger

**DC9320**  
Dual Port  
1-Hour Charger

**DC012**  
Worksite  
Charger/Radio

**DCB103**  
12V MAX\* - 20V MAX\*  
& 7.2V - 18V Dual System,  
Dual Port Charger

SPECIFICATIONS	DW0246	DW0249	DC9000	DC9310	DC9319	DC9320	DC012	DCB103
DCB361	36V	X	X	60	X	X	X	X
DW0242	24V	60	60	X	X	X	X	X
DC9096	18V	X	X	X	60	60	60	60
DC9180	18V	X	X	X	60	60	60	60
DC9091	14.4V	X	X	X	60	60	60	60
DC9071	12V	X	X	X	60	60	60	60
DW9061	9.6V	X	X	X	45	45	45	45
DW9057	7.2V	X	X	X	30	30	30	30

X=Not Compatible

**1. IS IT BETTER FOR DeWALT BATTERIES TO BE COMPLETELY DISCHARGED BEFORE CHARGING?**

**No.** Just the opposite. You should stop using a battery as soon as you feel a substantial decrease in power from the tool. Completely running down a battery may damage it. **Do not tape the trigger to run down the battery.**

**2. WHAT IS MEMORY, AND DO DeWALT BATTERIES HAVE IT?**

Memory is one of many conditions which causes a loss of run-time. Memory is created from repetitive light use in the exact same application (i.e., Cordless Phones, Video Cameras, Electric Shavers, etc.) Our products rarely see light use or the exact same loads, due to variability from the user, the accessory size, as well as the material. The same variability which causes different run-times prevents our cells from developing memory. Power tools are considered high-drain applications. Memory typically develops in lower-drain rate applications, such as cordless phones, laptops, etc..., because the rate at which the battery is draining is continuously the same. Power tools draw higher currents and have sporadic drain rates minimizing the opportunity for the battery to develop a memory.

**3. DOES IT HURT DeWALT BATTERIES TO LEAVE THEM IN THE CHARGER?**

**No.** The DeWALT chargers have a maintenance mode which allows batteries to remain in the charger, maintaining a fully charged pack until the user is ready to work. If DeWALT NiCd batteries are stored outside of the charger, they will discharge naturally, 15-20% the first 24 hours, 7-10% the next day, and about 1% every day thereafter. NiCd batteries lose the bulk of the capacity when outside of the charger in the first 3 days. In fact, it is better for the battery to leave it in the charger to be sure it goes through Equalization and Maintenance Modes.

One of the benefits of DeWALT XRP™ Lithium Ion batteries is that they have limited self discharge. Storing DeWALT Lithium Ion batteries outside of the charger will not result in loss of charge.

**4. WHAT CAN I DO TO IMPROVE THE RUN-TIME OF MY BATTERY?**

If no permanent damage has been done to your battery, you may be able to improve its run-time. The correct procedure for charging your batteries is as follows:

1. Discharge the battery under normal use. Remove the battery, once you feel a loss of power from the tool. **Do not tape the trigger ON.**
2. Let the battery sit out of the charger for a least 2 hours until the battery is at room temperature.
3. Place the battery in the charger overnight to allow for a full charge on each individual cell (A minimum of 8 hours at room temperature).

If there is no difference in run-time, there is either permanent damage or the battery has reached the end of its usable life. In either case, the battery should be replaced.

**5. DOES THE OUTSIDE TEMPERATURE AFFECT BATTERIES? HOW?**

**Yes.** If the batteries are too hot (105°F or higher) or too cold (below 40°F), the batteries will not take a full charge. Attempting to charge batteries outside the 40°F-105°F range can result in a permanent loss of run-time. When batteries are being charged and discharged, a chemical reaction is taking place, and if it is too hot or cold the chemical reaction is disturbed causing a loss of run-time.

**6. CAN THE DeWALT CHARGER BE USED WITH A GENERATOR?**

**Yes.** All DeWALT chargers, excluding the DW9106, have been designed to handle the variations in voltage and current delivered by generators.

**7. SHOULD ANY SPECIAL PRECAUTIONS BE TAKEN WHEN TRANSPORTING OR TRAVELING WITH BATTERIES?**

Transporting batteries can possibly cause fires if the battery terminals inadvertently come in contact with conductive materials such as keys, coins, hand tools and the like. The U.S. Department of Transportation Hazardous Material Regulations (HMR) actually prohibits transporting batteries in commerce or on airplanes (i.e., packed in suitcases and carryon luggage) UNLESS they are properly protected from short circuits. Lithium-Ion battery packs should not be placed in checked luggage. So anytime you transport individual batteries, make sure that the battery terminals are protected and well insulated from materials that could contact them and cause a short circuit. For more information consult the U.S. DOT website at [www.dot.gov](http://www.dot.gov).

**8. WHAT SHOULD BE DONE WITH BATTERIES ONCE THEY HAVE GONE BAD?**

**RECYCLE THEM.** DeWALT is an active participant with RBRC (Rechargeable Battery Recycling Corporation), the organization which is the international leader in the collection, transportation and recycling of NiCd, NiMH and Lithium Ion cells. Old batteries should be disposed of at DeWALT Service Centers.


For more information call 1-800-8-BATTERY or 1-800-8-228-8379.



**CORDLESS POWER TOOLS**



**GUARANTEED TOUGH.®**

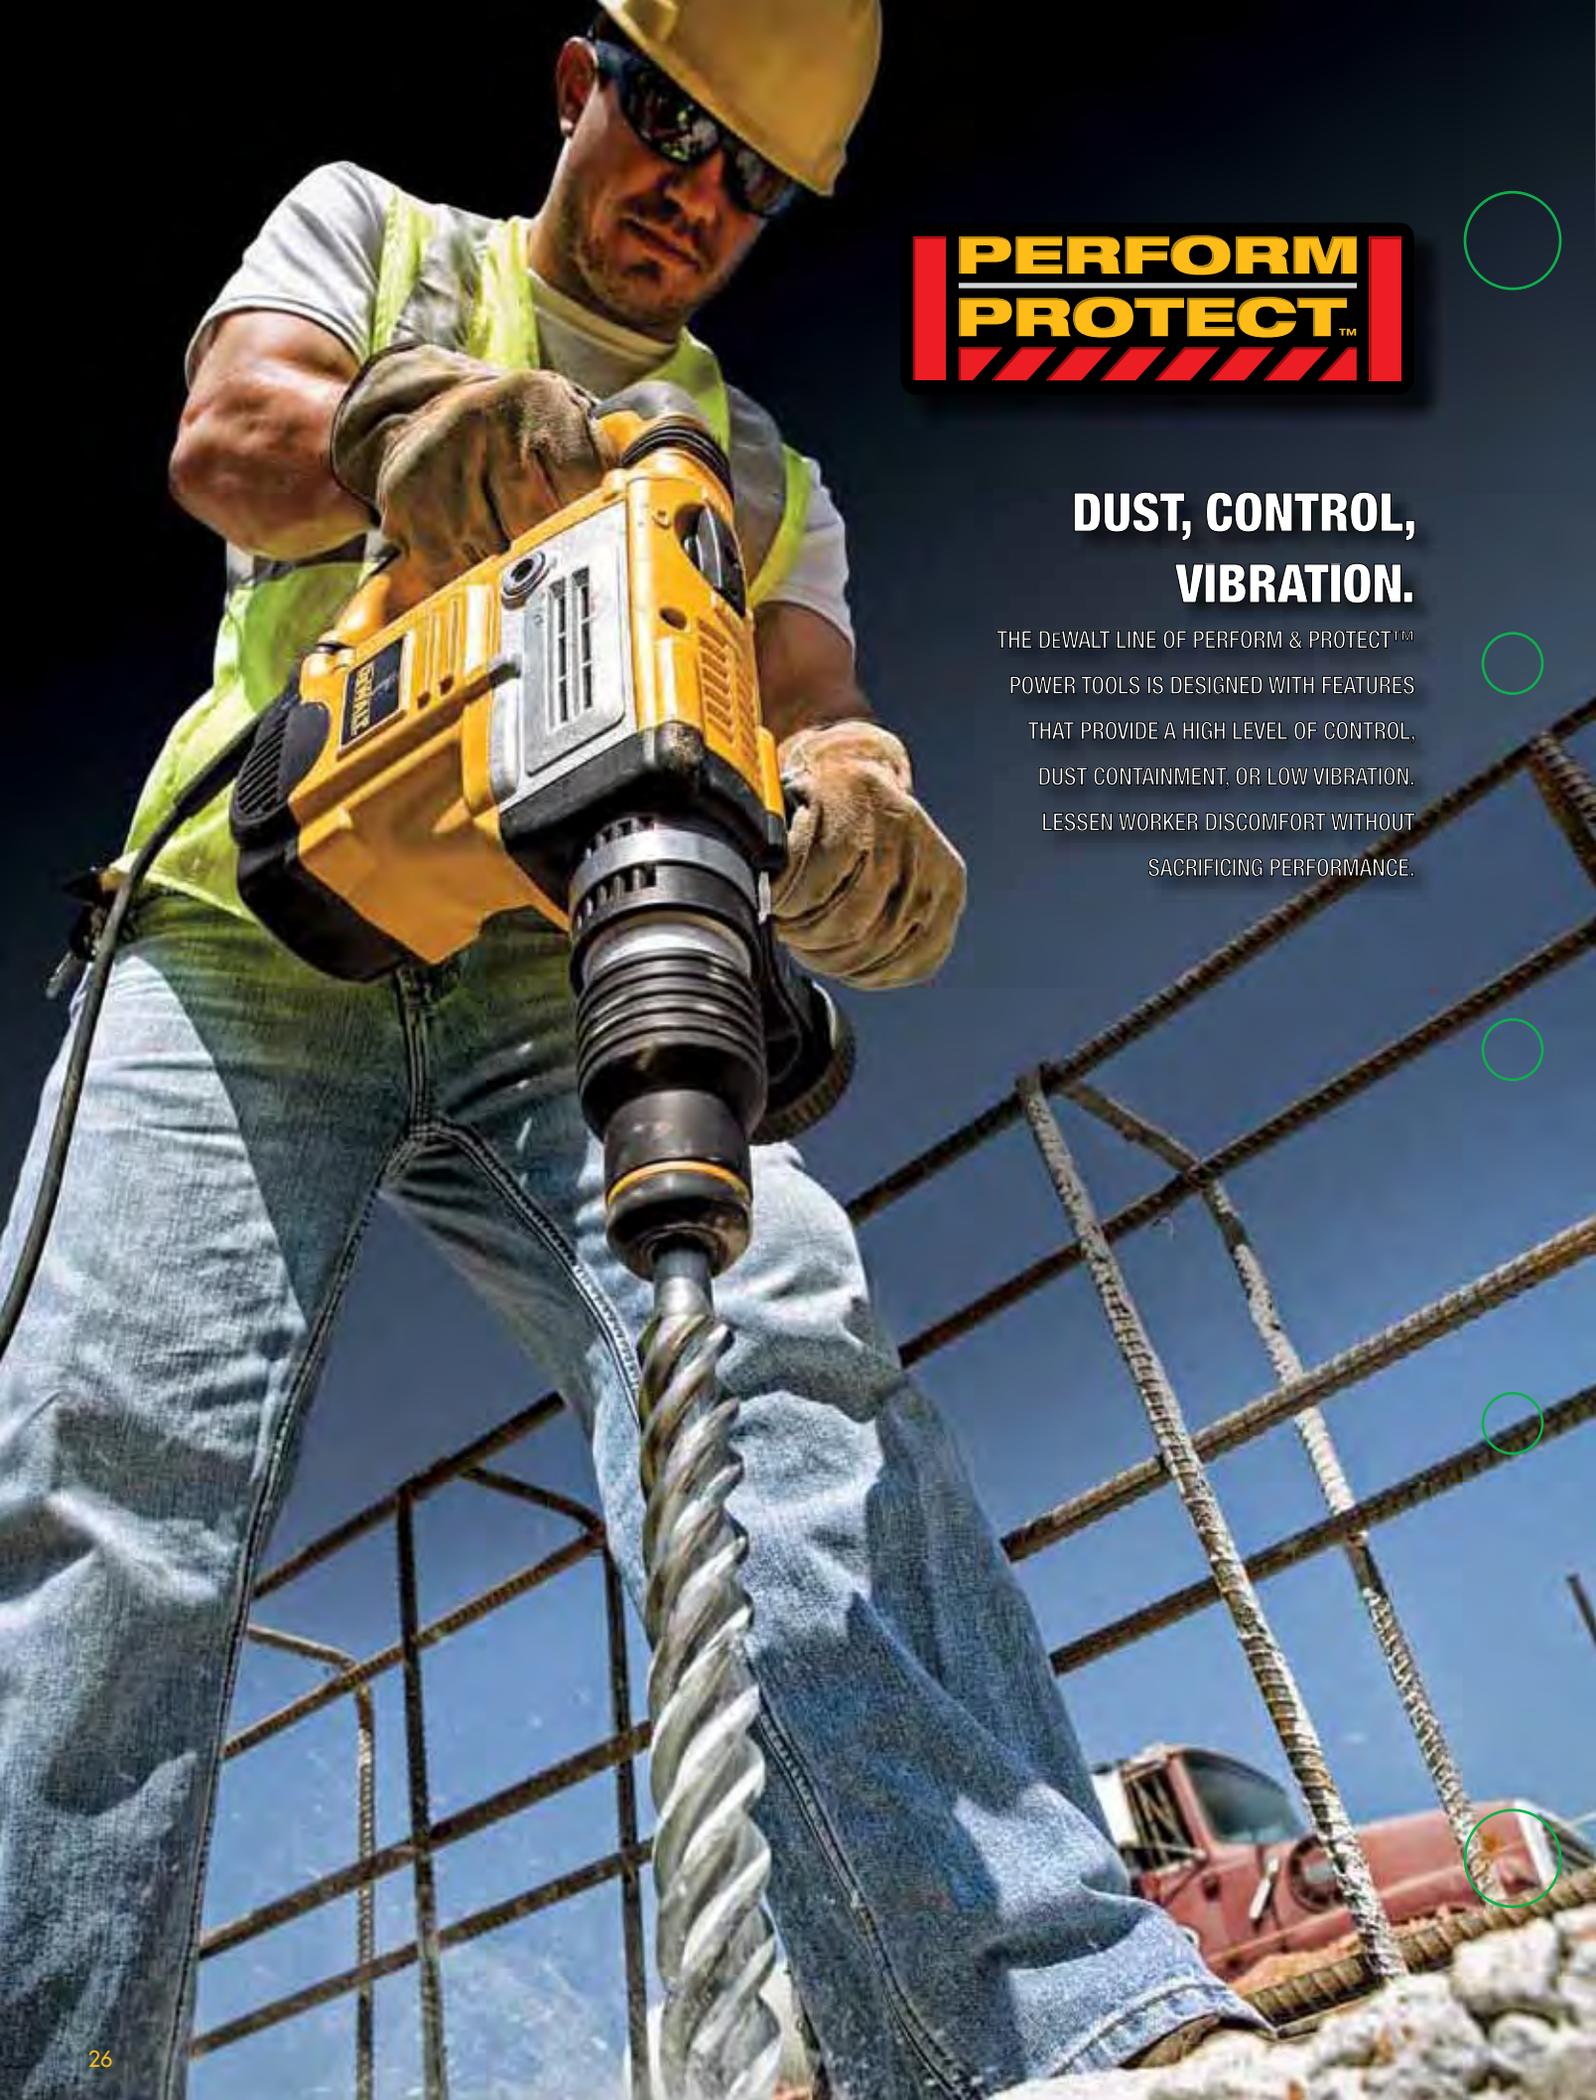

# PERFORM PROTECT™

## DUST, CONTROL, VIBRATION.

THE DEWALT LINE OF PERFORM & PROTECT™  
POWER TOOLS IS DESIGNED WITH FEATURES  
THAT PROVIDE A HIGH LEVEL OF CONTROL,  
DUST CONTAINMENT, OR LOW VIBRATION.  
LESSEN WORKER DISCOMFORT WITHOUT  
SACRIFICING PERFORMANCE.



**CORDED**

**GUARANTEED TOUGH.®**



## RECIPROCATING SAWS



SPECIFICATIONS	DW311K	DW310K	DWE305K	DWE357
Amps	13 Amps	12 Amps	12 Amps	12 Amps
Strokes/Min	0 - 2,700 spm	0 - 2,700 spm	0 - 2,900 spm	0 - 2,800 spm
Stroke Length	1-1/8"	1-1/8"	1-1/8"	1-1/8"
Keyless Blade Clamp	Twist	Twist	Lever	Lever
4-Position Blade Clamp	No	No	Yes	Yes
Adjustable Shoe	Yes	Yes	No	No
Variable-Speed Trigger	Yes	Yes	Yes	Yes
Variable-Speed Dial	Yes	No	No	No
Orbital Action	Yes	No	No	No
Anti-Slip Comfort Grip	Yes	No	Yes	Yes

## CIRCULAR SAWS



SPECIFICATIONS	DW384	DW364	DWS535 / DWS535T	DWE575	DWE575SB	DWE575DC
Amps	15 Amps	15 Amps	15 Amps	15 Amps	15 Amps	-
Max Watts Out	2,075 W	2,075 W	2,100 W	1,950 W	1,950 W	-
No Load Speed	5,800 rpm	5,800 rpm	4,800 rpm	5,200 rpm	5,200 rpm	-
Bevel Capacity	50°	50°	53°	57°	57°	-
Bevel Stops	N/A	N/A	45° / 22.5°	45° / 22.5°	45° / 22.5°	-
Rear Pivot	Yes	Yes	No	No	No	-
Electric Brake	Yes	Yes	No	No	Yes	-
Blade Diameter	8-1/4"	7-1/4"	7-1/4"	7-1/4"	7-1/4"	-
Depth Of Cut At 90°	2-15/16"	2-7/16"	2-7/16"	2.55"	2.55"	-
Depth Of Cut At 45°	2-1/4"	1-7/8"	1-7/8"	1-7/8"	1-7/8"	1-7/8"
Includes	Carbide tipped blade and blade wrench	Carbide tipped blade and blade wrench	Carbide tipped 7-1/4" blade, blade wrench / carbide tipped 7-1/4" blade, blade wrench, pre-installed w/ twistlock plug	Carbide tipped 7-1/4" blade and blade wrench	Carbide tipped 7-1/4" blade and blade wrench	Replacement lower guard lever and fastening screws (3)

## JIG SAWS




SPECIFICATIONS	DW331K	DW317K
Amps	6.5 Amps	5.5 Amps
Strokes/Min	500 - 3,100 spm	0 - 3,100 spm
Stroke Length	1"	1"
Keyless Blade Clamp	Yes	Yes
Dust Blower	Yes	No
Orbital Action	4-position	4-position
Tool Weight	6.4 lbs	6.2 lbs

## SCROLL SAW



SPECIFICATIONS	DW788	SCROLL SAW ATTACHMENTS
Amps	1.3 Amps	
Strokes/Min	400 - 1,750 spm	
Stroke Length	3/4"	
Depth of Cut (inches)	2"	
Tool Weight	56 lbs	
Includes	Hex wrench and blades	DW7880 - Scroll Saw Stand DW7881 - Scroll Saw Worklight

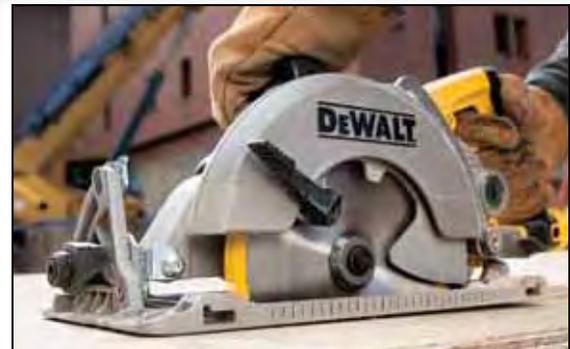

## MULTI-TOOL



SPECIFICATIONS	DWE315K
Amps	3.0 Amps
Oscillations/Min	0 - 22,000 opm
Variable Speed	Yes
Keyless Accessory Change	Yes
LED Light	Yes
Accessories Included	29
Tool Weight	3.1 lbs
Includes	DeWALT Oscillating Tool Guide System, bi-metal plunge cut blade, fast-cut wood blade, semi-circle flush cut blade, sanding pad, (25) sheets of sand paper, accessory storage box and multi-brand accessory adaptor

## TILE SAW



10" (254 mm)  
Wet Tile Saw



10" (254 mm)  
Wet Tile Saw w/ Stand

SPECIFICATIONS	D24000	D24000S	TILE SAW ATTACHMENTS
Amps	15 Amps	15 Amps	D24001 – Wet Tile Saw Stand
Blade Diameter	10"	10"	
Max Rip Capacity	24" Tile	24" Tile	
Diagonal Cut Capacity	18" Tile	18" Tile	
Plunge Feature	Yes	Yes	
Max. Depth of Cut	3-1/8"	3-1/8"	
Integrated 45° Miter	Yes	Yes	
Integrated 22.5° Miter	Yes	Yes	
Length	34"	34"	
Tool Weight	69 lbs	69 lbs	

## HANDHELD TILE SAW



4-3/8" (111.1 mm) Wet/Dry  
Handheld Tile Saw

SPECIFICATIONS	DWC860W
Amps	10.8 Amps
Bevel Capacity	45°
rpm	13,000 rpm
Arbor Size	20 mm
Tool Weight	6.6 lbs
Includes	12' Water line and regulator, 4-3/8" DeWALT diamond blade and 2 wrenches

## TABLE SAWS



10" (254 mm) Compact Job  
Site Table Saw with Site-Pro™  
Modular Guarding System



10" (254 mm) Job Site Table Saw with  
Site-Pro™ Modular Guarding System



10" (254 mm) Compact Job Site  
Table Saw w/ Rolling Stand



10" (254 mm) Jobsite Table Saw with  
Guard Detect and w/ Rolling Stand

SPECIFICATIONS	DWE7480	DWE7490X	DWE7491RS	DWE7499GD
Amps	15 Amps	15 Amps	15 Amps	15 Amps
No Load Speed	4,800 rpm	4,800 rpm	4,800 rpm	4,800 rpm
Blade Diameter	10"	10"	10"	10"
Arbor Size	5/8"	5/8"	5/8"	5/8"
Dust Port Diameter	2-1/2"	2-1/2"	2-1/2"	2-1/2"
Depth of Cut at 90°	3-1/8"	3-1/8"	3-1/8"	3-1/8"
Depth of Cut at 45°	2-1/4"	2-1/4"	2-1/4"	2-1/4"
Max Rip to Right of Blade	24"	28 1/4"	32-1/2"	32-1/2"
Max Rip to Left of Blade	12"	16-1/2"	22"	22"
Max Width of Dado	N/A	13/16"	13/16"	13/16"
Includes	Miter gauge, push stick, 10" 24T carbide blade and blade guard	Miter gauge, push stick, 10" 24T carbide blade, blade guard and folding table saw stand (DW7440)	Miter gauge, push stick, 10" 24T carbide blade, blade guard and rolling table saw stand (DW7440RS)	Miter gauge, push stick, 10" 24T carbide blade, blade guard and rolling table saw stand (DW7440RS)

### Portable Table Saw Attachments

DW7441 – Out feed and Side Support	DW7452 – Thick Kerf Riving Knife for DW745	DWE74911 – Rolling Table Saw Stand
DW7444 – Dado Throat Plate for DW744X	DW7440RS – Rolling Table Saw Stand for DW744X	
DW7450+ – Table Saw Stand for DW745	DWE7402DI – Dado Throatplate for 10" Portable Table Saw - (DWE7490X, DWE7491RS and DWE7499GD)	

\*Available through service only

## TRACK SAWS



6-1/2" (165 mm)  
TrackSaw™ Kit



TrackSaw™ Kit with  
59" (149 cm) and 102" (259 cm) Tracks



TrackSaw™ Kit with  
59" (149 cm) Track

SPECIFICATIONS	DWS520K	DWS520CK	DWS520SK
Power	12 Amp, 1300 W	12 Amp, 1300 W	12 Amp, 1300 W
No Load Speed	1,750 - 4,000 rpm	1,750 - 4,000 rpm	1,750 - 4,000 rpm
Blade Diameter	6-1/2"	6-1/2"	6-1/2"
Bevel Capacity	47°	47°	47°
Max. Cut at 90°	2-1/8"	2-1/8"	2-1/8"
Max. Cut at 45°	1-5/8"	1-5/8"	1-5/8"
Weight	11.5 lbs	11.5 lbs	11.5 lbs
Includes	6-1/2" (20 mm arbor size) 48T ultra fine finishing blade and blade wrench	6-1/2" (20 mm arbor size) 48T ultra fine finishing blade, 59" track, 102" Track and blade wrench	6-1/2" (20 mm arbor size) 48T ultra fine finishing blade, 59" Track and blade wrench

### Track Saw Attachments

DW5240 – Precision ground woodworking blade for TrackSaw™ System - 40T	DWS5023 – 102" (259 cm) TrackSaw™ Track	DWS5031 – TrackSaw™ Router Adapter
DW5258 – Precision ground woodworking blade for TrackSaw™ System - 48T	DWS5025 – TrackSaw™ Track Bag	DWS5032 – TrackSaw™ Replacement Friction Strip
DWS5020 – 46" (116.8 cm) TrackSaw™ Track	DWS5026 – TrackSaw™ Track Clamps	
DWS5022 – 59" (149.8 cm) TrackSaw™ Track	DWS5029 – TrackSaw™ Replacement Zero-clearance Anti Splinter Strip	

## MITER SAWS



**12" (305 mm) Double Bevel Sliding Compound Miter Saw**



**10" (254 mm) Double Bevel Sliding Compound Miter Saw**



**12" (305 mm) Double Bevel Compound Miter Saw with Light**



**12" (305 mm) Double Bevel Compound Miter Saw**

SPECIFICATIONS	DWS780	DW717	DW716XPS	DW716
Amps	15 Amps	15 Amps	15 Amps	15 Amps
No Load Speed	3,800 rpm	4,000 rpm	3,800 rpm	3,800 rpm
Blade Diameter	12"	10"	12"	12"
Arbor Size	5/8" or 1"	5/8"	5/8" or 1"	5/8" or 1"
Vertical Capacity	6-3/4"	6" Left - 3-1/2" Right"	6-1/2"	6-1/2"
Vertically Nested Capacity	7-1/2"	6 1/4"	6-5/8"	6-5/8"
Horizontal Capacity (MAX with back fence)	16"	14"	8" (10" with back fence)	8" (10" with back fence)
Includes	XPS light, Carbide blade, blade wrench, dust bag and vertical material clamp	Carbide blade, blade wrench, dust bag and vertical material clamp	Carbide blade, dust bag and blade wrench	Carbide blade, dust bag and blade wrench



**12" (305 mm) Single Bevel Compound Miter Saw**



**10" (254 mm) Single Bevel Miter Saw**

SPECIFICATIONS	DW715	DW713
Amps	15 Amps	15 Amps
No Load Speed	4,000 rpm	5,000 rpm
Blade Diameter	12"	10"
Arbor Size	5/8" or 1"	5/8"
Vertical Capacity	6-1/2"	3-1/2"
Vertically Nested Capacity	5-1/4"	4-1/2"
Horizontal Capacity	8"	6"
Includes	Carbide blade, dust bag and blade wrench	Carbide blade, dust bag and blade wrench

## MITER SAW STANDS



**Miter Saw Stand**



**Compact Miter Saw Stand**



**Work Stand**



**Work Stand with Miter Saw Mounting Brackets**



**Rolling Miter Saw Stand**

SPECIFICATIONS	DWX723	DWX724	DWX725	DWX725B	DWX726
Support Width	Up to 150"	Up to 100"	Up to 36"	Up to 36"	Up to 96"
Max. Capacity	500 lbs	500 lbs	1,000 lbs	1,000 lbs	300 lbs
Unit Weight	35 lbs	30 lbs	15.4 lbs	17.1 lbs	67 lbs
Includes	(2) Convertible work supports/stops and (2) mounting brackets	(2) Convertible work supports/stops and (2) mounting brackets	-	(2) Mounting brackets	-

### Miter Saw/Stand Attachments

	DW7026 – Miter Saw Stand Carry Strap		DW7080 <sup>†</sup> – Extension Kit (for DW712, DW713, DW715, DW716, DW717 & DW718)		DW7232 – Miter Saw Workstation Work Piece Support and Length Stop (for DWX723 and DWX724 stands)
	DW7027 – Wide Roller Material Support		DW7082 – Vertical Clamp (for DW712, DW713, DW715, DW716, DW717 & DW718)		
	DW7028 – Miter Saw Stand Extension Support		DW7084 – Crown Stops (for DW712, DW713, DW715, DW716, DW717, DW718 & DWS780)		
	DW7029 – Wide Miter Saw Stand Material Support and Stop		DW7231 – Miter Saw Workstation Tool Mounting Brackets (for DWX723, DWX724 and DWX725 stands)		
	DW7053 – Dust Bag (for all DeWALT Miter Saws)				
	DW7055 – Miter Saw Replacement Kerf Plate (for DW715 & DW716)				

<sup>†</sup>Available through service only

## SCREWDRIVERS



5,300 rpm  
High Speed VSR  
Drywall Scrugun



4,000 rpm  
Lightweight VSR  
Drywall Scrugun



4,000 rpm  
VSR Drywall Scrugun



2,500 rpm  
VSR All-Purpose  
Scrugun

SPECIFICATIONS	DW255	DW252	DW272/W/WT	DW257
Amps	6.0 Amps	6.0 Amps	6.3 Amps	6.2 Amps
No Load Speed	0 - 5,300 rpm	0 - 4,000 rpm	0 - 4,000 rpm	0 - 2,500 rpm
Clutch	Standard	Standard	Standard	Standard
Max Torque	60 in-lbs	60 in-lbs	81 in-lbs	132 in-lbs
Max Fastener Size	#8	#8	#8	#12
Tool Weight	2.9 lbs	2.8 lbs	3.1 lbs	3.5 lbs
Includes	-	-	W = 50' cord WT = 50' twist lock cord	-



2,500 rpm  
Heavy-Duty VSR  
All-Purpose Scrugun



2,500 rpm  
VSR Depth-Sensitive  
TEKS<sup>®</sup> Scrugun



2,500 rpm  
Lightweight VSR All-Purpose  
Scrugun Kit



2,000 rpm  
VSR VERSA-CLUTCH<sup>™</sup>  
Scrugun

SPECIFICATIONS	DW276	DW266	DW260K	DW267
Amps	6.5 Amps	6.5 Amps	6.2 Amps	6.5 Amps
No Load Speed	0 - 2,500 rpm	0 - 2,500 rpm	0 - 2,500 rpm	0 - 2,000 rpm
Clutch	Standard	Standard	Standard	VERSA-CLUTCH <sup>™</sup> System
Max Torque	132 in-lbs	132 in-lbs	132 in-lbs	164 in-lbs
Max Fastener Size	#14	#14	#12	#14
Tool Weight	3.6 lbs	3.5 lbs	3.2 lbs	3.7 lbs
Includes	-	-	1/4", 5/16", 3/8" Nut setters, 3 locators	-



2,500 rpm  
VSR VERSA-CLUTCH<sup>™</sup>  
Scrugun



1,000 rpm  
VSR VERSA-CLUTCH<sup>™</sup>  
Scrugun



2,500 rpm  
VSR Positive-Clutch Scrugun  
with 1/4" Bit Holder



2,500 rpm  
VSR Positive-Clutch Scrugun  
with Threaded Clutch Housing

SPECIFICATIONS	DW268	DW269	DW281	DW284
Amps	6.5 Amps	6.5 Amps	6.5 Amps	6.5 Amps
No Load Speed	0 - 2,500 rpm	0 - 1,000 rpm	0 - 2,500 rpm	0 - 2,500 rpm
Clutch	VERSA-CLUTCH <sup>™</sup> System	VERSA-CLUTCH <sup>™</sup> System	Positive	Positive
Max Torque	132 in-lbs	344 in-lbs	132 in-lbs	132 in-lbs
Max Fastener Size	#14	#14	#14	#14
Tool Weight	3.7 lbs	3.7 lbs	3.4 lbs	3.3 lbs

TEKS<sup>®</sup> is a registered trademark of Illinois Tool Works, Inc.

## IMPACT WRENCHES



1/2" (12.7 mm) Impact Wrench    1/2" (12.7 mm) Impact Wrench    3/4" (19 mm) Impact Wrench    3/4" (19 mm) Impact Wrench

SPECIFICATIONS	DW292/K*	DW293	DW294	DW297
Amps	7.5 Amps	7.5 Amps	7.5 Amps	7.5 Amps
No Load Speed	2,100 rpm	2,100 rpm	2,100 rpm	1,600 rpm
Max. Torque	345 ft-lbs	345 ft-lbs	345 ft-lbs	434 ft-lbs
Impacts/Min	2,700 ipm	2,700 ipm	2,700 ipm	1,800 ipm
Anvil Type	Detent Pin	Hog Ring	Detent Pin	Detent Pin
Tool Length	11-1/4"	11-1/4"	11-1/4"	13"
Tool Weight	7.0 lbs	7.0 lbs	7.0 lbs	11.0 lbs
Includes	-	-	-	360° side handle

\* (K) Includes Kitbag

## CUT-OUT TOOL



Cut-Out Tool

SPECIFICATIONS	DW660
Amps	5.0 Amps
No Load Speed	30,000 rpm
Collet Diameter	1/8", 1/4"
Adjustable Guide	Yes
Spindle Lock	Yes
Tool Length	10"
Tool Weight	3.2 lbs
Includes	(1) drywall cutting bit and 1/4", 1/8" collets

## 3/8" VSR DRILLS



SPECIFICATIONS	DWD115K	DWD112	DWD110K	DW223G	DW222	DWE1014
Chuck Size	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Keyless Chuck	Yes	Yes	Yes	No	Yes	No
Amps	8.0 Amps	8.0 Amps	8.0 Amps	7.0 Amps	6.7 Amps	7.0 Amps
No Load Speed	0 - 2,500 rpm	0 - 2,500 rpm	0 - 2,500 rpm	0 - 1,200 rpm	0 - 1,200 rpm	0 - 2,800 rpm
Max Watts Out	650 W	650 W	650 W	560 W	520 W	440 W
Capacity In Wood (Spade Bit)	1"	1"	1"	1-1/4"	1-1/4"	1"
Capacity In Wood (Hole Saw)	1-1/8"	1-1/8"	1-1/8"	2-1/8"	2-1/8"	1-1/8"
Capacity In Steel (Twist Bit)	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Tool Weight	4.1 lbs	4.1 lbs	4.1 lbs	3.6 lbs	3.3 lbs	3.6 lbs
Includes	-	-	-	Chuck key with holder	-	Chuck key

### DWD115K



## VSR DRILLS



1/4" (6.3 mm) VSR Drill    3/8" (9.5 mm) VSR Right Angle Drill

SPECIFICATIONS	DW217	DW160V
Chuck Size	1/4"	3/8"
Amps	6.7 Amps	4.0 Amps
No Load Speed	0 - 4,000 rpm	0 - 1,200 rpm
Max Watts Out	510 W	200 W
Keyless Chuck	No	No
Capacity In Wood (Spade Bit)	3/4"	1-1/8"
Capacity In Wood (Hole Saw)	N/A	1-1/8"
Capacity In Steel (Twist Bit)	1/4"	3/8"
Tool Weight	3.2 lbs	3.75 lbs
Includes	Chuck key with holder	Chuck key with holder

## 1/2" VSR DRILLS



SPECIFICATIONS	DWD215G	DWD216G	DWD210G	DW246	DW245	DW235G
Chuck Size	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"
Amps	10 Amps	10.5 Amps	10 Amps	7.8 Amps	7.8 Amps	7.8 Amps
No Load Speed	0 - 1,200 rpm	0 - 1,200 rpm	0 - 1,200 rpm	0 - 600 rpm	0 - 600 rpm	0 - 850 rpm
Max Watts Out	980 W	1100 W	980 W	600 W	600 W	600 W
Keyless Chuck	Yes	No	No	Yes	No	No
Capacity In Wood (Spade Bit)	1-1/2"	1-1/2"	1-1/2"	1-1/2"	1-1/2"	1-1/2"
Capacity In Wood (Auger Bit)	1-1/2"	1-1/2"	1-1/2"	1-1/2"	1-1/2"	1-1/8"
Capacity In Steel (Twist Bit)	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"
Capacity In Steel (Hole Saw)	2"	2"	2"	2-3/4"	2-3/4"	1-1/2"
Tool Weight	5.2 lbs	5.2 lbs	4.9 lbs	4.4 lbs	4.4 lbs	4.2 lbs
Includes	360° locking side handle	360° locking side handle	360° locking side handle and chuck key with holder	360° side handle	360° side handle and chuck key with holder	360° side handle and chuck key with holder

## DWD460



**Mechanical Clutch**  
In low speed for gear protection

**Multi-Position Adjustable Bail Handle**  
Provides maximum leverage and control

**Improved Chuck Jaws**  
Protects flat shank bits and holds them more securely

**Powerful 11 Amp Motor**  
For performance in heavy-duty applications

**Anti-slip Comfort Grip on Gear Casing & Handle**  
Provides additional comfort

**Variable Speed Trigger**  
Gives user increased control when starting a hole



**Bind-Up Control<sup>®</sup> System**  
Stall sensing technology that provides increased user control

**Knuckle Guard**  
Provides increased hand protection

**0-330 / 0-1,300 rpm**  
To match rpm / torque requirements to a variety of applications



**1/2" (12.7 mm) VSR Pistol Grip Drill with E-Clutch™ Anti-Lock Control**

## ELECTRONIC CLUTCH DRILL

SPECIFICATIONS	DWD220
Chuck Size	1/2"
Amps	10.5 Amps
No Load Speed	0 - 1,200 rpm
Max Watts Out	1100 W
Keyless Chuck	No
E-Clutch	Yes
Capacity In Wood (Spade Bit)	1-1/2"
Capacity In Wood (Auger Bit)	1-1/2"
Capacity In Steel (Twist Bit)	1/2"
Capacity In Steel (Hole Saw)	2"
Tool Weight	4.9 lbs
Includes	360° side handle and chuck key with holder

## 1/2" SPECIALTY DRILLS



SPECIFICATIONS	DWD460/K*	DWD450/K*	DW124/K*	DW120K	DW130V	DW140
Chuck Size	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"
Amps	11 Amps	11 Amps	11.5 Amps	7.0 Amps	9.0 Amps	7.0 Amps
No Load Speed	0-330 / 0-1,300 rpm	0-330 / 0-1,300 rpm	300 / 1,200 rpm	400 / 600 / 900 rpm	0 - 550 rpm	600 rpm
Max Watts Out	1015 W	1100 W	850 W	580 W	600 W	580 W
Kit Box	No/Yes	No/Yes	No/Yes	Yes	No	No
Mechanical Clutch	Yes and Bind-Up Control <sup>®</sup> System	Yes and Bind-Up Control <sup>®</sup> System	Yes	No	No	No
Capacity In Wood (Auger Bit)	1-1/2"	1-1/2"	1-1/2"	1-1/2"	1-1/2"	1-1/2"
Capacity In Steel (Twist Bit)	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"
Capacity In Steel (Hole Saw)	5"	5"	5"	5"	3"	1-1/2"
Tool Weight	11.7 lbs	11.2 lbs	13.5 lbs	9.7 lbs	7.5 lbs	7.0 lbs
Includes	2-position side handle, bail handle and chuck key with holder	2-position side handle, bail handle and chuck key with holder	2-position side handle, bail handle and chuck key with holder	5-position side handle, allen wrench and chuck key with holder	3-position side handle, 2-position rear spade handle and chuck key with holder	3-position side handle and chuck key

\* (K) Includes Kit box

## HAMMER DRILLS



SPECIFICATIONS	DW505	DW511	DWD520	DWD520K	DWD525K	DWE5010
Amps	7.8 Amps	7.8 Amps	10 Amps	10 Amps	10 Amps	7.0 Amps
Max Watts Out	650 W	650 W	980 W	980 W	980 W	550 W
No Load Speed	0-1,100 / 0-2,700 rpm	0-2,700 rpm	0-1,200 / 0-3,500 rpm	0-1,200 / 0-3,500 rpm	0-1,200 / 0-3,500 rpm	0-2,800 rpm
Blows/Min	0-19,000 / 0-46,000 bpm	0-46,000 bpm	0-56,000 bpm	0-56,000 bpm	0-56,000 bpm	0-47,600 bpm
Capacity In Steel	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"
Capacity In Wood	1-1/2"	1-1/4"	1-1/2"	1-1/2"	1-1/2"	1-1/4"
Concrete Optimum	5/32" - 3/8"	5/32" - 3/8"	5/32" - 7/16"	5/32" - 7/16"	5/32" - 7/16"	5/32" - 3/8"
Kit Box	No	No	No	Yes	Yes	No
Tool Length	13"	11-1/2"	14"	14"	13"	10.3"
Tool Weight	4.8 lbs	4.3 lbs	6.0 lbs	6.0 lbs	6.0 lbs	6.0 lbs
Includes	360° side handle, depth rod and chuck key	360° side handle, depth rod and chuck key	360° side handle, steel depth rod and chuck key	360° side handle, steel depth rod and chuck key	360° side handle, steel depth rod and chuck key with holder	360° side handle, steel depth rod and chuck key with holder

## CORDLESS SDS ROTARY HAMMERS



SPECIFICATIONS	DC212KA	DCH253M2	DCH363KL
Volts	18V	20V MAX*	36V
Chuck Type	SDS Plus	SDS Plus	SDS Plus
No Load Speed	0 - 1,100 rpm	0 - 1,200 rpm	0 - 1,100 rpm
Blows/Min	0 - 4,100 bpm	0 - 4,500 bpm	0 - 4,500 bpm
Impact Energy	2.0 J	2.1 J	2.3 J
Vibration Measurement	8.0 m/s <sup>2</sup>	6.9 m/s <sup>2</sup>	7.1 m/s <sup>2</sup>
Vibration Control	Yes - SHOCKS™	Yes - SHOCKS™	Yes - SHOCKS™
Chipping	No	Yes	Yes
Concrete Optimum	5/32" - 1/2"	5/32" - 1/2"	π" - 5/8"
Weight	7.6 lbs	6.4 lbs	7.7 lbs
Charger/Batteries	1-Hour Charger / (2) 18V XRP™	Fast Charger / (2) 20V MAX* Lithium Ion (4.0 Ah)	1-Hour Charger / (2) 36V Lithium Ion
Includes	360° side handle with depth rod	360° side handle with depth rod	360° side handle with depth rod
Also available	DC212KL (with 1-Hour Charger, (2) 18V XRP™ Lithium Ion); DC212B (Tool Only)	DCH253B (Tool Only)	DC233KLDH (with 1-Hour Charger / (2) 36V Lithium Ion, D25302DH dust extraction system)

\* With respect to the 20V MAX\*: Maximum initial battery voltage (measured without a workload) is 20 volts. Nominal voltage is 18.

According to EPTA-Procedure 05/2009

## SDS ROTARY HAMMERS



SPECIFICATIONS	D25012K	D25023K	D25123K	D25213K	D25223K
Optimal Concrete Drilling	5/32" - 1/2"	5/32" - 1/2"	5/32" - 5/8"	5/32" - 5/8"	5/32" - 5/8"
Amps	6.0 Amps	6.9 Amps	8.0 Amps	8.0 Amps	8.0 Amps
Impact Energy	1.8 J	1.8 J	2.8 J	2.8 J	2.8 J
Vibration Control	No	No	No	No	Yes - SHOCKS™
No Load Speed	0 - 1,550 rpm	0 - 1,550 rpm	0 - 1,150 rpm	0 - 1,150 rpm	0 - 1,150 rpm
Blows/Min	0 - 4,150 bpm	0 - 4,550 bpm	0 - 4,300 bpm	0 - 4,300 bpm	0 - 4,300 bpm
Vibration Measurement	11 m/s <sup>2</sup>	13.2 m/s <sup>2</sup>	17.8 m/s <sup>2</sup>	21 m/s <sup>2</sup>	10 m/s <sup>2</sup>
Chipping	No	Yes	Yes	Yes	Yes
Clutch	Yes	Yes	Yes	Yes	Yes
Tool Length	13.2"	16.2"	14.2"	16.6"	17.7"
Tool Weight	5.2 lbs	5.5 lbs	5.7 lbs	6.1 lbs	7.0 lbs
Limited Warranty - Service Contract	1 Yr.	1 Yr.	1 Yr.	1 Yr.	2 Yr.
Includes	360° side handle with depth rod				

According to EPTA-Procedure 05/2009

(continued on next page)

## SDS ROTARY HAMMERS

(continued)



SPECIFICATIONS	D25052K	D25313K	D25323K	D25324K	D25413K	D25416K
Optimal Concrete Drilling	5/32"- 1/2"	5/32"- 5/8"	5/32"- 5/8"	5/32"- 5/8"	1/4"- 7/8"	5/32"- 1/2"
Amps	6.0 Amps	8.0 Amps	8.0 Amps	8.0 Amps	9.0 Amps	6.0 Amps
Impact Energy	1.9 J	2.8 J	2.8 J	2.8 J	4.2 J	4.2 J
Vibration Control	Yes - SHOCKS™	No	Yes - SHOCKS™	Yes - SHOCKS™	Yes - SHOCKS™	Yes - SHOCKS™
No Load Speed	0 - 2,200 rpm	0 - 1,150 rpm	0 - 1,150 rpm	0 - 1,150 rpm	0 - 4,700 rpm	0 - 2,200 rpm
Blows/Min	0 - 6,200 bpm	0 - 4,300 bpm	0 - 4,300 bpm	0 - 4,300 bpm	0 - 6,200 bpm	0 - 6,200 bpm
Vibration Measurement	7.9 m/s <sup>2</sup>	18 m/s <sup>2</sup>	10.5 m/s <sup>2</sup>	10.5 m/s <sup>2</sup>	8.2 m/s <sup>2</sup>	7.9 m/s <sup>2</sup>
Chipping	Yes	Yes	Yes	Yes	Yes	Yes
Clutch	Yes	Yes	Yes	Yes	Yes	Yes
Tool Length	11.6"	11.5"	12.1"	12.4"	14.6"	11.6"
Tool Weight	6.5 lbs	6.5 lbs	7.5 lbs	7.8 lbs	9.2 lbs	6.5 lbs
Limited Warranty - Service Contract	1 Yr.	1 Yr.	2 Yr.	2 Yr.	1 Yr.	1 Yr.
Includes	360° side handle with depth rod and 3 Jaw Keyless chuck	360° side handle with depth rod	360° side handle with depth rod			

According to EPTA-Procedure 05/2009

## SDS MAX ROTARY HAMMERS



SPECIFICATIONS	D25501K	D25601K	D25603K	D25721K	D25723K
Optimal Concrete Drilling	3/8"- 1-1/4"	1/2"-1-3/8"	1/2"-1-3/8"	1"-1-5/8"	1"-1-5/8"
Amps	12 Amps	13.5 Amps	13.5 Amps	11 Amps	11 Amps
Impact Energy	8.0 J	8.0 J	11 J	11 J	11 J
Vibration Control	No	Yes - SHOCKS™	Yes - SHOCKS™	Yes - SHOCKS™	Yes - SHOCKS™
No Load Speed	490 rpm	210 - 415 rpm	210 - 415 rpm	137 - 275 rpm	137 - 275 rpm
Blows/Min	3,300 bpm	1,430 - 2,840 bpm	1,430 - 2,840 bpm	1,260 - 2,520 bpm	1,260 - 2,520 bpm
Vibration Measurement	18.3 m/s <sup>2</sup>	9.1 m/s <sup>2</sup>	9.1 m/s <sup>2</sup>	7.8 m/s <sup>2</sup>	7.8 m/s <sup>2</sup>
Clutch	Yes	Yes - 2 Stage	Yes - 2 Stage	No	Yes - 2 Stage & E-Clutch
Tool Length	18.6"	18.6"	18.6"	20.5"	20.5"
Tool Weight	13.5 lbs	15.1 lbs	15.1 lbs	17.5 lbs	17.5 lbs
Limited Warranty - Service Contract	1 Yr.	2 Yr.	2 Yr.	2 Yr.	2 Yr.
Includes	360° side handle	360° side handle	360° side handle	360° side handle	360° side handle

According to EPTA-Procedure 05/2009


## SDS MAX ROTARY HAMMERS



SPECIFICATIONS	D25761K	D25763K
Optimal Concrete Drilling	1"- 1-3/4"	1"- 1-3/4"
Amps	15 Amps	15 Amps
Impact Energy	15.5 J	15.5 J
Vibration Control	Yes - SHOCKS™	Yes - SHOCKS™
No Load Speed	125 - 250 rpm	125 - 250 rpm
Blows/Min	1,150 - 2,304 bpm	1,150 - 2,304 bpm
Vibration Measurement	9.3 m/s <sup>2</sup>	9.3 m/s <sup>2</sup>
Clutch	Integral	Yes - 2 Stage & E-Clutch
Tool Length	23"	23"
Tool Weight	19.2 lbs	19.2 lbs
Limited Warranty - Service Contract	2 Yr.	2 Yr.
Includes	360° side handle	360° side handle

According to EPTA-Procedure 05/2009

## SPLINE ROTARY HAMMERS

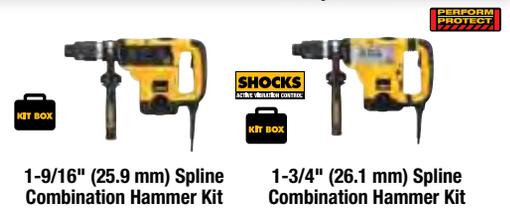

SPECIFICATIONS	D25553K	D25651K
Optimal Concrete Drilling	3/8"- 1-1/4"	1/2"- 1-3/8"
Amps	11 Amps	13.5 Amps
Impact Energy	8.0 J	8.0 J
Vibration Control	No	Yes - SHOCKS™
No Load Speed	490 rpm	210 - 415 rpm
Blows/Min	3,300 bpm	1,430 - 2,840 bpm
Vibration Measurement	18.3 m/s <sup>2</sup>	9.1 m/s <sup>2</sup>
Clutch	Yes	Yes - 2 Stage
Tool Length	18.6"	18.6"
Tool Weight	14 lbs	15.5 lbs
Limited Warranty - Service Contract	1 Yr.	2 Yr.
Includes	360° side handle	360° side handle

According to EPTA-Procedure 05/2009

## CHIPPING HAMMERS



SPECIFICATIONS	D25330K	D25831K	D25851K	D25891K
Amps	8.0 Amps	13.5 Amps	13.5 Amps	15 Amps
Impact Energy	2.8 J	8.0 J	8.0 J	15.5 J
Vibration Control	No	Yes - SHOCKS™	Yes - SHOCKS™	Yes - SHOCKS™
Vibration Measurement	17 m/s <sup>2</sup>	8.3 m/s <sup>2</sup>	8.3 m/s <sup>2</sup>	12.4 m/s <sup>2</sup>
Blows/Min	0 - 4,100 bpm	1,430 - 2,840 bpm	1,430 - 2,840 bpm	1,152 - 2,304 bpm
Variable Impact Control Dial	No	7 Settings	7 Settings	8 Settings
Chisel Rotation	Yes	Yes - Manual	Yes - Manual	Yes
Tool Length	11.5"	18.6"	18.6"	23"
Tool Weight	6.5 lbs	13.6 lbs	14 lbs	19 lbs
Limited Warranty - Service Contract	1 Yr.	2 Yr.	2 Yr.	2 Yr.
Includes	360° side handle	360° side handle	360° side handle	360° side handle

According to EPA-Procedure 05/2009

## DEMOLITION HAMMERS



SPECIFICATIONS	D25899K	D25901K	D25941K	D25960K
Amps	14 Amps	14 Amps	15 Amps	15 Amps
Impact Energy	17.9 J	19 J	22.5 J	35 J
Vibration Control	No	Yes - SHOCKS™	Yes - SHOCKS™	Yes - SHOCKS™
Vibration Measurement	11.5 m/s <sup>2</sup>	8.0 m/s <sup>2</sup>	9.0 m/s <sup>2</sup>	6.8 m/s <sup>2</sup>
Blows/Min	2,040 bpm	1,020 - 2,040 bpm	1,620 bpm	1,460 bpm
Variable Impact Control Dial	19 Settings	Yes	No	No
Chisel Rotation	One-step, 12 Positions	One-step, 12 Positions	One-step, 12 Positions	No
Tool Length	25.8"	26.8"	29.7"	30"
Tool Weight	21.2 lbs	23.4 lbs	27.2 lbs	40.5 lbs
Limited Warranty - Service Contract	1 Yr.	2 Yr.	2 Yr.	2 Yr.
Bit Type	SDS Max	SDS Max	3/4" Hex	1-1/8"
Includes	360° side handle	360° side handle	360° side handle	Bull point chisel and wheeled kit box


According to EPA-Procedure 05/2009

## PAVEMENT BREAKER



SPECIFICATIONS	D25980	D25980K	D259803
Amps	15 Amps	15 Amps	-
Impact Energy	52 J	52 J	-
Blows/Min	900 bpm	900 bpm	-
Vibration Control	Yes - SHOCKS™	Yes - SHOCKS™	-
Vibration Measurement	4.8 m/s <sup>2</sup>	4.8 m/s <sup>2</sup>	-
Tool Length	30.7"	30.7"	-
Tool Weight	68.3 lbs	129.3 lbs	61 lbs
Hand Truck	-	Multipurpose	Multipurpose
Limited Warranty - Service Contract	2 Yr.	2 Yr.	3 Yr.
Includes	-	Hammer truck, flat foot plate for hammer truck, pegged foot plate for hammer truck, (1) bull point chisel, (1) 1" cold chisel and (1) 3" wide chisel	Flat foot plate for hammer truck, pegged foot plate for hammer truck, (1) bull point chisel, (1) 1" cold chisel and (1) 3" wide chisel

According to EPA-Procedure 05/2009

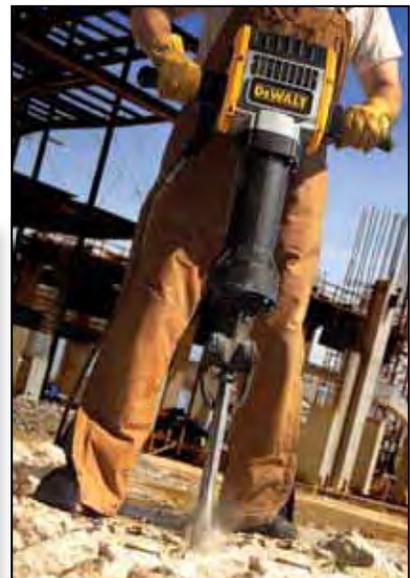

## DUST EXTRACTION FOR LARGE ROTARY HAMMERS



Large Hammer Dust Extraction - Hole Cleaning



Large Hammer Dust Extraction - Demolition



Large Hammer Dust Extraction - Chiseling

SPECIFICATIONS	DWH050K	DWH052K	DWH053K
Application	Drilling (up to 2") & Hole Cleaning (3/8" and up)	Chipping	Demolition
Used With	All rotary hammers or hammerdrills	DeWALT Spline, SDS Max, 3/4" Hex Chipping Hammers	1-1/8" Demolition Hammers
Hose Port Inner Diameter	35 mm	35 mm	35 mm
Hose Port Outer Diameter	42 mm	42 mm	42 mm
Compatible with Universal Connector	Yes	Yes	Yes
Includes	5/16" hole cleaning tube, 9/16" hole cleaning tube, 1-1/2" hole drilling head attachment, 2" hole drilling head attachment and dust extractor body	Dust extractor base, mounting bracket and mounting bracket strap	Dust extractor base, (3) chisel nozzles and (3) tool adaptors

## DUST EXTRACTION FOR SDS ROTARY HAMMERS



Dust Extractor Telescope w/ Hose for SDS Rotary Hammers



Dust Extraction for L-Shape SDS Hammer



Dust Extraction System for 36V SDS Rotary Hammer

SPECIFICATIONS	D25301D	D25300DH	D25302DH
Built-In Motor	N/A	Yes	Yes
2-Second Shut-Off Delay	N/A	Yes	Yes
Separate Vac Required	Yes	No	No
Fits DeWALT SDS Hammers	Corded & Cordless except D25404	Corded L-Shape except D25404	Cordless 36V
Includes	Side handle	-	Side handle

## DUST EXTRACTION FOR GRINDERS



5" / 6" (125 mm / 150 mm) Cutting/Tuck Pointing Shroud



5" / 6" (125 mm / 150 mm) Cutting/Tuck Pointing Shroud Kit



5" (125 mm) Surfacing Shroud Kit

SPECIFICATIONS	DWE46100	DWE46101	DWE46151
Max Wheel Diameter	5" / 6"	5" / 6"	5"
Hose Port Inner Diameter	35 mm	35 mm	35 mm
Hose Port Outer Diameter	42 mm	42 mm	42 mm
Tool Free Shroud Change	Yes	Yes	Yes
Tool Free Accessory Change	Yes	Yes	Yes
Includes	-	Universal connector, DWE46102 grinder with guard, side handle, matched flange set, wrench and diamond blade	Universal Connector and D28112 Grinder



5" (125 mm) Surfacing Shroud



7" (180 mm) Surface Grinding Dust Shroud

SPECIFICATIONS	DWE46150	DWE46170
Max Wheel Diameter	5"	7"
Hose Port Inner Diameter	35 mm	35 mm
Hose Port Outer Diameter	42 mm	42 mm
Tool Free Shroud Change	Yes	Yes
Tool Free Accessory Change	Yes	Yes



## DUST EXTRACTOR VACUUM



10 Gallon HEPA/RRP Wet/Dry Dust Extractor with Automatic Filter Cleaning



8 Gallon HEPA/RRP Wet/Dry Dust Extractor with Automatic Filter Clean

SPECIFICATIONS	DWV012	DWV010
Tank Size	10 gal	8 gal
Amps	15 Amps	15 Amps
Max cfm	155 cfm	150 cfm
Max Water Lift	81"	81"
Size (L x H x W)	23.5 x 27.2 x 18.5	20 x 20 x 19
Weight	33.5 lbs	21 lbs
Variable-Speed Dial	Yes	No
Power Cord	8'	8'
Hose Diameter	1-1/4"	1-1/4" - 2-1/2"
Hose Length	15'	15'
Limited Warranty	1 Yr.	1 Yr.
Includes	(2) HEPA filters and 15' Anti-static hose	(2) HEPA filters and 15' Anti-static hose

## DUST EXTRACTOR VACUUM ACCESSORIES

DWV9315	15' Kink Hose for DeWALT Dust Extractors	DWV9316	15' Anti Static Hose for DeWALT Dust Extractors	DWV9320	Replacement HEPA Filter (2 Pack) for DWV012 Type 1
DWV9400	Disposable Plastic Liner (5 Pack) for DeWALT Dust Extractors	DWV9401	Paper Bag (5 Pack) for DeWALT Dust Extractors	DWV9330	Replacement HEPA Filter (2 Pack) for DWV010 and DWV012 Type 2
DWV9402	Fleece Bag (5 Pack) for DeWALT Dust Extractors	DWV9314	8' x 2-1/2" Hose for DWV010 Dust Extractors		

## DUST EXTRACTOR VACUUM ATTACHMENTS



Beater Bar Floor Brush Kit

## DUST EXTRACTOR CONNECTORS



Universal Quick Connector

SPECIFICATIONS	DWV2759B	SPECIFICATIONS	DWV9000
Includes	11" Beater bar floor brush and (2) extension wands (1.38" friction fit)	Diameter	Universal quick connector for DeWALT dust extractor

## DUST EXTRACTOR CONNECTORS



Tapered Adapter



Tapered Adapter



Tapered Adapter



Tapered Large Diameter Adapter



Angled Adapter

SPECIFICATIONS	DWV9110	DWV9120	DWV9130	DWV9140	DWV9150
Diameter	1.14" - 1.45" 29 mm - 37 mm (Outer Diameter)	1.37" - 1.54" 35 mm - 39 mm (Outer Diameter)	1.37" 35 mm (Outer Diameter)	2.17" - 2.36" 55 mm - 60 mm (Outer Diameter)	1.37" (Outer Diameter) 35 mm



Permanent Adapter for 1" (25.4 mm) OD Port



Tool Adapter



Drywall Sander Dust Extractor Attachment



Large Hose Adapter



1-1/4" (31.7 mm) Hose Cord Clip

SPECIFICATIONS	DWV9160	DWV9170	DWV9180	DWV9190	D279058CL
Diameter	1" (Inner Diameter) 25.4 mm	1.25" (Outer Diameter) 31 mm	Allows PORTER-CABLE® 7800 drywall sander to be connected to DeWALT dust extractors	Connects to 2-1/2" (57.2 mm) hose O.D. for use with DWV9000	1-1/4" (31.7 mm)

## BASIC SMALL ANGLE GRINDERS



SPECIFICATIONS	DWE4011	DWE4012	DWE4120	DWE4120N	DW802G	D28402K	D28112	DWE402	DWE402N
Amps	7.0 AC/DC Amps	7.5 AC/DC Amps	9.0 AC/DC Amps	9.0 AC/DC Amps	9.0 AC/DC Amps	10 AC/DC Amps	10 AC/DC Amps	11 AC/DC Amps	11 AC/DC Amps
Max Watts Out / Max Horsepower	850 W / 1.14 HP	850 W / 1.14 HP	1140 W / 1.5 HP	1140 W / 1.5 HP	1,000 W / 1.3 HP	1,200 W / 1.6 HP	1,200 W / 1.6 HP	1,400 W / 1.8 HP	1,400 W / 1.8 HP
No Load Speed	12,000 rpm	12,000 rpm	12,000 rpm	12,000 rpm	10,000 rpm	11,000 rpm	11,000 rpm	11,000 rpm	11,000 rpm
Spindle Thread	5/8"-11	5/8"-11	5/8"-11	5/8"-11	5/8"-11	5/8"-11	5/8"-11	5/8"-11	5/8"-11
Switch Type	Slide	Paddle w/ lock-on	Paddle w/ lock-on	Paddle w/ No lock-on	Paddle w/ lock-on	Paddle w/ lock-on	Slide	Paddle w/ lock-on	Paddle w/ No lock-on
Dust Ejection System™	No	No	No	No	No	Yes	Yes	Yes	Yes
Tool-Free Flange System	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Tool Length	10-3/4"	10-5/8"	10-3/4"	10-3/4"	11.5"	11-1/4"	11-1/4"	12"	12"
Tool Weight	3.9 lbs	3.9 lbs	3.9 lbs	3.9 lbs	5.1 lbs	4.6 lbs	4.6 lbs	4.6 lbs	4.6 lbs
Includes	2-Position side handle, One-Touch™ guard type 27 and wrench		2-Position side handle, One-Touch™ guard type 27 and wrench		Side handle, type 27 keyless guard, backing flange, clamp nut, wrench and grinding wheel	2-Position side handle, One-Touch™ guard type 27 and wrench		2-Position side handle, One-Touch™ guard type 27 and wrench	

## HIGH PERFORMANCE SMALL ANGLE TRIGGER GRIP



SPECIFICATIONS	D28115	D28115N	D28065	D28065N	D28066N
Amps	13 Amps AC/DC	13 Amps AC/DC	13 Amps AC/DC	13 Amps AC/DC	13 Amps AC/DC
Max Watts Out / Max Horsepower	1,700 W / 2.3 HP	1,700 W / 2.3 HP	1,700 W / 2.3 HP	1,700 W / 2.3 HP	1,700 W / 2.3 HP
No Load Speed	9,000 rpm	9,000 rpm	9,000 rpm	9,000 rpm	9,000 rpm
Spindle Thread	5/8"-11	5/8"-11	5/8"-11	5/8"-11	5/8"-11
Switch Type	Trigger	Trigger	Trigger	Trigger	Trigger
Dust Ejection System™	Yes	Yes	Yes	Yes	Yes
Tool-Free Flange System	Yes	Yes	Yes	Yes	Yes
E-Clutch® / Overload Protection	No	No	No	No	No
Tool Length	15.25"	15.25"	15.25"	15.25"	15.25"
Tool Weight	4.75 lbs	4.75 lbs	4.75 lbs	4.75 lbs	4.75 lbs
Includes	2-Position side handle, 5" type 27 keyless adjustable guard and wrench		2-Position side handle, 5" type 27 keyless adjustable guard and wrench		2-Position side handle, 5" type 27 keyless adjustable guard, 6" type 27 keyless adjustable guard and wrench

## HIGH PERFORMANCE SMALL ANGLE BODY GRIP



SPECIFICATIONS	D28114	D28114N	D28131	D28144	D28144N	D28140
Amps	13 AC Amps	13 AC Amps	13 AC Amps	13 AC Amps	13 AC Amps	13 AC Amps
Max Watts Out / Max Horsepower	1,700 W / 2.3 HP	1,700 W / 2.3 HP	1,700 W / 2.3 HP	1,700 W / 2.3 HP	1,700 W / 2.3 HP	1,700 W / 2.3 HP
No Load Speed	11,000 rpm	11,000 rpm	11,000 rpm	9,000 rpm	9,000 rpm	9,000 rpm
Spindle Thread	5/8"-11	5/8"-11	5/8"-11	5/8"-11	5/8"-11	5/8"-11
Switch Type	Paddle w/ lock-on	Paddle no lock-on	Slide	Paddle w/ lock-on	Paddle no lock-on	Slide
Dust Ejection System™	Yes	Yes	Yes	Yes	Yes	Yes
Tool-Free Flange System	Yes	Yes	Yes	Yes	Yes	Yes
E-Clutch® / Overload Protection	Yes	Yes	Yes	Yes	Yes	Yes
Tool Length	13"	13"	13"	13"	13"	13"
Tool Weight	4.6 lbs	4.6 lbs	4.6 lbs	4.6 lbs	4.6 lbs	4.6 lbs
Includes	2-Position side handle, 5" type 27 keyless adjustable guard and wrench		2-Position side handle, 5" type 27 keyless adjustable guard and wrench	2-Position side handle, 6" type 27 keyless adjustable guard, 6" type 1 keyless adjustable guard and wrench		2-Position side handle, 6" type 27 keyless adjustable guard, 6" type 1 keyless adjustable guard and wrench

## MEDIUM ANGLE GRINDERS



SPECIFICATIONS	DW831	DW840
Amps	12 AC/DC Amps	13 AC/DC Amps
Max Watts Out / Max Horsepower	1,837 W / 2.5 HP	2,250 W / 3.0 HP
No Load Speed	10,000 rpm	8,000 rpm
Use Accessories rpm Above	10,000 rpm	8,000 rpm
Spindle Lock	Yes	Yes
Spindle Thread	5/8"-11	5/8"-11
Tool Length	14.33"	16.1"
Tool Weight	7.4 lbs	8.0 lbs
Includes	Grinding wheel, wrench, backing flange clamp nut, 5" type 27 keyless adjustable guard and 2-position side handle	Grinding wheel, wrench, backing flange clamp nut, 7" type 27 keyless adjustable guard and 2-position side handle



## LARGE ANGLE GRINDERS



SPECIFICATIONS	DWE4517	DWE4519	DWE4557	DWE4559N	DWE4559CN	D28499X	DWE4597	DWE4597N	DWE4599N
Amps	15 AC/DC Amps	15 AC/DC Amps	15 AC/DC Amps	15 AC/DC Amps	15 AC/DC Amps	15 AC/DC Amps	15 AC Amps	15 AC Amps	15 AC Amps
Max Watts Out / Max Horsepower	3,000 W / 4 HP	3,000 W / 4 HP	3,450 W / 4.7 HP	3,450 W / 4.7 HP	3,450 W / 4.7 HP	3,450 W / 4.7 HP	3,650 W / 4.9 HP	3,650 W / 4.9 HP	3,650 W / 4.9 HP
No Load Speed	8,500 rpm	6,500 rpm	8,500 rpm	6,500 rpm	6,500 rpm	6,000 rpm	8,500 rpm	8,500 rpm	6,500 rpm
Lock-On Trigger	Yes	Yes	Yes	No	No	Yes	Yes	No	No
Lock-Off Trigger	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Spindle Thread	5/8"-11	5/8"-11	5/8"-11	5/8"-11	5/8"-11	5/8"-11	5/8"-11	5/8"-11	5/8"-11
Motor Abrasion Protection	Epoxy	Epoxy	DES*	DES*	DES*	Epoxy	DES*	DES*	DES*
Steel-Cut Gears	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Pipeline™ Grip	No	No	No	No	Yes	No	No	No	No
Tool Length	19.3"	19.3"	20.8"	20.8"	20.9"	20.7"	21.4"	21.4"	21.4"
Tool Weight	12.1 lbs	12.1 lbs	11.6 lbs	12.1 lbs	12.4 lbs	14.5 lbs	12.3 lbs	12.3 lbs	12.8 lbs
E-Clutch	No	No	No	No	No	No	Yes	Yes	Yes
Overload Protection	No	No	No	No	No	No	Yes	Yes	Yes
Soft-Start	No	No	No	No	No	No	Yes	Yes	Yes
Anti-Vibe Handle	No	No	No	No	No	No	Yes	Yes	Yes
Includes	7" type 27 keyless adjustable guard and side handle	9" type 27 keyless adjustable guard and side handle	7" type 27 keyless adjustable guard and side handle	9" type 27 keyless adjustable guard and side handle	9" type 27 keyless adjustable guard, Pipeline™ Grip and side handle	7" type 27 keyless adjustable guard and side handle	7" type 27 keyless adjustable guard and Anti-Vibration side handle	7" type 27 keyless adjustable guard and Anti-Vibration side handle	9" type 27 keyless adjustable guard and Anti-Vibration side handle

## GRINDER ACCESSORIES

Guards	CAT #	DESCRIPTION	Flanges	CAT #	DESCRIPTION
	D284931	7" (177.8 mm) Guard (Type 1 wheels)		D284932	Type 1 Flange Set
	D284937	7" (177.8 mm) Keyless Guard (Type 27 wheels)			
	D284938	9" (228.6 mm) Keyless Guard (Type 28 wheels)			
	D284939	9" (228.6 mm) Keyless Guard (Type 27 wheels)			
	D284991	4-1/2" (115 mm) Jumbo Flap Disc Grinder Guard			
	D284992	5" (127 mm) Jumbo Flap Disc Keyless Guard for Small Angle Grinder			
	D284993	6" (152.4 mm) Jumbo Flap Disc Keyless Grinder Guard for Small Angle Grinder			
	DW4705	Diamond Blade Guard			
			<b>Flaring Cup Guards</b>	<b>CAT #</b>	<b>DESCRIPTION</b>
				D284933	Type 11 Flaring Cup Wheel Backing Flange
				D284934	4" (101.6 mm) Adjustable Flaring Cup Wheel Guard (Type 11 wheels)
				D284936	6" (152.4 mm) Adjustable Flaring Cup Wheel Guard (Type 11 wheels)
			<b>7" Polisher Accessories</b>		
<b>Service Parts</b>	<b>CAT #</b>	<b>DESCRIPTION</b>			
	DWE46007	Bail Handle		DW4985CL	7" Wool Buffing Pad & Backing Pad Kit
	N228079	Pipeline™ Grip		DW4985	7" Hook & Loop Backing Pad
				DW4988	7-1/2" Tie-On Wool Polishing Pad 1-1/2" Pile
				DW4989	7-1/2" Tie-On Blend Cutting Pad 1-1/2" Pile

## POLISHERS



SPECIFICATIONS	DWP849X	DWP849
Amps	12 AC Amps	12 AC Amps
Max Watts Out	1,250 W	1,250 W
No Load Speed	0-600 / 0-3,500 rpm	0-600 / 0-3,500 rpm
Spindle Thread	5/8"-11	5/8"-11
Spindle Lock	Yes	Yes
Tool Length	17.3"	17.3"
Tool Weight	6.7 lbs	6.6 lbs
Includes	Hook & loop backing pad and bale and straight side handle	Rubber backing pad and 2-position side handle

## DIE GRINDERS



SPECIFICATIONS	DWE4887	DWE4887N	DW888
Amps	4.2 AC/DC Amps	4.2 AC/DC Amps	5.0 AC/DC Amps
Max Watts Out	485 W	350 W	485 W
No Load Speed	25,000 rpm	25,000 rpm	19,000 rpm
Spindle Lock	N/A	N/A	N/A
Spindle Thread	1/4" collet & 1/8" sleeve	1/4" collet	1/4" collet & 1/8" sleeve
Switch Type	Paddle w/ Lock-On	Paddle	Trigger
Tool Length	19.2"	13"	19.2"
Tool Weight	6.0 lbs	3.25 lbs	6.0 lbs
Includes	(2) Wrenches, 1/4" collet and 1/8" reducing sleeve	(2) Wrenches and 1/4" collet	(2) Wrenches, 1/4" collet and 1/8" reducing sleeve

## STRAIGHT GRINDERS



SPECIFICATIONS	DW882	DW880
Amps	13 AC/DC Amps	5.0 AC/DC Amps
Max Watts Out	2,250 W	485 W
No Load Speed	5,700 rpm	19,000 rpm
Spindle Lock	No	No
Spindle Thread	5/8"-11	3/8"-24
Tool Length	24.4"	18.5"
Tool Weight	14.8 lbs	6.8 lbs
Includes	Wrench, arbor nuts and flanges	(2) Wrenches, arbor nuts and flanges

## BENCH GRINDERS



SPECIFICATIONS	DW758	DW756
Amps	4.2 AC Amps	4.0 AC Amps
Max Horsepower	3/4 HP	5/8 HP
No Load Speed	3,600 rpm	3,450 rpm
Wheel Diameter	8"	6"
Spindle Diameter	5/8"	1/2"
Adjustable Tool Resets	Yes	Yes
Tool Length	16"	15"
Tool Weight	39.5 lbs	28.5 lbs

\*DES = Dust Ejection System®

## SHEARS



18 Gauge Swivel Head Shear



14 Gauge Swivel Head Shear



14 Gauge Shear



12 Gauge Shear



5/16" (7.9 mm) Variable Speed Fiber Cement Siding Shear

SPECIFICATIONS	DW890	DW891	DW892	DW893	D28605
Amps	5.0 AC/DC Amps	5.0 AC/DC Amps	3.0 AC/DC Amps	6.5 AC/DC Amps	6.5 AC/DC Amps
Max Watts Out	470 W	470 W	384 W	225 W	800 W
Strokes/Min	0-2,500 spm	0-2,500 spm	2,700 spm	1,950 spm	0-2,500 spm
Capacity (Mild Steel)	18 ga.	14 ga.	14 ga.	12 ga.	N/A
Capacity (Stainless Steel)	20 ga.	16 ga.	16 ga.	14 ga.	N/A
Replacement Blade – Left/Right	DW8999 / DW8900	DW8999 / DW8900	–	–	–
Replacement Blade – Center	DW8901	DW8902	DW8920	DW8930	–
Tool Length	9.1"	9.1"	9.5"	10.5"	9.1"
Tool Weight	5.0 lbs	5.0 lbs	5.5 lbs	4.5 lbs	4.5 lbs
Includes	–	–	Blade kit	–	–

## NIBBLERS



16 Gauge Nibbler



16 Gauge Profile Nibbler



14 Gauge Nibbler

SPECIFICATIONS	DW896	DW897	DW898
Amps	3.0 AC/DC Amps	6.5 AC/DC Amps	6.5 AC/DC Amps
Max Watts Out	385 W	225 W	225 W
Strokes/Min	2,100 spm	1,950 spm	1,950 spm
Capacity (Mild Steel)	16 ga.	16 ga.	14 ga.
Capacity (Stainless Steel)	18 ga.	18 ga.	16 ga.
Starting Hole	1"	1"	5/8"
Tool Length	9.7"	10.5"	10.5"
Tool Weight	4.5 lbs	4.5 lbs	4.5 lbs

## BAND SAWS



Deep Cut Variable Speed Band Saw



Deep Cut Band Saw

SPECIFICATIONS	DW328	DWM120/K*
Amps	6.0 AC/DC Amps	10 AC Amps
Ft./Min.	100 - 245 fpm	100 - 350 fpm
Max Capacity (Rectangular)	4-3/4"	5" X 4-3/4"
Max Capacity (Round)	4-1/2" x 4-3/4"	5"
Front Handle Style	Pommel	Multi Position Bale
LED Light	No	Yes
AC/DC Capability	Yes	No
Rubber Bumpers	No	Yes w/ serviceable shroud
Tool Length	21.5"	21"
Includes	Hex wrench and standard 44-7/8" x 1/2" x .020" blade	Hex wrench and standard 44-7/8" x 1/2" x .020" blade

\* (K) Includes Kitbox

## CHOP SAWS



14" (355 mm) Chop Saw w/ QUIK-CHANGE™ Keyless Blade Change System



14" (355 mm) Chop Saw

SPECIFICATIONS	D28715	D28710
Amps	15 AC/DC Amps	15 AC/DC Amps
No Load Speed	4,000 rpm	3,800 rpm
Max Horsepower	5.5 Max HP	4.0 Max HP
Quick Lock Vise	Yes	Yes
Wheel Arbor	1"	1"
Wheel Diameter	14"	14"
Max Capacity (Round)	5"	5"
Max Capacity (Rectangular)	4-1/2" x 6-1/2"	4" x 7-5/8"
Blade Change	QUIK-CHANGE™	Wrench
Includes	14" Abrasive wheel, fence wrench and tool free flange system	14" Abrasive wheel and wrench

## MULTI-CUTTER<sup>®</sup> SAW



14" (355 mm) Multi-Cutter<sup>®</sup> Saw

SPECIFICATIONS	DW872
Amps	15 AC/DC Amps
No Load Speed	1,300 rpm
Spindle Lock	Yes
Quick Lock Vise	Yes
Wheel Arbor	1"
Wheel Diameter	14"
Max Capacity (Round)	5-3/16"
Max Capacity (Rectangular)	6-1/2" x 4-1/2"
Tool Length	21"
Includes	14" carbide tipped blade, wrench and vertical clamp

## CUT-OFF MACHINES



14" (355 mm) Cut-Off Machine



12" (304.8 mm) Cut-Off Machine

SPECIFICATIONS	D28755	D28754
Amps	15 AC/DC Amps	15 AC/DC Amps
No Load Speed	4,300 rpm	5,000 rpm
Depth of Cut	5"	4-1/2"
Max Horsepower	5.5 Max HP	5.3 Max HP
Dust Collection	Yes	No
Wheel Diameter	14"	12"
Wheel Rotation	clockwise / counter clockwise	clockwise / counter clockwise
Motor Abrasion Protection	Yes	Yes
Tool Length	21"	21"
Includes	Masonry wheel, metal cutting wheel and wrench	Masonry wheel, metal cutting wheel and wrench

## RANDOM ORBITAL SANDERS



SPECIFICATIONS	DWE6401DS	D26453K	D26451/K*	D26450	DW443	D26441/K*
Amps	6.0 Amps	3.0 Amps	3.0 Amps	3.0 Amps	4.5 Amps	2.4 Amps
Orbits/Min	0 - 3,700 opm	7,000 - 12,000 opm	12,000 opm	12,000 opm	4,000 - 6,800 opm	14,000 opm
Orbit Diameter	N/A	3/32"	3/32"	3/32"	3/16"	1/16"
Dust Collection	Yes	Yes	Yes	Yes	Yes	Yes
Paper Size/Type	5", 8 Hole	5", 8 Hole Hook & Loop	5", 8 Hole Hook & Loop	5", 8 Hole PSA Paper	6", 6 Hole Hook & Loop	1/4 Sheet
SFPM	N/A	N/A	N/A	N/A	N/A	N/A
Dust Sealed Switch	No	Yes	Yes	Yes	Yes	Yes
Pad Break	No	Yes - CFS	Yes - CFS	Yes - CFS	Yes	N/A
Tool Weight	4.0 lbs	3.5 lbs	3.4 lbs	3.4 lbs	5.7 lbs	3.0 lbs
Includes	5" 8 Hole hook & loop pad, dust shroud and wrench	Dust bag with vacuum adapter	Dust bag with vacuum adapter	Dust bag with vacuum adapter	Dust bag and side handle	Dust bag with vacuum adapter and sandpaper punch

\* (K) Includes Kitbag

## SANDING PADS

SANDER PAD	RELATED SANDER	DESCRIPTION
DW4382	D26450, D26451, D26451K, D26453K, D26456	5" (127 mm) PSA No-hole medium pad for use with 5" (127 mm) DeWALT ROS without dust collection
DW4385	DW421(D), DW422(D), DW423(D)	5" (127 mm) PSA 8-hole medium pad for use with 5" (127 mm) DeWALT ROS with dust collection
DW4388	D26450, D26451, D26451K, D26453K, D26456	5" (127 mm) Hook & loop 8-hole medium pad for use with 5" (127 mm) DeWALT ROS with dust collection
DW4390	DW443	Dust extraction adapter fits 1-1/4" (32 mm), 1-3/8" (35 mm) & 1-1/2" (38 mm) standard vacuum hoses (Sold at service ONLY)
DW4395	DW443	6" (152.4 mm) Hook & loop 6-hole hard pad with dust collection



Laminate Trimmer

## LAMINATE TRIMMER

SPECIFICATIONS	DWE6000
Amps	4.5 Amps
Collet Diameter	1/4"
Spindle Lock	Yes
Tool Weight	5 lbs
Includes	Standard base and collet wrench

## PLATE JOINER



Plate Joiner Kit

SPECIFICATIONS	DW682K
Amps	6.5 Amps
No Load Speed	10,000 rpm
Depth Of Cut (mm)	20 mm
Arbor Size	7/8"
Fence Type	Dual Rack and Pinion
Biscuits Accepted	0, 10, 20
Tool Weight	6.6 lbs
Includes	Carbide blade, dust bag vacuum adapter, Torx® key and wrench

### PLATE JOINER ACCESSORIES

DW6805 - Plate Joiner Blade



## BISCUITS

-  DW6800 - Bag of 75 No. 0 size Biscuits
-  DW6804 - Tube of 150 No. 0 size Biscuits
-  DW6810 - Bag of 75 No. 10 size Biscuits
-  DW6815 - Tube of 125 No. 10 size Biscuits
-  DW6820 - Bag of 75 No. 20 size Biscuits
-  DW6825 - Tube of 150 No. 20 size Biscuits

## ROUTERS



**1.25 HP Max Torque Variable Speed Compact Router with LED's**



**1.25 HP Max Torque Variable Speed Compact Router Combo Kit with LED's**



**1-3/4 HP (Max. Motor HP) Fixed Base / Plunge Router Combo Kit**



**1-3/4 HP (Max. Motor HP) Fixed Base Router**

SPECIFICATIONS	DWP611	DWP611PK	DW616PK	DW616/K*
Amps	7.0 Amps	7.0 Amps	11 Amps	11 Amps
Max Horsepower	1-1/4 HP	1-1/4 HP	1-3/4 HP	1-3/4 HP (Motor)
No Load Speed	16,000 - 27,000 rpm	16,000 - 27,000 rpm	24,500 rpm	24,500 rpm
Collet Diameter	1/4"	1/4"	1/2", 1/4"	1/2", 1/4"
Plunge Stroke	N/A	2"	2-1/2"	N/A
Depth Stop	Micro-fine Ring	Micro-fine Ring	Micro-fine Ring	Micro-fine Ring
Base Dimension	4"	4" (standard), 4-3/8" x 5-3/4" (plunge)	6"	6"
Spindle Lock	Yes - 12 position	Yes - 12 position	No	No
Tool Weight	5.5 lbs	8.0 lbs	10 lbs	7.1 / 7.1
Includes	Standard base and wrench	Extended sub-base, standard base and wrench	Plunge base, 1/4" and 1/2" collets, sub-base concentricity gauge and (2) wrenches	1/4" and 1/2" collets, sub-base concentricity gauge, vacuum adapter and (2) wrenches



**2-1/4 HP (Max. Motor HP) EVS D-Handle Router w/ Soft Start**



**2-1/4 HP (Max. Motor HP) EVS Fixed Base Router w/ Soft Start**



**2-1/4 HP (Max. Motor HP) EVS Fixed Base / Plunge Router Combo Kit w/ Soft Start**



**2-1/4 HP (Max. Motor HP) Three Base Router Kit**

SPECIFICATIONS	DW618D	DW618/K*	DW618PK	DW618B3
Amps	12 Amps	12 Amps	12 Amps	12 Amps
Max Horsepower	2-1/4 HP (Motor)	2-1/4 HP (Motor)	2-1/4 HP (Motor)	2-1/4 HP (Motor)
No Load Speed	8,000 - 24,000 rpm	8,000 - 24,000 rpm	8,000 - 24,000 rpm	8,000 - 24,000 rpm
Collet Diameter	1/2", 1/4"	1/2", 1/4"	1/2", 1/4"	1/2", 1/4"
Plunge Stroke	N/A	N/A	2-1/2"	2-1/2"
Depth Stop	Micro-fine Ring	Micro-fine Ring	Micro-fine Ring / 3 Stage Turret Stop	Micro-fine Ring / 3 Stage Turret Stop
Base Dimension	6"	6"	6"	6"
Spindle Lock	Yes	Yes	Yes	Yes
Tool Weight	8.2 lbs	7.2 / 7.2	10.1 lbs	10.1 lbs
Includes	D-handle base, 1/4" and 1/2" collets and wrench	Fixed base, 1/4" and 1/2" collets, large hole sub base and wrench	Fixed base, plunge base, 1/4" and 1/2" collets, large hole sub base and wrench	Fixed base, plunge base, D-handle base, 1/4" and 1/2" collets, concentricity gauge, large hole sub base and wrench



**3 HP (Max. Motor HP) EVS Plunge Router**



**2 HP (Max. Motor HP) EVS Plunge Router**

SPECIFICATIONS	DW625	DW621/K*
Amps	15 Amps	10 Amps
Max Horsepower	3 HP (Motor)	2 HP (Motor)
No Load Speed	8,000 - 22,000 rpm	8,000 - 24,000 rpm
Collet Diameter	1/2", 1/4"	1/2", 1/4"
Plunge Stroke	2-7/16"	2-1/8"
Depth Stop	3 Stage Turret Stop	3 Stage Turret Stop
Base Dimension	5-5/8 x 6-11/16"	4-5/16 x 6-1/4"
Spindle Lock	Yes	Yes
Tool Weight	11.2 lbs	9.0 lbs
Includes	1/4" and 1/2" collets, dust adapter, guide adapter and wrench	1/4" and 1/2" collets, guide adapter and wrench



## ROUTER ACCESSORIES

	DNP613 – Round Sub Base for Compact Routers		DW6183 – D-Handle Base for DW616/618		DW6913 – Universal Edge Guide with Dust Collection
	DNP614 – D-Shaped Sub Base for Compact Routers		DW6184 – Fixed Base for DW616/DW618		DW6966** – Fine Depth Adjuster
	DNP615 – Compact Router Dust Collection Adapter for Fixed Base Routers		DW6188** – Template Guide Set		DWE6014 - Laminate Trimmer D-Shaped Sub Base
	DNP616 – Compact Router Dust Collection Adapter for Plunge Base Routers		DW6902** – 1/4" (6.3 mm) Collet for use with DW625		DWE6015 - Laminate Trim Dust Collection Adaptor
	DNP617 – Centering Cone for Fixed Base Compact Routers		DW6904** – 3/8" (9.5 mm) Collet for use with DW625		DWE6018 - Laminate Trimmer Roller Guide
	DNP618 – Edge Guide for Fixed Base Compact Routers		DW6905** – 1/2" (12.7 mm) Collet for use with DW625		
	DW6182 – Plunge Base for DW616/DW618				

\* (K) Includes Kitbox or Kitbag  
\*\* Service part

## THICKNESS PLANERS



13" (330.2 mm) Three Knife, Two Speed Thickness Planer



13" (330.2 mm) Three Knife, Two Speed Thickness Planer



12-1/2" (317.5 mm) Thickness Planer w/ Three Knife Cutter-Head



DW7350 - Mobile Stand

SPECIFICATIONS	DW735X	DW735	DW734
Amps	15 Amps	15 Amps	15 Amps
Max. Depth of Cut	1/8"	1/8"	1/8"
Depth Capacity	6"	6"	6"
Width Capacity	13"	13"	12-1/2"
Speeds	2	2	1
Cuts Per Inch	96 and 179	96 and 179	96
Tool Weight	92 lbs	92 lbs	80 lbs
Includes	Infeed and outfeed tables, dust hose adapter and an extra set of knives	Dust hose adapter	Dust hood

### THICKNESS PLANER ACCESSORIES (DW735/X)

### (DW734)

DW7350 – Mobile Stand	DW7342 – 12-1/2" (317.5 mm) Disposable, Reversible Knives
DW7351 – 13" (330.2 mm) Folding Tables	
DW7352 – 13" (330.2 mm) Disposable, Reversible Knives	
DW7352-2 – 13" (330.2 mm) Vacuum Heat Treated Double Sided Two Pack Replacement Planer Knives	

## MEASURER



Laser Distance Measurer

SPECIFICATIONS	DW030P
Operating Range	100'
Accuracy	1/8"
Laser Class	II (<1mW) @ 635nm
Power Supply	(2) AAA Alkaline Batteries (Included)
Includes	Tool pouch and Lanyard

## HAND PLANERS



3-1/4" (82.5 mm) Planer Kit with 3/32" (2.5 mm) Depth of Cut



3-1/4" (82.5 mm) Portable Hand Planer



3-1/4" (82.5 mm) Portable Hand Planer Kit

SPECIFICATIONS	DW680K	D26676	D26677K
No Load Speed	15,000 rpm	17,000 rpm	17,000 rpm
Amps	7.0 Amps	5.5 Amps	5.5 Amps
Depth Of Cut (mm)	2.5 mm	1.5 mm	1.5 mm
Depth Of Cut (inches)	3/32"	1/16"	1/16"
Planing Width	3-1/4"	3-1/4"	3-1/4"
Rabbeting Depth	1/2"	23/64"	23/64"
Tool Weight	6.2 lbs	6.0 lbs	6.0 lbs
Includes	(2) reversible carbide blades and rabbeting fence	(2) resharpenable high-speed steel blades (installed), rabbeting fence, blade depth setting gage, blade resharpening tool and socket wrench	(2) High Speed Blades (installed), rabbeting fence, blade depth setting gage, dust adaptor and socket wrench

### HAND PLANER ACCESSORIES

DW6654 – Pair of Reversible Carbide Blades
DW6655 – High Speed Steel Blades

## HEAT GUNS



Heat Gun



LCD Heat Gun



Heat Gun Kit with LCD Display

SPECIFICATIONS	D26950	D26960	D26960K
Watts	1550W	1550W	1550W
Voltage	120V	120V	120V
Amps	13 Amps	13 Amps	13 Amps
Temperature	120° to 1100° F	150° to 1100° F	150° to 1100° F
Max. cfm	16 cfm	17.7 cfm	17.7 cfm
LCD	No	Yes	Yes
Power Cord	10'	10'	10'
Weight	2.1 lbs	2.3 lbs	2.3 lbs
Includes	Cone nozzle and fishtail surface nozzle	Cone nozzle and fishtail surface nozzle	Cone nozzle, fishtail surface nozzle and (10) other common accessories

## FINISH/BRAD NAILERS



**16 Gauge 1" - 2-1/2" (25.4 mm - 63.5 mm) Finish Nailer**



**15 Gauge 1" to 2-1/2" (25.4 mm - 63.5 mm) Finish Nailer**



**18 Gauge 2" (63.5 mm) Brad Nailer Kit**

SPECIFICATIONS	D51257K	D51276K	DWFP12231
Nail Diameter	16 Gauge	15 Gauge "Da" Style Nails	18 Gauge
Nail Length Capacity	1" - 2-1/2"	1" - 2-1/2"	5/8" - 2"
Magazine Angle	Straight	34°	Straight
Magazine Capacity	100 Nails	100 Nails	100 Nails
Magazine Loading	Rear Load, Load & Lock / Lock & Load	Rear Load, Load & Lock / Lock & Load	Side Load
Operating Pressure	70 - 120 psi	70 - 120 psi	70 - 120 psi
Depth Setting	Tool-Free Thumb Wheel	Tool-Free Thumb Wheel	Tool-Free Thumb Wheel
No Mar Pad	Low Profile Rubber	Low Profile Rubber	Low Profile Rubber
Integrated Belt Hook	Tool-Free Adjustable	Tool-Free Adjustable	Tool-Free Adjustable
Jam Clearing	Tool-Free Front Opening	Tool-Free Front Opening	Tool-Free Front Opening
Includes	Sample finish nails and 1/4" air fitting	Sample finish nails and 1/4" air fitting	Sample brad nails and 1/4" air fitting

## FINISH NAILS



CAT #	DESCRIPTION	LENGTH	BOX QTY.
<b>15 GAUGE "DA" Angled Finish Nails</b>			
DCA15150	"DA" Angle Finish Nails	1-1/2" (38.1 mm)	4,000
DCA15200	"DA" Angle Finish Nails	2" (50.8 mm)	4,000
DCA15250	"DA" Angle Finish Nails	2-1/2" (63.5 mm)	4,000
DCA15250G	Angle Finish Nail Galv	2-1/2" (63.5 mm)	4,000
<b>16 GAUGE 20° Angled Finish Nails</b>			
DCA16125	"FN" Angle Finish Nails	1-1/2" (38.1 mm)	2,500
DCA16150	"FN" Angle Finish Nails	2" (50.8 mm)	2,500
DCA16200	"FN" Angle Finish Nails	2-1/2" (63.5 mm)	2,500
DCA16250	"FN" Angle Finish Nails	2-1/2" (63.5 mm)	2,500

CAT #	DESCRIPTION	LENGTH	BOX QTY.
<b>18 GAUGE Straight Brad Nails</b>			
DBN18063	Brad Nail	5/8" (15.8 mm)	5,000
DBN18125	Brad Nail	1-1/4" (31.7 mm)	5,000
DBN18150	Brad Nail	1-1/2" (38.1 mm)	5,000
DBN18200	Brad Nail	2" (50.8 mm)	5,000
<b>16 GAUGE Straight Finish Nails</b>			
DCS16125	Straight Finish Nails	1-1/4" (31.7 mm)	2,500
DCS16150	Straight Finish Nails	1-1/2" (38.1 mm)	2,500
DCS16200	Straight Finish Nails	2" (50.8 mm)	2,500
DCS16250	Straight Finish Nails	2-1/2" (63.5 mm)	2,500



## PAPER TAPE FRAMING NAILS



CAT #	Head Type	Length	Diameter	Shank	Finish	Box Qty.
DPT-10D120FH	Off-Set Round Head	3"	.120"	Smooth	Bright	2500
DPT-10D120GFH	Off-Set Round Head	3"	.120"	Smooth	Galvanized	2000
DPT-10D131FH	Off-Set Round Head	3"	.131"	Smooth	Bright	2500
DPT-10DR120GFH	Off-Set Round Head	3"	.120"	Ring	Galvanized	2000
DPT-12D120FH	Off-Set Round Head	3-1/4"	.120"	Smooth	Bright	2500
DPT-12D131FH	Off-Set Round Head	3-1/4"	.131"	Smooth	Bright	2500
DPT-12D131GFH	Off-Set Round Head	3-1/4"	.131"	Smooth	Galvanized	2000
DPT-16D131FH	Off-Set Round Head	3-1/2"	.131"	Smooth	Bright	2000
DPT-6D113FH	Off-Set Round Head	2"	.113"	Smooth	Bright	5000
DPT-8D113FH	Off-Set Round Head	2-3/8"	.113"	Smooth	Bright	5000
DPT-8D113GFH	Off-Set Round Head	2-3/8"	.113"	Smooth	Galvanized	2000
DPT-8DR113FH	Off-Set Round Head	2-3/8"	.113"	Ring	Bright	5000
DPT-8DR113GFH	Off-Set Round Head	2-3/8"	.113"	Ring	Galvanized	2000
DPTS6DR113G	Clipped	2"	.113"	Ring	Galvanized	1000
DPTS8DR113	Clipped	2-3/8"	.113"	Ring	Bright	1000
DPTS8DR113G	Clipped	2-3/8"	.113"	Ring	Galvanized	1000
DPTS10D120	Clipped	3"	.120"	Smooth	Bright	1000
DPTS10DR120G	Clipped	3"	.120"	Ring	Galvanized	1000
DPTS10D131	Clipped	3"	.131"	Smooth	Bright	1000
DPTS12D131G	Clipped	3-1/4"	.131"	Smooth	Galvanized	1000

Compatible with most cordless and pneumatic paper tape nailers, including those made by DEWALT<sup>®</sup>, BOSTITCH<sup>®</sup>, PORTER-CABLE<sup>®</sup>, Paslode<sup>®</sup>, and Senco<sup>®</sup>

## ROOFING NAILER



**3/4" - 1-3/4" (19 mm - 44.4 mm) Coil Roofing Nailer**

SPECIFICATIONS	DWFP12658
Nail Style	Coil Roofing
Nail Diameter Range	.120"
Nail Length Capacity	3/4" - 1-3/4"
Canister Capacity	120 Nails
Operating Pressure	70 - 120 psi
Canister Loading	2-Door Side Load
Nose Piece Carbide Inserts	Yes
Selectable Trigger	Yes
Jam Clearing	Tool-Free Integrated In Nose Door
Includes	Nailer oil

## FLOORING TOOL



**2-in-1 Flooring Tool**

SPECIFICATIONS	DWFP12569
Nail Style	Staples and "L" Cleat Nails
Nail Diameter Range	15.5 GA Staples and 16 ga "L" Cleat Nails
Nail Length Capacity	1-1/2" - 2"
Canister Capacity	135 Cleats or 115 staples
Operating Pressure	70 - 100 psi
Canister Loading	Top Loading
Tool Base	Non-marring, interchangeable base plates
Selectable Trigger	Mallet Actuation
Jam Clearing	-
Includes	Mallet and 1/4" air fitting

## STAPLERS



1" - 2" x 1/2" (25.4 mm - 50.8 mm x 12.7 mm)  
16 Gauge Medium Crown Stapler



1" - 2" x 7/16" (25.4 mm - 50.8 mm x 11.1 mm)  
16 Gauge Medium Crown Stapler



1-1/2" (38.1 mm) 18 Gauge  
Narrow Crown Stapler Kit

SPECIFICATIONS	D51431	D51430	DWFP12232
Fastener Style	16 Gauge Staple	16 Gauge Staple	18 Gauge Staple
Crown Size	1/2"	7/16"	1/4"
Fastener Length Capacity	1" - 2"	1" - 2"	1/2" - 1-1/2"
Magazine Capacity	160 Staples	160 Staples	100 Staples
Magazine Angle	Straight	Straight	Straight
Magazine Loading	Top Load	Top Load	Bottom Load
Operating Pressure	70 - 120 psi	70 - 120 psi	70 - 120 psi
Speed	20 Fasteners/Second @ 100 psi	20 Fasteners/Second @ 100 psi	--
Depth Setting	Tool-Free Thumb Wheel	Tool-Free Thumb Wheel	Tool-Free depth-of-drive adjustment with detents for proper setting of staples
Includes	(2) allen wrenches and replacement sequential trigger	(2) allen wrenches and replacement sequential trigger	Sample fasteners and 1/4" air fitting

## DWFP55130

**Two quick couplers**  
to easily support 2 nailers

**3.0 SCFM delivered @ 90 PSI\*\*  
pump, 2.5 gallon tank and  
200 max PSI**  
enables many nails to be fired  
and provides quick recovery

**Low 12 amp draw motor**  
provides easy start-up and  
minimizes breaker tripping



**Ball valve drain**  
allows for quick and  
thorough tank draining

\*PORTER-CABLE C2002 and DWFP55130  
measured per ISO 3744

\*\*Tested per ISO 1217



**Low 71.5 dBA\***  
is 50% quieter than the  
PORTER-CABLE pancake  
style compressor

**Roll cage and control panel**  
provide protection to key  
compressor components

**Durable, oil-free pump**  
provides extended  
maintenance-free operation

**Convenient  
cord wrap**  
for easy storage



**Save space by operating  
and storing horizontally  
or vertically**



**Lightweight (36 lbs), thin  
(12.6") and compact design**  
is easy to carry and store

## HAND CARRY- OIL-FREE COMPRESSORS



1 Gallon, 135 Max PSI,  
Trim Compressor



6 Gallon, 165 Max PSI,  
Pancake Compressor



2.5 Gallon, 200 Max PSI,  
Quiet Trim Compressor

SPECIFICATIONS	D55140	DWFP55126	DWFP55130
Tank/Max PSI	1 Gallon / 135 PSI Max	6 Gallon / 165 PSI Max	2.5 Gallon / 200 PSI Max
SCFM@90 PSI	.75 scfm	2.6 scfm	3.0 scfm
Pump Type	Belt Drive Oil-Free	Belt Drive Oil-Free	Belt Drive Oil-Free
Amp Draw/Voltage	2.6A, 120V	10A, 120V	12A, 120V
Motor Type	Permanent Magnet	Universal	Universal
HP	0.3 Continuous HP	0.9 Continuous HP	1.1 Continuous HP
Noise Level	71.5 dBA	75.5 dBA	71.5 dBA
Tool Length	19"	16"	20.5" -
Tool Width	14.5"	16"	16.75"
Tool Height	9"	17.5"	12.5"
Tool Weight	24 lbs	30 lbs	36 lbs

Also available in 2" Brad Nailer Combo Kit  
**DWC1KIT-B**

## HAND CARRY-OIL-LUBE COMPRESSORS



4 Gallon, 125 Max PSI, Stacked Tank Compressor



4 Gallon, 125 Max PSI, 4.0 scfm, Stacked Tank Compressor



4 Gallon, 125 Max PSI, Wheeled Dolly-Style Air Compressor with Panel

SPECIFICATIONS	D55151	D55153	D55154
Tank/Max PSI	4 Gallon / 125 PSI Max	4 Gallon / 125 PSI Max	4 Gallon / 125 PSI Max
SCFM@90 PSI	3.4 scfm	4.0 scfm	4.0 scfm
Pump Type	Direct Drive Oil-Lube	Direct Drive Oil-Lube	Direct Drive Oil-Lube
Amp Draw/Voltage	14A, 120V	14A, 120V	14A, 120V
Motor Type	Induction	Induction	Induction
HP	1.1 Continuous HP	1.1 Continuous HP	1.1 Continuous HP
Noise Level	83.0 dBA	83.0 dBA	83.0 dBA
Tool Length	18.5"	18.5"	22" -
Tool Width	15.5"	15.5"	18.5"
Tool Height	14.75"	14.75"	23"
Tool Weight	53 lbs	56 lbs	87 lbs
Includes	DeWALT compressor oil	DeWALT compressor oil	DeWALT compressor oil

## WHEELED PORTABLE - OIL-FREE COMPRESSORS



4.5 Gallon, 200 Max PSI, Jobsite Compressor



15 Gallon, 200 Max PSI, Horizontal Workshop Compressor



15 Gallon, 200 Max PSI, Vertical Workshop Compressor

SPECIFICATIONS	D55146	D55167	D55168
Tank/Max PSI	4.5 Gallon / 200 PSI Max	15 Gallon / 200 PSI Max	15 Gallon / 200 PSI Max
SCFM@90 PSI	5.0 scfm	5.0 scfm	5.0 scfm
Pump Type	Belt Drive Oil-Free	Belt Drive Oil-Free	Belt Drive Oil-Free
Amp Draw/Voltage	15A, 120V	15A, 120V	15A, 120V
Motor Type	Universal	Universal	Universal
HP	1.6 Continuous HP	1.6 Continuous HP	1.6 Continuous HP
Noise Level	78.5 dBA	78.5 dBA	78.5 dBA
Tool Length	33.5"	39.6"	24.5"
Tool Width	23"	16.5"	22"
Tool Height	15"	30"	44.75"
Tool Weight	83 lbs	83 lbs	92 lbs

## AIR DISTRIBUTION




QUADRAPORT<sup>®</sup> Air Line Splitter with Regulator & 1/4" Couplers




QUADRAPORT<sup>®</sup> Air Line Splitter with Regulator & 3/8" Couplers

SPECIFICATIONS	D55040	D55041
Inlet Fitting Size	3/8" Industrial Series	3/8" Industrial Series
Coupler Size	1/4" Industrial Series	3/8" Industrial Series
Tool Length	12.5"	12.5"
Tool Width	7"	7"
Tool Height	4"	4"
Tool Weight	4 lbs	4 lbs
Includes	1/4" Industrial Series Fitting	-

AIR COMPRESSOR REGULATED: Regulator fully open allows all 4 ports to operate at air compressor PSI setting

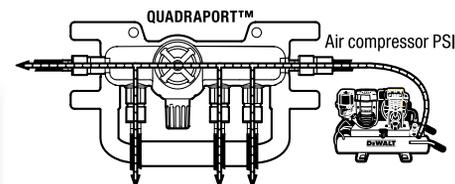

AIR COMPRESSOR AND QUADRAPORT<sup>™</sup> REGULATED: Regulator adjustment allows for 2 different pressure settings off one air compressor

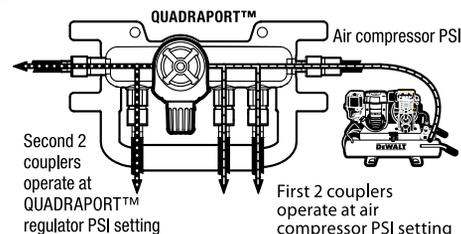



**DEWALT**®

**ACCESSORIES**

At DEWALT, we mean business.

We know that you take your job seriously – and we are serious about providing you with the tools to get that job done.

But that doesn't stop at the tool – because without the right accessory, you're working harder than you have to.

Our accessories have all been developed for you, to meet and exceed your needs.

We spend thousands of hours on the jobsite every year, testing and re-testing our accessories with the people who know best – you.

So when you buy a DEWALT accessory, you can be confident that we have put as much thought into it as you would.

We mean long life.


We mean efficient performance.

We mean innovative solutions to solve your frustrations.

**WE MEAN  
BUSINESS.**



**DEMAND DEWALT  
ABRASIVES**

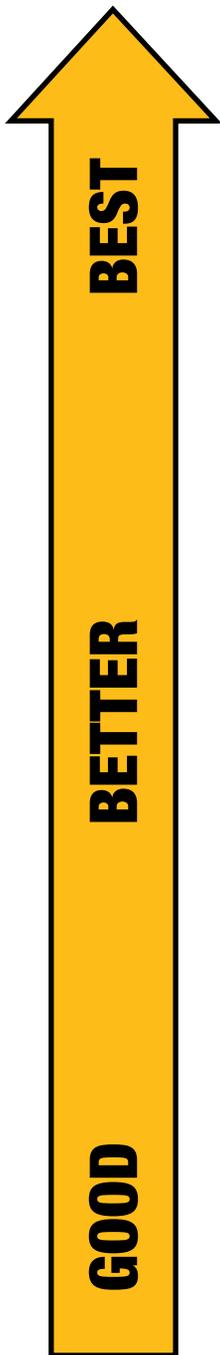

Bonded	Coated & Non-Woven	Diamonds	Wire Wheels
<p><b>XP<sup>TM</sup> CERAMIC PERFORMANCE</b></p> 	<p><b>XP3<sup>TM</sup> Ceramic</b></p> 	<p><b>XP4<sup>TM</sup></b></p> 	
<p><b>XP<sup>TM</sup> EXTENDED PERFORMANCE</b></p> 	<p><b>XP<sup>TM</sup> EXTENDED PERFORMANCE</b> Zirconia COOL DISC<sup>TM</sup></p> 	<p><b>XP<sup>TM</sup> EXTENDED PERFORMANCE</b></p> 	<p><b>XP<sup>TM</sup> EXTENDED PERFORMANCE</b></p> 
<p><b>HP<sup>TM</sup> HIGH PERFORMANCE</b></p> 	<p><b>HP<sup>TM</sup> HIGH PERFORMANCE</b></p> 	<p><b>HP<sup>TM</sup> HIGH PERFORMANCE</b></p> 	<p><b>HP<sup>TM</sup> HIGH PERFORMANCE</b></p> 
<p><b>HP<sup>TM</sup> HIGH PERFORMANCE</b></p> 	<p><b>HP<sup>TM</sup> HIGH PERFORMANCE</b></p> 		


## TYPE 1 BONDED ABRASIVES

**XP<sup>™</sup> CERAMIC PERFORMANCE**




CAT #	DIA.	THICKNESS	ARBOR	GRIT	MAX RPM	PACK
<b>.045" Metal &amp; Stainless Cutting</b>						
DWA8951	4.5	.045"	7/8"	SG60T	13,300	25
DWA8952	5	.045"	7/8"	SG60T	12,200	10

CAT #	DIA.	THICKNESS	ARBOR	GRIT	MAX RPM	PACK
<b>.045 Metal &amp; Stainless Cutting</b>						
DWA8953	6	.045"	7/8"	SG60T	10,100	10
DWA8954	7	.045"	7/8"	SG60T	8,700	10



**XP<sup>™</sup> EXTENDED PERFORMANCE**



CAT #	DIA.	THICKNESS	ARBOR	GRIT	MAX RPM	PACK
<b>.045" Metal &amp; Stainless Cutting</b>						
DW8850	4"	.045"	5/8"	Z60T	15,200	25
DW8851	4-1/2"	.045"	7/8"	Z60T	13,300	25
DW8852	5"	.045"	7/8"	Z60T	12,200	25
DW8853	6"	.045"	7/8"	Z60T	10,100	25
DW8854	7"	.045"	7/8"	Z60T	8,700	25

CAT #	DIA.	THICKNESS	ARBOR	GRIT	MAX RPM	PACK
<b>Metal Abrasive Saw Blades</b>						
DW8056	7"	1/8"	5/8" - $\blacklozenge$	TA24T	8,700	25
<b>Metal Chop Saw Blades</b>						
DW8057	12"	7/64"	1"	TA24T	5,000	10
DW8059	14"	7/64"	1"	TA24T	4,300	10



**HP<sup>™</sup> HIGH PERFORMANCE** SMALL DIAMETER CUTTING WHEELS



CAT #	DIA.	THICKNESS	ARBOR	GRIT	MAX RPM	PACK
<b>.045" Metal &amp; Stainless Cutting</b>						
DW8061	4"	.045"	5/8"	A60T	15,200	25
DW8062	4-1/2"	.045"	7/8"	A60T	13,300	25
DW8063	5"	.045"	7/8"	A60T	12,200	25
DW8725	6"	.040"	7/8"	A60T	10,100	25
DW8726	6"	.045"	7/8"	A60T	10,100	25
DW8065	7"	.045"	7/8"	A60T	8,700	25

CAT #	DIA.	THICKNESS	ARBOR	GRIT	MAX RPM	PACK
<b>.045" Masonry Cutting</b>						
DW8071	4"	.045"	5/8"	C60T	15,200	25
DW8072	4-1/2"	.045"	7/8"	C60T	13,300	25

CAT #	DIA.	THICKNESS	ARBOR	GRIT	MAX RPM	PACK
<b>.045" Aluminum Cutting &amp; Grinding</b>						
DW8062A	4-1/2"	.045"	7/8"	A60N	13,200	25
DW8725A	6"	.045"	7/8"	A60N	10,000	25

CAT #	DIA.	THICKNESS	ARBOR	GRIT	MAX RPM	PACK
<b>Small Diameter Cutoff Wheels Metal &amp; Stainless Cutting &amp; Grinding</b>						
DW8703	2-1/2"	.035"	1/4"	A36T	30,500	50
DW8701	2-1/2"	.035"	1/4"	A60T	30,500	50
DW8702	2-1/2"	.035"	3/8"	A36T	30,500	50
DW8700	2-1/2"	.035"	3/8"	A60T	30,500	50
DW8708	3"	.035"	1/4"	A36T	24,400	50
DW8706	3"	.035"	3/8"	A36T	24,400	50
DW8712	3"	.035"	3/8"	A60T	24,400	50
DW8704	3"	1/16"	1/4"	A36T	24,400	50
DW8705	3"	1/16"	3/8"	A36T	24,400	50

CAT #	DIA.	THICKNESS	ARBOR	GRIT	MAX RPM	PACK
<b>Small Diameter Cutoff Wheels Metal &amp; Stainless Cutting &amp; Grinding</b>						
DW8711	3"	1/16"	3/8"	A60T	24,400	50
DW8710	3"	1/8"	1/4"	A24R	24,400	50
DW8709	3"	1/8"	3/8"	A24R	24,400	50
DW8717	4"	.035"	3/8"	A36T	19,000	25
DW8720	4"	.035"	3/8"	A60T	19,000	25
DW8724	4"	.035"	5/8"	A60T	19,000	25
DW8713	4"	1/16"	1/4"	A36T	19,000	25
DW8715	4"	1/16"	1/4"	A60T	19,000	25
DW8716	4"	1/16"	3/8"	A36T	19,000	25
DW8719	4"	1/16"	3/8"	A60T	19,000	25
DW8722	4"	1/16"	5/8"	A36T	19,000	25
DW8723	4"	1/16"	5/8"	A60T	19,000	25
DW8718	4"	1/8"	3/8"	A24R	19,000	25
DW8727	6"	.045"	3/8"	A60T	13,300	25

CAT #	DIA.	THICKNESS	ARBOR	GRIT	MAX RPM	PACK
<b>Stainless Steel Cutting Wheels CONTAMINANT-FREE</b>						
DW8062S	4-1/2"	.045"	7/8"	A60S	13,300	25
DW8080	4-1/2"	3/32"	7/8"	A30S	13,300	25
DW8063S	5"	.045"	7/8"	A60S	12,200	25
DW8075S	6"	.045"	7/8"	A60S	10,100	25
DW8065S	7"	.045"	7/8"	A60S	8,700	25



**SMALL DIAMETER CUTTING WHEELS**



CAT #	DIA.	THICKNESS	ARBOR	GRIT	MAX RPM	PACK
<b>.045" Metal Cutting</b>						
DWA8050	4"	.045"	5/8"	A60T	15,200	25
DWA8051	4-1/2"	.045"	7/8"	A60T	13,300	25
DWA8054	7"	.045"	7/8"	A60T	8,700	25

CAT #	DIA.	THICKNESS	ARBOR	GRIT	MAX RPM	PACK
<b>.045" Masonry Cutting</b>						
DWA8050C	4"	.045"	5/8"	C60T	15,200	25
DWA8051C	4-1/2"	.045"	7/8"	C60T	13,300	25




## TYPE 1 BONDED ABRASIVES *(continued)*

### HP HIGH Performance CUTTING WHEELS



CAT #	DIA.	THICKNESS	ARBOR	GRIT	APPLICATION	MAX RPM	PACK
<b>Metal Chop Saw Wheels</b>							
DW8005	10"	7/64"	5/8"	A24R	General Purpose Metal Cutting	6,100	10
DW8004	12"	7/64"	1"	A24R	General Purpose Metal Cutting	5,000	10
DW8001	14"	7/64"	1"	A24R	General Purpose Metal Cutting	4,300	10
DW8002	14"	7/64"	1"	A24S	Fabrication Cutting	4,300	10
DW8003	14"	7/64"	1"	A24T	Stud Cutting	5,000	10
DW8010	16"	7/64"	1"	A24R	General Purpose Metal Cutting	3,800	10
DW8019	20"	3/16"	1"	A24R	General Purpose Metal Cutting	3,000	10
<b>Masonry Stationary &amp; Chop Saw Wheels</b>							
DW8009	10"	1/8"	5/8"	C24R	Masonry Cutting	6,100	10
<b>Stainless Steel Stationary &amp; Chop Saw Wheels CONTAMINANT-FREE</b>							
DW8015	12"	7/64"	1"	A30S	Stainless Steel Cutting	5,000	10
DW8016	14"	7/64"	1"	A30S	Stainless Steel Cutting	4,300	10
<b>Metal Cutting Abrasive Saw Blades</b>							
DW3508	6-1/2"	1/8"	5/8" - ◆	A24R	Metal Cutting	9,400	25
DW3511	7"	1/8"	5/8" - ◆	A24R	Metal Cutting	8,700	25
DW3531	8"	1/8"	5/8" - ◆	A24R	Metal Cutting	7,600	25
<b>Masonry Cutting Abrasive Saw Blades</b>							
DW3509	6-1/2"	1/8"	5/8" - ◆	C24R	Masonry Cutting	9,400	25
DW3521	7"	1/8"	5/8" - ◆	C24R	Masonry Cutting	8,700	25
DW3532	8"	1/8"	5/8" - ◆	C24R	Masonry Cutting	7,600	25
<b>Metal Chop Saw Wheels</b>							
DWA8011	14"	7/65"	1"	A24N	Fast General Purpose Metal Cutting	4,300	10
<b>Metal Cutting Abrasive Saw Blades</b>							
DWA3501	7"	1/8"	5/8" - ◆	A24N	Fast Metal Cutting	8,700	25
<b>Masonry Cutting Abrasive Saw Blades</b>							
DWA3502	7"	1/8"	5/8" - ◆	C24R	Fast Masonry Cutting	8,700	25



### XP EXTENDED Performance HIGH SPEED WHEELS



CAT #	DIA.	THICKNESS	ARBOR	GRIT	APPLICATION	MAX RPM	PACK
<b>Metal Cutting</b>							
DWA8021XP	14"	1/8"	1"/20mm	TA24T	High Speed Metal Cutting	5,500	10

### HP HIGH Performance HIGH SPEED WHEELS




CAT #	DIA.	THICKNESS	ARBOR	GRIT	APPLICATION	MAX RPM	PACK
<b>Metal &amp; Masonry Cutting</b>							
DWA8020D	12"	1/8"	1"/20mm	A24/C24P	High Speed Metal & Concrete Cutting	6,400	10
DWA8021D	14"	1/8"	1"/20mm	A24/C24P	High Speed Metal & Concrete Cutting	5,500	10
<b>Metal Cutting</b>							
DW8020	14"	1/8"	1"	A24R	High Speed Metal Cutting	5,500	10
DW8021	14"	1/8"	20mm	A24R	High Speed Metal Cutting	5,500	10
DW8022	12"	1/8"	1"	A24R	High Speed Metal Cutting	6,400	10
DW8023	12"	1/8"	20mm	A24R	High Speed Metal Cutting	6,400	10
<b>Masonry Cutting</b>							
DW8024	14"	1/8"	1"	C24P	High Speed Concrete Cutting	5,500	10
DW8025	14"	1/8"	20mm	C24P	High Speed Concrete Cutting	5,500	10
DW8026	12"	1/8"	1"	C24P	High Speed Concrete Cutting	6,400	10
DW8027	12"	1/8"	20mm	C24P	High Speed Concrete Cutting	6,400	10
DW8038	14"	3/16"	1" pinhole	C24P	Walk Behind Cured Concrete Cutting	4,300	10
DW8039	14"	3/16"	1" pinhole	C24N	Walk Behind Green Concrete & Asphalt Cutting	4,300	10



*(continued on next page)*

## TYPE 1 BONDED ABRASIVES *(continued)*

**HP HIGH Performance** HIGH SPEED WHEELS *(continued)*



CAT #	DIA.	THICKNESS	ARBOR	GRIT	APPLICATION	MAX RPM	PACK
<b>Ductile Pipe Cutting</b>							
DW8030	14"	1/8"	1"	A24/C24P	High Speed Ductile Cutting	5,500	10
DW8031	14"	1/8"	20mm	A24/C24P	High Speed Ductile Cutting	5,500	10
DW8032	12"	1/8"	1"	A24/C24P	High Speed Ductile Cutting	6,400	10
DW8033	12"	1/8"	20mm	A24/C24P	High Speed Ductile Cutting	6,400	10
<b>Asphalt Cutting</b>							
DW8034	14"	1/8"	1"	C24N	High Speed Asphalt Cutting	5,500	10
DW8035	14"	1/8"	20mm	C24N	High Speed Asphalt Cutting	5,500	10
DW8036	12"	1/8"	1"	C24N	High Speed Asphalt Cutting	6,400	10
DW8037	12"	1/8"	20mm	C24N	High Speed Asphalt Cutting	6,400	10
<b>3-LAYER FIBERGLASS</b>							
<b>Metal Cutting</b>							
DW8020R3	14"	1/8"	1"	A24R	Metal Cutting	5,500	10
DW8021R3	14"	1/8"	20mm	A24R	Metal Cutting	5,500	10
DWA8039R3	16"	5/32"	1"	A24R	Metal Cutting	4,700	10
DWA8038R3	16"	5/32"	20mm	A24R	Metal Cutting	4,700	10
<b>Masonry Cutting</b>							
DW8024R3	14"	1/8"	1"	C24R	Concrete Masonry	5,500	10
DW8025R3	14"	1/8"	20mm	C24R	Concrete Masonry	5,500	10
DWA8038CR3	16"	5/32"	20mm	C24R	Concrete Masonry	4,700	10
DWA8039CR3	16"	5/32"	1"	C24R	Concrete Masonry	4,700	10
<b>Ductile Pipe Cutting</b>							
DW8030R3	14"	1/8"	1"	A24/C24P	Ductile Pipe	5,500	10
DW8031R3	14"	1/8"	20mm	A24/C24P	Ductile Pipe	5,500	10
DWA8039DR3	16"	5/32"	1"	A24/C24P	Ductile Pipe	4,700	10
DWA8038DR3	16"	5/32"	20mm	A24/C24P	Ductile Pipe	4,700	10



**XP EXTENDED Performance** HIGH SPEED WHEELS



CAT #	DIA.	THICKNESS	ARBOR	GRIT	APP.	MAX RPM	PACK
<b>High Speed Rail Cutting</b>							
DW8020ZR	14"	1/8"	1"	Z24R	High Speed Rail Cutting	5,500	10

**HP HIGH Performance** HIGH SPEED WHEELS



CAT #	DIA.	THICKNESS	ARBOR	GRIT	APP.	MAX RPM	PACK
<b>High Speed Rail Cutting</b>							
DW8020R	14"	1/8"	1"	A24P	High Speed Rail Cutting	5,500	10
DW8021R	14"	1/8"	20mm	A24P	High Speed Rail Cutting	5,500	10
DWA8039RR3	16"	5/32"	1"	A24P	High Speed Rail Cutting	4,700	10

**HIGH SPEED WHEELS**




CAT #	DIA.	THICKNESS	ARBOR	GRIT	APPLICATION	MAX RPM	PACK
<b>Metal Cutting</b>							
DWA8030	14"	1/8"	1"	A24N	High Speed Metal Cutting	5,500	10
DWA8031	14"	1/8"	20mm	A24N	High Speed Metal Cutting	5,500	10
DWA8032	12"	1/8"	1"	A24N	High Speed Metal Cutting	6,400	10
DWA8033	12"	1/8"	20mm	A24N	High Speed Metal Cutting	6,400	10
<b>Masonry Cutting</b>							
DWA8034	14"	1/8"	1"	C24R	High Speed Concrete Cutting	5,500	10
DWA8035	14"	1/8"	20mm	C24R	High Speed Concrete Cutting	5,500	10
DWA8036	12"	1/8"	1"	C24R	High Speed Concrete Cutting	6,400	10
DWA8037	12"	1/8"	20mm	C24R	High Speed Concrete Cutting	6,400	10



## TYPE 27 BONDED ABRASIVES

**XP™ CERAMIC PERFORMANCE**



CAT #	DIA.	THICKNESS	ARBOR	GRIT	MAX RPM	PACK
<b>.045" Metal &amp; Stainless Cutting</b>						
DWA8957	4.5"	.045"	7/8"	SG60T	13,300	25
DWA8958	5"	.045"	7/8"	SG60T	12,200	10
DWA8959	6"	.045"	7/8"	SG60T	10,100	10
DWA8960	7"	.045"	7/8"	SG60T	8,700	10
<b>Metal &amp; Stainless Cutting &amp; Notching</b>						
DWA8904	4.5"	3/32"	7/8"	SG24N	13,300	25
DWA8905	4.5"	3/32"	5/8"-11	SG24N	13,300	10
DWA8910*	5"	3/32"	7/8"	SG24N	12,200	25
DWA8911*	5"	3/32"	5/8"-11	SG24N	12,200	10
DWA8916*	6"	3/32"	7/8"	SG24N	10,100	10
DWA8917*	6"	3/32"	5/8"-11	SG24N	10,100	10
DWA8922*	7"	3/32"	7/8"	SG24N	8,700	10
DWA8923*	7"	3/32"	5/8"-11	SG24N	8,700	10
DWA8928*	9"	3/32"	7/8"	SG24N	6,600	10
DWA8929*	9"	3/32"	5/8"-11	SG24N	6,600	10
<b>Metal &amp; Stainless Cutting &amp; Grinding</b>						
DWA8906	4.5"	1/8"	7/8"	SG24N	13,300	25
DWA8907	4.5"	1/8"	5/8"-11	SG24N	13,300	10
DWA8912	5"	1/8"	7/8"	SG24N	12,200	25

CAT #	DIA.	THICKNESS	ARBOR	GRIT	MAX RPM	PACK
<b>Metal &amp; Stainless Cutting &amp; Grinding</b>						
DWA8913	5"	1/8"	5/8"-11	SG24N	12,200	10
DWA8918*	6"	1/8"	7/8"	SG24N	10,100	10
DWA8919	6"	1/8"	5/8"-11	SG24N	10,100	10
DWA8924	7"	1/8"	7/8"	SG24N	8,700	10
DWA8925	7"	1/8"	5/8"-11	SG24N	8,700	10
DWA8930*	9"	1/8"	7/8"	SG24N	6,600	10
DWA8931	9"	1/8"	5/8"-11	SG24N	6,600	10
<b>Metal &amp; Stainless Grinding</b>						
DWA8908	4.5"	1/4"	7/8"	SG24N	13,300	25
DWA8909	4.5"	1/4"	5/8"-11	SG24N	13,300	10
DWA8914	5"	1/4"	7/8"	SG24N	12,200	25
DWA8915	5"	1/4"	5/8"-11	SG24N	12,200	10
DWA8920*	6"	1/4"	7/8"	SG24N	10,100	10
DWA8921*	6"	1/4"	5/8"-11	SG24N	10,100	10
DWA8926	7"	1/4"	7/8"	SG24N	8,700	10
DWA8927	7"	1/4"	5/8"-11	SG24N	8,700	10
DWA8932*	9"	1/4"	7/8"	SG24N	6,600	10
DWA8933	9"	1/4"	5/8"-11	SG24N	6,600	10

\*Made to order items: 500 PC. Minimum Order Quantity



**XP™ EXTENDED PERFORMANCE**




CAT #	DIA.	THICKNESS	ARBOR	GRIT	MAX RPM	PACK
<b>.045" Metal &amp; Stainless Cutting</b>						
DW8856	4"	.045"	5/8"	Z60T	15,200	25
DW8857	4-1/2"	.045"	7/8"	Z60T	13,300	25
DW8857H	4-1/2"	.045"	5/8"-11	Z60T	13,300	10
DW8858	5"	.045"	7/8"	Z60T	12,200	25
DW8858H	5"	.045"	5/8"-11	Z60T	12,200	10
DW8859	6"	.045"	7/8"	Z60T	10,100	25
DW8859H	6"	.045"	5/8"-11	Z60T	10,100	10
DW8860	7"	.045"	7/8"	Z60T	8,700	25
DW8860H	7"	.045"	5/8"-11	Z60T	8,700	10
<b>3/32" Metal &amp; Stainless Cutting &amp; Notching</b>						
DW8800	4"	3/32"	5/8"	Z24R	15,200	25
DW8804	4-1/2"	3/32"	7/8"	Z24R	15,200	25
DW8805	4-1/2"	3/32"	5/8"-11	Z24R	15,200	10
DW8810	5"	3/32"	7/8"	Z24R	15,200	25
DW8811	5"	3/32"	5/8"-11	Z24R	15,200	10
DW8816	6"	3/32"	7/8"	Z24R	10,100	10
DW8817	6"	3/32"	5/8"-11	Z24R	10,100	10
DW8822	7"	3/32"	7/8"	Z24R	8,700	10
DW8823	7"	3/32"	5/8"-11	Z24R	8,700	10
DW8828	9"	3/32"	7/8"	Z24R	6,600	10
DW8829	9"	3/32"	5/8"-11	Z24R	6,600	10
DW8801	4"	1/8"	3/8"	Z24R	15,200	25
DW8802	4"	1/8"	5/8"	Z24R	15,200	25
DW8806	4-1/2"	1/8"	7/8"	Z24R	13,300	25

CAT #	DIA.	THICKNESS	ARBOR	GRIT	MAX RPM	PACK
<b>1/8" Pipeline Metal &amp; Stainless Cutting &amp; Grinding</b>						
DW8807	4-1/2"	1/8"	5/8"-11	Z24R	13,300	10
DW8812	5"	1/8"	7/8"	Z24R	12,200	25
DW8813	5"	1/8"	5/8"-11	Z24R	12,200	10
DW8818	6"	1/8"	7/8"	Z24R	10,000	10
DW8819	6"	1/8"	5/8"-11	Z24R	10,000	10
DW8824	7"	1/8"	7/8"	Z24R	8,700	10
DW8825	7"	1/8"	5/8"-11	Z24R	8,700	10
DW8830	9"	1/8"	7/8"	Z24R	6,600	10
DW8831	9"	1/8"	5/8"-11	Z24R	6,600	10
<b>1/4" Metal &amp; Stainless Grinding</b>						
DW8803	4"	1/4"	5/8"	Z24R	15,200	25
DW8808	4-1/2"	1/4"	7/8"	Z24R	13,300	25
DW8809	4-1/2"	1/4"	5/8"-11	Z24R	13,300	10
DW8814	5"	1/4"	7/8"	Z24R	12,200	25
DW8815	5"	1/4"	5/8"-11	Z24R	12,200	10
DW8820	6"	1/4"	7/8"	Z24R	10,100	10
DW8821	6"	1/4"	5/8"-11	Z24R	10,100	10
DW8826	7"	1/4"	7/8"	Z24R	8,700	10
DW8827	7"	1/4"	5/8"-11	Z24R	8,700	10
DW8832	9"	1/4"	7/8"	Z24R	6,600	10
DW8833	9"	1/4"	5/8"-11	Z24R	6,600	10



(continued on next page)

## TYPE 27 BONDED ABRASIVES (continued)



CAT #	DIA.	THICKNESS	ARBOR	GRIT	MAX RPM	PACK
<b>.045" Metal &amp; Stainless Cutting</b>						
DW8420	4"	.045"	5/8"	A60T	15,200	25
DW8424	4-1/2"	.045"	7/8"	A60T	13,300	25
DW8424H	4-1/2"	.045"	5/8"-11	A60T	13,300	10
DW8425	5"	.045"	7/8"	A60T	12,200	25
DW8425H	5"	.045"	5/8"-11	A60T	12,200	25
DW8426	6"	.040"	7/8"	A60T	10,100	25
DW8426H	6"	.040"	5/8"-11	A60T	10,100	25
DW8427	7"	.045"	7/8"	A60T	8,700	25
DW8427H	7"	.045"	5/8"-11	A60T	8,700	25

CAT #	DIA.	THICKNESS	ARBOR	GRIT	MAX RPM	PACK
<b>3/32" Metal Cutting &amp; Notching</b>						
DW8750	4-1/2"	3/32"	7/8"	A24R	13,300	25
DW8751	4-1/2"	3/32"	5/8"-11	A24R	13,300	10
DW8752	5"	3/32"	7/8"	A24R	12,200	25
DW8753	5"	3/32"	5/8"-11	A24R	12,200	10
DW8754	6"	3/32"	7/8"	A24R	10,100	10
DW8755	6"	3/32"	5/8"-11	A24R	10,100	10
DW8756	7"	3/32"	7/8"	A24R	8,700	10
DW8757	7"	3/32"	5/8"-11	A24R	8,700	10
DW8758	9"	3/32"	7/8"	A24R	6,600	10
DW8759	9"	3/32"	5/8"-11	A24R	6,600	10

CAT #	DIA.	THICKNESS	ARBOR	GRIT	MAX RPM	PACK
<b>1/8" Pipeline Metal &amp; Stainless Cutting &amp; Grinding</b>						
DW4418	4"	1/8"	5/8"	A24R	15,200	25
DW8434	4-1/2"	1/8"	7/8"	A24R	13,300	25
DW8435	4-1/2"	1/8"	5/8"-11	A24R	13,300	10
DW8484	5"	1/8"	7/8"	A24R	12,200	25
DW8436	5"	1/8"	5/8"-11	A24R	12,200	10
DW8485	6"	1/8"	7/8"	A24R	10,100	10

CAT #	DIA.	THICKNESS	ARBOR	GRIT	MAX RPM	PACK
<b>1/8" Pipeline Metal &amp; Stainless Cutting &amp; Grinding</b>						
DW8438	6"	1/8"	5/8"-11	A24R	10,100	10
DW8486	7"	1/8"	7/8"	A24R	8,700	10
DW8437	7"	1/8"	5/8"-11	A24R	8,700	10
DW8487	9"	1/8"	7/8"	A24R	6,600	10
DW8439	9"	1/8"	5/8"-11	A24R	6,600	10

CAT #	DIA.	THICKNESS	ARBOR	GRIT	MAX RPM	PACK
<b>1/4" Metal &amp; Stainless Grinding</b>						
DW4419	4"	1/4"	5/8"	A24R	15,200	25
DW4514	4-1/2"	1/4"	7/8"	A24R	13,300	25
DW4514B5	4-1/2"	1/4"	7/8"	A24R	13,300	5
DW4523	4-1/2"	1/4"	5/8"-11	A24R	13,300	10
DW4619	5"	1/4"	7/8"	A24R	12,200	25
DW4623	5"	1/4"	5/8"-11	A24R	12,200	10
DW4624	6"	1/4"	7/8"	A24R	10,100	10
DW4626	6"	1/4"	5/8"-11	A24R	10,100	10
DW4719	7"	1/4"	7/8"	A24R	8,700	10
DW4999	7"	1/4"	5/8"-11	A24R	8,700	10
DW4949	9"	1/4"	7/8"	A24R	6,600	10
DW4954	9"	1/4"	5/8"-11	A24R	6,600	10
DW4954RT	9"	1/4"	5/8"-11	A24R	6,600	10



### SMALL DIAMETER CUTTING WHEELS



CAT #	DIA.	THICKNESS	ARBOR	GRIT	MAX RPM	PACK
<b>Stainless Steel Cutting Wheels CONTAMINANT-FREE</b>						
DW8424S	4-1/2"	.045"	7/8"	A60S	13,300	25
DW8425S	5"	.045"	7/8"	A60S	12,200	25

CAT #	DIA.	THICKNESS	ARBOR	GRIT	MAX RPM	PACK
<b>Stainless Steel Cutting Wheels CONTAMINANT-FREE</b>						
DW8426S	6"	.045"	7/8"	A60S	10,100	25
DW8427S	7"	.045"	7/8"	A60S	8,700	25



### METAL CUTTING & GRINDING



CAT #	DIA.	THICKNESS	ARBOR	GRIT	MAX RPM	PACK
<b>.045" Metal &amp; Stainless Fast Cutting</b>						
DWA4530	4"	.045"	5/8"	A60T	15,200	25
DWA4531	4-1/2"	.045"	7/8"	A60T	13,300	25
DWA4534	7"	.045"	7/8"	A60T	8,700	25


CAT #	DIA.	THICKNESS	ARBOR	GRIT	MAX RPM	PACK
<b>1/8" Metal &amp; Stainless Fast Cutting &amp; Grinding</b>						
DWA4510	4"	1/8"	5/8"	A24N	15,200	25
DWA4511	4-1/2"	1/8"	7/8"	A24N	13,300	25
DWA4511H	4-1/2"	1/8"	5/8"-11	A24N	13,300	10
DWA4512	5"	1/8"	7/8"	A24N	12,200	25
DWA4512H	5"	1/8"	5/8"-11	A24N	12,200	10
DWA4513	6"	1/8"	7/8"	A24N	10,100	10
DWA4513H	6"	1/8"	5/8"-11	A24N	10,100	10
DWA4514	7"	1/8"	7/8"	A24N	8,700	10
DWA4514H	7"	1/8"	5/8"-11	A24N	8,700	10
DWA4515	9"	1/8"	7/8"	A24N	6,600	10
DWA4515H	9"	1/8"	5/8"-11	A24N	6,600	10

CAT #	DIA.	THICKNESS	ARBOR	GRIT	MAX RPM	PACK
<b>1/4" Metal &amp; Stainless Fast Grinding</b>						
DWA4500	4"	1/4"	5/8"	A24N	15,200	25
DW4541	4-1/2"	1/4"	7/8"	A24N	13,300	25
DW4542	4-1/2"	1/4"	5/8"-11	A24N	13,300	10
DW4543	5"	1/4"	7/8"	A24N	12,200	25
DW4544	5"	1/4"	5/8"-11	A24N	12,200	10
DW4545	6"	1/4"	7/8"	A24N	10,100	10
DW4546	6"	1/4"	5/8"-11	A24N	10,100	10
DW4547	7"	1/4"	7/8"	A24N	8,700	10
DW4548	7"	1/4"	5/8"-11	A24N	8,700	10
DW4549	9"	1/4"	7/8"	A24N	6,600	10
DW4550	9"	1/4"	5/8"-11	A24N	6,600	10



(continued on next page)

## TYPE 27 BONDED ABRASIVES *(continued)*



### HP HIGH Performance

### MASONRY CUTTING & GRINDING WHEELS



CAT #	DIA.	THICKNESS	ARBOR	GRIT	MAX RPM	PACK
<b>1/8" Masonry Cutting</b>						
DW4428	4"	1/8"	5/8"	C24R	15,200	25
DW4528	4-1/2"	1/8"	7/8"	C24R	13,300	25
DW4552	4-1/2"	1/8"	5/8"-11	C24R	13,300	10
DW4628	5"	1/8"	7/8"	C24R	12,200	25
DW4728	7"	1/8"	7/8"	C24R	8,700	10
DW4758	7"	1/8"	5/8"-11	C24R	8,700	10
DW4928	9"	1/8"	7/8"	C24R	6,600	10

CAT #	DIA.	THICKNESS	ARBOR	GRIT	MAX RPM	PACK
<b>1/4" Masonry Grinding</b>						
DW4429	4"	1/4"	5/8"	C24R	15,200	25
DW4524	4-1/2"	1/4"	7/8"	C24R	13,300	25
DW4551	4-1/2"	1/4"	5/8"-11	C24R	13,300	10
DW4629	5"	1/4"	7/8"	C24R	12,200	25
DW4554	7"	1/4"	7/8"	C24R	8,700	10
DW4759	7"	1/4"	5/8"-11	C24R	8,700	10
DW4959	9"	1/4"	5/8"-11	C24R	6,600	10



### MASONRY GRINDING



CAT #	DIA.	THICKNESS	ARBOR	GRIT	APPLICATION	MAX RPM	PACK
<b>1/4" Masonry Grinding</b>							
DWA4500C	4"	1/4"	5/8"	C24R	Fast Masonry Grinding	15,200	25
DWA4501C	4-1/2"	1/4"	7/8"	C24R	Fast Masonry Grinding	13,300	25
DWA4514CH	7"	1/4"	5/8"-11	C24R	Fast Masonry Grinding	8,700	10



### HP HIGH Performance

### STAINLESS CUTTING & GRINDING WHEELS



CAT #	DIA.	THICKNESS	ARBOR	GRIT	MAX RPM	PACK
<b>1/8" Stainless Steel Cutting CONTAMINANT-FREE</b>						
DW8452	4-1/2"	1/8"	7/8"	A30S	13,300	25
DW8452H	4-1/2"	1/8"	5/8"-11	A30S	13,300	10
DW8454	5"	1/8"	7/8"	A30S	12,200	25
DW8454H	5"	1/8"	5/8"-11	A30S	12,200	10
DW8457	6"	1/8"	7/8"	A30S	10,100	10
DW8457H	6"	1/8"	5/8"-11	A30S	10,100	10
DW8456	7"	1/8"	7/8"	A30S	8,700	10
DW8456H	7"	1/8"	5/8"-11	A30S	8,700	10
DW8458	9"	1/8"	7/8"	A30S	6,600	10
DW8458H	9"	1/8"	5/8"-11	A30S	6,600	10

CAT #	DIA.	THICKNESS	ARBOR	GRIT	MAX RPM	PACK
<b>1/4" Stainless Steel Grinding CONTAMINANT-FREE</b>						
DW8410	4"	1/4"	5/8"	A30S	15,200	25
DW8414	4-1/2"	1/4"	7/8"	A30S	13,300	25
DW8415	4-1/2"	1/4"	5/8"-11	A30S	13,300	10
DW8464	5"	1/4"	7/8"	A30S	12,200	25
DW8416	5"	1/4"	5/8"-11	A30S	12,200	10
DW8465	6"	1/4"	7/8"	A30S	10,100	10
DW8465H	6"	1/4"	5/8"-11	A30S	10,100	10
DW8466	7"	1/4"	7/8"	A30S	8,700	10
DW8417	7"	1/4"	5/8"-11	A30S	8,700	10
DW8468	9"	1/4"	7/8"	A30S	6,600	10
DW8419	9"	1/4"	5/8"-11	A30S	6,600	10



### HP HIGH Performance

### GRINDING WHEELS




CAT #	DIA.	THICKNESS	ARBOR	GRIT	APPLICATION	MAX RPM	PACK
<b>1/4" Aluminum Grinding</b>							
DW8400	4"	1/4"	5/8"	A30N	Aluminum Grinding	15,200	25
DW8404	4-1/2"	1/4"	7/8"	A30N	Aluminum Grinding	13,300	25
DW8405	4-1/2"	1/4"	5/8"-11	A30N	Aluminum Grinding	13,300	10
DW8474	5"	1/4"	7/8"	A30N	Aluminum Grinding	12,200	25
DW8406	5"	1/4"	5/8"-11	A30N	Aluminum Grinding	12,200	10
DW8476	7"	1/4"	7/8"	A30N	Aluminum Grinding	8,700	10
DW8407	7"	1/4"	5/8"-11	A30N	Aluminum Grinding	8,700	10
DW8409	9"	1/4"	5/8"-11	A30N	Aluminum Grinding	6,600	10



## TYPE 28 BONDED ABRASIVES

**HP HIGH Performance** GRINDING WHEELS




CAT #	DIA.	THICKNESS	ARBOR	GRIT	APPLICATION	MAX RPM	PACK
<b>1/4" Metal Grinding</b>							
DW8445	7"	1/4"	7/8"	A24R	Flat Metal Grinding	8,700	10
DW8446	7"	1/4"	5/8"-11	A24R	Flat Metal Grinding	8,700	10
DW8447	9"	1/4"	7/8"	A24R	Flat Metal Grinding	6,600	10
DW8448	9"	1/4"	5/8"-11	A24R	Flat Metal Grinding	6,600	10



## TYPE 11 BONDED ABRASIVES

**XP EXTENDED Performance** CUP WHEELS



CAT #	DIA.	THICKNESS	ARBOR	GRIT	APPLICATION	MAX RPM	PACK
<b>Metal Grinding</b>							
DWA4965	6"	2"	5/8"-11	ZA16Q	Cast Iron, Bronze, Brass, Steel Castings	6,000	10

**HP HIGH Performance** CUP WHEELS



CAT #	DIA.	THICKNESS	ARBOR	GRIT	APPLICATION	MAX RPM	PACK
<b>Metal Grinding</b>							
DW4960	4"	2"	5/8"-11	A16R	Metal Surface Grinding	9,000	10
DW4962	5"	2"	5/8"-11	A16R	Metal Surface Grinding	7,000	10
DW4964	6"	2"	5/8"-11	A16R	Metal Surface Grinding	6,000	10
<b>Masonry Grinding</b>							
DW4961	4"	2"	5/8"-11	C16R	Masonry Surface Grinding	9,000	10
DW4963	5"	2"	5/8"-11	C16R	Masonry Surface Grinding	7,000	10
DW4965	6"	2"	5/8"-11	C16R	Masonry Surface Grinding	6,000	10



**HP HIGH Performance** FLEXIBLE GRINDING DISC




CAT #	DIA.	ARBOR	GRIT	APPLICATION	MAX RPM	PACK
<b>Concrete, Masonry, Aluminum, Paint / General Purpose</b>						
DWAH216C	4-1/2"	7/8"	C16	Concrete, Masonry, Aluminum, Paint / General Purpose	13,200	10
DWAH224C	4-1/2"	7/8"	C24	Concrete, Masonry, Aluminum, Paint / General Purpose	13,200	10
DWAH236C	4-1/2"	7/8"	C36	Concrete, Masonry, Aluminum, Paint / General Purpose	13,200	10
DWAH716C	7"	7/8"	C16	Concrete, Masonry, Aluminum, Paint / General Purpose	8,600	10
DWAH724C	7"	7/8"	C24	Concrete, Masonry, Aluminum, Paint / General Purpose	8,600	10
DWAH736C	7"	7/8"	C36	Concrete, Masonry, Aluminum, Paint / General Purpose	8,600	10




## CUPSTONE

**HP HIGH Performance** HAND & FLOOR RUB



CAT #	DIA.	THICKNESS	HEIGHT	GRIT	APPLICATION	PACK
<b>Plain</b>						
DWA4960	4"	2"	2"	C10	Concrete, Stone & Brick Flooring	6
DWA4961	4"	2"	2"	C24	Concrete, Stone & Brick Flooring	6
DWA4963F	6"	2"	2"	C24	Concrete, Stone & Brick Flooring	6
DWA4963	6"	3"	1"	C24	Concrete, Stone & Brick Flooring	1
DWA4964	8"	3-1/2"	1-1/2"	C24	Concrete, Stone & Brick Flooring	1

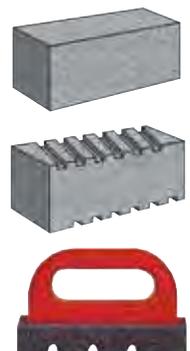

## TYPE 27 FLAP DISCS




**XP** EXTENDED Performance

**WEARABLE BACKING FLAP DISCS**

CAT #	DIA.	ARBOR	GRIT	MAX RPM	PACK
DW8210	4-1/2"	7/8"	Z40	13,300	10
DW8211	4-1/2"	7/8"	Z60	13,300	10
DW8212	4-1/2"	7/8"	Z80	13,300	10
DW8213	4-1/2"	7/8"	Z120	13,300	10
DW8210H	4-1/2"	5/8"-11	Z40	13,300	5
DW8211H	4-1/2"	5/8"-11	Z60	13,300	5
DW8212H	4-1/2"	5/8"-11	Z80	13,300	5
DW8213H	4-1/2"	5/8"-11	Z120	13,300	5

CAT #	DIA.	ARBOR	GRIT	MAX RPM	PACK
DW8214	5"	7/8"	Z40	12,200	10
DW8215	5"	7/8"	Z60	12,200	10
DW8216	5"	7/8"	Z80	12,200	10
DW8218H	7"	5/8"-11	Z40	8,700	5
DW8219H	7"	5/8"-11	Z60	8,700	5
DW8220H	7"	5/8"-11	Z80	8,700	5
DW8221H	7"	5/8"-11	Z120	8,700	5

**Type 27**



**XP** EXTENDED Performance

**FLAP DISCS**



CAT #	DIA.	ARBOR	GRIT	MAX RPM	PACK
<b>CONTAMINANT-FREE</b>					
DW8250	4-1/2"	7/8"	Z40	13,300	10
DW8251	4-1/2"	7/8"	Z60	13,300	10
DW8252	4-1/2"	7/8"	Z80	13,300	10
DW8253	4-1/2"	7/8"	Z120	13,300	10
DW8254	4-1/2"	5/8"-11	Z40	13,300	5
DW8255	4-1/2"	5/8"-11	Z60	13,300	5
DW8256	4-1/2"	5/8"-11	Z80	13,300	5
DW8257	4-1/2"	5/8"-11	Z120	13,300	5
DW8258	5"	7/8"	Z40	12,200	10
DW8259	5"	7/8"	Z60	12,200	10

CAT #	DIA.	ARBOR	GRIT	MAX RPM	PACK
DW8260	5"	7/8"	Z80	12,200	10
DW8274	6"	7/8"	Z40	10,100	10
DW8275	6"	7/8"	Z60	10,100	10
DW8276	6"	7/8"	Z80	10,100	10
DW8277	6"	7/8"	Z120	10,100	10
DW8276H	6"	5/8"-11	Z80	10,100	5
DW8266	7"	7/8"	Z40	8,700	10
DW8270	7"	5/8"-11	Z40	8,700	5
DW8271	7"	5/8"-11	Z60	8,700	5
DW8272	7"	5/8"-11	Z80	8,700	5



**HP** HIGH Performance

**FLAP DISCS**



CAT #	DIA.	ARBOR	GRIT	MAX RPM	PACK
<b>CONTAMINANT-FREE</b>					
DW8300	4"	5/8"	Z36	15,200	10
DW8302	4"	5/8"	Z60	15,200	10
DW8303	4"	5/8"	Z80	15,200	10
DW8304	4"	5/8"	Z120	15,200	10
DW8350	4-1/2"	7/8"	Z24	13,300	10
DW8351	4-1/2"	7/8"	Z40	13,300	10
DW8352	4-1/2"	7/8"	Z60	13,300	10
DW8353	4-1/2"	7/8"	Z80	13,300	10
DW8354	4-1/2"	7/8"	Z120	13,300	10
DW8355	4-1/2"	5/8"-11	Z24	13,300	5
DW8356	4-1/2"	5/8"-11	Z40	13,300	5
DW8357	4-1/2"	5/8"-11	Z60	13,300	5
DW8358	4-1/2"	5/8"-11	Z80	13,300	5
DW8359	4-1/2"	5/8"-11	Z120	13,300	5

CAT #	DIA.	ARBOR	GRIT	MAX RPM	PACK
DW8361	5"	7/8"	Z40	12,200	10
DW8362	5"	7/8"	Z60	12,200	10
DW8363	5"	7/8"	Z80	12,200	10
DW8367	5"	5/8"-11	Z60	12,200	5
DW8368	5"	5/8"-11	Z80	12,200	5
DW8370	7"	7/8"	Z24	8,700	10
DW8371	7"	7/8"	Z40	8,700	10
DW8372	7"	7/8"	Z60	8,700	10
DW8373	7"	7/8"	Z80	8,700	10
DW8375	7"	5/8"-11	Z24	8,700	5
DW8376	7"	5/8"-11	Z40	8,700	5
DW8377	7"	5/8"-11	Z60	8,700	5
DW8378	7"	5/8"-11	Z80	8,700	5
DW8379	7"	5/8"-11	Z120	8,700	5




## TYPE 29 FLAP DISCS

**HP** HIGH Performance



**Type 29**



CAT #	DIA.	ARBOR	GRIT	MAX RPM	PACK
<b>CONTAMINANT-FREE</b>					
DW8336	4-1/2"	7/8"	Z24	13,300	10
DW8306	4-1/2"	7/8"	Z36	13,300	10
DW8308	4-1/2"	7/8"	Z60	13,300	10
DW8309	4-1/2"	7/8"	Z80	13,300	10
DW8310	4-1/2"	7/8"	Z120	13,300	10

CAT #	DIA.	ARBOR	GRIT	MAX RPM	PACK
DW8337	4-1/2"	5/8"-11	Z24	13,300	5
DW8311	4-1/2"	5/8"-11	Z36	13,300	5
DW8312	4-1/2"	5/8"-11	Z60	13,300	5
DW8313	4-1/2"	5/8"-11	Z80	13,300	5
DW8314	4-1/2"	5/8"-11	Z120	13,300	5
DW8315	5"	7/8"	Z36	12,200	10

CAT #	DIA.	ARBOR	GRIT	MAX RPM	PACK
DW8317	5"	7/8"	Z60	12,200	10
DW8318	5"	7/8"	Z80	12,200	10
DW8339	5"	5/8"-11	Z24	12,200	5
DW8332	5"	5/8"-11	Z36	12,200	5
DW8333	5"	5/8"-11	Z60	12,200	5
DW8334	5"	5/8"-11	Z80	12,200	5

(continued on next page)

## TYPE 29 FLAP DISCS *(continued)*




CAT #	DIA.	ARBOR	GRIT	MAX RPM	PACK
DW8380	6"	7/8"	Z40	10,100	10
DW8381	6"	7/8"	Z60	10,100	10
DW8382	6"	7/8"	Z80	10,100	10
DW8380H	6"	5/8"-11	Z40	10,100	5
DW8381H	6"	5/8"-11	Z60	10,100	5
DW8382H	6"	5/8"-11	Z80	10,100	5
DW8321	7"	7/8"	Z36	8,700	10
DW8323	7"	7/8"	Z60	8,700	10
DW8341	7"	5/8"-11	Z24	8,700	5
DW8327	7"	5/8"-11	Z36	8,700	5
DW8329	7"	5/8"-11	Z60	8,700	5
DW8330	7"	5/8"-11	Z80	8,700	5
DW8331	7"	5/8"-11	Z120	8,700	5

## FLAP DISCS

CAT #	DIA.	ARBOR	GRIT	MAX RPM	PACK
<b>CONTAMINANT-FREE</b>					
DWA8201	4"	5/8"	40	15,200	10
DWA8202	4"	5/8"	60	15,200	10
DWA8203	4"	5/8"	80	15,200	10
DWA8206	4-1/2"	7/8"	40	13,300	10
DWA8206H	4-1/2"	5/8"-11	40	13,300	5
DWA8207	4-1/2"	7/8"	60	13,300	10
DWA8207H	4-1/2"	5/8"-11	60	13,300	5
DWA8208	4-1/2"	7/8"	80	13,300	10
DWA8208H	4-1/2"	5/8"-11	80	13,300	5
DWA8216H	7"	5/8"-11	40	8,700	5
DWA8217H	7"	5/8"-11	60	8,700	5
DWA8218H	7"	5/8"-11	80	8,700	5

### Type 29



## FIBER DISCS



CAT #	DIA.	ARBOR	GRIT	MAX RPM	PACK
DARB6G0225	4-1/2"	7/8"	24	13,300	25
DARB6G0325	4-1/2"	7/8"	36	13,300	25
DARB6G0525	4-1/2"	7/8"	50	13,300	25
DARB6H0225	5"	7/8"	24	12,200	25
DARB6H0325	5"	7/8"	36	12,200	25
DARB6H0525	5"	7/8"	50	12,200	25
DARB6K0225	7"	7/8"	24	8,700	25
DARB6K0325	7"	7/8"	36	8,700	25
DARB6K0525	7"	7/8"	50	8,700	25

CAT #	DIA.	ARBOR	GRIT	MAX RPM	PACK
DARC6G0215	4-1/2"	Quick Lock	24	13,300	15
DARC6G0315	4-1/2"	Quick Lock	36	13,300	15
DARC6G0515	4-1/2"	Quick Lock	50	13,300	15
DARC6H0215	5"	Quick Lock	24	12,200	15
DARC6H0315	5"	Quick Lock	36	12,200	15
DARC6H0515	5"	Quick Lock	50	12,200	15
DARC6K0215	7"	Quick Lock	24	8,700	15
DARC6K0315	7"	Quick Lock	36	8,700	15
DARC6K0515	7"	Quick Lock	50	8,700	15



CAT #	DIA.	ARBOR	GRIT	MAX RPM	PACK
DARB5G0225	4-1/2"	7/8"	24	13,300	25
DARB5G0325	4-1/2"	7/8"	36	13,300	25
DARB5G0525	4-1/2"	7/8"	50	13,300	25
DARB5G0625	4-1/2"	7/8"	60	13,300	25
DARB5G0825	4-1/2"	7/8"	80	13,300	25
DARB5G1025	4-1/2"	7/8"	100	13,300	25
DARB5G1225	4-1/2"	7/8"	120	13,300	25
DARB5H0225	5"	7/8"	24	12,200	25
DARB5H0325	5"	7/8"	36	12,200	25
DARB5H0525	5"	7/8"	50	12,200	25
DARB5H0625	5"	7/8"	60	12,200	25
DARB5H0825	5"	7/8"	80	12,200	25
DARB5H1025	5"	7/8"	100	12,200	25
DARB5H1225	5"	7/8"	120	12,200	25

CAT #	DIA.	ARBOR	GRIT	MAX RPM	PACK
DARB5K0225	7"	7/8"	24	8,700	25
DARB5K0325	7"	7/8"	36	8,700	25
DARB5K0525	7"	7/8"	50	8,700	25
DARB5K0625	7"	7/8"	60	8,700	25
DARB5K0825	7"	7/8"	80	8,700	25
DARB5K1025	7"	7/8"	100	8,700	25
DARB5K1225	7"	7/8"	120	8,700	25



CAT #	DIA.	ARBOR	GRIT	MAX RPM	PACK
DARC5G0215	4-1/2"	Quick Lock	24	13,300	15
DARC5G0315	4-1/2"	Quick Lock	36	13,300	15
DARC5G0515	4-1/2"	Quick Lock	50	13,300	15
DARC5G0615	4-1/2"	Quick Lock	60	13,300	15
DARC5G0815	4-1/2"	Quick Lock	80	13,300	15
DARC5H0215	5"	Quick Lock	24	12,200	15
DARC5H0315	5"	Quick Lock	36	12,200	15
DARC5H0515	5"	Quick Lock	50	12,200	15
DARC5H0615	5"	Quick Lock	60	12,200	15
DARC5H0815	5"	Quick Lock	80	12,200	15
DARC5K0215	7"	Quick Lock	24	8,700	15
DARC5K0315	7"	Quick Lock	36	8,700	15
DARC5K0515	7"	Quick Lock	50	8,700	15
DARC5K0615	7"	Quick Lock	60	8,700	15
DARC5K0815	7"	Quick Lock	80	8,700	15



CAT #	DIA.	ARBOR	GRIT	MAX RPM	PAC
DARB4G0225	4-1/2"	7/8"	24	13,300	25
DARB4G0325	4-1/2"	7/8"	36	13,300	25
DARB4G0525	4-1/2"	7/8"	50	13,300	25

CAT #	DIA.	ARBOR	GRIT	MAX RPM	PAC
DARB4G0625	4-1/2"	7/8"	60	13,300	25
DARB4G0825	4-1/2"	7/8"	80	13,300	25
DARB4H0225	5"	7/8"	24	12,200	25

CAT #	DIA.	ARBOR	GRIT	MAX RPM	PACK
DARB4H0325	5"	7/8"	36	12,200	25
DARB4H0525	5"	7/8"	50	12,200	25
DARB4H0625	5"	7/8"	60	12,200	25

*(continued on next page)*

## FIBER DISCS (continued)

### XP EXTENDED Performance ZIRCONIA



CAT #	DIA.	ARBOR	GRIT	MAX RPM	PACK
DARB4H0825	5"	7/8"	80	12,200	25
DARB4K0225	7"	7/8"	24	8,700	25
DARB4K0325	7"	7/8"	36	8,700	25
DARB4K0525	7"	7/8"	50	8,700	25
DARB4K0625	7"	7/8"	60	8,700	25
DARB4K0825	7"	7/8"	80	8,700	25
DARC4G0215	4-1/2"	Quick Lock	24	13,300	15
DARC4G0315	4-1/2"	Quick Lock	36	13,300	15
DARC4G0515	4-1/2"	Quick Lock	50	13,300	15
DARC4G0615	4-1/2"	Quick Lock	60	13,300	15
DARC4G0815	4-1/2"	Quick Lock	80	13,300	15

CAT #	DIA.	ARBOR	GRIT	MAX RPM	PACK
DARC4H0215	5"	Quick Lock	24	12,200	15
DARC4H0315	5"	Quick Lock	36	12,200	15
DARC4H0515	5"	Quick Lock	50	12,200	15
DARC4H0615	5"	Quick Lock	60	12,200	15
DARC4H0815	5"	Quick Lock	80	12,200	15
DARC4K0215	7"	Quick Lock	24	8,700	15
DARC4K0315	7"	Quick Lock	36	8,700	15
DARC4K0515	7"	Quick Lock	50	8,700	15
DARC4K0615	7"	Quick Lock	60	8,700	15
DARC4K0815	7"	Quick Lock	80	8,700	15



### HP HIGH Performance ALUMINUM OXIDE



CAT #	DIA.	ARBOR	GRIT	MAX RPM	PACK
DARB1F0305	4"	5/8"	36	15,200	5
DARB1F0605	4"	5/8"	60	15,200	5
DARB1F0805	4"	5/8"	80	15,200	5
DARB1G0205	4-1/2"	7/8"	24	13,300	5
DARB1G0305	4-1/2"	7/8"	36	13,300	5
DARB1G0605	4-1/2"	7/8"	60	13,300	5
DARB1G0805	4-1/2"	7/8"	80	13,300	5
DARB1H0205	5"	7/8"	24	12,200	5
DARB1H0305	5"	7/8"	36	12,200	5
DARB1H0605	5"	7/8"	60	12,200	5
DARB1H0805	5"	7/8"	80	12,200	5
DARB1K0205	7"	7/8"	24	8,700	5
DARB1K0305	7"	7/8"	36	8,700	5
DARB1K0605	7"	7/8"	60	8,700	5
DARB1K0805	7"	7/8"	80	8,700	5

CAT #	DIA.	ARBOR	GRIT	MAX RPM	PACK
DARB1F0325	4"	5/8"	36	15,200	25
DARB1F0525	4"	5/8"	50	15,200	25
DARB1F0625	4"	5/8"	60	15,200	25
DARB1F0825	4"	5/8"	80	15,200	25
DARB1F1025	4"	5/8"	100	15,200	25
DARB1F1225	4"	5/8"	120	15,200	25
DARB1G0125	4-1/2"	7/8"	16	13,300	25
DARB1G0225	4-1/2"	7/8"	24	13,300	25
DARB1G0325	4-1/2"	7/8"	36	13,300	25
DARB1G0525	4-1/2"	7/8"	50	13,300	25
DARB1G0625	4-1/2"	7/8"	60	13,300	25
DARB1G0825	4-1/2"	7/8"	80	13,300	25
DARB1G1025	4-1/2"	7/8"	100	13,300	25
DARB1G1225	4-1/2"	7/8"	120	13,300	25
DARB1H0125	5"	7/8"	16	15,200	25

CAT #	DIA.	ARBOR	GRIT	MAX RPM	PACK
DARB1H0225	5"	7/8"	24	15,200	25
DARB1H0325	5"	7/8"	36	13,300	25
DARB1H0525	5"	7/8"	50	13,300	25
DARB1H0625	5"	7/8"	60	13,300	25
DARB1H0825	5"	7/8"	80	12,200	25
DARB1H1025	5"	7/8"	100	12,200	25
DARB1H1225	5"	7/8"	120	12,200	25
DARB1K0125	7"	7/8"	16	8,700	25
DARB1K0225	7"	7/8"	24	8,700	25
DARB1K0325	7"	7/8"	36	8,700	25
DARB1K0525	7"	7/8"	50	8,700	25
DARB1K0625	7"	7/8"	60	8,700	25
DARB1K0825	7"	7/8"	80	8,700	25
DARB1K1025	7"	7/8"	100	8,700	25
DARB1K1225	7"	7/8"	120	8,700	25

### HP HIGH Performance ALUMINUM OXIDE



CAT #	DIA.	ARBOR	GRIT	MAX RPM	PACK
DARC1G0115	4-1/2"	Quick Lock	16	13,300	15
DARC1G0215	4-1/2"	Quick Lock	24	13,300	15
DARC1G0315	4-1/2"	Quick Lock	36	13,300	15
DARC1G0515	4-1/2"	Quick Lock	50	13,300	15
DARC1G0615	4-1/2"	Quick Lock	60	13,300	15
DARC1G0815	4-1/2"	Quick Lock	80	13,300	15
DARC1H0115	5"	Quick Lock	16	12,200	15
DARC1H0215	5"	Quick Lock	24	12,200	15
DARC1H0315	5"	Quick Lock	36	12,200	15
DARC1H0515	5"	Quick Lock	50	12,200	15
DARC1H0615	5"	Quick Lock	60	12,200	15
DARC1H0815	5"	Quick Lock	80	12,200	15
DARC1K0115	7"	Quick Lock	16	8,700	15
DARC1K0215	7"	Quick Lock	24	8,700	15
DARC1K0315	7"	Quick Lock	36	8,700	15
DARC1K0515	7"	Quick Lock	50	8,700	15
DARC1K0615	7"	Quick Lock	60	8,700	15
DARC1K0815	7"	Quick Lock	80	8,700	15

## FLAP WHEELS

### HP HIGH Performance ANGLE GRINDER FLAP WHEELS



CAT #	DIA.	ARBOR	GRIT	MAX RPM	PACK
DAGH1G0410	4-1/2"	5/8"-11	40	13,300	10
DAGH1G0610	4-1/2"	5/8"-11	60	13,300	10
DAGH1G0810	4-1/2"	5/8"-11	80	13,300	10
DAGH1G1210	4-1/2"	5/8"-11	120	13,300	10



### HP HIGH Performance FINISHING FLAP WHEELS



CAT #	DIA.	WIDTH	SHAFT	GRIT	MAX RPM	PACK
DAFE7F0610	2"	1"	1/4"	60	12,000	10
DAFE7F1010	2"	1"	1/4"	100	12,000	10
DAFE7F1510	2"	1"	1/4"	150	12,000	10
DAFE7K0610	3"	1-3/4"	1/4"	60	8,000	10
DAFE7K1010	3"	1-3/4"	1/4"	100	8,000	10
DAFE7K1510	3"	1-3/4"	1/4"	150	8,000	10
DAFE7L0610	4"	1-3/4"	1/4"	60	6,000	10
DAFE7L1010	4"	1-3/4"	1/4"	100	6,000	10
DAFE7L1510	4"	1-3/4"	1/4"	150	6,000	10



(continued on next page)

## FLAP DISCS (continued)

**HP HIGH Performance** FLAP WHEELS



CAT #	DIA.	WIDTH	SHAFT	GRIT	MAX RPM	PACK
DAFE1P0410	3/4"	3/4"	1/4"	40	25,000	10
DAFE1P0610	3/4"	3/4"	1/4"	60	25,000	10
DAFE1P0810	3/4"	3/4"	1/4"	80	25,000	10
DAFE1P1210	3/4"	3/4"	1/4"	120	25,000	10
DAFE1A0410	1"	1/2"	1/4"	40	25,000	10
DAFE1A0610	1"	1/2"	1/4"	60	25,000	10
DAFE1A0810	1"	1/2"	1/4"	80	25,000	10
DAFE1A1210	1"	1/2"	1/4"	120	25,000	10
DAFE1A1810	1"	1/2"	1/4"	180	25,000	10
DAFE1A2410	1"	1/2"	1/4"	240	25,000	10
DAFE1B0410	1"	1"	1/4"	40	25,000	10
DAFE1B0610	1"	1"	1/4"	60	25,000	10
DAFE1B0810	1"	1"	1/4"	80	25,000	10
DAFE1B1210	1"	1"	1/4"	120	25,000	10
DAFE1B1810	1"	1"	1/4"	180	25,000	10
DAFE1B2410	1"	1"	1/4"	240	25,000	10
DAFE1D0410	1-1/2"	1"	1/4"	40	25,000	10
DAFE1D0610	1-1/2"	1"	1/4"	60	25,000	10
DAFE1D0810	1-1/2"	1"	1/4"	80	25,000	10
DAFE1D1210	1-1/2"	1"	1/4"	120	25,000	10
DAFE1D1810	1-1/2"	1"	1/4"	180	25,000	10
DAFE1D2410	1-1/2"	1"	1/4"	240	25,000	10
DAFE1E0410	2"	1/2"	1/4"	40	25,000	10
DAFE1E0610	2"	1/2"	1/4"	60	25,000	10
DAFE1E0810	2"	1/2"	1/4"	80	25,000	10
DAFE1E1210	2"	1/2"	1/4"	120	25,000	10
DAFE1E1810	2"	1/2"	1/4"	180	25,000	10
DAFE1E2410	2"	1/2"	1/4"	240	25,000	10
DAFE1R0410	2"	3/4"	1/4"	40	25,000	10
DAFE1R0610	2"	3/4"	1/4"	60	25,000	10
DAFE1R0810	2"	3/4"	1/4"	80	25,000	10
DAFE1R1210	2"	3/4"	1/4"	120	25,000	10
DAFE1R1810	2"	3/4"	1/4"	180	25,000	10

CAT #	DIA.	WIDTH	SHAFT	GRIT	MAX RPM	PACK
DAFE1R2410	2"	3/4"	1/4"	240	25,000	10
DAFE1F0410	2"	1"	1/4"	40	25,000	10
DAFE1F0610	2"	1"	1/4"	60	25,000	10
DAFE1F0810	2"	1"	1/4"	80	25,000	10
DAFE1F1210	2"	1"	1/4"	120	25,000	10
DAFE1F1810	2"	1"	1/4"	180	25,000	10
DAFE1F2410	2"	1"	1/4"	240	25,000	10
DAFE1Q0410	2-1/2"	1"	1/4"	40	25,000	10
DAFE1Q0610	2-1/2"	1"	1/4"	60	25,000	10
DAFE1Q0810	2-1/2"	1"	1/4"	80	25,000	10
DAFE1Q1210	2-1/2"	1"	1/4"	120	25,000	10
DAFE1Q1810	2-1/2"	1"	1/4"	180	25,000	10
DAFE1Q2410	2-1/2"	1"	1/4"	240	25,000	10
DAFE1G0410	3"	1/2"	1/4"	40	20,000	10
DAFE1G0610	3"	1/2"	1/4"	60	20,000	10
DAFE1G0810	3"	1/2"	1/4"	80	20,000	10
DAFE1G1210	3"	1/2"	1/4"	120	20,000	10
DAFE1G1810	3"	1/2"	1/4"	180	20,000	10
DAFE1G2410	3"	1/2"	1/4"	240	20,000	10
DAFE1H0410	3"	1"	1/4"	40	20,000	10
DAFE1H0610	3"	1"	1/4"	60	20,000	10
DAFE1H0810	3"	1"	1/4"	80	20,000	10
DAFE1H1210	3"	1"	1/4"	120	20,000	10
DAFE1H1810	3"	1"	1/4"	180	20,000	10
DAFE1H2410	3"	1"	1/4"	240	20,000	10
DAFK1M0510	6-1/2"	1"	1"	50	5,800	10
DAFK1M0610	6-1/2"	1"	1"	60	5,800	10
DAFK1M0810	6-1/2"	1"	1"	80	5,800	10
DAFK1M1210	6-1/2"	1"	1"	120	5,800	10
DAFK1N0510	6-1/2"	2"	1"	50	5,800	10
DAFK1N0610	6-1/2"	2"	1"	60	5,800	10
DAFK1N0810	6-1/2"	2"	1"	80	5,800	10
DAFK1N1210	6-1/2"	2"	1"	120	5,800	10



## QUICK CHANGE DISCS

**XP3<sup>™</sup> CERAMIC**



CAT #	DIA.	ARBOR	GRIT	MAX RPM	PACK
DALD6C031A	2"	QDC	36	20,000	100
DALD6C051A	2"	QDC	50	20,000	100
DALD6C061A	2"	QDC	60	20,000	100
DALD6E0350	3"	QDC	36	20,000	50
DALD6E0550	3"	QDC	50	20,000	50
DALD6E0650	3"	QDC	60	20,000	50

CAT #	DIA.	ARBOR	GRIT	MAX RPM	PACK
DALN6C031A	2"	QRC	36	20,000	100
DALN6C051A	2"	QRC	50	20,000	100
DALN6C061A	2"	QRC	60	20,000	100
DALN6E0350	3"	QRC	36	20,000	50
DALN6E0550	3"	QRC	50	20,000	50
DALN6E0650	3"	QRC	60	20,000	50

CAT #	DIA.	ARBOR	GRIT	MAX RPM	PACK
DALP6C031A	2"	QMC	36	20,000	100
DALP6C051A	2"	QMC	50	20,000	100
DALP6C061A	2"	QMC	60	20,000	100
DALP6E0350	3"	QMC	36	20,000	50
DALP6E0550	3"	QMC	50	20,000	50
DALP6E0650	3"	QMC	60	20,000	50

**XP EXTENDED Performance** ZIRCONIA COOL DISC<sup>™</sup>



CAT #	DIA.	ARBOR	GRIT	MAX RPM	PACK
DALD5A031A	1"	QDC	36	30,000	100
DALD5A051A	1"	QDC	50	30,000	100
DALD5A061A	1"	QDC	60	30,000	100
DALD5A081A	1"	QDC	80	30,000	100
DALD5A121A	1"	QDC	120	30,000	100
DALD5B031A	1-1/2"	QDC	36	30,000	100
DALD5B051A	1-1/2"	QDC	50	30,000	100

CAT #	DIA.	ARBOR	GRIT	MAX RPM	PACK
DALD5B061A	1-1/2"	QDC	60	30,000	100
DALD5B081A	1-1/2"	QDC	80	30,000	100
DALD5B121A	1-1/2"	QDC	120	30,000	100
DALD5C031A	2"	QDC	36	20,000	100
DALD5C051A	2"	QDC	50	20,000	100
DALD5C061A	2"	QDC	60	20,000	100
DALD5C081A	2"	QDC	80	20,000	100

CAT #	DIA.	ARBOR	GRIT	MAX RPM	PACK
DALD5C121A	2"	QDC	120	20,000	100
DALD5E0350	3"	QDC	36	20,000	50
DALD5E0550	3"	QDC	50	20,000	50
DALD5E0650	3"	QDC	60	20,000	50
DALD5E0850	3"	QDC	80	20,000	50
DALD5E1250	3"	QDC	120	20,000	50
DALN5B031A	1-1/2"	QRC	36	30,000	100

*(continued on next page)*

## QUICK CHANGE DISCS (continued)

### XP EXTENDED Performance ZIRCONIA COOL DISC™



CAT #	DIA.	ARBOR	GRIT	MAX RPM	PACK
DALN5B051A	1-1/2"	QRC	50	30,000	100
DALN5B061A	1-1/2"	QRC	60	30,000	100
DALN5B081A	1-1/2"	QRC	80	30,000	100
DALN5B121A	1-1/2"	QRC	120	30,000	100
DALN5C031A	2"	QRC	36	20,000	100
DALN5C051A	2"	QRC	50	20,000	100
DALN5C061A	2"	QRC	60	20,000	100
DALN5C081A	2"	QRC	80	20,000	100
DALN5C121A	2"	QRC	120	20,000	100
DALN5E0350	3"	QRC	36	20,000	50

CAT #	DIA.	ARBOR	GRIT	MAX RPM	PACK
DALN5E0550	3"	QRC	50	20,000	50
DALN5E0650	3"	QRC	60	20,000	50
DALN5E0850	3"	QRC	80	20,000	50
DALN5E1250	3"	QRC	120	20,000	50
DALP5B031A	1-1/2"	QMC	36	30,000	100
DALP5B051A	1-1/2"	QMC	50	30,000	100
DALP5B061A	1-1/2"	QMC	60	30,000	100
DALP5B081A	1-1/2"	QMC	80	30,000	100
DALP5B121A	1-1/2"	QMC	120	30,000	100
DALP5C031A	2"	QMC	36	20,000	100

CAT #	DIA.	ARBOR	GRIT	MAX RPM	PACK
DALP5C051A	2"	QMC	50	20,000	100
DALP5C061A	2"	QMC	60	20,000	100
DALP5C081A	2"	QMC	80	20,000	100
DALP5C121A	2"	QMC	120	20,000	100
DALP5E0350	3"	QMC	36	20,000	50
DALP5E0550	3"	QMC	50	20,000	50
DALP5E0650	3"	QMC	60	20,000	50
DALP5E0850	3"	QMC	80	20,000	50
DALP5E1250	3"	QMC	120	20,000	50

### XP EXTENDED Performance ZIRCONIA



CAT #	DIA.	ARBOR	GRIT	MAX RPM	PACK
DALD4A021A	1"	QDC	24	30,000	100
DALD4A031A	1"	QDC	36	30,000	100
DALD4A041A	1"	QDC	40	30,000	100
DALD4A051A	1"	QDC	50	30,000	100
DALD4A061A	1"	QDC	60	30,000	100
DALD4A081A	1"	QDC	80	30,000	100
DALD4A121A	1"	QDC	120	30,000	100
DALD4B021A	1-1/2"	QDC	24	30,000	100
DALD4B031A	1-1/2"	QDC	36	30,000	100
DALD4B041A	1-1/2"	QDC	40	30,000	100
DALD4B051A	1-1/2"	QDC	50	30,000	100
DALD4B061A	1-1/2"	QDC	60	30,000	100
DALD4B081A	1-1/2"	QDC	80	30,000	100
DALD4B121A	1-1/2"	QDC	120	30,000	100
DALD4C021A	2"	QDC	24	20,000	100
DALD4C031A	2"	QDC	36	20,000	100
DALD4C041A	2"	QDC	40	20,000	100
DALD4C051A	2"	QDC	50	20,000	100
DALD4C061A	2"	QDC	60	20,000	100
DALD4C081A	2"	QDC	80	20,000	100
DALD4C121A	2"	QDC	120	20,000	100
DALD4E0250	3"	QDC	24	20,000	50
DALD4E0350	3"	QDC	36	20,000	50
DALD4E0450	3"	QDC	40	20,000	50

CAT #	DIA.	ARBOR	GRIT	MAX RPM	PACK
DALD4E0550	3"	QDC	50	20,000	50
DALD4E0650	3"	QDC	60	20,000	50
DALD4E0850	3"	QDC	80	20,000	50
DALD4E1250	3"	QDC	120	20,000	50
DALN4B021A	1-1/2"	QRC	24	30,000	100
DALN4B031A	1-1/2"	QRC	36	30,000	100
DALN4B041A	1-1/2"	QRC	40	30,000	100
DALN4B051A	1-1/2"	QRC	50	30,000	100
DALN4B061A	1-1/2"	QRC	60	30,000	100
DALN4B081A	1-1/2"	QRC	80	30,000	100
DALN4B121A	1-1/2"	QRC	120	30,000	100
DALN4C021A	2"	QRC	24	20,000	100
DALN4C031A	2"	QRC	36	20,000	100
DALN4C041A	2"	QRC	40	20,000	100
DALN4C051A	2"	QRC	50	20,000	100
DALN4C061A	2"	QRC	60	20,000	100
DALN4C081A	2"	QRC	80	20,000	100
DALN4C121A	2"	QRC	120	20,000	100
DALN4E0250	3"	QRC	24	20,000	50
DALN4E0350	3"	QRC	36	20,000	50
DALN4E0450	3"	QRC	40	20,000	50
DALN4E0550	3"	QRC	50	20,000	50
DALN4E0650	3"	QRC	60	20,000	50
DALN4E0850	3"	QRC	80	20,000	50

CAT #	DIA.	ARBOR	GRIT	MAX RPM	PACK
DALN4E1250	3"	QRC	120	20,000	50
DALP4B021A	1-1/2"	QMC	24	30,000	100
DALP4B031A	1-1/2"	QMC	36	30,000	100
DALP4B041A	1-1/2"	QMC	40	30,000	100
DALP4B051A	1-1/2"	QMC	50	30,000	100
DALP4B061A	1-1/2"	QMC	60	30,000	100
DALP4B081A	1-1/2"	QMC	80	30,000	100
DALP4B121A	1-1/2"	QMC	120	30,000	100
DALP4C021A	2"	QMC	24	20,000	100
DALP4C031A	2"	QMC	36	20,000	100
DALP4C041A	2"	QMC	40	20,000	100
DALP4C051A	2"	QMC	50	20,000	100
DALP4C061A	2"	QMC	60	20,000	100
DALP4C081A	2"	QMC	80	20,000	100
DALP4C121A	2"	QMC	120	20,000	100
DALP4E0250	3"	QMC	24	20,000	50
DALP4E0350	3"	QMC	36	20,000	50
DALP4E0450	3"	QMC	40	20,000	50
DALP4E0550	3"	QMC	50	20,000	50
DALP4E0650	3"	QMC	60	20,000	50
DALP4E0850	3"	QMC	80	20,000	50
DALP4E1250	3"	QMC	120	20,000	50

### HP HIGH Performance ALUMINUM OXIDE



CAT #	DIA.	ARBOR	GRIT	MAX RPM	PACK
DALD1A021A	1"	QDC	24	30,000	100
DALD1A031A	1"	QDC	36	30,000	100
DALD1A041A	1"	QDC	40	30,000	100
DALD1A051A	1"	QDC	50	30,000	100
DALD1A061A	1"	QDC	60	30,000	100
DALD1A081A	1"	QDC	80	30,000	100
DALD1A121A	1"	QDC	120	30,000	100
DALD1B021A	1-1/2"	QDC	24	30,000	100
DALD1B031A	1-1/2"	QDC	36	30,000	100
DALD1B041A	1-1/2"	QDC	40	30,000	100
DALD1B051A	1-1/2"	QDC	50	30,000	100
DALD1B061A	1-1/2"	QDC	60	30,000	100

CAT #	DIA.	ARBOR	GRIT	MAX RPM	PACK
DALD1B081A	1-1/2"	QDC	80	30,000	100
DALD1B121A	1-1/2"	QDC	120	30,000	100
DALD1C021A	2"	QDC	24	20,000	100
DALD1C031A	2"	QDC	36	20,000	100
DALD1C041A	2"	QDC	40	20,000	100
DALD1C051A	2"	QDC	50	20,000	100
DALD1C061A	2"	QDC	60	20,000	100
DALD1C081A	2"	QDC	80	20,000	100
DALD1C121A	2"	QDC	120	20,000	100
DALD1E0250	3"	QDC	24	20,000	50
DALD1E0350	3"	QDC	36	20,000	50
DALD1E0450	3"	QDC	40	20,000	50

CAT #	DIA.	ARBOR	GRIT	MAX RPM	PACK
DALD1E0550	3"	QDC	50	20,000	50
DALD1E0650	3"	QDC	60	20,000	50
DALD1E0850	3"	QDC	80	20,000	50
DALD1E1250	3"	QDC	120	20,000	50
DALN1B021A	1-1/2"	QRC	24	30,000	100
DALN1B031A	1-1/2"	QRC	36	30,000	100
DALN1B041A	1-1/2"	QRC	40	30,000	100
DALN1B051A	1-1/2"	QRC	50	30,000	100
DALN1B061A	1-1/2"	QRC	60	30,000	100
DALN1B081A	1-1/2"	QRC	80	30,000	100
DALN1B121A	1-1/2"	QRC	120	30,000	100
DALN1C021A	2"	QRC	24	20,000	100

(continued on next page)

## QUICK CHANGE DISCS *(continued)*

### HP HIGH Performance ALUMINUM OXIDE *(continued)*



CAT #	DIA.	ARBOR	GRIT	MAX RPM	PACK
DALN1C031A	2"	QRC	36	20,000	100
DALN1C041A	2"	QRC	40	20,000	100
DALN1C051A	2"	QRC	50	20,000	100
DALN1C061A	2"	QRC	60	20,000	100
DALN1C081A	2"	QRC	80	20,000	100
DALN1C121A	2"	QRC	120	20,000	100
DALN1E0250	3"	QRC	24	20,000	50
DALN1E0350	3"	QRC	36	20,000	50
DALN1E0450	3"	QRC	40	20,000	50
DALN1E0550	3"	QRC	50	20,000	50
DALN1E0650	3"	QRC	60	20,000	50
DALN1E0850	3"	QRC	80	20,000	50

CAT #	DIA.	ARBOR	GRIT	MAX RPM	PACK
DALN1E1250	3"	QRC	120	20,000	50
DALP1B021A	1-1/2"	QMC	24	30,000	100
DALP1B031A	1-1/2"	QMC	36	30,000	100
DALP1B041A	1-1/2"	QMC	40	30,000	100
DALP1B051A	1-1/2"	QMC	50	30,000	100
DALP1B061A	1-1/2"	QMC	60	30,000	100
DALP1B081A	1-1/2"	QMC	80	30,000	100
DALP1B121A	1-1/2"	QMC	120	30,000	100
DALP1C021A	2"	QMC	24	20,000	100
DALP1C031A	2"	QMC	36	20,000	100
DALP1C041A	2"	QMC	40	20,000	100

CAT #	DIA.	ARBOR	GRIT	MAX RPM	PACK
DALP1C051A	2"	QMC	50	20,000	100
DALP1C061A	2"	QMC	60	20,000	100
DALP1C081A	2"	QMC	80	20,000	100
DALP1C121A	2"	QMC	120	20,000	100
DALP1E0250	3"	QMC	24	20,000	50
DALP1E0350	3"	QMC	36	20,000	50
DALP1E0450	3"	QMC	40	20,000	50
DALP1E0550	3"	QMC	50	20,000	50
DALP1E0650	3"	QMC	60	20,000	50
DALP1E0850	3"	QMC	80	20,000	50
DALP1E1250	3"	QMC	120	20,000	50

### HP HIGH Performance SURFACE FINISHING, NON-WOVEN



CAT #	DIA.	ARBOR	GRIT	MAX RPM	PACK
DALD7ACR25	1"	QDC	Coarse	30,000	25
DALD7AMD25	1"	QDC	Medium	30,000	25
DALD7AFN25	1"	QDC	Fine	30,000	25
DALD7CCR25	2"	QDC	Coarse	20,000	25
DALD7CMD25	2"	QDC	Medium	20,000	25
DALD7CFN25	2"	QDC	Fine	20,000	25
DALD7ECR25	3"	QDC	Coarse	20,000	25

CAT #	DIA.	ARBOR	GRIT	MAX RPM	PACK
DALD7EMD25	3"	QDC	Medium	20,000	25
DALD7EFN25	3"	QDC	Fine	20,000	25
DALN7CCR25	2"	QRC	Coarse	20,000	25
DALN7CMD25	2"	QRC	Medium	20,000	25
DALN7CFN25	2"	QRC	Fine	20,000	25
DALN7ECR25	3"	QRC	Coarse	20,000	25
DALN7EMD25	3"	QRC	Medium	20,000	25

CAT #	DIA.	ARBOR	GRIT	MAX RPM	PACK
DALN7EFN25	3"	QRC	Fine	20,000	25
DALP7CCR25	2"	QMC	Coarse	20,000	25
DALP7CMD25	2"	QMC	Medium	20,000	25
DALP7CFN25	2"	QMC	Fine	20,000	25
DALP7ECR25	3"	QMC	Coarse	20,000	25
DALP7EMD25	3"	QMC	Medium	20,000	25
DALP7EFN25	3"	QMC	Fine	20,000	25

### Arbor Types

QDC



QRC



QMC



## BELTS

### XP EXTENDED Performance ZIRCONIA



CAT #	WIDTH	LENGTH	GRIT	PACK
DABB4D0310	1/4"	18"	36	10
DABB4D0410	1/4"	18"	40	10
DABB4D0610	1/4"	18"	60	10
DABB4D0810	1/4"	18"	80	10
DABB4D1210	1/4"	18"	120	10
DABB4E0310	1/4"	24"	36	10
DABB4E0410	1/4"	24"	40	10
DABB4E0610	1/4"	24"	60	10
DABB4E0810	1/4"	24"	80	10
DABB4E1210	1/4"	24"	120	10

CAT #	WIDTH	LENGTH	GRIT	PACK
DABC4G0410	3/8"	13"	40	10
DABC4G0610	3/8"	13"	60	10
DABC4G0810	3/8"	13"	80	10
DABC4G1210	3/8"	13"	120	10
DABD4D0410	1/2"	18"	40	10
DABD4D0610	1/2"	18"	60	10
DABD4D0810	1/2"	18"	80	10
DABD4D1210	1/2"	18"	120	10
DABD4E0410	1/2"	24"	40	10
DABD4E0610	1/2"	24"	60	10

CAT #	WIDTH	LENGTH	GRIT	PACK
DABD4E0810	1/2"	24"	80	10
DABD4E1210	1/2"	24"	120	10
DABF4D0410	3/4"	18"	40	10
DABF4D0610	3/4"	18"	60	10
DABF4D0810	3/4"	18"	80	10
DABF4D1210	3/4"	18"	120	10
DABF4H0410	3/4"	20-1/2"	40	10
DABF4H0610	3/4"	20-1/2"	60	10
DABF4H0810	3/4"	20-1/2"	80	10
DABF4H1210	3/4"	20-1/2"	120	10

### HP HIGH Performance SURFACE FINISHING, NON-WOVEN



CAT #	WIDTH	LENGTH	GRIT	PACK
DABD7DCR10	1/2"	18"	Coarse	10
DABD7DM10	1/2"	18"	Medium	10
DABD7ECR03	1/2"	24"	Coarse	5

CAT #	WIDTH	LENGTH	GRIT	PACK
DABD7EMD05	1/2"	24"	Medium	5
DABF7DCR05	3/4"	18"	Coarse	5
DABF7DM05	3/4"	18"	Medium	5

*(continued on next page)*

## BELTS (continued)

**HP HIGH Performance** ALUMINUM OXIDE



CAT #	WIDTH	LENGTH	GRIT	PACK	CAT #	WIDTH	LENGTH	GRIT	PACK	CAT #	WIDTH	LENGTH	GRIT	PACK
DABB1D0410	1/4"	18"	40	10	DABC1G0810	3/8"	13"	80	10	DABD1E1210	1/2"	24"	120	10
DABB1D0610	1/4"	18"	60	10	DABC1G1210	3/8"	13"	120	10	DABF1D0410	3/4"	18"	40	10
DABB1D0810	1/4"	18"	80	10	DABD1D0410	1/2"	18"	40	10	DABF1D0610	3/4"	18"	60	10
DABB1D1210	1/4"	18"	120	10	DABD1D0610	1/2"	18"	60	10	DABF1D0810	3/4"	18"	80	10
DABB1E0410	1/4"	24"	40	10	DABD1D0810	1/2"	18"	80	10	DABF1D1210	3/4"	18"	120	10
DABB1E0610	1/4"	24"	60	10	DABD1D1210	1/2"	18"	120	10	DABF1H0410	3/4"	20-1/2"	40	10
DABB1E0810	1/4"	24"	80	10	DABD1E0410	1/2"	24"	40	10	DABF1H0610	3/4"	20-1/2"	60	10
DABB1E1210	1/4"	24"	120	10	DABD1E0610	1/2"	24"	60	10	DABF1H0810	3/4"	20-1/2"	80	10
DABC1G0410	3/8"	13"	40	10	DABD1E0810	1/2"	24"	80	10	DABF1H1210	3/4"	20-1/2"	120	10
DABC1G0610	3/8"	13"	60	10										

## CARTRIDGE ROLLS

**HP HIGH Performance** ALUMINUM OXIDE



CAT #	DIA.	LENGTH	PILOT	SHAPE	GRIT	MAX RPM	PACK	CAT #	DIA.	LENGTH	PILOT	SHAPE	GRIT	MAX RPM	PACK
DACG1B061A	3/8"	1-1/2"	1/8"	Straight	60	25,000	100	DACG1F061A	3/4"	1-1/2"	1/8"	Straight	80	25,000	100
DACG1B081A	3/8"	1-1/2"	1/8"	Straight	80	25,000	100	DATG1A061A	3/8"	1"	1/8"	Taper	60	25,000	50
DACG1B121A	3/8"	1-1/2"	1/8"	Straight	120	25,000	100	DATG1A081A	3/8"	1"	1/8"	Taper	80	25,000	50
DACG1D181A	3/8"	1-1/2"	1/8"	Straight	180	25,000	100	DATG1A121A	3/8"	1"	1/8"	Taper	120	25,000	50
DACG1C061A	1/2"	1"	1/8"	Straight	60	25,000	100	DATG1A181A	3/8"	1"	1/8"	Taper	180	25,000	100
DACG1C081A	1/2"	1"	1/8"	Straight	80	25,000	100	DATG1B081A	3/8"	1-1/2"	1/8"	Taper	80	25,000	100
DACG1C121A	1/2"	1"	1/8"	Straight	120	25,000	100	DATG1B121A	3/8"	1-1/2"	1/8"	Taper	120	25,000	100
DACG1D041A	1/2"	1-1/2"	1/8"	Straight	40	25,000	100	DATG1C061A	1/2"	1"	1/8"	Taper	60	25,000	100
DACG1D061A	1/2"	1-1/2"	1/8"	Straight	60	25,000	100	DATG1C081A	1/2"	1"	1/8"	Taper	80	25,000	100
DACG1D081A	1/2"	1-1/2"	1/8"	Straight	80	25,000	100	DATG1D061A	1/2"	1-1/2"	1/8"	Taper	60	25,000	100
DACG1D121A	1/2"	1-1/2"	1/8"	Straight	120	25,000	100	DATG1D081A	1/2"	1-1/2"	1/8"	Taper	80	25,000	100
DACG1D181A	1/2"	1-1/2"	1/8"	Straight	180	25,000	100	DATG1D121A	1/2"	1-1/2"	1/8"	Taper	120	25,000	100
DACG1D241A	1/2"	1-1/2"	1/8"	Straight	240	25,000	100	DATG1D181A	1/2"	1-1/2"	1/8"	Taper	180	25,000	100
DACG1E061A	1/2"	2"	1/8"	Straight	60	25,000	50	DATG1E061A	1/2"	2"	1/8"	Taper	60	25,000	100
DACG1E081A	1/2"	2"	1/8"	Straight	80	25,000	50	DATG1E081A	1/2"	2"	1/8"	Taper	80	25,000	100
DACG1E121A	1/2"	2"	1/8"	Straight	120	25,000	50	DATG1E121A	1/2"	2"	1/8"	Taper	120	25,000	100
DACG1F061A	3/4"	1-1/2"	1/8"	Straight	60	25,000	100								


## PAPER DISCS

**5" HOOK & LOOP RANDOM ORBIT DISCS**

CAT #	HOLES	DIA.	GRIT	PACK
DW4301	8	5"	80	5
DW4303	8	5"	120	5
DW4304	8	5"	150	5
DW4306	8	5"	220	5
DW4307	8	5"	Asst.	5
DW4309	8	5"	80	25
DW4310	8	5"	100	25
DW4311	8	5"	120	25
DW4312	8	5"	150	25
DW4313	8	5"	180	25
DW4314	8	5"	220	25

**6" HOOK & LOOP RANDOM ORBIT DISCS**

CAT #	HOLES	DIA.	GRIT	PACK
DW4331	6	6"	80	5
DW4333	6	6"	120	5
DW4334	6	6"	150	5
DW4336	6	6"	220	5



## ROLLS

**PAPER ROLLS ALUMINUM OXIDE**



CAT #	TYPE	WIDTH	LENGTH	GRIT
DAK2110801	PSA	2-3/4"	10 Meters	80
DAK2111001	PSA	2-3/4"	10 Meters	100
DAK2111201	PSA	2-3/4"	10 Meters	120
DAK2111501	PSA	2-3/4"	10 Meters	150
DAK2111801	PSA	2-3/4"	10 Meters	180
DAK2112201	PSA	2-3/4"	10 Meters	220
DAK2113201	PSA	2-3/4"	10 Meters	320



## SHOP ROLLS



**ALUMINUM OXIDE**



CAT #	LGTH	WIDTH	GRIT
DANG120401	50 Yards	1"	40
DANG120601	50 Yards	1"	60
DANG120801	50 Yards	1"	80
DANG121001	50 Yards	1"	100
DANG121201	50 Yards	1"	120
DANG121501	50 Yards	1"	150
DANG121801	50 Yards	1"	180
DANG122201	50 Yards	1"	220
DANG122401	50 Yards	1"	240
DANG123201	50 Yards	1"	320
DANG124001	50 Yards	1"	400
DANK120401	50 Yards	1-1/2"	40
DANK120601	50 Yards	1-1/2"	60
DANK120801	50 Yards	1-1/2"	80
DANK121001	50 Yards	1-1/2"	100
DANK121201	50 Yards	1-1/2"	120
DANK121501	50 Yards	1-1/2"	150
DANK121801	50 Yards	1-1/2"	180
DANK122201	50 Yards	1-1/2"	220
DANK122401	50 Yards	1-1/2"	240
DANK123201	50 Yards	1-1/2"	320
DANK124001	50 Yards	1-1/2"	400
DANL120401	50 Yards	2"	40
DANL120601	50 Yards	2"	60
DANL120801	50 Yards	2"	80

CAT #	LGTH	WIDTH	GRIT
DANL121001	50 Yards	2"	100
DANL121201	50 Yards	2"	120
DANL121501	50 Yards	2"	150
DANL121801	50 Yards	2"	180
DANL122201	50 Yards	2"	220
DANL122401	50 Yards	2"	240
DANL123201	50 Yards	2"	320
DANL124001	50 Yards	2"	400
DANM120401	50 Yards	2-1/2"	40
DANM120601	50 Yards	2-1/2"	60
DANM120801	50 Yards	2-1/2"	80
DANM121001	50 Yards	2-1/2"	100
DANM121201	50 Yards	2-1/2"	120
DANM121501	50 Yards	2-1/2"	150
DANM121801	50 Yards	2-1/2"	180
DANM122201	50 Yards	2-1/2"	220
DANM122401	50 Yards	2-1/2"	240
DANM123201	50 Yards	2-1/2"	320
DANM124001	50 Yards	2-1/2"	400
DANN120401	50 Yards	3"	40
DANN120601	50 Yards	3"	60
DANN120801	50 Yards	3"	80
DANN121001	50 Yards	3"	100
DANN121201	50 Yards	3"	120
DANN121501	50 Yards	3"	150

CAT #	LGTH	WIDTH	GRIT
DANN121801	50 Yards	3"	180
DANN122201	50 Yards	3"	220
DANN122401	50 Yards	3"	240
DANN123201	50 Yards	3"	320
DANN124001	50 Yards	3"	400
DANP120401	50 Yards	3-1/2"	40
DANP120601	50 Yards	3-1/2"	60
DANP120801	50 Yards	3-1/2"	80
DANP121001	50 Yards	3-1/2"	100
DANP121201	50 Yards	3-1/2"	120
DANP121501	50 Yards	3-1/2"	150
DANP121801	50 Yards	3-1/2"	180
DANP122201	50 Yards	3-1/2"	220
DANP122401	50 Yards	3-1/2"	240
DANP123201	50 Yards	3-1/2"	320
DANP124001	50 Yards	3-1/2"	400
DANR120401	50 Yards	4"	40
DANR120601	50 Yards	4"	60
DANR120801	50 Yards	4"	80
DANR121001	50 Yards	4"	100
DANR121201	50 Yards	4"	120
DANR121501	50 Yards	4"	150
DANR121801	50 Yards	4"	180
DANR122201	50 Yards	4"	220
DANR122401	50 Yards	4"	240

CAT #	LGTH	WIDTH	GRIT
DANR123201	50 Yards	4"	320
DANR124001	50 Yards	4"	400
DANS120401	50 Yards	4-1/2"	40
DANS120601	50 Yards	4-1/2"	60
DANS120801	50 Yards	4-1/2"	80
DANS121001	50 Yards	4-1/2"	100
DANS121201	50 Yards	4-1/2"	120
DANS121501	50 Yards	4-1/2"	150
DANS121801	50 Yards	4-1/2"	180
DANS122201	50 Yards	4-1/2"	220
DANS122401	50 Yards	4-1/2"	240
DANS123201	50 Yards	4-1/2"	320
DANS124001	50 Yards	4-1/2"	400
DANU120401	50 Yards	6"	40
DANU120601	50 Yards	6"	60
DANU120801	50 Yards	6"	80
DANU121001	50 Yards	6"	100
DANU121201	50 Yards	6"	120
DANU121501	50 Yards	6"	150
DANU121801	50 Yards	6"	180
DANU122201	50 Yards	6"	220
DANU122401	50 Yards	6"	240
DANU123201	50 Yards	6"	320
DANU124001	50 Yards	6"	400



**ALUMINUM OXIDE**



CAT #	LGTH	WIDTH	GRIT
DANG220401	50 Yards	1"	40
DANG220601	50 Yards	1"	60
DANG220801	50 Yards	1"	80
DANG221001	50 Yards	1"	100
DANG221201	50 Yards	1"	120
DANG221501	50 Yards	1"	150
DANG221801	50 Yards	1"	180
DANG222201	50 Yards	1"	220
DANG222401	50 Yards	1"	240
DANG223201	50 Yards	1"	320
DANG224001	50 Yards	1"	400
DANK220401	50 Yards	1-1/2"	40
DANK220601	50 Yards	1-1/2"	60
DANK220801	50 Yards	1-1/2"	80
DANK221001	50 Yards	1-1/2"	100
DANK221201	50 Yards	1-1/2"	120
DANK221501	50 Yards	1-1/2"	150

CAT #	LGTH	WIDTH	GRIT
DANK221801	50 Yards	1-1/2"	180
DANK222201	50 Yards	1-1/2"	220
DANK222401	50 Yards	1-1/2"	240
DANK223201	50 Yards	1-1/2"	320
DANK224001	50 Yards	1-1/2"	400
DANL220401	50 Yards	2"	40
DANL220601	50 Yards	2"	60
DANL220801	50 Yards	2"	80
DANL221001	50 Yards	2"	100
DANL221201	50 Yards	2"	120
DANL221501	50 Yards	2"	150
DANL221801	50 Yards	2"	180
DANL222201	50 Yards	2"	220
DANL222401	50 Yards	2"	240
DANL223201	50 Yards	2"	320
DANL224001	50 Yards	2"	400

CAT #	LGTH	WIDTH	GRIT
DANN220401	50 Yards	3"	40
DANN220601	50 Yards	3"	60
DANN220801	50 Yards	3"	80
DANN221001	50 Yards	3"	100
DANN221201	50 Yards	3"	120
DANN221501	50 Yards	3"	150
DANN221801	50 Yards	3"	180
DANN222201	50 Yards	3"	220
DANN222401	50 Yards	3"	240
DANN223201	50 Yards	3"	320
DANN224001	50 Yards	3"	400
DANR220401	50 Yards	4"	40
DANR220601	50 Yards	4"	60
DANR220801	50 Yards	4"	80
DANR221001	50 Yards	4"	100
DANR221201	50 Yards	4"	120

CAT #	LGTH	WIDTH	GRIT
DANR221501	50 Yards	4"	150
DANR221801	50 Yards	4"	180
DANR222201	50 Yards	4"	220
DANR223201	50 Yards	4"	320
DANR224001	50 Yards	4"	400
DANU220401	50 Yards	6"	40
DANU220601	50 Yards	6"	60
DANU220801	50 Yards	6"	80
DANU221001	50 Yards	6"	100
DANU221201	50 Yards	6"	120
DANU221501	50 Yards	6"	150
DANU221801	50 Yards	6"	180
DANU222201	50 Yards	6"	220
DANU222401	50 Yards	6"	240
DANU223201	50 Yards	6"	320
DANU224001	50 Yards	6"	400

## SHEETS

**WATERPROOF SHEETS SILICON CARBIDE**

CAT #	WIDTH	LENGTH	GRIT	PACK
DASY3J0850	9"	11"	80	50
DASY3J1050	9"	11"	100	50
DASY3J1250	9"	11"	120	50
DASY3J1550	9"	11"	150	50
DASY3J1850	9"	11"	180	50

CAT #	WIDTH	LENGTH	GRIT	PACK
DASY3J2250	9"	11"	220	50
DASY3J2450	9"	11"	240	50
DASY3J2850	9"	11"	280	50
DASY3J3250	9"	11"	320	50
DASY3J3650	9"	11"	360	50

CAT #	WIDTH	LENGTH	GRIT	PACK
DASY3J4050	9"	11"	400	50
DASY3J5050	9"	11"	500	50
DASY3J6050	9"	11"	600	50
DASY3J8050	9"	11"	800	50
DASY3J1A50	9"	11"	1000	50
DASY3J1B50	9"	11"	1200	50
DASY3J1C50	9"	11"	1500	50

## NON-WOVEN

### NON-WOVEN DISCS\*\*



CAT #	DIA.	ARBOR	GRIT	PACK
DADA7NCR10	4"	No Hole	Coarse	10
DADA7NMD10	4"	No Hole	Medium	10
DADA7NFN10	4"	No Hole	Fine	10
DADB7NCR10	4"	5/8"	Coarse	10
DADB7NMD10	4"	5/8"	Medium	10
DADB7NFN10	4"	5/8"	Fine	10
DADC7NCR10	4-1/2"	No Hole	Coarse	10
DADC7NMD10	4-1/2"	No Hole	Medium	10

CAT #	DIA.	ARBOR	GRIT	PACK
DADC7NFN10	4-1/2"	No Hole	Fine	10
DADD7NCR10	4-1/2"	7/8"	Coarse	10
DADD7NMD10	4-1/2"	7/8"	Medium	10
DADD7NFN10	4-1/2"	7/8"	Fine	10
DADE7NCR10	5"	No Hole	Coarse	10
DADE7NMD10	5"	No Hole	Medium	10
DADE7NFN10	5"	No Hole	Fine	10
DADF7NCR10	5"	7/8"	Coarse	10

CAT #	DIA.	ARBOR	GRIT	PACK
DADF7NMD10	5"	7/8"	Medium	10
DADF7NFN10	5"	7/8"	Fine	10
DADG7NCR10	7"	No Hole	Coarse	10
DADG7NMD10	7"	No Hole	Medium	10
DADG7NFN10	7"	No Hole	Fine	10
DADH7NCR10	7"	7/8"	Coarse	10
DADH7NMD10	7"	7/8"	Medium	10
DADH7NFN10	7"	7/8"	Fine	10

\*\*Use with long hook backing pads – found on page 70

### NON-WOVEN HAND PADS



CAT #	LGTH	WIDTH	GRIT	COLOR	PACK
DAXU7ACR10	6"	9"	Coarse	Brown	10
DAXU7AGP10	6"	9"	General Purpose	Green	10
DAXU7AFN10	6"	9"	Fine	Maroon	10
DAXU7AVF10	6"	9"	Very Fine	Green	10
DAXU7AUF10	6"	9"	Ultra Fine	Gray	10
DAXU7ANA10	6"	9"	No Abrasive	White	10

### NON-WOVEN FLAP DISCS



CAT #	DIA.	ARBOR	GRIT	MAX RPM	PACK
DAAB7GCR05	4-1/2"	7/8"	Coarse	13,300	5
DAAB7GMD05	4-1/2"	7/8"	Medium	13,300	5
DAAB7GVF05	4-1/2"	7/8"	Very Fine	13,300	5
DAAH7GCR05	4-1/2"	5/8"-11	Coarse	13,300	5
DAAH7GMD05	4-1/2"	5/8"-11	Medium	13,300	5
DAAH7GVF05	4-1/2"	5/8"-11	Very Fine	13,300	5



### POWER STRIP DISCS



CAT #	DIA.	ARBOR	MAX RPM	PACK
DAAB7GPW05	4-1/2"	7/8"	13,300	10
DAAH7GPW05	4-1/2"	5/8"-11	13,300	10




## COATED FLOORING

### HP HIGH Performance™ EDGE SANDING DISC



CAT #	DIA.	ARBOR	GRIT	TYPE	APPLICATION	PACK
DWAB0716P	7"	7/8"	C16	Paper	Wooden, Tile, & Concrete Floors	25
DWAB0720C	7"	7/8"	C20	Cloth	Wooden, Tile, & Concrete Floors	25
DWAB0720P	7"	7/8"	C20	Paper	Wooden, Tile, & Concrete Floors	25
DWAB0724P	7"	7/8"	C24	Paper	Wooden, Tile, & Concrete Floors	25
DWAB0736	7"	7/8"	C36	Paper	Wooden, Tile, & Concrete Floors	25
DWAB0740	7"	7/8"	C40	Paper	Wooden, Tile, & Concrete Floors	25
DWAB0750	7"	7/8"	C50	Paper	Wooden, Tile, & Concrete Floors	25
DWAB0760	7"	7/8"	C60	Paper	Wooden, Tile, & Concrete Floors	25
DWAB0780	7"	7/8"	C80	Paper	Wooden, Tile, & Concrete Floors	25
DWAB0710	7"	7/8"	C100	Paper	Wooden, Tile, & Concrete Floors	25
DWAB0712	7"	7/8"	C120	Paper	Wooden, Tile, & Concrete Floors	25

### HP HIGH Performance™ FLOOR SANDING BELT




CAT #	WIDTH	LENGTH	GRIT	APPLICATION	PACK
DWAC8924	8"	19"	C24	Wooden, Tile, & Concrete Floors	5
DWAC8936	8"	19"	C36	Wooden, Tile, & Concrete Floors	5
DWAC8940	8"	19"	C40	Wooden, Tile, & Concrete Floors	10
DWAC8950	8"	19"	C50	Wooden, Tile, & Concrete Floors	10
DWAC8960	8"	19"	C60	Wooden, Tile, & Concrete Floors	10
DWAC8980	8"	19"	C80	Wooden, Tile, & Concrete Floors	10
DWAC8912	8"	19"	C120	Wooden, Tile, & Concrete Floors	10
DWAC8910	8"	19"	C100	Wooden, Tile, & Concrete Floors	10

## COATED FLOORING (continued)



**FLOOR  
SANDING  
DISC**




CAT #	DIA.	ARBOR	GRIT	TYPE	APPLICATION	PACK
DWAB1612C	16"	2"	C12	Cloth	Wooden, Tile, Concrete Floors	25
DWAB1612P	16"	2"	C12	Paper	Wooden, Tile, Concrete Floors	25
DWAB1616C	16"	2"	C16	Cloth	Wooden, Tile, Concrete Floors	25
DWAB1616P	16"	2"	C16	Paper	Wooden, Tile, Concrete Floors	25
DWAB1620C	16"	2"	C20	Cloth	Wooden, Tile, Concrete Floors	25
DWAB1620P	16"	2"	C20	Paper	Wooden, Tile, Concrete Floors	25
DWAB1624P	16"	2"	C24	Paper	Wooden, Tile, Concrete Floors	25
DWAB1636	16"	2"	C36	Paper	Wooden, Tile, Concrete Floors	25
DWAB1640	16"	2"	C40	Paper	Wooden, Tile, Concrete Floors	25
DWAB1660	16"	2"	C60	Paper	Wooden, Tile, Concrete Floors	25
DWAB1680	16"	2"	C80	Paper	Wooden, Tile, Concrete Floors	25
DWAB1610	16"	2"	C100	Paper	Wooden, Tile, Concrete Floors	25
DWAB1712P	17"	2"	C12	Paper	Wooden, Tile, Concrete Floors	25
DWAB1716C	17"	2"	C16	Cloth	Wooden, Tile, Concrete Floors	25
DWAB1716P	17"	2"	C16	Paper	Wooden, Tile, Concrete Floors	25
DWAB1720C	17"	2"	C20	Cloth	Wooden, Tile, Concrete Floors	25

CAT #	DIA.	ARBOR	GRIT	TYPE	APPLICATION	PACK
DWAB1720P	17"	2"	C20	Paper	Wooden, Tile, Concrete Floors	25
DWAB1724C	17"	2"	C24	Cloth	Wooden, Tile, Concrete Floors	25
DWAB1724P	17"	2"	C24	Paper	Wooden, Tile, Concrete Floors	25
DWAB1736	17"	2"	C36	Paper	Wooden, Tile, Concrete Floors	25
DWAB1740	17"	2"	C40	Paper	Wooden, Tile, Concrete Floors	25
DWAB1760	17"	2"	C60	Paper	Wooden, Tile, Concrete Floors	25
DWAB1780	17"	2"	C80	Paper	Wooden, Tile, Concrete Floors	25
DWAB1710	17"	2"	C100	Paper	Wooden, Tile, Concrete Floors	25
DWAB2012	20"	2"	C12	Paper	Wooden, Tile, Concrete Floors	25
DWAB2012P	20"	2"	C12	Paper	Wooden, Tile, Concrete Floors	25
DWAB2016P	20"	2"	C16	Paper	Wooden, Tile, Concrete Floors	25
DWAB2020P	20"	2"	C36	Paper	Wooden, Tile, Concrete Floors	25
DWAB2036	20"	2"	C36	Paper	Wooden, Tile, Concrete Floors	25
DWAB2060	20"	2"	C60	Paper	Wooden, Tile, Concrete Floors	25
DWAB2080	20"	2"	C80	Paper	Wooden, Tile, Concrete Floors	25
DWAB2010	20"	2"	C100	Paper	Wooden, Tile, Concrete Floors	25



**FLOOR  
SANDING  
SHEET**




CAT #	WIDTH	LENGTH	GRIT	TYPE	APPLICATION	PACK
DWAB5216P	8"	19-1/2"	C16	Paper	Wooden, Tile, Concrete Floors	25
DWAB5220C	8"	19-1/2"	C20	Cloth	Wooden, Tile, Concrete Floors	25
DWAB5220P	8"	19-1/2"	C20	Paper	Wooden, Tile, Concrete Floors	25
DWAB5224C	8"	19-1/2"	C24	Cloth	Wooden, Tile, Concrete Floors	25
DWAB5224P	8"	19-1/2"	C24	Paper	Wooden, Tile, Concrete Floors	25
DWAB5236	8"	19-1/2"	C36	Paper	Wooden, Tile, Concrete Floors	25
DWAB5240	8"	19-1/2"	C40	Paper	Wooden, Tile, Concrete Floors	25
DWAB5250	8"	19-1/2"	C50	Paper	Wooden, Tile, Concrete Floors	25
DWAB5260	8"	19-1/2"	C60	Paper	Wooden, Tile, Concrete Floors	25
DWAB5280	8"	19-1/2"	C80	Paper	Wooden, Tile, Concrete Floors	25
DWAB5210	8"	19-1/2"	C100	Paper	Wooden, Tile, Concrete Floors	25
DWAB5212	8"	19-1/2"	C120	Paper	Wooden, Tile, Concrete Floors	25
DWAB3616C	8"	20"	C16	Cloth	Wooden, Tile, Concrete Floors	25
DWAB3616P	8"	20"	C16	Paper	Wooden, Tile, Concrete Floors	25
DWAB3620C	8"	20"	C20	Cloth	Wooden, Tile, Concrete Floors	25
DWAB3620P	8"	20"	C20	Paper	Wooden, Tile, Concrete Floors	25
DWAB3624C	8"	20"	C24	Cloth	Wooden, Tile, Concrete Floors	25
DWAB3624P	8"	20"	C24	Paper	Wooden, Tile, Concrete Floors	25

CAT #	WIDTH	LENGTH	GRIT	TYPE	APPLICATION	PACK
DWAB3636	8"	20"	C36	Paper	Wooden, Tile, Concrete Floors	25
DWAB3640	8"	20"	C40	Paper	Wooden, Tile, Concrete Floors	25
DWAB3650	8"	20"	C50	Paper	Wooden, Tile, Concrete Floors	25
DWAB3660	8"	20"	C60	Paper	Wooden, Tile, Concrete Floors	25
DWAB3680	8"	20"	C80	Paper	Wooden, Tile, Concrete Floors	25
DWAB3610	8"	20"	C100	Paper	Wooden, Tile, Concrete Floors	25
DWAB3612	8"	20"	C120	Paper	Wooden, Tile, Concrete Floors	25
DWAB1816C	12"	18" PSA	C16	Cloth	Wooden, Tile, Concrete Floors	10
DWAB1816P	12"	18" PSA	C16	Paper	Wooden, Tile, Concrete Floors	10
DWAB1820C	12"	18" PSA	C20	Cloth	Wooden, Tile, Concrete Floors	10
DWAB1820P	12"	18" PSA	C20	Paper	Wooden, Tile, Concrete Floors	10
DWAB1824P	12"	18" PSA	C24	Paper	Wooden, Tile, Concrete Floors	10
DWAB1836	12"	18" PSA	C36	Paper	Wooden, Tile, Concrete Floors	10
DWAB1850	12"	18" PSA	C50	Paper	Wooden, Tile, Concrete Floors	10
DWAB1860	12"	18" PSA	C60	Paper	Wooden, Tile, Concrete Floors	10
DWAB1880	12"	18" PSA	C80	Paper	Wooden, Tile, Concrete Floors	10
DWAB1810	12"	18" PSA	C100	Paper	Wooden, Tile, Concrete Floors	10
DWAB1812	12"	18" PSA	C120	Paper	Wooden, Tile, Concrete Floors	10


## NON-WOVEN FLOORING



**FLOOR MESH  
SCREEN DISCS  
& SHEETS**




CAT #	DIA	GRIT	APPLICATION	PACK
DWAJ1760	17"	C60	Wood, Concrete, Tile Flooring	10
DWAJ1780	17"	C80	Wood, Concrete, Tile Flooring	10
DWAJ1710	17"	C100	Wood, Concrete, Tile Flooring	10
DWAJ1712	17"	C120	Wood, Concrete, Tile Flooring	10
DWAJ1715	17"	C150	Wood, Concrete, Tile Flooring	10
DWAJ1718	17"	C180	Wood, Concrete, Tile Flooring	10
DWAJ1722	17"	C220	Wood, Concrete, Tile Flooring	10



CAT #	WIDTH	LENGTH	GRIT	APPLICATION	PACK
DWAJ1822	12"	18"	C220	Wood, Concrete, Tile Flooring	10
DWAJ1860	12"	18"	C60	Wood, Concrete, Tile Flooring	10
DWAJ1880	12"	18"	C80	Wood, Concrete, Tile Flooring	10
DWAJ1810	12"	18"	C100	Wood, Concrete, Tile Flooring	10
DWAJ1812	12"	18"	C120	Wood, Concrete, Tile Flooring	10
DWAJ1815	12"	18"	C150	Wood, Concrete, Tile Flooring	10
DWAJ1818	12"	18"	C180	Wood, Concrete, Tile Flooring	10

(continued on next page)

## NON-WOVEN FLOORING *(continued)*



CAT #	DIA	APPLICATION	PACK
DWAJ172B	17"	Wood & Tile Heavy Duty Finishing	5
DWAJ172G	17"	Wood & Tile Cleaning & Scrubbing	5
DWAJ172R	17"	Wood & Tile Light Polishing After Treatment	5
DWAJ172T	17"	Wood & Tile Light Polishing & Buffing	5
DWAJ172W	17"	Wood & Tile Fine Polishing	5

CAT #	WIDTH	LENGTH	APPLICATION	PACK
DWAJ182R	12"	18"	Wood & Tile Light Polishing After Treatment	5
DWAJ182W	12"	18"	Wood & Tile Fine Polishing	5

## DIAMONDS



**METAL CUTTING**



CAT #	DIA.	EDGE THICKNESS	ARBOR SIZE	APPLICATION	MAX RPM
DW8500	14"	3/32"	1"	Metal Cutting	4,300



**100X LIFE\*\***  
\*\*vs. Standard DeWALT Chop Saw Blades

SCAN FOR MORE INFO



**CUP GRINDING WHEELS**



CAT #	DIA.	ARBOR	NUMBER OF ROWS	APPLICATION	MAX RPM
DW4770	4"	5/8"-11	Single Row	Heavy-Duty Masonry Grinding	15,200
DW4772	4"	5/8"-11	Double Row	General Purpose Masonry Grinding	15,200
DW4772T	4"	5/8"-11	Turbo	Smooth Finish Masonry Grinding	15,200
DW4774	4-1/2"	5/8"-11	Double Row	General Purpose Masonry Grinding	13,300
DW4776	5"	5/8"-11	Single Row	Heavy-Duty Masonry Grinding	12,200
DW4777	5"	5/8"-11	Double Row	General Purpose Masonry Grinding	12,200
DW4777T	5"	5/8"-11	Turbo	Smooth Finish Masonry Grinding	12,200
DW4771	7"	5/8"-11	Single Row	Heavy-Duty Masonry Grinding	8,600
DW4773	7"	5/8"-11	Double Row	General Purpose Masonry Grinding	8,600
DW4773T	7"	5/8"-11	Turbo	Smooth Finish Masonry Grinding	8,600



**SEGMENTED BLADES**



CAT #	DIA.	EDGE THICKNESS	SEGMENT HEIGHT	ARBOR SIZE	APPLICATION	MAX RPM
DW4711	4"	.080"	7mm	5/8", 7/8", 20mm	Masonry Cutting	15,200
DW4713	4-1/2"	.080"	7mm	7/8"	Masonry Cutting	13,300
DW4778	5"	.080"	7mm	7/8"	Masonry Cutting	12,200
DW4714	7"	.095"	7mm	5/8", 7/8", ♦	Masonry Cutting	8,700
DW4716	12"	.125"	7mm	1", 20mm	General Purpose Cutting	6,300
DW4747	12"	.125"	7mm	1", 20mm	Fast Cutting	6,300
DW4743	12"	.125"	7mm	1", 20mm	Cured Concrete Cutting	6,300
DW4745	12"	.125"	7mm	1", 20mm	Asphalt or Green Concrete Cutting	6,300
DWA47421	14"	.125"	7mm	1", 20mm	General Purpose Cutting	5,400
DW4748	14"	.125"	7mm	1", 20mm	Fast Cutting	5,400
DW4744	14"	.125"	7mm	1", 20mm	Cured Concrete Cutting	5,400
DW4746	14"	.125"	7mm	1", 20mm	Asphalt or Green Concrete Cutting	5,400



**SEGMENTED BLADES**



CAT #	DIA.	EDGE THICKNESS	SEGMENT HEIGHT	ARBOR SIZE	APPLICATION	MAX RPM
DW4781	4"	.080"	7mm	5/8", 7/8", 20mm	Masonry Cutting	15,200
DW4782	4-1/2"	.080"	7mm	7/8"	Masonry Cutting	13,300
DW4783	5"	.080"	7mm	7/8"	Masonry Cutting	12,200
DW4784	7"	.095"	7mm	5/8", 7/8", ♦	Masonry Cutting	8,700



*(continued on next page)*

## DIAMONDS *(continued)*

### **XP<sup>™</sup> EXTENDED Performance** TUCK POINTING BLADES



CAT #	DIA.	EDGE THICKNESS	SEGMENT HEIGHT	ARBOR SIZE	TYPE	APPLICATION	MAX RPM
DW4710	4"	.25"	8mm	5/8", 7/8", 20mm	Standard	Tuck Pointing	15,200
DW4710S	4"	.25"	8mm	5/8", 7/8", 20mm	Sandwich	Tuck Pointing	15,200
DW4740	4-1/2"	.25"	8mm	7/8"	Standard	Tuck Pointing	13,300
DW4740S	4-1/2"	.25"	8mm	7/8"	Sandwich	Tuck Pointing	13,300
DW4741	5"	.25"	8mm	7/8"	Standard	Tuck Pointing	12,200
DW4741S	5"	.25"	8mm	7/8"	Sandwich	Tuck Pointing	12,200
DW4739	6"	.25"	8mm	7/8"	Standard	Tuck Pointing	10,100
DW4739S	6"	.25"	8mm	7/8"	Sandwich	Tuck Pointing	10,100



### **XP<sup>™</sup> EXTENDED Performance** TURBO BLADES



CAT #	DIA.	EDGE THICKNESS	SEGMENT HEIGHT	ARBOR SIZE	APPLICATION	MAX RPM	PACK
DW4700	4"	.080"	7.5mm	5/8", 7/8", 20mm	Masonry Cutting	15,200	1
DW4701	4-1/2"	.080"	7.5mm	7/8"	Masonry Cutting	13,300	1
DW4701B**	4-1/2"	.080"	7.5mm	7/8"	Masonry Cutting	13,300	10
DW4786	5"	.080"	7.5mm	7/8"	Masonry Cutting	12,200	1
DW4702	7"	.090"	7.5mm	5/8", 7/8", ♦	Masonry Cutting	8,700	1
DW4702B**	7"	.090"	7.5mm	5/8", 7/8", ♦	Masonry Cutting	8,700	10
DW4703	8"	.090"	7.5mm	5/8", 7/8", ♦	Masonry Cutting	8,700	1
DW4704	12"	.110"	7.5mm	1", 20mm	Masonry Cutting	6,300	1



\*\*Bulk

### **HP<sup>™</sup> HIGH Performance** TURBO BLADES



CAT #	DIA.	EDGE THICKNESS	SEGMENT HEIGHT	ARBOR SIZE	APPLICATION	MAX RPM	PACK
DW4724	4"	.080"	7mm	5/8", 7/8", 20mm	Masonry Cutting	15,200	1
DW4724B**	4"	.080"	7mm	5/8", 7/8", 20mm	Masonry Cutting	15,200	10
DW4725	4-1/2"	.080"	7mm	7/8"	Masonry Cutting	13,300	1
DW4725B**	4-1/2"	.080"	7mm	7/8"	Masonry Cutting	13,300	10
DW4727	5"	.080"	7mm	7/8"	Masonry Cutting	12,200	1
DW4712	7"	.090"	7mm	5/8", 7/8", ♦	Masonry Cutting	8,700	1
DW4712B**	7"	.090"	7mm	5/8", 7/8", ♦	Masonry Cutting	8,700	10



\*\*Bulk

### **XP4<sup>™</sup>** TILE BLADES



CAT #	DIA.	EDGE THICKNESS	SEGMENT HEIGHT	ARBOR SIZE	APPLICATION	MAX RPM
DW4735	4"	.060"	5/8", 7/8", 20mm	8mm	Porcelain Tile - Wet or Dry	15,200
DW4738	4-3/8"	.060"	5/8", 7/8"	8mm	Porcelain Tile - Wet or Dry	13,300
DW4765	4-1/2"	.060"	8mm	5/8", 7/8", 20mm	Porcelain Tile - Wet or Dry	13,300
DW4766	7"	.060"	8mm	5/8"	Porcelain Tile - Wet	8,700
DW4764	10"	.060"	8mm	5/8"	Porcelain Tile - Wet	5,400



### **XP<sup>™</sup> EXTENDED Performance** TILE BLADES




CAT #	DIA.	EDGE THICKNESS	SEGMENT HEIGHT	ARBOR SIZE	APPLICATION	MAX RPM
DW4729	4"	.060"	5mm	5/8", 7/8", 20mm	Ceramic Tile - Wet or Dry	15,200
DW4760	7"	.060"	6.5mm	5/8"	Ceramic Tile - Wet	8,700
DW4767	8"	.060"	6.0mm	5/8"	Ceramic Tile - Wet	7,600
DW4761	10"	.060"	6.5mm	5/8"	Ceramic Tile - Wet	5,400
DW4762	10"	.060"	8mm	5/8"	Porcelain Tile - Wet	5,400



*(continued on next page)*

## DIAMONDS *(continued)*

### HP HIGH Performance TILE BLADES



CAT #	DIA.	EDGE THICKNESS	SEGMENT HEIGHT	ARBOR SIZE	APPLICATION	MAX RPM
DW4790	4"	.060"	5mm	5/8", 7/8", 20mm	Tile - Wet	15,200
DW4791	7"	.060"	5mm	5/8"	Tile - Wet	8,700
DW4792	10"	.060"	5mm	5/8"	Tile - Wet	5,400

## POLISHING

### POLISHING PADS




CAT #	DIA.	ARBOR	MATERIAL	PACK
DW4980	6"	5/8"	Cotton	1
DW4988	7"	-	Wool	1
DW4989	7"	-	Cotton Blend	1
DW4985	7"	5/8"-11	Rubber Backing Pad	1
DW4985CL	7"	5/8"-11	Cotton & Backing Pad	1

## WIRE BRUSHES

### XP EXTENDED Performance WIRE WHEELS




CAT #	DIA.	WIRE SIZE	ARBOR	WIRE STYLE	MATERIAL	MAX RPM	PACK	CAT #	DIA.	WIRE SIZE	ARBOR	WIRE STYLE	MATERIAL	MAX RPM	PACK
DW4926	4"	.020"	5/8"-11	Stringer Bead	Carbon	20,000	6	DW49253	4"	.020"	5/8"-11	Cable Twist	Carbon	20,000	6
DW49250	5"	.020"	5/8"-11	Stringer Bead	Carbon	12,000	6	DW49254	5"	.020"	5/8"-11	Cable Twist	Carbon	12,000	6
DW4936	6"	.020"	5/8"-11	Stringer Bead	Carbon	12,000	6	DW4938	6"	.020"	5/8"-11	Cable Twist	Carbon	12,000	6
DW4927	4"	.020"	5/8"-11	Stringer Bead	Stainless	20,000	6	DW49255	4"	.020"	5/8"-11	Cable Twist	Stainless	20,000	6
DW49251	5"	.020"	5/8"-11	Stringer Bead	Stainless	12,000	6	DW49256	5"	.020"	5/8"-11	Cable Twist	Stainless	12,000	6
DW49252	6"	.020"	5/8"-11	Stringer Bead	Stainless	12,000	6	DW49257	6"	.020"	5/8"-11	Cable Twist	Stainless	12,000	6



### HP HIGH Performance WIRE WHEELS



CAT #	DIA.	WIRE SIZE	ARBOR	WIRE STYLE	MATERIAL	MAX RPM	PACK	CAT #	DIA.	WIRE SIZE	ARBOR	WIRE STYLE	MATERIAL	MAX RPM	PACK
DW4925	4"	.020"	5/8"-11	Stringer Bead	Carbon	20,000	1	DW49253	4"	.020"	5/8"-11	Cable Twist	Carbon	20,000	6
DW49201	5"	.020"	5/8"-11	Stringer Bead	Carbon	12,000	1	DW4930	4"	.020"	5/8"-11	Cable Twist	Carbon	20,000	1
DW49202	6"	.020"	5/8"-11	Stringer Bead	Carbon	12,000	1	DW4935	4"	.020"	10mm x 1-1/4"	Cable Twist	Carbon	20,000	1
DW49202B	6"	.020"	5/8"-11	Stringer Bead	Carbon	12,000	1	DW49203	5"	.020"	5/8"-11	Cable Twist	Carbon	12,000	1
DW49204	4"	.020"	5/8"-11	Stringer Bead	Stainless Steel	20,000	1	DW4937	6"	.020"	5/8"-11	Cable Twist	Carbon	6,000	1
DW49504B	4"	.020"	5/8"-11	Stringer Bead	Stainless Steel	20,000	6								



### HP HIGH Performance SMALL WIRE WHEELS



CAT #	DIA.	WIRE SIZE	FACE WIDTH	TRIM LENGTH	SHANK	WIRE STYLE	WHEEL TYPE	MATERIAL	MAX RPM	PACK
DW4903	3"	.014"	1/2"	3/4"	1/4"	Crimped	Circular	Carbon	20,000	12
DW49007	2"	.014"	1/2"	1/2"	1/4"	Crimped	Flared	Carbon	20,000	12
DW49008	3"	.014"	1/2"	15/16"	1/4"	Crimped	Flared	Carbon	20,000	12



(continued on next page)

## WIRE BRUSHES *(continued)*

### **XP** EXTENDED Performance CUP BRUSHES



CAT #	DIA.	WIRE SIZE	WIRE STYLE	MATERIAL	ARBOR	TRIM LENGTH	MAX RPM	PACK
DW49150	3"	.014"	Crimped	Carbon	5/8"-11	13/16"	14,000	6
DW49151	4"	.014"	Crimped	Carbon	5/8"-11	1-1/8"	9,000	6
DW49152	5"	.014"	Crimped	Carbon	5/8"-11	1-3/8"	8,000	4
DW49153	6"	.014"	Crimped	Carbon	5/8"-11	1-3/8"	6,600	4
DW49154	3"	.014"	Crimped	Stainless	5/8"-11	13/16"	14,000	6
DW49155	4"	.014"	Crimped	Stainless	5/8"-11	1-1/8"	9,000	6
DW49156	5"	.014"	Crimped	Stainless	5/8"-11	1-3/8"	8,000	4
DW49157	3"	.020"	Knotted	Carbon	5/8"-11	7/8"	14,000	6
DW49158	4"	.020"	Knotted	Carbon	5/8"-11	1-1/8"	9,000	6
DW49159	6"	.020"	Knotted	Carbon	5/8"-11	1-3/8"	6,600	4
DW49160	3"	.020"	Knotted	Stainless	5/8"-11	7/8"	14,000	6
DW49161	4"	.020"	Knotted	Stainless	5/8"-11	1-1/8"	9,000	6
DW49162	6"	.020"	Knotted	Stainless	5/8"-11	1-3/8"	6,600	4



### **HP** HIGH Performance CUP BRUSHES



CAT #	DIA.	WIRE SIZE	WIRE STYLE	MATERIAL	ARBOR	TRIM LENGTH	MAX RPM	PACK
DW4920	3"	.014"	Crimped	Carbon	5/8"-11	13/16"	14,000	1
DW49101	4"	.014"	Crimped	Carbon	5/8"-11	1-1/8"	9,000	1
DW4922	5"	.014"	Crimped	Carbon	5/8"-11	1-3/8"	8,000	1
DW49102	6"	.014"	Crimped	Carbon	5/8"-11	1-3/8"	6,600	1
DW4910	3"	.020"	Knotted	Carbon	5/8"-11	7/8"	14,000	1
DW4915	3"	.020"	Knotted	Carbon	10mm x 1.25"	7/8"	14,000	1
DW4916	4"	.020"	Knotted	Carbon	5/8"-11	1-1/8"	9,000	1
DW4917	6"	.020"	Knotted	Carbon	5/8"-11	1-3/8"	6,600	1
DW4910S	3"	.020"	Knotted	Stainless	5/8" - 11		14,000	1



### **XP** EXTENDED Performance END BRUSHES



CAT #	DIA.	WIRE SIZE	WIRE STYLE	MATERIAL	TRIM LENGTH	MAX RPM	PACK	CAT #	DIA.	WIRE SIZE	WIRE STYLE	MATERIAL	TRIM LENGTH	MAX RPM	PACK
DW49050	3/4"	.020"	Crimped	Carbon	1"	22,000	12	DW49054	3/4"	.020"	Knotted	Carbon	1"	20,000	12
DW49051	1"	.020"	Crimped	Carbon	1"	22,000	12	DW49055	1"	.020"	Knotted	Carbon	1"	20,000	12
DW49052	3/4"	.020"	Crimped	Stainless	1"	22,000	12	DW49056	3/4"	.020"	Knotted	Stainless	1"	20,000	12
DW49053	1"	.020"	Crimped	Stainless	1"	22,000	12	DW49057	1"	.020"	Knotted	Stainless	1"	20,000	12



### **HP** HIGH Performance END BRUSHES



CAT #	DIA.	WIRE SIZE	WIRE STYLE	MATERIAL	TRIM LENGTH	MAX RPM	PACK	CAT #	DIA.	WIRE SIZE	WIRE STYLE	MATERIAL	TRIM LENGTH	MAX RPM	PACK
DW49001	3/4"	.014"	Crimped	Carbon	1"	20,000	12	DW49004	3/4"	.014"	Knotted	Carbon	1-3/8"	20,000	12
DW4901	1"	.014"	Crimped	Carbon	1-1/8"	20,000	1	DW49005	1"	.014"	Knotted	Carbon	1-3/8"	20,000	12
DW4901B	1"	.014"	Crimped	Carbon	1-3/8"	20,000	12	DW49006	3/4"	.020"	Knotted	Carbon	13/16"	20,000	12
DW49002	3/4"	.020"	Crimped	Carbon	1-3/8"	20,000	12	DW4902	1"	.020"	Knotted	Carbon	1"	20,000	1
DW49003	1"	.020"	Crimped	Carbon	1-1/8"	20,000	12	DW4902B	1"	.020"	Knotted	Carbon	1"	20,000	12



### **HP** HIGH Performance BENCH GRINDER BRUSHES



CAT #	DIA.	WIRE SIZE	WIRE STYLE	MATERIAL	ARBOR	WIDTH	LENGTH	MAX RPM	PACK
DW4904	6"	.014"	Crimped	Carbon	5/8"-1/2"	3/4"	1-1/8"	6,000	1
DW4905	6"	.014"	Crimped	Carbon	5/8"-1/2"	1"	1-1/8"	6,000	1
DW4906	8"	.014"	Crimped	Carbon	5/8"	3/4"	1-9/16"	4,000	1
DW4907	8"	.014"	Crimped	Carbon	5/8"	1"	1-9/16"	4,000	1
DW4908	10"	.014"	Crimped	Carbon	3/4"	1-9/16"	2-1/2"	3,600	1



## WIRE BRUSHES *(continued)*


### SCRATCH BRUSHES

CAT #	SIZE	HANDLE STYLE	WIRE SIZE	MATERIAL	PACK	CAT #	SIZE	HANDLE STYLE	WIRE SIZE	MATERIAL	PACK
DW49701	4 x 16	Shoe Handle	.014"	Carbon	12	DW49705	3 x 7	Angled Back	.014"	Carbon	36
DW49702	4 x 16	Shoe Handle	.012"	Stainless	12	DW49706	3 x 7	Angled Back	.012"	Stainless	36
DW49703	3 x 19	Curved Handle	.014"	Carbon	12	DW49707	3 x 7	Small Plastic	.006"	Brass	36
DW49704	3 x 19	Curved Handle	.012"	Stainless	12	DW49708	3 x 7	Small Plastic	.006"	Stainless	36



## ROAD CONSTRUCTION

### HP HIGH Performance CONSTRUCTION WIRE BRUSH



CAT #	DIA.	WIRE SIZE	WIDTH	ARBOR	APPLICATION	MATERIAL	RPM	PACK
DW49259	12"	.035"	3/8"	1"	Concrete Masonry	Carbon	5,000	2

## ABRASIVE ACCESSORIES

### FIBER DISC BACKING PADS



CAT #	DIA.	ARBOR	MATERIAL	MAX RPM
DW4939	4-1/2"	7/8"	Paper	16,000
DW4940	4"	5/8"-11 & M10 x 1.25"	Medium Rubber	12,000
DW4942	4-1/2"	5/8"-11	Paper	16,000
DW4945	4-1/2"	5/8"-11	Rubber	12,000
DW4950	5"	7/8"	Phenolic Disc	6,000
DW4955	7"	7/8"	Phenolic Disc	6,000
DW4956	9"	7/8"	Phenolic Disc	6,000
DAJHXGMD01	4-1/2"	5/8"-11	Medium Rubber Turbo	11,000
DAJHXHMD01	5"	5/8"-11	Medium Rubber Turbo	10,000
DAJHXKMD01	7"	5/8"-11	Medium Rubber Turbo	8,500
DAJHXKHD01	7"	5/8"-11	Firm Rubber Turbo	8,500
DAJHXMMMD01	9"	5/8"-11	Medium Rubber Turbo	6,500
DAJHXMH01	9"	5/8"-11	Firm Rubber Turbo	6,500

### QUICK LOCK FIBER DISC BACKING PADS



CAT #	DIA.	ARBOR	MATERIAL	MAX RPM
DAJHXGQM01	4-1/2"	5/8"-11	Medium	13,300
DAJHXHQM01	5"	5/8"-11	Medium	12,200
DAJHXKQM01	7"	5/8"-11	Medium	8,700
DAJHXKQH01	7"	5/8"-11	Firm	8,700

### HANDLE



CAT #	DESCRIPTION	SIZE
DAMHXX01	Hand Pad Handle	6" x 4-1/2"

### ADAPTERS



CAT #	DESCRIPTION
DW4900	Spindle Adapter M10 x 1.25" to 5/8"-11
DW4706	Backing Flange for 5/8"-11 Shaft Grinders to Mount Type 1 Cutoff Wheels

### QUICK CHANGE MANDRELS

CAT #	DESCRIPTION	DIA.	ARBOR	SHANK	MAX RPM
DAMQ1XXX01	Small	1"-1-1/2"	QDC	1/4"	30,000
DAMQ2XXX01	Large	2"-4"	QDC	1/4"	20,000
DAMR1MXX01	Medium	1"-1-1/2"	QRC	1/4"	25,000
DAMR1FXX01	Firm	1"-1-1/2"	QRC	1/4"	30,000
DAMR2MXX01	Medium	2"	QRC	1/4"	25,000
DAMR2FXX01	Firm	2"	QRC	1/4"	30,000
DAMR3MXX01	Medium	3"	QRC	1/4"	20,000
DAMR3FXX01	Firm	3"	QRC	1/4"	20,000
DAMM1MXX01	Medium	1-1/2"	QMC	1/4"	25,000
DAMM1FXX01	Firm	1-1/2"	QMC	1/4"	30,000
DAMM2MXX01	Medium	2"	QMC	1/4"	25,000
DAMM2FXX01	Firm	2"	QMC	1/4"	30,000
DAMM3MXX01	Medium	3"	QMC	1/4"	20,000
DAMM3FXX01	Firm	3"	QMC	1/4"	20,000

### CARTRIDGE ROLL MANDRELS



CAT #	PILOT SIZE	PILOT LENGTH	ROLL LENGTH	SHANK SIZE	SHANK LENGTH	OVERALL LENGTH	MAX RPM
DAMCX83401	1/8"	3/4"	1"	1/4"	1-1/4"	2-1/2"	25,000
DAMCX81001	1/8"	1"	1-1/2"	1/4"	1-1/4"	2-3/4"	25,000
DAMCX81501	1/8"	1-1/2"	2"	1/4"	1-1/4"	3-1/4"	25,000

### HOOK & LOOP BACKING PADS\*\*



CAT #	DESCRIPTION	DIA.	ARBOR	MAX RPM
DAPHXGLH01	Long Hook	4-1/2"	5/8"-11	13,300
DAPHXHLH01	Long Hook	5"	5/8"-11	13,300
DAPHXKLH01	Long Hook	7"	5/8"-11	8,700

\*\*For use with non-woven discs

A BLADE FOR EVERY TRADE



A COMPLETE RANGE OF PRECISION BLADES

**PRECISION™**

IDEAL FOR TRIM CARPENTERS:

Trim Installation, Stair Installation,  
Cabinet Installation

- Trim
- Hardwood Floor
- Maple
- Oak
- Molding



A COMPLETE RANGE OF CONSTRUCTION BLADES

**CONSTRUCTION**

IDEAL FOR GENERAL CONTRACTORS:

Framing, Deck Building

- Dimensional Lumber
- OSB
- Plywood



A COMPLETE RANGE OF WOODWORKING BLADES

**WOODWORKING**

IDEAL FOR WOODWORKERS:

Cabinet Manufacturing, Production  
Woodshops and Furniture Shops

- Hardwoods
- Cherry
- Maple
- Oak
- Hickory
- Melamine

## PRECISION SAW BLADES

### PRECISION Framing™



CAT #	DESCRIPTION	KERF TYPE	DIA.	TEETH	ARBOR	HOOK ANGLE	KERF	PLATE THICKNESS	TOOTH GRIND
DW9199	Framing Blade	Thin Kerf	6-1/2"	24	5/8"	18°	.063"	.039"	ATB
DW9196	Cross Cutting Blade	Thin Kerf	6-1/2"	40	5/8"	18°	.063"	.039"	ATB
DW3199	Framing Blade	Thin Kerf	7-1/4"	24	5/8"-♦	18°	.063"	.039"	ATB
DW3599B10**	Framing Blade	Thin Kerf	7-1/4"	24	5/8"-♦	18°	.063"	.039"	ATB
DW3194	Cross Cutting Blade	Thin Kerf	7-1/4"	40	5/8"-♦	18°	.063"	.039"	ATB
DW3594B10**	Cross Cutting Blade	Thin Kerf	7-1/4"	40	5/8"-♦	18°	.063"	.039"	ATB
DW3196	Fine Cutting Blade	Thin Kerf	7-1/4"	60	5/8"-♦	18°	.063"	.039"	ATB
DW3596B10**	Fine Cutting Blade	Thin Kerf	7-1/4"	60	5/8"-♦	18°	.063"	.039"	ATB
DW3185	Cross Cutting Blade	Thin Kerf	8-1/4"	40	5/8"-♦	18°	.071"	.047"	ATB

\*\*Bulk



### PRECISION Trim™



CAT #	DESCRIPTION	DIA.	TEETH	ARBOR	HOOK ANGLE	KERF	PLATE THICKNESS	TOOTH GRIND	MAX RPM
DW7118PT	Premium Finish	8-1/2"	60	5/8"	-5°	.094"	.063"	ATB	9,000
DW7124PT	Fast Ripping	10"	24	5/8"	20°	.098"	.071"	FT	6,000
DW7140PT	General Purpose	10"	40	5/8"	20°	.098"	.071"	ATB	6,000
DW7150PT	Combination	10"	50	5/8"	15°	.098"	.071"	ATB+R	6,000
DW3215PT	Smooth Crosscutting	10"	60	5/8"	7°	.098"	.071"	ATB	6,000
DW3218PT	Ultra Fine Finish	10"	80	5/8"	7°	.098"	.071"	ATB	6,000
DW3216PT	Smooth Crosscutting	12"	60	1"	7°	.106"	.079"	ATB	4,800
DW3232PT	Ultra Fine Finish	12"	80	1"	7°	.106"	.079"	ATB	4,800
DW72100PT	Ultra Miter	12"	100	1"	-5°	.106"	.079"	ATB+R	4,800
<b>Specialty</b>									
DW7119PT	Non-Ferrous/Plastic/Fine Trim	8-1/2"	60	5/8"	-5°	.094"	.063"	TCG	9,000
DW3219PT	Non-Ferrous/Plastic/Fine Trim	10"	80	5/8"	-5°	.098"	.071"	TCG	6,000
DW7296PT	Non-Ferrous/Plastic/Fine Trim	12"	96	1"	-5°	.102"	.079"	TCG	4,800



## PRECISION™ SAW BLADES

SCAN FOR MORE INFO



**2X™ LARGER CARBIDE\*\***

**2X™ LONGER LIFE\*\*\***

- **Exclusive Plate Technology**  
Improved cut performance and reduced vibration†
- **Face Grind**  
For clean, precise cuts
- **Premium Carbide**  
2X larger carbide than DEWALT construction series

**Tough Coat®**  
FINISH REVESTIMIENTO | REVÊTEMENT  
Anti-stick coating

\*\*Vs. DeWALT construction series    \*\*\*Vs. Freud's DIABLO® D0724R in 3/4" chip board    † Vs. previous design  
Freud® and Diablo® are registered trademarks of Freud America, Inc.

## CONSTRUCTION SAW BLADES

### PORTABLE



CAT #	DESCRIPTION	KERF TYPE	DIA.	TEETH	ARBOR	HOOK ANGLE	KERF	PLATE THICKNESS	TOOTH GRIND
<b>Carbide Tipped</b>									
DW3161	Circular Saw Blade	Thin Kerf	6-1/2"	18	5/8"-♦	25°	.071"	.045"	ATB
DW3192	Circular Saw Blade	Thin Kerf	7-1/4"	18	5/8"-♦	15°	.071"	.045"	ATB
DW3592B10*	Circular Saw Blade	Thin Kerf	7-1/4"	18	5/8"-♦	15°	.071"	.045"	ATB
DW3174	Pressure Treated/Wet Lumber	Thin Kerf	7-1/4"	20	5/8"-♦	25°	.071"	.045"	ATB
DW3178	Framing Blade	Thin Kerf	7-1/4"	24	5/8"-♦	18°	.071"	.045"	ATB
DW3578B10*	Framing Blade	Thin Kerf	7-1/4"	24	5/8"-♦	18°	.071"	.045"	ATB
DW3176	Circular Saw Blade	Thin Kerf	7-1/4"	36	5/8"-♦	15°	.071"	.045"	ATB
DW3576B10*	Circular Saw Blade	Thin Kerf	7-1/4"	36	5/8"-♦	15°	.071"	.045"	ATB
DW3182	Framing Blade	Thin Kerf	8-1/4"	24	5/8"-♦	20°	.076"	.050"	ATB
DW3582B10*	Framing Blade	Thin Kerf	8-1/4"	24	5/8"-♦	20°	.076"	.050"	ATB
DW3184	Circular Saw Blade	Thin Kerf	8-1/4"	40	5/8"-♦	15°	.076"	.050"	ATB
<b>Specialty Applications</b>									
DW3191	Nail Cutting Circular Saw Blade	Thin Kerf	7-1/4"	18	5/8"-♦	15°	.071"	.045"	ATB
DW3591B10*	Nail Cutting Circular Saw Blade	Thin Kerf	7-1/4"	18	5/8"-♦	15°	.071"	.045"	ATB
DW3193	PCD Diamond Fiber Cement Blade (HARDIEPLANK <sup>®</sup> * & HARDIEBACKER <sup>®</sup> †)	-	7-1/4"	6	5/8"	-5°	.090"	.060"	FTG

\*HARDIEPLANK<sup>®</sup> & HARDIEBACKER<sup>®</sup> are a registered trademark of JAMES HARDIE TECHNOLOGY LIMITED CORPORATION †Bulk



### CORDLESS



CAT #	DESCRIPTION	DIA.	TEETH	ARBOR	HOOK ANGLE	KERF	PLATE THICKNESS	TOOTH GRIND
DW9055	Carbide - Fast Woodcutting	5-3/8"	16	10mm	20°	.059"	.039"	ATB
DW9054	Carbide - Smooth Woodcutting	5-3/8"	24	10mm	20°	.059"	.039"	ATB
DW9155	Carbide - Fast Cutting	6-1/2"	18	5/8"	20°	.059"	.039"	ATB
DWA9555***	Carbide - Fast Cutting	6-1/2"	18	5/8"	20°	.059"	.039"	ATB
DW9154	Carbide - Framing	6-1/2"	24	5/8"	20°	.059"	.039"	ATB
<b>Specialty</b>								
DW9052	Carbide - Aluminum/Non-Ferrous Metals	5-3/8"	30	10mm	3°	.059"	.039"	FTG
DW9053	Steel - Vinyl/Paneling	5-3/8"	80	10mm	-10°/-45°	.059"	.039"	Alt. Set
DW9152	Carbide - Aluminum Cutting	6-1/2"	36	5/8"	3°	.059"	.039"	FTG
DW9153	Steel - Vinyl/Paneling	6-1/2"	90	5/8"	18°/45°/20°	.059"	.039"	FTG
<b>Combo Packs</b>								
DW9058	Combo Pack (DW9052 & DW9055)	5-3/8"	16, 30	10mm	3°, 20°	.059"	.039"	FTG/ATB
DW9059C5	Combo Pack (DW9052, DW9053 & DW9054)	5-3/8"	24, 30, 78	10mm	20°	.059"	.039"	ATB
DW9158	Combo Pack (DW9155 & DW9154)	6-1/2"	18, 24	5/8"	20°	.059"	.039"	ATB

\*\*\*10-Pack



### LARGE DIAMETER




CAT #	DESCRIPTION	DIA.	TEETH	ARBOR	HOOK ANGLE	KERF	PLATE THICKNESS	TOOTH GRIND
DW3112**	Fast Ripping Table Saw Blade	10"	24	5/8"	15°	.095"	.069"	ATB
DW3103	General Purpose Saw Blade	10"	32	5/8"	7°	.095"	.069"	ATB
DW3114**	General Purpose Saw Blade	10"	40	5/8"	10°	.095"	.069"	ATB
DW3106	Fine Finish Saw Blade	10"	60	5/8"	7°	.095"	.069"	ATB
DW3123	General Purpose Saw Blade	12"	32	1"	7°	.095"	.069"	ATB
DW3126	Fine Finish Saw Blade	12"	60	1"	7°	.095"	.069"	ATB
DW3128	Fine Finish Saw Blade	12"	80	1"	7°	.095"	.069"	ATB
DW3106P5	Construction 10" Combo Pack (DW3106 & DW3103)	10"	32, 60	5/8"	7°	.095"	.069"	ATB
DW3128P5	Construction 12" Combo Pack (DW3128 & DW3123)	12"	32, 80	1"	7°	.095"	.069"	ATB

\*\*To be used on table saws only



## METAL CUTTING SAW BLADES

### STEEL CUTTING BLADES



CAT #	DESCRIPTION	DIA.	TEETH	ARBOR	HOOK ANGLE	KERF	PLATE THICKNESS	TOOTH GRIND	MAX RPM
DWA7538	5-3/8" 30T Ferrous Metal Cutting	5-3/8"	30	20mm	1.5°	.059"	.044"	TCG	4,200
DWA7770	5 1/2" 30T Ferrous Metal Cutting	5-1/2"	30	20mm	1.5°	.059"	.044"	TCG	4,200
DWA7762	6 1/2" 48T Ferrous Metal Cutting	6-1/2"	48	5/8"	1.5°	.061"	.047"	TCG	4,200
DWA7763	6-3/4" 40T Ferrous Metal Cutting	6-3/4"	40	20mm	1.5°	.061"	.047"	TCG	4,200
DWA7738	7" 36T Ferrous Metal Cutting	7"	36	20mm	1.5°	.077"	.063"	TCG	4,000
DWA7777	7" 60T Ferrous Metal Cutting	7"	60	20mm	1.5°	.077"	.063"	TCG	4,000
DWA7766	7 1/4" 48T Ferrous Metal Cutting	7-1/4"	48	5/8"	1.5°	.077"	.063"	TCG	4,000
DWA7840	8" 48T Ferrous Metal Cutting	8"	48	5/8"	1.5°	.077"	.063"	TCG	4,000
DWA7948	9" 48T Ferrous Metal Cutting	9"	48	1"	1.5°	.083"	.069"	TCG	3,600
DWA7759	10" 52T Ferrous Metal Cutting	10"	52	5/8"	1.5°	.091"	.077"	TCG	1,800
DWA7737	Heavy Gauge Ferrous Metal Cutting	12"	60	1"	1.5°	.091"	.077"	TCG	1,800
DWA7740	Light Gauge Ferrous Metal Cutting	12"	80	1"	1.5°	.091"	.077"	TCG	1,800
DWA7747	Heavy Gauge Ferrous Metal Cutting	14"	66	1"	1.5°	.091"	.077"	TCG	1,800
DWA7745	Light Gauge Ferrous Metal Cutting	14"	90	1"	1.5°	.091"	.077"	TCG	1,800




### STAINLESS STEEL CUTTING BLADES



CAT #	DESCRIPTION	DIA.	TEETH	ARBOR	HOOK ANGLE	KERF	PLATE THICKNESS	TOOTH GRIND	MAX RPM
DWA7771	5-1/2" 40T Stainless Steel Metal Cutting	5-1/2"	40	20mm	10°	.060"	.044"	MTCG	4,200
DWA7772	7" 48T Stainless Steel Metal Cutting	7"	48	20mm	10°	.079"	.063"	MTCG	4,000
DWA7748	7-1/4" 48T Stainless Steel Metal Cutting	7-1/4"	48	5/8"	10°	.079"	.063"	MTCG	4,000
DWA7848	8" 60T Stainless Steel Metal Cutting	8"	60	5/8"	10°	.079"	.063"	MTCG	4,000
DWA7968	9" 60T Stainless Steel Metal Cutting	9"	60	1"	10°	.085"	.069"	MTCG	3,600
DWA7739	12" 80T Stainless Steel Metal Cutting	12"	80	1"	10°	.085"	.069"	MTCG	1,800
DWA7749	14" 90T Stainless Steel Metal Cutting	14"	90	1"	10°	.085"	.069"	MTCG	1,800



### ALUMINUM CUTTING BLADES



CAT #	DESCRIPTION	DIA.	TEETH	ARBOR	HOOK ANGLE	KERF	PLATE THICKNESS	TOOTH GRIND	MAX RPM
DW9052	5-3/8" 30T Aluminum Metal Cutting	5-3/8"	30	20mm	3°	.059"	.039"	FLAT TOP	7,000
DWA7760	5 1/2" 30T Aluminum Metal Cutting	5-1/2"	30	5/8"	3°	.059"	.039"	FLAT TOP	7,000
DW9152	6-1/2" 36T Aluminum Metal Cutting	6-1/2"	36	5/8"	3°	.059"	.039"	FLAT TOP	7,000
DWA7761	7-1/4" 48T Aluminum Metal Cutting	7-1/4"	48	5/8"	-5°	.083"	.063"	TCG	4,000
DWA7758	7-1/4" 60T Aluminum Metal Cutting	7-1/4"	60	5/8"	-5°	.083"	.063"	TCG	4,000
DWA7664	9" 72T Aluminum Metal Cutting	9"	72	1"	-5°	.083"	.063"	TCG	6,000
DW7665	10" 80T Aluminum Thin Plate Metal Cutting	10"	80	5/8"	-5°	.110"	.069"	TCG	6,000
DW71080T5	10" 80T Aluminum Thick Plate Metal Cutting	10"	80	5/8"	-5°	.126"	.087"	TCG	6,000
DW7666	12" 80T Aluminum Thin Plate Metal Cutting	12"	80	1"	-5°	.110"	.077"	TCG	4,800
DW71280T5	12" 80T Aluminum Thick Plate Metal Cutting	12"	80	1"	-5°	.126"	.098"	TCG	4,800
DWA7889	14" 100T Aluminum Metal Cutting	14"	100	1"	-5°	.126"	.098"	TCG	4,800



## WOODWORKING SAW BLADES

### GENERAL PURPOSE



CAT #	DESCRIPTION	KERF TYPE	DIA.	TEETH	ARBOR	HOOK ANGLE	KERF	PLATE THICKNESS	TOOTH GRIND
DW7657	General Purpose	Thin Kerf	10"	40	5/8"	20°	.110"	.069"	ATB
DW7658	General Purpose	Thin Kerf	12"	48	1"	10°	.110"	.077"	ATB
DW7659	General Purpose	Thin Kerf	14"	48	1"	10°	.110"	.079"	ATB
DW71040A	General Purpose	Full Kerf	10"	40	5/8"	10°	.125"	.087"	ATB
DW71248A	General Purpose	Full Kerf	12"	48	1"	10°	.125"	.087"	ATB
DW71448A	General Purpose	Full Kerf	14"	48	1"	10°	.125"	.087"	ATB



(continued on next page)

## WOODWORKING SAW BLADES *(continued)*

### RIPPING



CAT #	DESCRIPTION	KERF TYPE	DIA.	TEETH	ARBOR	HOOK ANGLE	KERF	PLATE THICKNESS	TOOTH GRIND
DW7642	Fast Ripping	Thin Kerf	10"	24	5/8"	20°	.110"	.069"	FTG
DW7643	Fast Ripping	Thin Kerf	12"	30	1"	20°	.110"	.077"	FTG
DW7638	Glue Line Ripping	Thin Kerf	10"	30	5/8"	20°	.110"	.069"	FTG
DW7639	Glue Line Ripping	Thin Kerf	12"	40	1"	20°	.110"	.077"	FTG
DW7654	Finish Ripping	Thin Kerf	10"	40	5/8"	10°	.110"	.069"	TCG
DW7655	Finish Ripping	Thin Kerf	12"	40	1"	10°	.110"	.079"	TCG
DW71024F	Fast Ripping	Full Kerf	10"	24	5/8"	20°	.125"	.087"	FTG
DW71230F	Fast Ripping	Full Kerf	12"	30	1"	20°	.125"	.087"	FTG
DW71030F	Glue Line Ripping	Full Kerf	10"	30	5/8"	20°	.125"	.087"	FTG
DW71240F	Glue Line Ripping	Full Kerf	12"	40	1"	20°	.125"	.087"	FTG
DW71040T	Finish Ripping	Full Kerf	10"	40	5/8"	10°	.125"	.087"	TCG
DW71250T	Finish Ripping	Full Kerf	12"	50	1"	10°	.125"	.087"	TCG



### FINE CROSSCUTS



CAT #	DESCRIPTION	KERF TYPE	DIA.	TEETH	ARBOR	HOOK ANGLE	KERF	PLATE THICKNESS	TOOTH GRIND
DW7644	Fine Crosscuts	Thin Kerf	8-1/2"	60	5/8"	-5°	.110"	.069"	ATB
DW7646**	Fine Crosscuts	Thin Kerf	10"	60	5/8"	10°	.110"	.069"	ATB
DW7645	Fine Crosscuts	Thin Kerf	10"	60	5/8"	-5°	.110"	.069"	ATB
DW7632	Fine Crosscuts	Thin Kerf	10"	60	5/8"	7°	.110"	.069"	ATB
DW7648	Fine Crosscuts	Thin Kerf	12"	60	1"	-5°	.110"	.077"	ATB
DW7633	Fine Crosscuts	Thin Kerf	12"	80	1"	7°	.110"	.077"	ATB
DW7649	Fine Crosscuts	Thin Kerf	12"	80	1"	-5°	.110"	.077"	ATB
DW722060T	Fine Crosscuts	Full Kerf	220mm	60	30mm	10°	.125"	.087"	TCG
DW71060A**	Fine Crosscuts	Full Kerf	10"	60	5/8"	12°	.125"	.087"	ATB
DW71060A5	Fine Crosscuts	Full Kerf	10"	60	5/8"	-5°	.125"	.087"	ATB
DW71060T**	Fine Crosscuts	Full Kerf	10"	60	5/8"	12°	.125"	.087"	TCG
DW71272T**	Fine Crosscuts	Full Kerf	12"	72	1"	12°	.125"	.087"	TCG
DW71280A	Fine Crosscuts	Full Kerf	12"	80	1"	7°	.125"	.087"	ATB



\*\*To be used on table saws only

### ULTRA-FINE CROSSCUTS



CAT #	DESCRIPTION	KERF	DIA.	TEETH	ARBOR	HOOK ANGLE	KERF	PLATE THICKNESS	TOOTH GRIND
DW7647	Ultra-Fine Crosscuts	Thin Kerf	10"	80	5/8"	-5°	.110"	.069"	ATB
DW7673	Ultra-Fine Crosscuts	Thin Kerf	10"	80	5/8"	7°	.110"	.069"	ATB
DW7650	Ultra-Fine Crosscuts	Thin Kerf	12"	96	1"	-5°	.110"	.079"	ATB
DW7674	Ultra-Fine Crosscuts	Thin Kerf	12"	100	1"	-5°	.110"	.079"	4ATB+R
DW7651	Ultra-Fine Crosscuts	Thin Kerf	14"	100	1"	-5°	.110"	.079"	ATB
DW71080A**	Ultra-Fine Crosscuts	Full Kerf	10"	80	5/8"	10°	.125"	.087"	ATB
DW71080T**	Ultra-Fine Crosscuts	Full Kerf	10"	80	5/8"	10°	.125"	.087"	TCG
DW712100RN5	Ultra-Fine Crosscuts	Full Kerf	12"	100	1"	-5°	.125"	.100"	4ATB+R



\*\*To be used on table saws only

### DADO



CAT #	DESCRIPTION	DIA.	TEETH	ARBOR	HOOK ANGLE	KERF	PLATE THICKNESS	TOOTH GRIND
DW7670	Stacked Dado Set	8"	24	5/8"	0°	.925"	.125"	ATB / FTG



(continued on next page)

## WOODWORKING SAW BLADES *(continued)*

### COMBINATION



CAT #	DESCRIPTION	KERF	DIA.	TEETH	ARBOR	HOOK ANGLE	KERF	PLATE THICKNESS	TOOTH GRIND
DW7640	Combination	Thin Kerf	10"	50	5/8"	15°	.110"	.069"	4ATB+R
DW7641	Combination	Thin Kerf	12"	60	1"	15°	.110"	.079"	4ATB+R
DW71050R	Combination	Full Kerf	10"	50	5/8"	15°	.125"	.087"	4ATB+R
DW71260R	Combination	Full Kerf	12"	60	1"	15°	.125"	.087"	4ATB+R



### SPECIALTY APPLICATIONS



CAT #	DESCRIPTION	KERF	DIA.	TEETH	ARBOR	HOOK ANGLE	KERF	PLATE THICKNESS	TOOTH GRIND
<b>Crosscutting Plywood</b>									
DW7671	Plywood Crosscutting	Thin Kerf	10"	80	5/8"	-5°	.110"	.069"	HI-ATB
DW7672	Plywood Crosscutting	Thin Kerf	12"	96	1"	-5°	.110"	.079"	HI-ATB
DW71080HN5	Plywood Crosscutting	Full Kerf	10"	80	5/8"	-5°	.125"	.100"	HI-ATB
DW71296HN5	Plywood Crosscutting	Full Kerf	12"	96	1"	-5°	.125"	.100"	HI-ATB
<b>Melamines</b>									
DW7662	Melamines & Veneers	Thin Kerf	10"	80	5/8"	0°	.110"	.069"	H-ATB
DW7663	Melamines & Veneers	Thin Kerf	12"	80	1"	0°	.110"	.079"	H-ATB
DW722048HG	Melamines & Veneers	Full Kerf	220mm	48	30mm	10°	.125"	.087"	HG
DW730072HG	Melamines & Veneers	Full Kerf	300mm	72	30mm	10°	.125"	.087"	HG
DW71060HG	Melamines & Veneers	Full Kerf	10"	60	5/8"	10°	.125"	.087"	HG
DW71272HG	Melamines & Veneers	Full Kerf	12"	72	1"	10°	.125"	.087"	HG
<b>Non-Ferrous Metal</b>									
DW7665	Non-Ferrous Metal	Thin Kerf	10"	80	5/8"	-5°	.110"	.069"	TCG
DW7666	Non-Ferrous Metal	Thin Kerf	12"	80	1"	-5°	.110"	.079"	TCG
DW71080T5	Non-Ferrous Metal	Full Kerf	10"	80	5/8"	-5°	.125"	.087"	TCG
DW71280T5	Non-Ferrous Metal	Full Kerf	12"	80	1"	-5°	.125"	.087"	TCG
<b>Solid Surface &amp; Plastics</b>									
DW7667	Solid Surface & Plastics	Thin Kerf	10"	80	5/8"	0°	.110"	.069"	M-TCG
DW7668	Solid Surface & Plastics	Thin Kerf	12"	80	1"	0°	.110"	.079"	M-TCG
DW71080MT	Solid Surface & Plastics	Full Kerf	10"	80	5/8"	0°	.125"	.087"	M-TCG
DW71280MT	Solid Surface & Plastics	Full Kerf	12"	80	1"	0°	.125"	.087"	M-TCG
<b>Laminates</b>									
DW7660	Laminates	Thin Kerf	10"	80	5/8"	0°	.110"	.069"	TCG
DW7661	Laminates	Thin Kerf	12"	80	1"	0°	.110"	.079"	TCG
DW71080T0	Laminates	Full Kerf	10"	80	5/8"	0°	.125"	.087"	TCG
DW71280T0	Laminates	Full Kerf	12"	80	1"	0°	.125"	.087"	TCG



## STEEL CIRCULAR SAW BLADES

### STEEL SAW BLADES



CAT #	DESCRIPTION	DIA.	TEETH	ARBOR	CAT #	DESCRIPTION	DIA.	TEETH	ARBOR
DW3310	Fast Cut	6-1/2"	24	5/8"-◆	DW3350	Combination	10"	40	5/8"-◆
DW3323	Fast Cut	7-1/4"	26	5/8"-◆	DW3370	Fast Cut	10"	28	5/8"-◆
DW3324	Crosscut	7-1/4"	100	5/8"-◆	DW3372	Hollow Ground Planer	7-1/4"	80	5/8"-◆
DW3325	Combo	7-1/4"	40	5/8"-◆	DW3523	Combo Bulk	7-1/4"	26	5/8"-◆
DW3326	Hollow Ground Plywood	7-1/4"	140	5/8"-◆	DW3524	Crosscut	7-1/4"	100	5/8"-◆
DW3327	Hollow Ground Planer	7-1/4"	60	5/8"-◆	DW3526	Hollow Ground Plywood Bulk	7-1/4"	140	5/8"-◆
DW3329	Non-Ferrous	7-1/4"	68	5/8"-◆	DW3526L	Hollow Ground Plywood Bulk (Shrink Band on Teeth)	7-1/4"	140	5/8"-◆
DW3330	Iron/Steel	7-1/4"	16 Slots	5/8"-◆					
DW3332	Master Combo	8-1/4"	60	5/8"-◆					



# DEWALT'S MASONRY SOLUTIONS



## CONCRETE & MASONRY DRILLING

Fits all brands Electric and Cordless Hammerdrills including DEWALT, Bosch\* and Hilti\*.

\*Bosch® is a registered trademark of Robert Bosch GmbH and Hilti® is a registered trademark of Hilti Aktiengesellschaft

### MULTI-MATERIAL

CAT #	DIA.	OVERALL LENGTH
DWA56084	1/8"	4-1/2"
DWA56104	5/32"	4"
DWA56124	3/16"	4-1/2"
DWA56144	7/32"	4-1/2"

CAT #	DIA.	OVERALL LENGTH
DWA56165	1/4"	4-3/4"
DWA56205	5/16"	5-1/4"
DWA56245	3/8"	5-1/4"
DWA56326	1/2"	6-1/4"

CAT #	DIAMETERS
<b>5 Pc. Drill Bit Set</b>	
DWA56015	1/8", 3/16", 1/4", 5/16", 3/8"



### PERCUSSION BITS



CAT #	DIA.	USABLE LENGTH	OVERALL LENGTH
DW5221	1/8"	2"	3"
DW5209	5/32"	2"	3"
DW5227	5/32"	4"	6"
DW5222	3/16"	2"	3"
DW5223	3/16"	4"	6"
DW5211	7/32"	4"	6"
DW5224	1/4"	2"	4"
DW5225	1/4"	4"	6"
DW5226	1/4"	7"	12"
DW5228	5/16"	4"	6"
DW5229	5/16"	7"	12"
DW5230	3/8"	4"	6"
DW5231	3/8"	10"	12"

CAT #	DIA.	USABLE LENGTH	OVERALL LENGTH
DW5232	3/8"	16"	18"
DW5233	3/8"	22"	24"
DW5234	7/16"	4"	6"
DW5235	1/2"	4"	6"
DW5236	1/2"	10"	12"
DW5237	1/2"	16"	18"
DW5238	1/2"	22"	24"
DW5241	5/8"	4"	6"
DW5242	5/8"	7"	12"
DW5217	9/16"	4"	6"
DW5244	3/4"	4"	6"
DW5245	3/4"	7"	12"
DW5219	7/8"	7"	12"

CAT #	DIA.	USABLE LENGTH	OVERALL LENGTH
DW5249	1"	7"	12"
<b>Bulk Packs</b>			
DW5221B25	1/8"	2"	3"
DW5227B25	5/32"	4"	6"
DW5222B25	3/16"	2"	3"
DW5223B25	3/16"	4"	6"
DW5224B25	1/4"	2"	4"
DW5225B25	1/4"	4"	6"
DW5228B25	5/16"	4"	6"
DW5230B25	3/8"	4"	6"
DW5235B10	1/2"	4"	6"

### PERCUSSION SETS

CAT #	DESCRIPTION	INCLUDES
DW5204	4 Pc. Premium Percussion Masonry Drill Bit Set	3/16" x 3", 1/4" x 4", 5/16" x 6", 3/8" x 6"
DW5205	5 Pc. Premium Percussion Masonry Drill Bit Set	5/32" x 6", 3/16" x 6", 1/4" x 6", 5/16" x 6", 3/8" x 6", Medium TOUGH CASE® Container
DW5207	7 Pc. Premium Percussion Masonry Drill Bit Set	3/16" x 3", (2)1/4" x 4", 1/4" x 6", 5/16" x 6", 3/8" x 6", 1/2" x 6"



DW5205

(continued on next page)

## CONCRETE & MASONRY DRILLING (continued)



CAT #	DIA.	USABLE LENGTH	OVERALL LENGTH
<b>Full Head Carbide SDS Plus</b>			
DW5502**	3/16"	2"	4-1/2"
DW5503**	3/16"	4"	6-1/2"
DW5504	3/16"	6"	8-1/2"
DW55050	3/16"	8"	10-1/2"
DW5506	3/16"	10"	12"
DW5507	3/16"	12"	14"
DW55100	7/32"	4"	6-1/2"
DW5512	7/32"	8"	10"
DW5516**	1/4"	2"	4-1/2"
DW5517**	1/4"	4"	6"
DW5518	1/4"	6"	8-1/2"
DW55200	1/4"	10"	12"
DW5521	1/4"	12"	14"
DW5524	5/16"	4"	6-1/2"
DW5526	5/16"	10"	12"
DW5527***	3/8"	4"	6-1/2"
DW5529	3/8"	8"	10"
DW55300	3/8"	10"	12"
DW5531	3/8"	16"	18"
DW5532	3/8"	21"	23-1/2"
DW5537***	1/2"	4"	6"
DW5538	1/2"	8"	10-1/2"
DW5539	1/2"	10"	12"
DW5540	1/2"	16"	18"
DW55410	1/2"	22"	24"

CAT #	DIA.	USABLE LENGTH	OVERALL LENGTH
<b>4 Cutter SDS Plus</b>			
DW5471	5/8"	8"	10"
DW5472	5/8"	16"	18"
DW5474	3/4"	8"	10"
DW5475	3/4"	16"	18"
DW5477	7/8"	8"	10"
DW5478	7/8"	16"	18"
DW5479	1"	8"	10"
DW5480	1"	16"	18"
DW5481	1-1/8"	8"	10"
DW5482	1-1/8"	16"	18"

CAT #	DIA.	USABLE LENGTH	OVERALL LENGTH
<b>SDS Plus Bulk Packs</b>			
DW5502B25**	3/16"	2"	4-1/2"
DW5503B25**	3/16"	4"	6-1/2"
DW5504B25	3/16"	6"	8-1/2"
DW55050B25	3/16"	8"	10-1/2"
DW5506B25	3/16"	10"	12"
DW55100B25	7/32"	4"	6-1/2"
DW5516B25**	1/4"	2"	4-1/2"
DW5517B25**	1/4"	4"	6"
DW5518B25	1/4"	6"	8-1/2"
DW5524B25	5/16"	4"	6-1/2"
DW5527B25***	3/8"	4"	6-1/2"
DW5537B25***	1/2"	4"	6"

### MASONRY DRILLING



CAT #	DIA.	USABLE LENGTH	OVERALL LENGTH
<b>2 Cutter SDS Plus</b>			
DW5400	5/32"	2"	4"
DW5401	5/32"	4-1/2"	6-1/2"
DW5402	3/16"	2"	4"
DW5403**	3/16"	4-1/2"	6-1/2"
DW5404**	3/16"	6-1/2"	8-1/2"
DW5405	3/16"	8"	10"
DW5406	3/16"	10"	12"
DW5407	3/16"	12"	14"
DW5408	3/16"	14"	16"
DW5410	7/32"	4"	6"
DW5412	7/32"	8"	10"
DW5416**	1/4"	2"	4"
DW5417**	1/4"	4"	6"
DW5418	1/4"	6-1/2"	8-1/2"
DW5420	1/4"	10"	12"
DW5421	1/4"	12"	14"
DW5424	5/16"	4"	6"
DW5426	5/16"	10"	12"
DW5427***	3/8"	4"	6"
DW5429	3/8"	8"	10"
DW5430	3/8"	10"	12"
DW5431	3/8"	16"	18"
DW5432	3/8"	22"	24"
DW5433	7/16"	4"	6"
DW5435	7/16"	10"	12"
DW5436	7/16"	16"	18"
DW5437***	1/2"	4"	6"
DW5438	1/2"	8"	10"
DW5439	1/2"	10"	12"
DW5440	1/2"	16"	18"
DW5441	1/2"	22"	24"
DW5442	9/16"	4"	6"
DW5443	9/16"	10"	12"
DW5444	9/16"	16"	18"
DW5445	9/16"	22"	24"
DW5446***	5/8"	6"	8"
DW5447	5/8"	10"	12"
DW5448	5/8"	16"	18"
DW5449	5/8"	22"	24"
DW5450	11/16"	6"	8"
DW5453	3/4"	6"	8"
DW5455	3/4"	10"	12"
DW5456	3/4"	16"	18"
DW5457	3/4"	22"	24"
DW5458	27/32"	6"	8"
DW5460	7/8"	6"	8"
DW5461	7/8"	10"	12"
DW5462	7/8"	16"	18"
DW5464	1"	8"	10"
DW5466	1"	16"	18"
DW5468	1-1/8"	8"	10"
DW5469	1-1/8"	16"	18"




CAT #	DIA.	USABLE LENGTH	OVERALL LENGTH
<b>SDS Plus Bulk Packs</b>			
DW5401B25	5/32"	4-1/2"	6-1/2"
DW5402B25**	3/16"	2"	4"
DW5403B25**	3/16"	4-1/2"	6-1/2"
DW5404B25	3/16"	6-1/2"	8-1/2"
DW5405B25	3/16"	8"	10"
DW5406B25	3/16"	10"	12"
DW5410B25	7/32"	4"	6"
DW5416B25**	1/4"	2"	4"
DW5417B25**	1/4"	4"	6"
DW5418B25	1/4"	6-1/2"	8-1/2"
DW5424B25	5/16"	4"	6"
DW5427B25***	3/8"	4"	6"
DW5437B25***	1/2"	4"	6"
DW5446B10***	5/8"	6"	8"

CAT #	INCLUDES:
DW5470	5 Pc. SDS Plus Hammer Bit Set
	INCLUDES: 3/16" x 4-1/2" x 6-1/2", 1/4" x 2" x 4", 1/4" x 4" x 6", 3/8" x 4" x 6", 1/2" x 4" x 6"

\*\*Compatible with Pin Anchor Drive  
\*\*\*Compatible with Depth Setter



\*Bosch® is a registered trademark of Robert Bosch GmbH and Hilti® is a registered trademark of Hilti Aktiengesellschaft

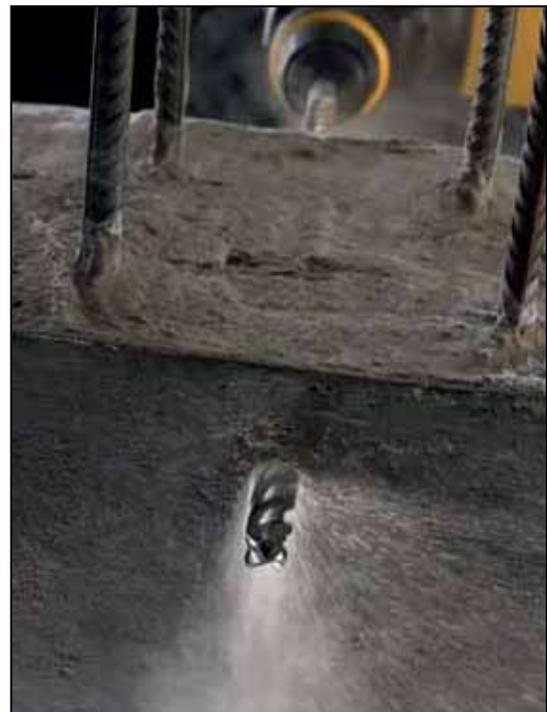

(continued on next page)

## CONCRETE & MASONRY DRILLING *(continued)*

<b>HIGH IMPACT CARBIDE</b>		<b>SDS max</b>	
CAT #	DIA.	USABLE LENGTH	OVERALL LENGTH
<b>4 Cutter SDS Max</b>			
DW5806	5/8"	8"	13-1/2"
DW5809	5/8"	16"	21-1/2"
DW5807	5/8"	31"	36"
DW5808	11/16"	16"	21-1/2"
DW5810	3/4"	8"	13-1/2"
DW5812	3/4"	16"	21-1/2"
DW5813	3/4"	31"	36"
DW5814	13/16"	16"	21-1/2"
DW5815	7/8"	8"	13-1/2"
DW5816	7/8"	16"	21-1/2"
DW5851	7/8"	31"	36"
DW5817	27/32"	16"	21-1/2"
DW5818	1"	8"	13-1/2"
DW5819	1"	16"	21-1/2"
DW5852	1"	24"	29"
DW5820	1"	31"	36"
DW5821	1-1/8"	10"	15"
DW5822	1-1/8"	18"	22-1/2"
DW5853	1-1/8"	24"	29"
DW5854	1-1/8"	31"	36"
DW5824	1-1/4"	10"	15"
DW5825	1-1/4"	18"	22-1/2"
DW5855	1-1/4"	24"	29"
DW5826	1-1/4"	31"	36"
DW5829	1-7/16"	18"	22-1/2"
DW5860	1-5/16"	18"	22-1/2"
DW5827	1-3/8"	18"	22-1/2"
DW5856	1-3/8"	24"	29"
DW5857	1-3/8"	31"	36"
DW5828	1-1/2"	18"	22-1/2"
DW5858	1-1/2"	24"	29"
DW5859	1-1/2"	31"	36"
DW5861	1-9/16"	18"	22-1/2"
DW5830	1-3/4"	18"	22-1/2"
DW5831	2"	18"	22-1/2"

<b>HIGH IMPACT CARBIDE</b>		<b>SPLINE</b>	
CAT #	DIA.	USABLE LENGTH	OVERALL LENGTH
<b>4 Cutter Spline</b>			
DW5740	5/8"	5"	10"
DW5741	5/8"	11"	16"
DW5742	5/8"	17"	22"
DW5743	5/8"	22"	27"
DW5744	5/8"	31"	36"
DW5746	3/4"	5"	10"
DW5747	3/4"	11"	16"
DW5748	3/4"	17"	22"
DW5749	3/4"	22"	27"
DW5750	3/4"	31"	36"
DW5751	27-32"	11"	16"
DW5752	7/8"	11"	16"
DW5753	7/8"	17"	22"
DW5755	1"	11"	16"
DW5756	1"	17"	22"
DW5757	1"	31"	36"
DW5758	1-1/8"	11"	16"
DW5759	1-1/8"	17"	22"
DW5760	1-1/4"	11"	16"
DW5761	1-1/4"	17"	22"
DW5762	1-1/4"	31"	36"
DW5763	1-3/8"	11"	16"
DW5765	1-3/8"	17"	22"
DW5764	1-1/2"	17"	22"
DW5768	1-3/4"	17"	22"
DW5769	2"	17"	22"

<b>MASONRY DRILLING</b>		<b>SPLINE</b>	
CAT #	DIA.	USABLE LENGTH	OVERALL LENGTH
<b>2 Cutter Spline</b>			
DW5700	3/8"	5"	10"
DW5701	3/8"	8"	13"
DW5702	7/16"	5"	10"
DW5703	1/2"	5"	10"
DW5704	1/2"	11"	16"
DW5705	1/2"	17"	22"
DW5706	1/2"	22"	27"
DW5707	1/2"	31"	36"
DW5708	9/16"	5"	10"
DW5735	9/16"	17"	22"
DW5709	5/8"	5"	10"
DW5710	5/8"	11"	16"
DW5711	5/8"	17"	22"
DW5712	5/8"	22"	27"
DW5713	11/16"	5"	10"
DW5714	3/4"	5"	10"
DW5715	3/4"	11"	16"
DW5716	3/4"	17"	22"
DW5717	3/4"	22"	27"
DW5719	7/8"	11"	16"
DW5720	7/8"	17"	22"
DW5721	1"	11"	16"
DW5722	1"	17"	22"
DW5723	1"	31"	36"
DW5724	1-1/8"	5"	10"
DW5725	1-1/8"	11"	16"
DW5726	1-1/8"	17"	22"
DW5727	1-1/4"	11"	16"
DW5728	1-1/4"	17"	22"
DW5729	1-3/8"	11"	16"
DW5730	1-3/8"	17"	22"

**SDS max**

**Fits All Brands of SDS Max Rotary Hammers including DeWALT, Bosch\*\* and Hilti\*\*.**

**SPLINE**

**Fits All Brands of SDS Spline Rotary Hammers including DeWALT and Bosch\*\*.**

\*Bosch® is a registered trademark of Robert Bosch GmbH and Hilti® is a registered trademark of Hilti Aktiengesellschaft

\*\*Compatible with Pin Anchor Drive  
\*\*\*Compatible with Depth Setter

<b>MASONRY DRILLING</b>		<b>SDS max</b>	
CAT #	DIA.	USABLE LENGTH	OVERALL LENGTH
<b>2 Cutter SDS Max</b>			
DW5803	1/2"	8"	13-1/2"
DW5804	1/2"	16"	21-1/2"
DW5801	9/16"	8"	13-1/2"
DW5802	9/16"	16"	21-1/2"
DW5870	5/8"	8"	13-1/2"
DW5871	5/8"	16"	21-1/2"
DW5872	3/4"	8"	13-1/2"
DW5873	3/4"	16"	21-1/2"
DW5874	7/8"	8"	13-1/2"
DW5875	7/8"	16"	21-1/2"
DW5876	1"	8"	13-1/2"
DW5877	1"	16"	21-1/2"
DW5878	1-1/8"	10"	15"
DW5879	1-1/8"	18"	22-1/2"
DW5880	1-1/4"	10"	15"
DW5881	1-1/4"	16"	22-1/2"

**HIGH IMPACT CARBIDE**

**2X LONGER LIFE†**

**PERFORM PROTECT™**

Less Bit Vibration†



SCAN FOR MORE INFO



Available in SDS Max and Spline

Aggressive Flute Design Allows for Fast Driving Speed

Increased Surface Area on Carbide Tip†

† Vs. previous design  
(continued on next page)

## PIN ANCHOR DRIVE SYSTEM



■ Set Pin Anchors Fast

■ No Hammer Needed



■ Ideal for Overhead Applications



SCAN FOR MORE INFO



## DEPTH SETTER



■ Proprietary System ONLY from DeWALT

■ Control Drilling Depth

■ Accurate Depth Stop for Setting Drop-in Anchors



## DUST COLLECTOR



■ Minimizes Dust while Drilling Overhead

■ Flexible for Visibility

■ Works with Depth Setter



SCAN FOR MORE INFO

## CONCRETE & MASONRY DRILLING (continued)

### MASONRY DRILLING



CAT #	DIA.	USABLE LENGTH	OVERALL LENGTH
<b>SDS Plus Hex Bits</b>			
DW5359	5/32"	2"	5"
DW5360	5/32"	3"	6"
DW5361	5/32"	4"	7"
DW5362	3/16"	2"	5"
DW5363	3/16"	3"	6"
DW5364	3/16"	4"	7"
DW5365	Drive Sleeve for Hex SDS Hammer Bit		
<b>SDS Plus Hex Bit Bulk Pack</b>			
DW5364B25	3/16"	4"	7"

CAT #	DESCRIPTION	INCLUDES
<b>SDS Plus Hex Bit Kit</b>		
DW5366	10 Pc. Anchor Drive Installation Kit	5/32" x 4" x 7", 3/16" x 4" x 7", Drive Sleeve, Percussion Bit Holder, Insert Bit Adapter, #2 & #3 Insert Bits, 1/4" & 5/16" Nutsetter, Hex Key, Medium TOUGH CASE® Container

### PIN ANCHOR DRIVE SYSTEM



CAT #	INCLUDES
DW5517PAD**	Pin Anchor Drive Sleeve & 1/4" SDS Plus Bit

\*\*Must use specified SDS Plus bits (on previous page)

### DUST COLLECTOR & DEPTH SETTER



CAT #	INCLUDES
DWA5537DS**	Adjustable Depth Setter & 1/2" SDS Plus Bit
DWA500DC	Dust Collector

\*\*Must use specified SDS Plus bits (on previous page)

### ONE PIECE CARBIDE CORE BITS



CAT #	DIA.	LENGTH
<b>SDS Max</b>		
DW5914	1-3/4"	12"
DW5915	1-3/4"	22"
DW5916	2"	12"
DW5917	2"	22"
DW5918	2-3/4"	12"
DW5919	2-3/4"	22"
DW5920	3-1/4"	12"
DW5921	3-1/4"	22"
DW5922	3-1/2"	12"
DW5923	3-1/2"	22"

CAT #	DIA.	LENGTH
<b>SDS Max (continued)</b>		
DW5924	4"	12"
DW5925	4"	22"
DW5926	5"	22"
DW5927	6"	22"
<b>Spline</b>		
DW5930	1-3/4"	12"
DW5931	1-3/4"	22"
DW5932	2"	12"
DW5933	2"	22"
DW5934	2-3/4"	12"

CAT #	DIA.	LENGTH
<b>Spline (continued)</b>		
DW5935	2-3/4"	22"
DW5937	3-1/4"	22"
DW5938	3-1/2"	12"
DW5939	3-1/2"	22"
DW5940	4"	12"
DW5941	4"	22"
DW5942	5"	22"
DW5943	6"	22"
DW5945	Replacement Centering Bit	

(continued on next page)

## CONCRETE & MASONRY DRILLING *(continued)*

### TWO PIECE CARBIDE CORE BITS



CAT #	DESCRIPTION	DIA.
DW5900	1-1/2" x 4" Core Bit Body	1-1/2"
DW5901	2" x 4" Core Bit Body	2"
DW5902	2-1/2" x 4" Core Bit Body	2-1/2"
DW5903	3" x 4" Core Bit Body	3"
DW5904	3-1/2" x 4" Core Bit Body	3-1/2"
DW5905	4" x 4" Core Bit Body	4"
DW5906	5" x 4" Core Bit Body	5"

CAT #	DESCRIPTION
DW5907	Centering Core Bit Body
DW5909	7" Spline Core Bit Shank
DW5910	16" Spline Core Bit Shank
DW5911	7" SDS Max Core Bit Shank
DW5912	16" SDS Max Core Bit Shank
DW5908	Thread Adapter 

### DIAMOND DRILL BITS FOR TILE

CAT #	DESCRIPTION
DW5570	3/16" Diamond Drill Bit
DW5572	1/4" Diamond Drill Bit
DW5574	5/16" Diamond Drill Bit
DW5576	3/8" Diamond Drill Bit
DW5578	1/2" Diamond Drill Bit
DW5580	5/8" Diamond Drill Bit
DW5582	3/4" Diamond Drill Bit
DW5584	1" Diamond Drill Bit
DW5586	1-3/8" Diamond Drill Bit



### HIGH IMPACT STEEL



CAT #	DESCRIPTION
<b>SDS Plus</b>	
DWA5320	12" Bull Point
DWA5321	1-1/2" x 12" Scaling Chisel
DWA5322	3/4" x 12" Cold Chisel
<b>SDS Max</b>	
DWA5850	12" Bull Point
DWA5851	16" Bull Point Bit
DWA5852	1" x 12" Cold Chisel
DWA5853	1" x 16" Cold Chisel
DWA5854	2" x 16" Scaling Chisel
DWA5855	3" x 16" Scaling Chisel
DWA5856	10" Carbide Bushing Tool

CAT #	DESCRIPTION
<b>3/4" Hex</b>	
DWA5970	16" Bull Point 3/4" Hex
DWA5973	1" x 16" Cold Chisel 3/4" Hex
	
<b>LONGER LIFE***</b>	



\*\*\*Vs. competitive products

### CHISELS & DEMOLITION STEEL



CAT #	DESCRIPTION
<b>SDS Plus Steel</b>	
DW5348	10" Bull Point <b>Fits All Brands of SDS Plus Hammers.</b>
DW5349	10" Scaling Chisel <b>Fits All Brands of SDS Plus Hammers.</b>
DW5350	10" Cold Chisel <b>Fits All Brands of SDS Plus Hammers.</b>
<b>SDS Max</b>	
DW5832	12" Bull Point <b>Fits All Brands of SDS Max Chipping and Demolition Hammers.</b>
DW5833	18" Bull Point <b>Fits All Brands of SDS Max Chipping and Demolition Hammers.</b>
DW5834	1" x 12" Cold Chisel <b>Fits All Brands of SDS Max Chipping and Demolition Hammers.</b>
DW5835	1" x 18" Cold Chisel
DW5837	2" x 12" Scaling Chisel
DW5838	3" x 12" Scaling Chisel
DW5848B	4" Clay Spade
DW5843	10" Bushing Tool
DW5847	3/4" Ground Rod Driver
DW5842	12" Slotting Tool
DW5846	Asphalt Cutter
DW5832B15**	12" Bull Point Bit
DW5833B15**	18" Bull Point Bit
DW5834B15**	12" Cold Chisel
DW5835B15**	18" Cold Chisel
DW5838B10**	3" Scaling Chisel
DW5843B10**	Bushing Tool

CAT #	DESCRIPTION
<b>Spline - 3/4" Hex x 21/32" Round Spline Shank</b>	
DW5770	12" Bull Point <b>Fits All Brands of Spline Chipping and Demolition Hammers.</b>
DW5771	18" Bull Point <b>Fits All Brands of Spline Chipping and Demolition Hammers.</b>
DW5779	1" x 12" Cold Chisel
DW5780	1" x 18" Cold Chisel
DW5773	1-1/2" x 12" Scaling Chisel
DW5774	2" x 12" Scaling Chisel
DW5775	3" x 12" Scaling Chisel
DW5786B	4-1/2" Clay Spade
DW5783	10" Bushing Tool
DW5785	3/4" Ground Rod Driver
DW5772	12" Slotting Tool
DW5770B15**	12" Bull Point
DW5771B15**	18" Bull Point
DW5775B10**	3" Scaling Chisel
DW5779B15**	12" Cold Chisel
DW5780B15**	18" Cold Chisel
DW5783B10**	10" Bushing Tool
	

CAT #	DESCRIPTION
<b>3/4" Hex</b>	
DW5950	12" Bull Point <b>Fits All Brands of 3/4" Hex Chipping and Demolition Hammers.</b>
DW5951	18" Bull Point <b>Fits All Brands of 3/4" Hex Chipping and Demolition Hammers.</b>
DW5953	1" x 12" Cold Chisel
DW5954	1" x 18" Cold Chisel
DW5952	3" x 12" Scaling Chisel
DW5959B	4-1/2" Clay Spade
DW5949	10" Bushing Tool
DW5958	3/4" Ground Rod Driver
DW5949B10	10" Bushing Tool
DW5950B15	12" Bull Point Chisel
DW5951B15	18" Bull Point
DW5952B10	3" Scaling Chisel
DW5953B15	1" x 12" Cold Chisel
DW5954B15	1" x 18" Cold Chisel
<b>1-1/8" Hex</b>	
DW5960	20" Bull Point <b>Fits All Brands of 1-1/8" Hex Pavement Breakers.</b>
DW5962	20" Cold Chisel <b>Fits All Brands of 1-1/8" Hex Pavement Breakers.</b>
DW5961	3" x 20" Scaling Chisel <b>Ring and notch retentions allow for use in electric and pneumatic hammers.</b>
DW5965	5-1/2" Clay Spade
DW5964	1" Ground Rod Driver
DW5963	17" Asphalt Cutter

### SHANK ADAPTERS

CAT #	DESCRIPTION
DW5351	SDS Plus to 1/2" Chuck Adapter
DW5790	Spline to 1/2" Chuck Adapter

CAT #	DESCRIPTION
DW5353	1/2" Chuck & Key
DW5791	Spline to SDS Plus Adapter

CAT #	DESCRIPTION
DW5891	SDS Max to SDS Plus Adapter



## BIT TIPS



### IMPACT READY® FASTENING

#### TIPS & POWER BITS


CAT #	DESCRIPTION	LENGTH	QTY.
<b>⊕ 1" Phillips Bit Tips</b>			
DWA1PH0IRB	#0 IMPACT READY® FlexTorq™	1"	50
DWA1PH1R2	#1 IMPACT READY® FlexTorq™	1"	2
DWA1PH1IRB	#1 IMPACT READY® FlexTorq™	1"	50
DWA1PH2IR2	#2 IMPACT READY® FlexTorq™	1"	2
DWA1PH2IR5	#2 IMPACT READY® FlexTorq™	1"	5
DWA1PH2IR10	#2 IMPACT READY® FlexTorq™	1"	10
DWA1PH2IRB	#2 IMPACT READY® FlexTorq™	1"	50
DWA1PH3IR2	#3 IMPACT READY® FlexTorq™	1"	2
DWA1PH3IRB	#3 IMPACT READY® FlexTorq™	1"	50
DWA1PR1IRB	Reduced #1 IMPACT READY® FlexTorq™	1"	50
DWA1PR2IR2	Reduced #2 IMPACT READY® FlexTorq™	1"	2
DWA1PR2IRB	Reduced #2 IMPACT READY® FlexTorq™	1"	50
<b>⊖ 1" Square Bit Tips</b>			
DWA1SQ0IRB	#0 IMPACT READY® FlexTorq™	1"	50
DWA1SQ1IR	#1 IMPACT READY® FlexTorq™	1"	2
DWA1SQ1IRB	#1 IMPACT READY® FlexTorq™	1"	50
DWA1SQ2IR	#2 IMPACT READY® FlexTorq™	1"	2
DWA1SQ2IR5	#2 IMPACT READY® FlexTorq™	1"	5
DWA1SQ2IR10	#2 IMPACT READY® FlexTorq™	1"	10
DWA1SQ2IRB	#2 IMPACT READY® FlexTorq™	1"	50
DWA1SQ3IRB	#3 IMPACT READY® FlexTorq™	1"	50
<b>⊖ 1" Slotted Bit Tips</b>			
DWA1SL2IRB	2-4 IMPACT READY® FlexTorq™	1"	50
DWA1SL4IRB	4-6 IMPACT READY® FlexTorq™	1"	50
DWA1SL6IRB	6-8 IMPACT READY® FlexTorq™	1"	50
DWA1SL8IRB	8-10 IMPACT READY® FlexTorq™	1"	50
DWA1SL10IRB	10-12 IMPACT READY® FlexTorq™	1"	50
DWA1SL12IRB	12-14 IMPACT READY® FlexTorq™	1"	50
DWA1SL14IRB	14-16 IMPACT READY® FlexTorq™	1"	50
<b>⊖ 1" Hex Bit Tips</b>			
DWA1HX116IRB	1/16" IMPACT READY® FlexTorq™	1"	50
DWA1HX564IRB	5/64" IMPACT READY® FlexTorq™	1"	50
DWA1HX332IRB	3/32" IMPACT READY® FlexTorq™	1"	50
DWA1HX764IRB	7/64" IMPACT READY® FlexTorq™	1"	50
DWA1HX18IRB	1/8" IMPACT READY® FlexTorq™	1"	50
DWA1HX964IRB	9/64" IMPACT READY® FlexTorq™	1"	50
DWA1HX532IRB	5/32" IMPACT READY® FlexTorq™	1"	50
DWA1HX316IRB	3/16" IMPACT READY® FlexTorq™	1"	50
DWA1HX732IRB	7/32" IMPACT READY® FlexTorq™	1"	50
DWA1HX14IRB	1/4" IMPACT READY® FlexTorq™	1"	50
DWA1HX516IRB	5/16" IMPACT READY® FlexTorq™	1"	50
DWA1HX38IRB	3/8" IMPACT READY® FlexTorq™	1"	50

CAT #	DESCRIPTION	LENGTH	QTY.
<b>⊖ 1" Hex Security Bit Tips</b>			
DWA1HS332IRB	3/32" IMPACT READY® FlexTorq™	1"	50
DWA1HS764IRB	7/64" IMPACT READY® FlexTorq™	1"	50
DWA1HS18IRB	1/8" IMPACT READY® FlexTorq™	1"	50
DWA1HS964IRB	9/64" IMPACT READY® FlexTorq™	1"	50
DWA1HS532IRB	5/32" IMPACT READY® FlexTorq™	1"	50
DWA1HS316IRB	3/16" IMPACT READY® FlexTorq™	1"	50
DWA1HS732IRB	7/32" IMPACT READY® FlexTorq™	1"	50
DWA1HS14IRB	1/4" IMPACT READY® FlexTorq™	1"	50
DWA1HS516IRB	5/16" IMPACT READY® FlexTorq™	1"	50
<b>⊕ 1" Spanner Bit Tips</b>			
DWA1SP4IRB	#4 IMPACT READY® FlexTorq™	1"	50
DWA1SP6IRB	#6 IMPACT READY® FlexTorq™	1"	50
DWA1SP8IRB	#8 IMPACT READY® FlexTorq™	1"	50
DWA1SP10IRB	#10 IMPACT READY® FlexTorq™	1"	50
DWA1SP12IRB	#12 IMPACT READY® FlexTorq™	1"	50
DWA1SP14IRB	#14 IMPACT READY® FlexTorq™	1"	50
<b>⊕ 1" Pozi Bit Tips</b>			
DWA1PZIRB	#0 IMPACT READY® FlexTorq™	1"	50
DWA1PZ1IRB	#1 IMPACT READY® FlexTorq™	1"	50
DWA1PZ2IRB	#2 IMPACT READY® FlexTorq™	1"	50
DWA1PZ3IRB	#3 IMPACT READY® FlexTorq™	1"	50
<b>⊕ 1" Tri-Wing Bit Tips</b>			
DWA1TW1IRB	#1 IMPACT READY® FlexTorq™	1"	50
DWA1TW2IRB	#2 IMPACT READY® FlexTorq™	1"	50
DWA1TW3IRB	#3 IMPACT READY® FlexTorq™	1"	50
DWA1TW4IRB	#4 IMPACT READY® FlexTorq™	1"	50
DWA1TW5IRB	#5 IMPACT READY® FlexTorq™	1"	50
<b>⊖ 1" Clutch Type A and G Bit Tips</b>			
DWA1CA18IRB	1/8" IMPACT READY® FlexTorq™ Clutch Type A	1"	50
DWA1CG18IRB	1/8" IMPACT READY® FlexTorq™ Clutch Type G	1"	50
DWA1CA532IRB	5/32" IMPACT READY® FlexTorq™ Clutch Type A	1"	50
DWA1CG532IRB	5/32" IMPACT READY® FlexTorq™ Clutch Type G	1"	50
DWA1CA316IRB	3/16" IMPACT READY® FlexTorq™ Clutch Type A	1"	50
DWA1CG316IRB	3/16" IMPACT READY® FlexTorq™ Clutch Type G	1"	50

(continued on next page)

## IMPACT READY<sup>®</sup>

IMPACT DRIVER ACCESSORIES



## IMPACT READY<sup>®</sup> FASTENING

### TIPS & POWER BITS


CAT #	DESCRIPTION	LENGTH	QTY.
<b>1" Star Bit Tips</b>			
DWA1TX6IRB	T6 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	1"	50
DWA1TX7IRB	T7 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	1"	50
DWA1TX8IRB	T8 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	1"	50
DWA1TX9IRB	T9 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	1"	50
DWA1TX10IRB	T10 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	1"	50
DWA1TX15IRB	T15 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	1"	50
DWA1TX20IR2	T20 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	1"	2
DWA1TX20IRB	T20 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	1"	50
DWA1TX25IR2	T25 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	1"	2
DWA1TX25IRB	T25 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	1"	50
DWA1TX27IRB	T27 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	1"	50
DWA1TX30IRB	T30 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	1"	50
DWA1TX40IRB	T40 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	1"	50
<b>1" Star Security Bit Tips</b>			
DWA1TS7IRB	T7 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	1"	50
DWA1TS8IRB	T8 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	1"	50
DWA1TS9IRB	T9 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	1"	50
DWA1TS10IRB	T10 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	1"	50
DWA1TS15IRB	T15 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	1"	50
DWA1TS20IRB	T20 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	1"	50
DWA1TS25IRB	T25 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	1"	50
DWA1TS40IRB	T40 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	1"	50
<b>1" Tri-Wing Bit Tips</b>			
DWA1TW1IRB	#1 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	1"	50
DWA1TW2IRB	#2 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	1"	50
DWA1TW3IRB	#3 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	1"	50
DWA1TW4IRB	#4 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	1"	50
DWA1TW5IRB	#5 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	1"	50
<b>2" Phillips Bit Tips</b>			
DWA2PH1IRB	#1 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	2"	50
DWA2PH2IRB	#2 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	2"	50
DWA2PH3IRB	#3 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	2"	50
DWA2PH2IR	#2 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	2"	1
DWA2PH2IR5	#2 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	2"	5
<b>2" Slotted Bit Tips</b>			
DWA2SL2IRB	2-4 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	2"	50
DWA2SL4IRB	4-6 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	2"	50
DWA2SL6IRB	6-8 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	2"	50
DWA2SL8IRB	8-10 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	2"	50
DWA2SL10IRB	10-12 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	2"	50
DWA2SL12IRB	12-14 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	2"	50

CAT #	DESCRIPTION	LENGTH	QTY.
<b>2" Pozi Bit Tips</b>			
DWA2PZ1IRB	#1 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	2"	50
DWA2PZ2IRB	#2 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	2"	50
DWA2PZ3IRB	#3 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	2"	50
<b>2" Square Bit Tips</b>			
DWA2SQ1IRB	#1 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	2"	50
DWA2SQ2IRB	#2 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	2"	50
DWA2SQ3IRB	#3 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	2"	50
DWA2SQ2IR	#2 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	2"	1
<b>2" Star Bit Tips</b>			
DWA2TX6IRB	T6 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	2"	50
DWA2TX7IRB	T7 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	2"	50
DWA2TX8IRB	T8 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	2"	50
DWA2TX9IRB	T9 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	2"	50
DWA2TX10IRB	T10 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	2"	50
DWA2TX15IRB	T15 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	2"	50
DWA2TX20IR2	T20 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	2"	2
DWA2TX20IRB	T20 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	2"	50
DWA2TX25IR2	T25 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	2"	2
DWA2TX25IRB	T25 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	2"	50
DWA2TX27IRB	T27 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	2"	50
DWA2TX30IR2	T30 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	2"	2
DWA2TX30IRB	T30 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	2"	50
DWA2TX40IR2	T40 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	2"	2
DWA2TX40IRB	T40 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	2"	50
<b>2" Frearson Bit Tips</b>			
DWA2FR2IRB	#2 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	2"	50
<b>3 1/2" Phillips Bit Tips</b>			
DWA3PH1IRB	#1 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	3-1/2"	50
DWA3PH2IR	#2 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	3-1/2"	1
DWA3PH2IRB	#2 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	3-1/2"	50
DWA3PH3IRB	#3 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	3-1/2"	50
<b>3 1/2" Pozi Bit Tips</b>			
DWA3PZ1IRB	#1 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	3-1/2"	50
DWA3PZ2IRB	#2 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	3-1/2"	50
DWA3PZ3IRB	#3 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	3-1/2"	50
<b>3 1/2" Slotted Bit Tips</b>			
DWA3SL2IRB	2-4 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	3-1/2"	50
DWA3SL4IRB	4-6 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	3-1/2"	50
DWA3SL6IRB	6-8 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	3-1/2"	50
DWA3SL8IRB	8-10 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	3-1/2"	50
DWA3SL10IRB	10-12 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	3-1/2"	50
DWA3SL12IRB	12-14 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	3-1/2"	50
<b>3 1/2" Square Bit Tips</b>			
DWA3SQ1IRB	#1 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	3-1/2"	50
DWA3SQ2IRB	#2 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	3-1/2"	50
DWA3SQ3IRB	#3 IMPACT READY <sup>®</sup> FlexTorq <sup>™</sup>	3-1/2"	50

(continued on next page)

## IMPACT READY® IMPACT DRIVER ACCESSORIES

# BITS, HOLDERS, & SOCKETS

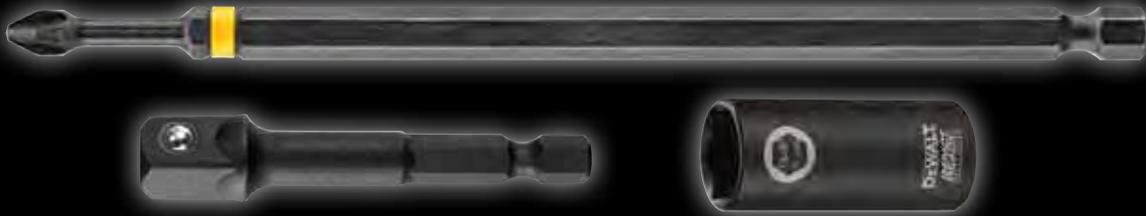

## IMPACT READY® FASTENING (continued)

### TIPS & POWER BITS

CAT #	DESCRIPTION	LENGTH	QTY.
<b>⊕ 6" Phillips Bit Tips</b>			
DWA6PH1IRB	#1 IMPACT READY® FlexTorq™	6"	50
DWA6PH2IR	#2 IMPACT READY® FlexTorq™	6"	1
DWA6PH2IRB	#2 IMPACT READY® FlexTorq™	6"	50
DWA6PH3IRB	#3 IMPACT READY® FlexTorq™	6"	50
<b>⊕ 6" Pozi Bit Tips</b>			
DWA6PZ1IRB	#1 IMPACT READY® FlexTorq™	6"	50
DWA6PZ2IRB	#2 IMPACT READY® FlexTorq™	6"	50
DWA6PZ3IRB	#3 IMPACT READY® FlexTorq™	6"	50
<b>⊖ 6" Slotted Bit Tips</b>			
DWA6SL2IRB	2-4 IMPACT READY® FlexTorq™	6"	50
DWA6SL4IRB	4-6 IMPACT READY® FlexTorq™	6"	50
DWA6SL6IRB	6-8 IMPACT READY® FlexTorq™	6"	50
DWA6SL8IRB	8-10 IMPACT READY® FlexTorq™	6"	50
DWA6SL10IRB	10-12 IMPACT READY® FlexTorq™	6"	50
DWA6SL12IRB	12-14 IMPACT READY® FlexTorq™	6"	50
<b>⊙ 6" Square Bit Tips</b>			
DWA6SQ1IRB	#1 IMPACT READY® FlexTorq™	6"	50
DWA6SQ2IRB	#2 IMPACT READY® FlexTorq™	6"	50
DWA6SQ3IRB	#3 IMPACT READY® FlexTorq™	6"	50

### SLEEVES & HOLDERS


CAT #	DESCRIPTION	LENGTH	QTY.
<b>Sleeves</b>			
DWA2PH2IR2S	#2 IMPACT READY® FlexTorq™ & Magnetic Sleeve	2"	2
DWA2SLVIR	2" IMPACT READY® FlexTorq™ Bit & Screwlock Sleeve	2"	1
DWA2SLVIRB	2" IMPACT READY® FlexTorq™ Bit & Screwlock Sleeve	2"	25
DWA2SQ2IR2S	#2 IMPACT READY® FlexTorq™	2"	2
<b>Holders</b>			
DWA3HLDIR	IMPACT READY® FlexTorq™ Bit Tip Holder w/ Screwlock System		1
DWA3HLDIRB	IMPACT READY® FlexTorq™ Bit Tip Holder w/ Screwlock System		25
DWA3SL8IRB	8-10 IMPACT READY® FlexTorq™		50

### SETS



CAT #	DESCRIPTION	INCLUDES
DWA2T35IR	35 Pc IMPACT READY® FlexTorq™ Screwdriving Set	(1) 1" Phillips IMPACT READY® Bits: PH1, (9) PH2, PH3, (6) 1" Square IMPACT READY® Bits: SQ1, (4) SQ2, SQ3, (6) 1" Star IMPACT READY® Bits: (3) T20, (3) T25, (4) IMPACT READY® Socket Adapters: 3/8", 7/16", 1/2", 9/16", (3) IMPACT READY® Nutsetters: 5/16", 3/8", 1/4", (2) 1" Slotted Bits: SL6, SL8, (1) IMPACT READY® 1/4" Hex Shank Adapter, (1) 3" IMPACT READY® Screw Lock Holder, (1) 2" PH2 IMPACT READY® Bits
DWA2T40IR	40 Pc IMPACT READY® FlexTorq™ Screwdriving Set	(6) 2" PH2 IMPACT READY® Bit, (4) 1" PH2 Bit, (3) 1" PH2, (3) 1" T20 IMPACT READY® Bit, (3) 1" T25 IMPACT READY® Bit, (2) 1" SL8 IMPACT READY® Bit, (2) 1" SQ2 IMPACT READY® Bit, (1) 3/8" Nutsetter, (1) 1/4" Nutsetter, (1) 5/16" Nutsetter, (1) IMPACT READY® Sleeve, (1) 3" IMPACT READY® Screw Lock Holder, (1) 2" SQ2 IMPACT READY® Bit, (1) 2" T25 IMPACT READY® Bit, (1) 2" SL8 IMPACT READY® Bit, (1) 1" SL6 IMPACT READY® Bit, (1) 1" PH1 IMPACT READY® Bit, (1) 1" PH3 IMPACT READY® Bit, (1) 1" SL10 IMPACT READY® Bit, (1) 1" T15 IMPACT READY® Bit, (1) 1" T30 IMPACT READY® Bit, (1) 1" SQ3 IMPACT READY® Bit, (1) 1" SQ1 IMPACT READY® Bit, (1) 3.5" PH2 IMPACT READY® Bit
DWA2FTS30IR	30 Pc IMPACT READY® FlexTorq™ Screwdriving Set	(8) 1" Phillips IMPACT READY® Bits: PH1, (6) PH2, PH3, (4) 2" PH2 IMPACT READY® Bit, (4) 1" Square IMPACT READY® Bits: SQ1, (2) SQ2, SQ3, (4) 1" Slotted IMPACT READY® Bits: SL6, (2) SL8, SL10, (6) 1" Star IMPACT READY® Bits: (2) T20, (3) T25, T27, (1) Holders: Magnetic ScrewLock™ Sleeve, (1) 3/8" Socket Adaptor, (2) Nut Drivers: 1/4", 5/16"
DWA2FTS35IR	35 Pc IMPACT READY® FlexTorq™ Screwdriving Set	(7) 1" Phillips IMPACT READY® Bits: PH1, (5) PH2, PH3, (5) 2" PH2 IMPACT READY® Bit, (4) 1" Square IMPACT READY® Bits: SQ1, (2) SQ2, SQ3, (4) 1" Slotted IMPACT READY® Bits: SL6, (2) SL8, SL10, (6) 1" Star IMPACT READY® Bits: T15, T20, (3) T25, T27, (2) 2" T25 IMPACT READY® Bit, (2) Nutsetter: 1/4", 5/16", (2) Holders: Magnetic ScrewLock™ Sleeve, Magnetic Bit Tip Holder, (1) 3/8" Socket Adaptor, (2) Sockets: 3/8", 1/2"
DWAX101IR	31 Pc IMPACT READY® FlexTorq™ Screwdriving Set	(10) 1" Phillips IMPACT READY® Bits: (2) PH1, (6) PH2, (2) PH3, (5) 1" Slotted IMPACT READY® Bits: SL6, (3) SL8, SL10, (5) 1" Square IMPACT READY® Bits: SQ1, (2) SQ2, SQ3, (10) 1" Star IMPACT READY® Bits: (2) T20, (6) T25, (2) T27, (1) Holders: Magnetic ScrewLock™ Holder

### SOCKETS



CAT #	SOCKET SIZE	DRIVE SIZE	CAT #	SOCKET SIZE	DRIVE SIZE
DW2281	1/4"	3/8"	DW22862	1/2"	1/2"
DW2282	5/16"	3/8"	DW22872	9/16"	1/2"
DW2283	11/32"	3/8"	DW22882	5/8"	1/2"
DW2284	3/8"	3/8"	DW22892	11/16"	1/2"
DW2285	7/16"	3/8"	DW22902	3/4"	1/2"
DW2286	1/2"	3/8"	DW22912	13/16"	1/2"
DW2287	9/16"	3/8"	DW22922	7/8"	1/2"
DW2288	5/8"	3/8"	DW22932	15/16"	1/2"
DW2289	11/16"	3/8"	DW22942	1"	1/2"
DW2290	3/4"	3/8"	DW22952	1-1/16"	1/2"
DW22842	3/8"	1/2"	DW22962	1-1/8"	1/2"
DW22852	7/16"	1/2"	DW22972	1-1/4"	1/2"

## INNOVATIVE HOLDERS



## NUT DRIVERS



## IMPACT READY<sup>®</sup> FASTENING *(continued)*

### SOCKET ADAPTERS



CAT #	DESCRIPTION
DW2541IR	1/4" Hex Shank to 1/4" Socket Adapter
DW2542IR	1/4" Hex Shank to 3/8" Socket Adapter
DW2547IR	1/4" Hex Shank to 1/2" Socket Adapter
DW2298	1/2" Square to 1/4" RAPID LOAD <sup>®</sup> Adapter
DW2299	1/2" to 3/8" Reducer

### SOCKET SETS



DW22838

CAT #	DESCRIPTION	INCLUDES
DW22838	3/8" 10 Pc. Socket Set - IMPACT READY <sup>®</sup>	5/16", 3/8", 7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 1/2" & (2) 1/4"-3/8" Adapters
DW22812	1/2" 10 Pc. Socket Set - IMPACT READY <sup>®</sup>	7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 13/16", 7/8" & (2) 1/4"-1/2" Adapters

### BIT TIP HOLDERS

CAT #	DESCRIPTION
DW2046	2" Magnetic Bit Tip Holder
DWHJHLD	IMPACT CLUTCH <sup>®</sup> Holder
DWA2509	RAPID LOAD <sup>®</sup> Holder with ScrewLock <sup>™</sup> System
DWARA100	Right Angle Attachment with ScrewLock <sup>™</sup> System
Hog Ring**	
DW2045	3" Magnetic with Hog Ring
DWPVTHLD	Magnetic Pivot Holder with Hog Ring

\*\*Hog ring helps secure bit, must use pliers to remove bit



### CLEANABLE NUT DRIVERS

CAT #	DESCRIPTION
DWA2221IR	1/4" IMPACT READY <sup>®</sup> Cleanable Nut Driver
DWA2222IR	5/16" IMPACT READY <sup>®</sup> Cleanable Nut Driver
DWA2223IR	3/8" IMPACT READY <sup>®</sup> Cleanable Nut Driver
DWA2228IR	7/16" IMPACT READY <sup>®</sup> Cleanable Nut Driver
DWA2230IR	1/2" IMPACT READY <sup>®</sup> Cleanable Nut Driver
DWA2240IR	3 Pc. IMPACT READY <sup>®</sup> Cleanable Nut Driver



### NUT DRIVERS



CAT #	DESCRIPTION
DW2218IR	1/4" x 1-7/8" Magnetic Nut Driver - IMPACT READY <sup>®</sup>
DW2219IR	5/16" x 1-7/8" Magnetic Nut Driver - IMPACT READY <sup>®</sup>
DW2220IR	3/8" x 1-7/8" Magnetic Nut Driver - IMPACT READY <sup>®</sup>
DW2227IR	7/16" x 1-7/8" Magnetic Nut Driver - IMPACT READY <sup>®</sup>
DW2230IR	1/2" x 1-7/8" Magnetic Nut Driver - IMPACT READY <sup>®</sup>
DW2221IR	1/4" x 2-9/16" Magnetic Nut Driver - IMPACT READY <sup>®</sup>
DW2222IR	5/16" x 2-9/16" Magnetic Nut Driver - IMPACT READY <sup>®</sup>
DW2223IR	3/8" x 2-9/16" Magnetic Nut Driver - IMPACT READY <sup>®</sup>
DW2228IR	7/16" x 2-9/16" Magnetic Nut Driver - IMPACT READY <sup>®</sup>
DW2234IR	1/2" x 2-9/16" Magnetic Nut Driver - IMPACT READY <sup>®</sup>
DW2235IR	5 Pc. Magnetic Nut Driver Set (1/4", 5/16", 3/8", 7/16", 1/2") - IMPACT READY <sup>®</sup>

### PIVOTING NUT DRIVERS

CAT #	DESCRIPTION
DW2221IRP	1/4" Magnetic Pivoting Nut Driver - IMPACT READY <sup>®</sup>
DW2219IRP	5/16" Magnetic Pivoting Nut Driver - IMPACT READY <sup>®</sup>
DW2223IRP	3/8" Magnetic Pivoting Nut Driver - IMPACT READY <sup>®</sup>
DW2228IRP	7/16" Magnetic Pivoting Nut Driver - IMPACT READY <sup>®</sup>
DW2234IRP	1/2" Magnetic Pivoting Nut Driver - IMPACT READY <sup>®</sup>
DWPVTDREV3	3 Pc. Pivoting Netsetters (1/4", 5/16", 3/8") - IMPACT READY <sup>®</sup>
DWPVTDREV	4 Pc. Pivoting Netsetters (1/4", 5/16", 3/8", 7/16") - IMPACT READY <sup>®</sup>
DWPVTSET	10 Pc. Screwdriving Set - IMPACT READY <sup>®</sup>



## IMPACT READY® IMPACT DRIVER ACCESSORIES

### DRILL BITS 5X MORE DURABLE\*

### HOLE SAWS

### STEP BITS



## IMPACT READY® DRILLING

### DRILLING



CAT #	QTY./CARD	BULK	BULK QTY.	DIA. INCHES	DIA. DECIMAL	OVERALL LENGTH
DD5008	1	DD5008B6	6	1/8"	.1250"	2.625"
DD5009	1	DD5009B6	6	9/64"	.1406"	2.75"
DD5010	1	DD5010B6	6	5/32"	.1562"	2.8125"
DD5011	1	DD5011B6	6	11/64"	.1719"	2.9375"
DD5012	1	DD5012B6	6	3/16"	.1875"	3"
DD5013	1	DD5013B6	6	13/64"	.2031"	3.0625"
DD5014	1	DD5014B6	6	7/32"	.2188"	3.125"
DD5015	1	DD5015B6	6	15/64"	.2344"	3.15625"

CAT #	QTY./CARD	BULK	BULK QTY.	DIA. INCHES	DIA. DECIMAL	OVERALL LENGTH
DD5016	1	DD5016B6	6	1/4"	.2500"	3.1875"
DD5018	1	DD5018B3	3	9/32"	.2812"	3.5"
DD5020	1	DD5020B3	3	5/16"	.3125"	4"
DD5022	1	DD5022B3	3	11/32"	.3437"	4"
DD5024	1	DD5024B3	3	3/8"	.3750"	4"
DD5028	1	DD5028B3	3	7/16"	.4375"	4"
DD5032	1	DD5032B3	3	1/2"	.5000"	4"

### DRILLING SETS



DW5057



DD5060

CAT #	DESCRIPTION	INCLUDES
DD5055	5 Pc. Drilling Set - IMPACT READY®	(2) 1/8", 5/32", 3/16", 1/4"
DD5057	7 Pc. Drilling Set - IMPACT READY®	(2) 1/8", 5/32", 3/16", 7/32", 1/4", 5/16"
DD5060	10 Pc. Drilling Set - IMPACT READY®	(2) 1/8", 9/64", 5/32", 11/64", 3/16", 7/32", 1/4", 5/16", 3/8", TOUGH CASE® Container

### HOLE SAWS



CAT #	SIZE Inches	SIZE Metric
D180012IR	3/4"	19mm
D180014IR	7/8"	22mm
D180016IR	1"	25mm
D180018IR	1-1/8"	29mm
D180020IR	1-1/4"	32mm
D180020IR	1-1/4"	32mm

CAT #	SIZE Inches	SIZE Metric
D180022IR	1-3/8"	35mm
D180024IR	1-1/2"	38mm
D1800IR5 TOUGH CASE® 5 Pc. Set	3/4", 7/8", (2) 1-1/8", 1-3/8"	19, 22, (2) 29, 35mm

### STEP DRILL BITS



CAT #	DESCRIPTION	# OF HOLES	STEP INCREMENTS	SHANK DIA.	MAX. MAT. THICKNESS
<b>Hex Shank - IMPACT READY®</b>					
DWA1783IR	1/8" - 1/2" Step Drill Bit - IMPACT READY®	13	1/32"	1/4"	1/8"
DWA1784IR	3/16" - 1/2" Step Drill Bit - IMPACT READY®	6	1/16"	1/4"	5/16"
DWA1786IR	3/16" - 7/8" Step Drill Bit - IMPACT READY®	12	1/16"	1/4"	1/8"
DWA1789IR	7/8" - 1-1/8" Step Drill Bit - IMPACT READY®	2	-	1/4"	1/8"
DWA1790IR	3 Pc. Step Drill Bit Set - IMPACT READY®	19 Total	1/32" 1/16" 1/16"	1/4" 1/4" 1/4"	1/8" 5/16" 1/8"

\* vs. conventional hex shank drill bits

## INDUSTRIAL METAL DRILLING

### INDUSTRIAL COBALT



Ideal for Drill Press, CNC, Corded & Cordless Drills

CAT #	DIAMETER	FLUTE LENGTH	OVERALL LENGTH
-------	----------	--------------	----------------

#### Fractional Jobber

DD4004B12	1/16"	7/8"	1-7/8"
DD4005B12	5/64"	1"	2"
DD4006B12	3/32"	1-1/4"	2-1/4"
DD4007B12	7/64"	1-1/2"	2-5/8"
DD4008B12	1/8"	1-1/8"	2-3/4"
DD4009B12	9/64"	1-1/4"	2-7/8"
DD4010B12	5/32"	1-1/2"	3-1/8"
DD4011B12	11/64"	1-5/8"	3-1/4"
DD4012B12	3/16"	1-3/4"	3-1/2"
DD4013B12	13/64"	1-7/8"	3-5/8"
DD4014B12	7/32"	2"	3-3/4"
DD4015B12	15/64"	2-1/8"	3-7/8"
DD4016B12	1/4"	2-1/4"	4"
DD4017B12	17/64"	2-3/8"	4-1/8"
DD4018B12	9/32"	2-1/2"	4-1/4"
DD4019B12	19/64"	2-5/8"	4-3/8"
DD4020B6	5/16"	2-3/4"	4-1/2"
DD4021B6	21/64"	2-7/8"	4-5/8"
DD4022B6	11/32"	3"	4-3/4"
DD4023B6	23/64"	3-1/8"	4-7/8"
DD4024B6	3/8"	3-1/4"	5"
DD4025B6	25/64"	3-5/16"	5-1/8"
DD4026B6	13/32"	3-3/8"	5-1/4"
DD4027B6	27/64"	3-1/2"	5-3/8"
DD4028B6	7/16"	3-5/8"	5-1/2"
DD4029B6	29/64"	3-3/4"	5-5/8"
DD4030B6	15/32"	3-7/8"	5-3/4"
DD4031B6	31/64"	4"	5-7/8"
DD4032B6	1/2"	4-1/8"	6"

#### Fractional Screw Machine

DD4104B12	1/16"	5/8"	1-5/8"
DD4105B12	5/64"	11/16"	1-11/16"
DD4106B12	3/32"	3/4"	1-3/4"
DD4107B12	7/64"	13/16"	1-13/16"
DD4108B12	1/8"	7/8"	1-7/8"
DD4109B12	9/64"	15/16"	1-15/16"
DD4110B12	5/32"	1"	2-1/6"
DD4111B12	11/64"	1-1/16"	2-1/8"
DD4112B12	3/16"	1-1/8"	2-3/16"
DD4113B12	13/64"	1-3/16"	2-1/4"
DD4114B12	7/32"	1-1/4"	2-3/8"
DD4115B12	15/64"	1-5/16"	2-7/16"
DD4116B12	1/4"	1-3/8"	2-1/2"
DD4117B12	17/64"	1-7/16"	2-5/8"
DD4118B12	9/32"	1-1/2"	2-11/16"
DD4119B12	19/64"	1-9/16"	2-3/4"
DD4120B6	5/16"	1-5/8"	2-13/16"
DD4121B6	21/64"	1-11/16"	2-15/16"
DD4122B6	11/32"	1-11/16"	3"
DD4123B6	23/64"	1-3/4"	3-1/16"

CAT #	DIAMETER	FLUTE LENGTH	OVERALL LENGTH
-------	----------	--------------	----------------

#### Fractional Screw Machine (continued)

DD4124B6	3/8"	1-13/16"	3-1/8"
DD4125B6	25/64"	1-7/8"	3-1/4"
DD4126B6	13/32"	1-15/16"	3-5/16"
DD4127B6	27/64"	2"	3-3/8"
DD4128B6	7/16"	2-1/16"	3-7/16"
DD4129B6	29/64"	2-1/8"	3-9/16"
DD4130B6	15/32"	2-1/8"	3-5/8"
DD4131B6	31/64"	2-3/16"	3-11/16"
DD4132B6	1/2"	2-1/4"	3-3/4"

#### Numbered Jobber

DD4201B12	#1	2-5/8"	3-7/8"
DD4202B12	#2	2-5/8"	3-7/8"
DD4203B12	#3	2-1/2"	3-3/4"
DD4204B12	#4	2-1/2"	3-3/4"
DD4205B12	#5	2-1/2"	3-3/4"
DD4206B12	#6	2-1/2"	3-3/4"
DD4207B12	#7	2-7/16"	3-5/8"
DD4208B12	#8	2-7/16"	3-5/8"
DD4209B12	#9	2-7/16"	3-5/8"
DD4210B12	#10	2-7/16"	3-5/8"
DD4211B12	#11	2-5/16"	3-1/2"
DD4212B12	#12	2-5/16"	3-1/2"
DD4213B12	#13	2-5/16"	3-1/2"
DD4214B12	#14	2-3/16"	3-3/8"
DD4215B12	#15	2-3/16"	3-3/8"
DD4216B12	#16	2-3/16"	3-3/8"
DD4217B12	#17	2-3/16"	3-3/8"
DD4219B12	#18	2-1/8"	3-1/4"
DD4219B12	#19	2-1/8"	3-1/4"
DD4220B12	#20	2-1/8"	3-1/4"
DD4221B12	#21	2-1/8"	3-1/4"
DD4222B12	#22	2"	3-1/8"
DD4223B12	#23	2"	3-1/8"
DD4224B12	#24	2"	3-1/8"
DD4225B12	#25	1-7/8"	3"
DD4226B12	#26	1-7/8"	3"
DD4227B12	#27	1-7/8"	3"
DD4228B12	#28	1-3/4"	2-7/8"
DD4229B12	#29	1-3/4"	2-7/8"
DD4230B12	#30	1-5/8"	2-3/4"

#### Numbered Screw Machine

DD4301B12	#1	1-5/16"	2-7/16"
DD4302B12	#2	1-5/16"	2-7/16"
DD4303B12	#3	1-1/4"	2-3/8"
DD4304B12	#4	1-1/4"	2-3/8"
DD4305B12	#5	1-1/4"	2-3/8"
DD4306B12	#6	1-1/4"	2-3/8"
DD4307B12	#7	1-3/16"	2-1/4"
DD4308B12	#8	1-3/16"	2-1/4"
DD4309B12	#9	1-3/16"	2-1/4"

CAT #	DIAMETER	FLUTE LENGTH	OVERALL LENGTH
-------	----------	--------------	----------------

#### Numbered Screw Machine (continued)


DD4310B12	#10	1-3/16"	2-1/4"
DD4311B12	#11	1-3/16"	2-1/4"
DD4312B12	#12	1-3/16"	2-1/4"
DD4313B12	#13	1-1/8"	2-3/16"
DD4314B12	#14	1-1/8"	2-3/16"
DD4315B12	#15	1-1/8"	2-3/16"
DD4316B12	#16	1-1/8"	2-3/16"
DD4317B12	#17	1-1/8"	2-3/16"
DD4318B12	#18	1-1/16"	2-1/8"
DD4319B12	#19	1-1/16"	2-1/8"
DD4320B12	#20	1-1/16"	2-1/8"
DD4321B12	#21	1-1/16"	2-1/8"
DD4322B12	#22	1-1/16"	2-1/8"
DD4323B12	#23	1"	2-1/16"
DD4324B12	#24	1"	2-1/16"
DD4325B12	#25	1"	2-1/16"
DD4326B12	#26	1"	2-1/16"
DD4327B12	#27	1"	2-1/16"
DD4328B12	#28	15/16"	1-15/16"
DD4329B12	#29	15/16"	1-15/16"
DD4330B12	#30	15/16"	1-15/16"

#### Lettered Jobber

DD4401B12	A	2-5/8"	3-7/8"
DD4402B12	B	2-3/4"	4"
DD4403B12	C	2-3/4"	4"
DD4404B12	D	2-3/4"	4"
DD4405B12	E	2-3/4"	4"
DD4406B12	F	2-7/8"	4-1/8"
DD4407B12	G	2-7/8"	4-1/8"
DD4408B12	H	2-7/8"	4-1/8"
DD4409B12	I	2-7/8"	4-1/8"
DD4410B12	J	2-7/8"	4-1/8"
DD4411B12	K	2-15/16"	4-1/4"
DD4412B12	L	2-15/16"	4-1/4"
DD4413B12	M	3-1/16"	4-3/8"
DD4414B12	N	3-1/16"	4-3/8"
DD4415B6	O	3-3/16"	4-1/2"
DD4416B6	P	3-5/16"	4-5/8"
DD4417B6	Q	3-7/16"	4-3/4"
DD4418B6	R	3-7/16"	4-3/4"
DD4419B6	S	3-1/2"	4-7/8"
DD4420B6	T	3-1/2"	4-7/8"
DD4421B6	U	3-5/8"	5"
DD4422B6	V	3-5/8"	5"
DD4423B6	W	3-3/4"	5-1/8"
DD4424B6	X	3-3/4"	5-1/8"
DD4425B6	Y	3-7/8"	5-1/4"
DD4426B6	Z	3-7/8"	5-1/4"

## METAL & WOOD DRILLING

### COBALT PILOT POINT®



CAT #	QTY./CARD	DIA. INCHES	DIA. DECIMAL	DRILLING DEPTH	OVERALL LENGTH
DW1204	1	1/16"	.0625"	.88"	1.88"
DW1205	1	5/64"	.0781"	1.00"	2.00"
DW1206	1	3/32"	.0938"	1.25"	2.25"
DW1207	1	7/64"	.1094"	1.50"	2.62"
DW1208	1	1/8"	.1250"	1.62"	2.75"
DW1209	1	9/64"	.1406"	1.75"	2.88"
DW1210	1	5/32"	.1562"	2.00"	3.12"
DW1211	1	11/64"	.1719"	2.12"	3.25"
DW1212	1	3/16"	.1875"	2.31"	3.50"

CAT #	QTY./CARD	DIA. INCHES	DIA. DECIMAL	DRILLING DEPTH	OVERALL LENGTH
DW1213	1	13/64"	.2031"	2.44"	3.62"
DW1214	1	7/32"	.2188"	2.50"	3.75"
DW1215	1	15/64"	.2344"	2.62"	3.88"
DW1216	1	1/4"	.2500"	2.75"	4.00"
DW1220	1	5/16"	.3125"	3.19"	4.50"
DW1224	1	3/8"	.3750"	3.62"	5.00"
DW1228**	1	7/16"	.4375"	4.06"	5.59"
DW1232**	1	1/2"	.5000"	4.5"	6.00"

\*\*3/8" Reduced shank

### COBALT SETS

CAT #	DESCRIPTION	INCLUDES
DW1263	14 Pc. Cobalt PILOT POINT® Drill Bit Set	(2) 1/16", 5/64", 3/32", 7/64", (2) 1/8", 9/64", 5/32", 3/16", 7/32", 1/4", 5/16", 3/8", TOUGH CASE® Container
DW1269	29 Pc. Cobalt PILOT POINT® Drill Bit Set	1/16", 5/64", 3/32", 7/64", 1/8", 9/64", 5/32", 11/64", 3/16", 13/64", 7/32", 15/64", 1/4", 17/64", 9/32", 19/64", 5/16", 21/64", 11/32", 23/64", 3/8", 25/64", 13/32", 27/64", 7/16", 29/64", 15/32", 31/64", 1/2", TOUGH CASE® Container
DD4069	29 Pc. Cobalt Set	1/16", 5/64", 3/32", 7/64", 1/8", 9/64", 5/32", 11/64", 3/16", 13/64", 7/32", 15/64", 1/4", 17/64", 9/32", 19/64", 5/16", 21/64", 11/32", 23/64", 3/8", 25/64", 13/32", 27/64", 7/16", 29/64", 15/32", 31/64", 1/2", TOUGH CASE® Container



DW1269




DD4069



DW1263

### TITANIUM SPEED TIP



CAT #	QTY./CARD	DIA. INCHES	DIA. DECIMAL	DRILLING DEPTH	OVERALL LENGTH
DW1304	2	1/16"	.0625"	.88"	1.88"
DW1305	2	5/64"	.0781"	1.00"	2.00"
DW1306	2	3/32"	.0938"	1.25"	2.25"
DW1307	2	7/64"	.1094"	1.50"	2.62"
DW1308	2	1/8"	.1250"	1.62"	2.75"
DW1309	1	9/64"	.1406"	1.75"	2.88"
DW1310	1	5/32"	.1562"	2.00"	3.12"
DW1311	1	11/64"	.1719"	2.12"	3.25"
DW1312	1	3/16"	.1875"	2.31"	3.50"

CAT #	QTY./CARD	DIA. INCHES	DIA. DECIMAL	DRILLING DEPTH	OVERALL LENGTH
DW1313	1	13/64"	.2031"	2.44"	3.62"
DW1314	1	7/32"	.2188"	2.50"	3.75"
DW1315	1	15/64"	.2344"	2.62"	3.88"
DW1316	1	1/4"	.2500"	2.75"	4.00"
DW1320	1	5/16"	.3125"	3.19"	4.50"
DW1324	1	3/8"	.3750"	3.62"	5.00"
DW1328**	1	7/16"	.4375"	4.06"	5.50"
DW1332**	1	1/2"	.5000"	4.50"	6.00"

\*\*3/8" Reduced shank

### TITANIUM SETS

CAT #	DESCRIPTION	INCLUDES
DW1363	13 Pc. Titanium Drill Bit Set	(2) 1/16", 5/64", (2) 3/32", 7/64", (2) 1/8", 9/64", 5/32", 3/16", 7/32", 1/4", TOUGH CASE® Container
DW1341	14 Pc. Titanium Speed Tip Drill Bit Set	(2) 1/16", 5/64", 3/32", 7/64", (2) 1/8", 9/64", 3/16", 7/32", 1/4", 5/16", 3/8", 1/2", TOUGH CASE® Container
DW1342	21 Pc. Titanium Speed Tip Drill Bit Set	(2) 1/16", (2) 5/64", 3/32", 7/64", (2) 1/8", 9/64", 5/32", 11/64", (2) 3/16", (2) 13/64", 7/32", 15/64", 1/4", 5/16", 3/8", 1/2", TOUGH CASE® Container
DW1354	14 Pc. Titanium PILOT POINT® Drill Bit Set	1/16", 5/64", 3/32", 7/64", (2) 1/8", 9/64", 5/32", 3/16", 7/32", 1/4", 5/16", 3/8", 1/2", TOUGH CASE® Container
DW1361	21 Pc. Titanium PILOT POINT® Drill Bit Set	(2) 1/16", (2) 5/64", 3/32", 7/64", (2) 1/8", 9/64", 5/32", 11/64", (2) 3/16", 13/64", 7/32", 15/64", (2) 1/4", 5/16", 3/8", 1/2", TOUGH CASE® Container
DW1369	29 Pc. Titanium PILOT POINT® Drill Bit Set	1/16", 5/64", 3/32", 7/64", 1/8", 9/64", 5/32", 11/64", 3/16", 13/64", 7/32", 15/64", 1/4", 17/64", 9/32", 19/64", 5/16", 21/64", 11/32", 23/64", 3/8", 25/64", 13/32", 27/64", 7/16", 29/64", 15/32", 31/64", 1/2", TOUGH CASE® Container




DW1361

(continued on next page)

## METAL & WOOD DRILLING *(continued)*

### GOLD FERROUS PILOT POINT®



CAT #	QTY./CARD	BULK	BULK QTY.	DIA. INCHES	DIA. DECIMAL	DRILLING DEPTH	OVERALL LENGTH
DW1904	2	DW1904B	12	1/16"	.0625"	.88"	1.88"
DW1905	2	DW1905B	12	5/64"	.0781"	1.00"	2.00"
DW1906	2	DW1906B	12	3/32"	.0938"	1.25"	2.25"
DW1907	2	DW1907B	12	7/64"	.1094"	1.50"	2.62"
DW1908	2	DW1908B	12	1/8"	.1250"	1.62"	2.75"
DW1909	1	DW1909B	12	9/64"	.1406"	1.75"	2.88"
DW1910	1	DW1910B	12	5/32"	.1562"	2.00"	3.12"
DW1911	1	DW1911B	12	11/64"	.1719"	2.12"	3.25"
DW1912	1	DW1912B	12	3/16"	.1875"	2.31"	3.50"
DW1913	1	DW1913B	12	13/64"	.2031"	2.44"	3.62"
DW1914	1	DW1914B	12	7/32"	.2188"	2.50"	3.75"
DW1915	1	DW1915B	12	15/64"	.2344"	2.62"	3.88"
DW1916	1	DW1916B	12	1/4"	.2500"	2.75"	4.00"
DW1917	1	DW1917B	12	17/64"	.2656"	2.88"	4.12"
DW1918	1	DW1918B	12	9/32"	.2812"	2.94"	4.25"

CAT #	QTY./CARD	BULK	BULK QTY.	DIA. INCHES	DIA. DECIMAL	DRILLING DEPTH	OVERALL LENGTH
DW1919	1	DW1919B	12	19/64"	.2969"	3.06"	4.38"
DW1920	1	DW1920B	6	5/16"	.3125"	3.19"	4.50"
DW1921	1	DW1921B	6	21/64"	.3281"	3.31"	4.62"
DW1922	1	DW1922B	6	11/32"	.3438"	3.44"	4.75"
DW1923	1	DW1923B	6	23/64"	.3594"	3.50"	4.88"
DW1924	1	DW1924B	6	3/8"	.3750"	3.62"	5.00"
DW1925**	1	DW1925B**	6	25/64"	.3906"	3.75"	5.12"
DW1926**	1	DW1926B**	6	13/32"	.4062"	3.88"	5.25"
DW1927**	1	DW1927B**	6	27/64"	.4219"	3.94"	5.50"
DW1928**	1	DW1928B**	6	7/16"	.4375"	4.06"	5.59"
DW1929**	1	DW1929B**	6	29/64"	.4531"	4.19"	5.75"
DW1930**	1	DW1930B**	6	15/32"	.4688"	4.31"	5.87"
DW1931**	1	DW1931B**	6	31/64"	.4844"	4.38"	5.98"
DW1932**	1	DW1932B**	6	1/2"	.5000"	4.5"	6.00"

\*\*3/8" Reduced shank

### GOLD FERROUS PILOT POINT® SETS

CAT #	DESCRIPTION	INCLUDES
DW1169	14 Pc. PILOT POINT® Drill Bit Set	(2) 1/16", 5/64", 3/32", 7/64", (2) 1/8", 9/64", 5/32", 3/16", 7/32", 1/4", 5/16", 3/8", TOUGH CASE® Container
DW1956	16 Pc. PILOT POINT® Drill Bit Set	(2) 1/16", 5/64", 3/32", 7/64", 1/8", 9/64", 5/32", 11/64", 3/16", 13/64", 7/32", 1/4", 5/16", 3/8", 1/2", TOUGH CASE® Container
DW1969	29 Pc. PILOT POINT® Drill Bit Set	1/16", 5/64", 3/32", 7/64", 1/8", 9/64", 5/32", 11/64", 3/16", 13/64", 7/32", 15/64", 1/4", 17/64", 9/32", 19/64", 5/16", 21/64", 11/32", 23/64", 3/8", 25/64", 13/32", 27/64", 7/16", 29/64", 15/32", 31/64", 1/2", Metal Index Container



DW1956



DW1969

### BLACK OXIDE



CAT #	DIAMETER	DRILLING DEPTH	OVERALL LENGTH	QTY.
DW1104	1/16"	.88"	1.88"	2
DW1105	5/64"	1"	2"	2
DW1106	3/32"	1.25"	2.25"	2
DW1107	7/64"	1.5"	2.62"	2
DW1108	1/8"	1.62"	2.75"	2
DW1109	9/64"	1.75"	2.88"	1
DW1110	5/32"	2"	3.12"	1
DW1111	11/64"	2.12"	3.25"	1
DW1112	3/16"	2.31"	3.5"	1
DW1113	13/64"	2.44"	3.62"	1
DW1114	7/32"	2.5"	3.75"	1
DW1115	15/64"	2.62"	3.88"	1
DW1116	1/4"	2.75"	4.00"	1
DW1117	17/64"	2.88"	4.12"	1
DW1118	9/32"	2.94"	4.25"	1
DW1119	19/64"	3.06"	4.38"	1
DW1120	5/16"	3.19"	4.5"	1
DW1121	21/64"	3.31"	4.62"	1
DW1122	11/32"	3.44"	4.75"	1
DW1123	23/64"	3.5"	4.88"	1
DW1124	3/8"	3.62"	5.00"	1
DW1125**	25/64"	3.75"	5.12"	1
DW1126**	13/32"	3.88"	5.25"	1
DW1127**	27/64"	3.94"	5.50"	1
DW1128**	7/16"	4.06"	5.59"	1
DW1129**	29/64"	4.19"	5.75"	1

CAT #	DIAMETER	DRILLING DEPTH	OVERALL LENGTH	QTY.
DW1130**	15/32"	4.31"	5.87"	1
DW1131**	31/64"	4.38"	5.98"	1
DW1132**	1/2"	4.5"	6.00"	1
<b>Reduced Shank</b>				
DW1620**	9/16"	3"	6"	1
DW1622**	5/8"	3"	6"	1
DW1623**	11/16"	3"	6"	1
DW1625**	3/4"	3"	6"	1
DW1627***	7/8"	3"	6"	1
DW1629***	1"	3"	6"	1
<b>6" Extended Length Bit</b>				
DW1603	1/8"	1.65"	6"	1
DW1605	3/16"	2.36"	6"	1
DW1607	1/4"	2.83"	6"	1
DW1609	5/16"	3.27"	6"	1
DW1611	3/8"	3.74"	6"	1
DW1615	1/2"	4.65"	6"	1
<b>12" Extended Length Bit</b>				
DW1602	1/8"	1.65"	12"	1
DW1604	3/16"	2.36"	12"	1
DW1606	1/4"	2.83"	12"	1
DW1608	5/16"	3.26"	12"	1
DW1610	3/8"	3.74"	12"	1
DW1612**	7/16"	4.17"	12"	1
DW1614**	1/2"	4.64"	12"	1



DW1116

\*\*3/8" Reduced shank

\*\*\*1/2" Reduced shank

*(continued on next page)*

## METAL & WOOD DRILLING (continued)

### BLACK OXIDE SETS

CAT #	DESCRIPTION	INCLUDES
DW1163	13 Pc. Black Oxide Drill Bit Set	(2) 1/16", 5/64", (2) 3/32", 7/64", (2) 1/8", 9/64", 5/32", 3/16", 7/32", 1/4", TOUGH CASE® Container
DW1167	17 Pc. Black Oxide Drill Bit Set	(2) 1/16", 5/64", 3/32", 7/64", 1/8", 9/64", 5/32", 11/64", 3/16", 13/64", 7/32", 15/64", 1/4", 5/16", 3/8", 1/2", TOUGH CASE® Container
DW1176	16 Pc. Black Oxide Drill Bit Set	(2) 1/16", 5/64", 3/32", 7/64", 1/8", 9/64", (2) 5/32", 11/64", (2) 3/16", 7/32", 1/4", 5/16", 3/8", TOUGH CASE® Container
DW1177	20 Pc. Black Oxide Drill Bit Set	(3) 1/16", 5/64", (2) 3/32", 7/64", (2) 1/8", 9/64", 5/32", 11/64", 3/16", 13/64", 7/32", 15/64", 1/4", 5/16", 3/8", 1/2", TOUGH CASE® Container
DW1162	14 Pc. Black Oxide Drill Bit Set	(2) 1/16", 5/64", 3/32", 7/64", (2) 1/8", 9/64", 5/32", 3/16", 7/32", 1/4", 5/16", 3/8", TOUGH CASE® Container



DW1177

### IMPACT READY® IMPACT DRIVER ACCESSORIES

See Page 88 for IMPACT READY®  
Drilling Listngs

## STEP BITS

### STEP DRILL BITS



CAT #	DESCRIPTION	# OF HOLES	STEP INCREMENTS	SHANK DIAMETER	MAX. MAT. THICKNESS
<b>Rotary</b>					
DW1787	3/4" – 1-3/8" Step Drill Bit	11	1/16"	3/8"	1/8"
<b>Hex Shank - IMPACT READY®</b>					
DWA1783IR	1/8" – 1/2" Step Drill Bit - IMPACT READY®	13	1/32"	1/4"	1/8"
DWA1784IR	3/16" – 1/2" Step Drill Bit - IMPACT READY®	6	1/16"	1/4"	5/16"
DWA1786IR	3/16" – 7/8" Step Drill Bit - IMPACT READY®	12	1/16"	1/4"	1/8"
DWA1789IR	7/8" – 1-1/8" Step Drill Bit - IMPACT READY®	2	-	1/4"	1/8"
DWA1790IR	3 Pc. Step Drill Bit Set - IMPACT READY®	19 Total	1/32" 1/16" 1/16"	1/4" 1/4" 1/4"	1/8" 5/16" 1/8"

### IMPACT READY® IMPACT DRIVER ACCESSORIES

See Page 88 for  
IMPACT READY®  
Step Drill Bit Listngs

## WOOD DRILLING



### HEAVY-DUTY SELF FEED BITS\*\*

CAT #	DESCRIPTION	CAT #	DESCRIPTION
DW1630	1"	DW1639	2-9/16"
DW1631	1-1/8"	DW1640	3"
DW1632	1-1/4"	DW1641	3-5/8"
DW1633	1-3/8"	DW1642	4-5/8"
DW1634	1-1/2"	DW1646	5-1/2" Extension
DW1635	1-3/4"	DW1647	12" Extension
DW1636	2"	DW1650	Replacement Parts (DW1630-DW1639)
DW1637	2-1/8"	DW1651	Replacement Parts (DW1640-DW1642)
DW1638	2-1/4"		**7/16" Quick change shank

### HEAVY-DUTY SELF FEED BIT SETS

CAT #	DESCRIPTION	INCLUDES
DW1648	5 Pc. Self Feed Bit Set	1-3/8", 1-1/2", 2-1/8", 2-9/16", 5-1/2" Extension
DW1649	8 Pc. Self Feed Bit Set	1", 1-1/8", 1-1/4", 1-1/2", 1-3/4", 2-1/8", 2-9/16", 5-1/2" Extension



DW1649

(continued on next page)

## WOOD DRILLING *(continued)*

### HEAVY-DUTY SPADE BITS



CAT #	DESCRIPTION	CAT #	DESCRIPTION	CAT #	DESCRIPTION
DW1570	1/4" x 6"	DW1579	13/16" x 6"	DW1590	3/8" x 16"
DW1571	5/16" x 6"	DW1580**	7/8" x 6"	DW1591	1/2" x 16"
DW1572	3/8" x 6"	DW1581	15/16" x 6"	DW1592	5/8" x 16"
DW1573	7/16" x 6"	DW1582**	1" x 6"	DW1593	3/4" x 16"
DW1574	1/2" x 6"	DW1583**	1-1/8" x 6"	DW1594	7/8" x 16"
DW1575**	9/16" x 6"	DW1584**	1-1/4" x 6"	DW1595	1" x 16"
DW1576**	5/8" x 6"	DW1585	1-3/8" x 6"	DW1588	6" Extension
DW1577	11/16" x 6"	DW1586	1-1/2" x 6"	DW1589	12" Extension
DW1578**	3/4" x 6"				

\*\*Available in bulk 25 packs

### HEAVY-DUTY SPADE BIT SET

CAT #	DESCRIPTION	INCLUDES
DW1587	6 Pc. Wood Boring Bit Set	3/8", 1/2", 5/8", 3/4", 7/8", 1"



DW1587

### POWER SHIP AUGER BITS\*\*\*



CAT #	DIA.	FLUTE LENGTH	OVERALL LENGTH	CAT #	DIA.	FLUTE LENGTH	OVERALL LENGTH
<b>Short</b>				<b>Long</b>			
DW1665	5/8"	4"	6"	DW1680	9/16"	12"	17"
DW1666	11/16"	4"	6"	DW1681	5/8"	12"	17"
DW1667	3/4"	4"	6"	DW1682	11/16"	12"	17"
DW1668	13/16"	4"	6"	DW1683	3/4"	12"	17"
DW1669	7/8"	4"	6"	DW1684	13/16"	12"	17"
DW1670	15/16"	4"	6"	DW1685	7/8"	12"	17"
DW1671	1"	4"	6"	DW1686	15/16"	12"	17"
DW1672	1-1/16"	4"	6"	DW1687	1"	12"	17"
DW1673	1-1/8"	4"	6"	DW1688	1-1/16"	12"	17"
DW1674	1-1/4"	4"	6"	DW1689	1-1/8"	12"	17"
DW1675	1-3/8"	4"	6"	DW1690	1-1/4"	12"	17"
DW1676	1-1/2"	4"	6"	DW1691	1-3/8"	12"	17"
				DW1692	1-1/2"	12"	17"

\*\*\*7/16" Quick change shank



### BELL HANGER BITS



CAT #	DIA.	LENGTH	CAT #	DIA.	LENGTH
DW1768	1/4"	12"	DW1776	7/16"	18"
DW1769	5/16"	12"	DW1777	1/2"	18"
DW1770	3/8"	12"	DW1778	1/4"	24"
DW1771	7/16"	12"	DW1779	5/16"	24"
DW1772	1/2"	12"	DW1780	3/8"	24"
DW1773	1/4"	18"	DW1781	7/16"	24"
DW1774	5/16"	18"	DW1782	1/2"	24"
DW1775	3/8"	18"			



### BRAD POINT



CAT #	DIA. INCHES	DIA. DECIMAL	FLUTE LENGTH	OVERALL LENGTH	QTY./ CARD
DW1702	1/8"	.1250"	1.75"	2.75"	1
DW1704	3/16"	.1875"	2.25"	3.38"	1
DW1706	1/4"	.2500"	2.50"	4.00"	1
DW1708	5/16"	.3125"	3.13"	4.75"	1
DW1710	3/8"	.3750"	3.50"	5.25"	1
DW1714	1/2"	.500"	4.00"	6.00"	1

### BRAD POINT SETS

CAT #	DESCRIPTION	INCLUDES
DW1720	6 Pc. Brad Point Bit Set	1/8", 3/16", 1/4", 5/16", 3/8", 1/2"



DW1720

## FASTENING ACCESSORIES

### 1" BIT TIPS



CAT #	DESCRIPTION	QTY.
<b>⊕ 1" Phillips Bit Tips</b>		
DW2001	#1 Phillips	2
DW2001BL**	#1 Phillips	100
DW2002	#2 Phillips	2
DW2002B10	#2 Phillips	10
DW2002BL**	#2 Phillips	100
DW2003	#3 Phillips	2
DW2003BL**	#3 Phillips	100
DW2002X10	#2 Phillips - Bit Box	10
DW2002B30	#2 Phillips - Bit Box	30
<b>⊕ 1" Drywall Bit Tips</b>		
DW2125	#2 Drywall	25
DW2004BL**	#2 Drywall	100
<b>1" Deck Bit Tip</b>		
⊕/2025	Deck Bit Tip	3

CAT #	DESCRIPTION	QTY.
<b>⊖ 1" Slotted Bit Tips</b>		
DW2006	#6 Slotted	2
DW2008	#8 Slotted	2
DW2008BL**	#8 Slotted	100
DW2010	#10 Slotted	2
DW2010BL**	#10 Slotted	100
DW2012	#12 Slotted	2
<b>□ 1" Square Recess Bit Tips</b>		
DW2201	#1 Square Recess	2
DW2202	#2 Square Recess	2
DW2202B10	#2 Square Recess	10
DW2200	#2 Square Recess	25
DW2203	#3 Square Recess	2
DW2203BL**	#3 Square Recess	100

CAT #	DESCRIPTION	QTY.
<b>⊙ 1" Star Bit Tips</b>		
DW2615B**	T15 Star	50
DW2620B**	T20 Star	50
DW2625B**	T25 Star	50
DW2627B**	T27 Star	50
DW2630B**	T30 Star	50

\*\*Bulk



See Page 84-89 for  
**IMPACT READY®**  
Bit Tip Listings  
& Power Bit Listings

### POWER BITS



CAT #	DESCRIPTION	LENGTH	QTY.
<b>⊕ Phillips Power Bits</b>			
DW2021	#1 Phillips	2"	1
DW2022	#2 Phillips	2"	1
DW2115	#2 Phillips - Multi-Pack	2"	5
DW2022B**	#2 Phillips	2"	100
DW2023	#3 Phillips	2"	1
DW2023B**	#3 Phillips	2"	100
DW2031	#1 Phillips	3-1/2"	1
DW2032	#2 Phillips	3-1/2"	1
DW2033	#3 Phillips	3-1/2"	1
DW2061	#1 Phillips	6"	1
DW2062	#2 Phillips	6"	1
DW2063	#3 Phillips	6"	1
DW2022B6	#1 Phillips	2"	6
<b>⊕ Deck Power Bits</b>			
DW2021	Deck	2"	3

CAT #	DESCRIPTION	LENGTH	QTY.
<b>⊖ Slotted Power Bits</b>			
DW2015	#6 Slotted	2"	1
DW2016	#8 Slotted	2"	1
DW2017	#10 Slotted	2"	1
DW2036	#6 Slotted	3-1/2"	1
DW2038	#8 Slotted	3-1/2"	1
DW2040	#10 Slotted	3-1/2"	1
DW2065	#8 Slotted	6"	1
<b>□ Square Recess Power Bits</b>			
DW2211	#1 Square Recess	2"	1
DW2212	#2 Square Recess	2"	1
DW2212B	#2 Square Recess	2"	100
DW2213	#3 Square Recess	2"	1
DW2231	#1 Square Recess	3-1/2"	1
DW2232	#2 Square Recess	3-1/2"	1
DW2233	#3 Square Recess	3-1/2"	1

CAT #	DESCRIPTION	LENGTH	QTY.
<b>□ Square Recess Power Bit (continued)</b>			
DW2261	#1 Square Recess	6"	1
DW2262	#2 Square Recess	6"	1
DW2263	#3 Square Recess	6"	1
<b>⊙ Star Power Bit</b>			
DW2645B**	T10 Star	2"	50
DW2648B**	T15 Star	2"	50
DW2660B**	T20 Star	2"	50
DW2665B**	T25 Star	2"	50
DW2670B**	T30 Star	2"	50
DW2680B**	T40 Star	2"	50
DW2648	T15 Star	2"	1
DW2660	T20 Star	2"	1
DW2665	T25 Star	2"	1
DW2670	T30 Star	2"	1

\*\*Bulk

### DOUBLE ENDED BITS



CAT #	DESCRIPTION	QTY.
DW2024	PH#2/SL#8	1
DW2024B**	PH#2/SL#8	100
DW2028	PH#2/PH#2	1
DW2028B**	PH#2/PH#2	100

CAT #	DESCRIPTION	QTY.
DW2029	PH#2/PH#2	5
DW2215	PH#2/SQ#2	3
DW2024B6	PH#2/SL#6	6
DW2028B6	PH#2/PH#2	6

\*\*Bulk

### BIT TIP HOLDERS



CAT #	DESCRIPTION	QTY.
DW2046	2" Magnetic	1
DW2050	Quick Change Magnetic	1
<b>Hog Ring***</b>		
DW2045	3" Magnetic with Hog Ring	1
DW2045B**	3" Magnetic with Hog Ring	50

\*\*Bulk

\*\*\*Hog ring helps secure bit, must use pliers to remove bit



See Page 87 for **IMPACT READY®**  
Bit Tip Holder Listings

(continued on next page)

## FASTENING ACCESSORIES (continued)

### MAGNETIC DRIVE GUIDES



CAT #	DESCRIPTION	QTY.
DW2054	Compact Magnetic Drive Guide	1
DW2055	6" Magnetic Drive Guide	1
DW2055B**	6" Magnetic Drive Guide	25

\*\*Bulk

### MAGNETIC DRIVE GUIDE SETS

CAT #	DESCRIPTION
DW2095	7 Pc. Magnetic Drive Guide Set
DW2052	10 Pc. Magnetic Drive Guide Set with #2 Square Recess Bit Tips
DW2053	16 Pc. Magnetic Drive Guide Set
DW2089CS	12 Pc. Magnetic Drive Guide Set - Clipstrip
DW2097CS	14 Pc. Magnetic Drive Guide Set - Clipstrip
DW2053CS	16 Pc. Magnetic Drive Guide Set - Clipstrip



DW2095

### MAGNETIC NUT DRIVERS



CAT #	DESCRIPTION	QTY.	CAT #	DESCRIPTION	QTY.	CAT #	DESCRIPTION	QTY.
DW2218	1/4" x 1-7/8"	1	DW2222	5/16" x 2-9/16"	1	DW2219B2	5/16" x 1-7/8"	2
DW2218B**	1/4" x 1-7/8"	50	DW2222B**	5/16" x 2-9/16"	50	DW2219B3	5/16" x 1-7/8"	3
DW2219	5/16" x 1-7/8"	1	DW2223	3/8" x 1-7/8"	1	DW2218B3	1/4" x 2-9/16"	3
DW2219B**	5/16" x 1-7/8"	50	DW2223B**	3/8" x 1-7/8"	50	DW2227	7/8" x 1-7/8"	3
DW2220	3/8" x 1-7/8"	1	DW2224	3 Pc. Nutdriver Set (1/4", 5/16", 3/8")	1	DW2227B**	7/8" x 1-7/8"	50
DW2220B**	3/8" x 1-7/8"	50	DW2225	Acoustical Eye Lag Driver	1	DW2224	3 Pc. Nut Driver Set (1/4", 5/16", 3/8")	1
DW2221	1/4" x 2-9/16"	1	DW2225B**	Acoustical Eye Lag Driver	50	DW2228	7/16" x 2-9/16"	1
DW2221B**	1/4" x 2-9/16"	50	DW2218B2	1/4" x 1-7/8"	2	DW2228B**	7/16" x 2-9/16"	50

\*\*Bulk

## IMPACT READY® IMPACT DRIVER ACCESSORIES

See Page 86 - 87 for **IMPACT READY®** Nut Driver and Socket Listings

### SCREWDRIVING SETS



DW2176



DWMTC

CAT #	DESCRIPTION
<b>TOUGH CASE® Sets</b>	
DW2160	13 Pc. Screwdriving Set with TOUGH CASE® Container
DW2161	21 Pc. Screwdriving Set with TOUGH CASE® Container
DW2162	29 Pc. Screwdriving Set with TOUGH CASE® Container
DW2163	37 Pc. Screwdriving Set with TOUGH CASE® Container
DW2166	45 Pc. Screwdriving Set with TOUGH CASE® Container
DW2167	25 Pc. Screwdriving Set with TOUGH CASE® Container
DW2174	18 Pc. Screwdriving Set with TOUGH CASE® Container
DW2176	37 Pc. Screwdriving Set with TOUGH CASE® Container
DW2587	80 Pc. Screwdriving Set with TOUGH CASE® Container

### Magnetic TOUGH CASE® Sets

DWMTC15	15 Pc. Screwdriving Set with Magnetic TOUGH CASE® Container
---------	---

### Compact TOUGH CASE® Sets

DWAX100	31 Pc. Screwdriving Set with Compact TOUGH CASE® Container
DWAX200	31 Pc. Security Set with Compact TOUGH CASE® Container

### Cases

DW2190	Medium TOUGH CASE® Container - Case Only
DWMTC	Magnetic TOUGH CASE® Container - Case Only

### SPECIALTY BIT PACKS

CAT #	DESCRIPTION	INCLUDES
DW2067	7 Pc. Star Bit Set	T10, T15, T20, T25, T27, T30, T40
DW2067SCR	7 Pc. Security Star Set	T10, T15, T20, T25, T27, T30, T40
DW2068	9 Pc. 1" Hex Bit Set	5/64", 3/32", 7/64", 1/16", 1/8", 9/64", 5/32", 3/16", 1/4"
DW2069	3 Pc. POZIDRIV®* 1" Bit Set	#1, #2, #3

\*POZIDRIV® is a registered trademark of the Philips Screw Company



DW2067

### SCREW SETTERS



CAT #	DESCRIPTION	QTY.
DW2014	Drywall Screw Setter	1
DW2014B**	Drywall Screw Setter	100
DW2043	Adjustable Screw Setter - Non Magnetic	1

\*\*Bulk



## IMPACT READY® IMPACT DRIVER ACCESSORIES

See Page 86 for **IMPACT READY®** Sets Listings

## QUICK CHANGE ACCESSORIES

### DRILL DRIVE SETS



CAT #	DESCRIPTION	INCLUDES
DW2730	8 Pc. Drill Drive Set	Drill Drive Holder, Drill Drive Connector, #6 & #8 Drill Bits with Countersinks, #8 Replacement Drill Bit, 3 Screwdriver Bit Tips, Heavy-Duty Container
DW2735P	12 Pc. Drill Drive Set	Drill Drive Holder, Drill Drive Connector, #6, #8 & #10 Drill Bits with Countersinks, #6 (2), #8 & #10 Replacement Drill Bits, 3 Screwdriver Bit Tips, Heavy-Duty Container

**Drill Drive Replacement Countersinks & Drill Bits are Listed Below**

### RAPID LOAD® QUICK CHANGE ACCESSORIES



CAT #	DESCRIPTION
<b>Countersinks</b>	
DW2537	#6 Countersink Replacement Drill Bit 9/64"
DW2538	#8 Countersink Replacement Drill Bit 11/64"
DW2539	#10 Countersink Replacement Drill Bit 3/16"
DW2540	#12 Countersink Replacement Drill Bit 7/32"
DW2567	#6 Countersink with 9/64" Drill Bit
DW2568	#8 Countersink with 11/64" Drill Bit
DW2569	#10 Countersink with 3/16" Drill Bit
DW2570	#12 Countersink with 7/32" Drill Bit
DW2535	3 Pc. Countersink Set #6, #8, #10

CAT #	DESCRIPTION
<b>Rotary Masonry Drill Bits</b>	
DW2572	5/32" Rotary Masonry Bit
DW2573	3/16" Rotary Masonry Bit
DW2574	1/4" Rotary Masonry Bit
DW2571	3 Pc. Countersink Set 5/32", 3/16", 1/4"
<b>Socket Adapters</b>	
DW2541	1/4" Socket Adapter
DW2542	3/8" Socket Adapter

### RAPID LOAD® QUICK CHANGE ACCESSORY SYSTEM

*These ACCESSORIES also fit the RAPID LOAD® Holder but are found in separate listings in this catalog.*

**Power Bits - Page 94**  
**Bit Tip Holders - Page 94**  
**Magnetic Nut Drivers - Page 95**  
**Magnetic Drive Guides - Page 95**

### RAPID LOAD® HOLDER



CAT #	DESCRIPTION
DW2505	RAPID LOAD® Hex Holder
DWA2500	RAPID LOAD® Holder with SureSet™ System

- Pressure-activated ball-groove system for rapid loading and strong retention
- Impact & rust resistant nickel plated nose for extended use
- Stainless steel interior parts for greater durability and magnetic to hold fasteners
- The RAPID LOAD® holder fits all brands of 3/8" and 1/2" cordless and corded drills, as well as 7 in 1 Screwdrivers
- Able to hold 1" bit tips, 1" double ended bit tips and all 1/4" hex shank accessories

### RAPID LOAD® SETS

CAT #	DESCRIPTION
DW2502	17 Pc. RAPID LOAD® Set
DW2503	20 Pc. RAPID LOAD® Set
DW2504	27 Pc. RAPID LOAD® Set with Magnetic Compact
DW2507	6 Pc. RAPID LOAD® Set with Magnetic Compact
DW2513	15 Pc. RAPID LOAD® Set
DW2518	30 Pc. RAPID LOAD® Set
DW2521	28 Pc. RAPID LOAD® Set
DW2522	32 Pc. RAPID LOAD® Set
DW2530	35 Pc. RAPID LOAD® Set



DW2502



DW2507

## 2X<sup>™</sup> LONG LIFE<sup>™</sup>



- Long Life**  
 Proprietary coating, steel construction, tooth geometry and blade thickness help to reduce heat build-up

- Outstanding Durability**  
 Thick and wide blade

- Efficient Cutting Performance**  
 Variable pitch 14/18 TPI



SCAN FOR MORE INFO

2X<sup>™</sup>

RECIPROCATING SAW BLADE SELECTION GUIDE												
MATERIALS	WOOD	NAIL-EMBEDDED WOOD	WOOD SCROLLING	DEMOLITION/FIRE & RESCUE	PVC	CAST IRON	THICK METAL ≥ 1/8"	MEDIUM METAL 1/16" - 1/8"	THIN METAL ≤ 1/16"	METAL SCROLLING	DRYWALL/PLASTER	CEMENT BOARD
<b>BEST</b>	Demolition with <i>PlungePoint</i> DWA4166 DWA4169 DWA41612		Wood Scrolling Blade DW4816	First Response DWA4174 DWA4176 DWA4179 DWA41712	Bi-Metal DW4802 DW4803 DW4804	DWA4186 DWA4188 DWA41812				Metal Scrolling DW4815	Drywall/Plaster DW4851	Carbide Grit DW4843 DW4844
<b>BETTER</b>	Bi-Metal with <i>PlungePoint</i> DW4802 DW4803 DW4804			Multi-Material DW4845 DW4846 DW4839B25	Bi-Metal 14 TPI 4" DW4807		Bi-Metal DW4808 DW4809 DW4838	Bi-Metal DW4810 DW4811 DW4812 DW482B25	Bi-Metal DW4812 DW4813		Multi-Material DW4845 DW4846 DW4839B25	
<b>GOOD</b>	Bi-Metal DW4847 DW4848 DW4849											

## RECIPROCATING SAW BLADES

### 2X<sup>™</sup> LONG LIFE WOOD CUTTING



DWA4166

CAT #	BLADE LENGTH	TPI	BLADE TYPE
<b>5 Packs</b>			
DWA4166	6"	6	Taper
DWA4169	9"	6	Taper
DWA41612	12"	6	Taper
<b>25 Packs</b>			
DWA4166B25	6"	6	Taper
DWA4169B25	9"	6	Taper
DWA41612B25	12"	6	Taper
<b>100 Packs</b>			
DWA4166B	6"	6	Taper
DWA4169B	9"	6	Taper
DWA41612B	12"	6	Taper

### 2X<sup>™</sup> LONG LIFE METAL CUTTING



DWA4188

CAT #	BLADE LENGTH	TPI	BLADE TYPE
<b>5 Packs</b>			
DWA4186	6"	14/18	Straight
DWA4188	8"	14/18	Straight
DWA41812	12"	14/18	Straight
<b>25 Packs</b>			
DWA4186B25	6"	14/18	Straight
DWA4188B25	8"	14/18	Straight
DWA41812B25	12"	14/18	Straight
<b>100 Packs</b>			
DWA4186B	6"	14/18	Straight
DWA4188B	8"	14/18	Straight
DWA41812B	12"	14/18	Straight

### 2X<sup>™</sup> LONG LIFE GENERAL PURPOSE



DWA4176

CAT #	BLADE LENGTH	TPI	BLADE TYPE
<b>5 Packs</b>			
DWA4174	4"	10	Straight
DWA4176	6"	10	Straight
DWA4179	9"	10	Straight
DWA41712	12"	10	Straight
<b>25 Packs</b>			
DWA4176B25	6"	10	Straight
DWA4179B25	9"	10	Straight
DWA41712B25	12"	10	Straight
<b>100 Packs</b>			
DWA4176B	6"	10	Straight
DWA4179B	9"	10	Straight
DWA41712B	12"	10	Straight

### SETS

CAT #	DESCRIPTION	INCLUDES
DWA4101	8 PC 2X <sup>™</sup> Recip Set with Telescoping Case	(3) DWA4166, (3) DWA4186, DWA4179, DWA4188



(continued on next page)

## RECIPROCATING SAW BLADES *(continued)*



DW4809

### WOOD CUTTING

CAT #	BLADE LENGTH	TPI	BLADE TYPE
<b>2 Packs</b>			
DW4802-2	6"	6	Taper
DW4804-2	12"	6	Taper
DW4847-2	6"	5/8	Taper
<b>5 Packs</b>			
DW4801	6"	3	Taper
DW4802	6"	6	Taper
DW4803	9"	6	Taper
DW4804	12"	6	Taper
DW4847	6"	5/8	Taper
DW4848	9"	5/8	Taper
DW4849	12"	5/8	Taper
DW4850	6"	6	Straight
<b>25 Packs</b>			
DW4802B25	6"	6	Taper
DW4803B25	9"	6	Taper
DW4804B25	12"	6	Taper
DW4847B25	6"	5/8	Taper
<b>100 Packs</b>			
DW4802B	6"	6	Taper
DW4803B	9"	6	Taper
DW4804B	12"	6	Taper

### METAL CUTTING



DW4809

CAT #	BLADE LENGTH	TPI	BLADE TYPE
<b>2 Packs</b>			
DW4808-2	6"	14	Straight
DW4810-2	4"	18	Straight
DW4811-2	6"	18	Straight
DW4813-2	6"	24	Straight
<b>5 Packs</b>			
DW4807	4"	14	Straight
DW4808	6"	14	Straight
DW4809	8"	14	Straight
DW4838	12"	14	Straight
DW4810	4"	18	Straight
DW4811	6"	18	Straight
DW4821	8"	18	Straight
DW4812	4"	24	Straight
DW4813	6"	24	Straight
DW4846L	9"	10/14	Straight

CAT #	BLADE LENGTH	TPI	BLADE TYPE
<b>25 Packs</b>			
DW4807B25	4"	14	Straight
DW4808B25	6"	14	Straight
DW4809B25	8"	14	Straight
DW4810B25	4"	18	Straight
DW4811B25	6"	18	Straight
DW4821B25	8"	18	Straight
DW4822B25	12"	18	Straight
DW4812B25	4"	24	Straight
DW4813B25	6"	24	Straight
<b>100 Packs</b>			
DW4807B	4"	14	Straight
DW4808B	6"	14	Straight
DW4809B	8"	14	Straight
DW4811B	6"	18	Straight
DW4821B	8"	18	Straight
DW4813B	6"	24	Straight

### SPECIALTY



DW4844



DW4876

CAT #	BLADE LENGTH	TPI	BLADE TYPE
<b>Scroll Cutting Blades</b>			
DW4814	3-1/2"	14	General Purpose
DW4815	3-1/2"	18	Metal
DW4816	6"	6	Wood
<b>Drywall Cutting Blades</b>			
DW4851	6"	6	Taper

CAT #	BLADE LENGTH	TPI	BLADE TYPE
<b>Carbide Grit Edge Blades</b>			
DW4844	6"	Coarse	Straight
DW4843	8"	Coarse	Straight
<b>Cordless Bi-Metal Blades</b>			
DW4876	6"	5/8	Taper
DW4878	6"	18	Straight

### GENERAL PURPOSE



DW4845

CAT #	BLADE LENGTH	TPI	BLADE TYPE
<b>2 Packs</b>			
DW4806-2	6"	10	Straight
DW4845-2	6"	10/14	Straight
<b>5 Packs</b>			
DW4845	6"	10/14	Straight
DW4846	8"	10/14	Straight
<b>25 Packs</b>			
DW4806B25	6"	10	Straight
DW4845B25	6"	10/14	Straight
DW4846B25	8"	10/14	Straight
DW4839B25	12"	10/14	Straight
<b>100 Packs</b>			
DW4806B	6"	10	Straight
DW4845B	6"	10/14	Straight
DW4846B	8"	10/14	Straight
DW4839B	12"	10/14	Straight



DW4856



DW4892

### SETS

CAT #	DESCRIPTION	INCLUDES
DW4853	3 Pc. Bi-Metal Saw Blade Set	DW4802, DW4806, DW4811
DW4875	3 Pc. Cordless Bi-Metal Saw Blade Set	DW4876, DW487, DW4878
DW4857	5 Pc. Bi-Metal Saw Blade Set	(2) DW4802, DW4808, DW4811, DW4813
DW4856	6 Pc. Bi-Metal Saw Blade Set	DW4802, DW4847, DW4806, DW4808, DW4811, DW4813
DW4896	6 Pc. Bi-Metal Saw Blade Set with Telescoping Case	(2) DW4809, (2) DW4803, (2) DW4865
DW4892	12 Pc. Bi-Metal Saw Blade Set with Telescoping Case	(3) DW4802, (2) DW4811, (2) DW4809, (2) DW4803, DW4865
DW4890	15 Pc. Bi-Metal Saw Blade Set with Medium TOUGH CASE®	(5) DW4802, (5) DW4808, (5) DW4811
DW4897	15 Pc. Bi-Metal Saw Blade Set with Telescoping Case	(4) DW4802, (4) DW4811, (3) DW4809, (3) DW4803, DW4865
DW4898	10 Pc. Bi-Metal Reciprocating Saw Blade Set with Case	(4) DW4802, (4) DW4811, (1) DW4809, (1) DW4803
DW4899	16 Pc. Bi-Metal Reciprocating Saw Blade Set with Case	(6) DW4802, (5) DW4811, (2) DW4809, (2) DW4803, DW4865

## HOLE SAWS

### 2X™ LONG LIFE PREMIUM HOLE SAWS



CAT #	SIZE Inches	SIZE Metric	MAX SPEED
DWA1809	9/16"	14mm	550
DWA1810	5/8"	16mm	530
DWA1811	11/16"	17mm	500
DWA1812	3/4"	19mm	460
DWA1898	-	20mm	425
DWA1813	13/16"	21mm	425
DWA1814	7/8"	22mm	390
DWA1815	15/16"	24mm	370
DWA1816	1"	25mm	350
DWA1817	1-1/16"	27mm	325
DWA1818	1-1/8"	29mm	300
DWA1819	1-3/16"	30mm	285
DWA1820	1-1/4"	32mm	275

CAT #	SIZE Inches	SIZE Metric	MAX SPEED
DWA1821	1-5/16"	33mm	260
DWA1822	1-3/8"	35mm	250
DWA1823	1-7/16"	37mm	240
DWA1824	1-1/2"	38mm	230
DWA1825	1-9/16"	40mm	220
DWA1826	1-5/8"	41mm	210
DWA1827	1-11/16"	43mm	205
DWA1828	1-3/4"	44mm	195
DWA1829	1-13/16"	46mm	190
DWA1830	1-7/8"	48mm	180
DWA1832	2"	51mm	170
DWA1833	2-1/16"	52mm	165
DWA1834	2-1/8"	54mm	160

CAT #	SIZE Inches	SIZE Metric	MAX SPEED
DWA1836	2-1/4"	57mm	150
DWA1838	2-3/8"	60mm	140
DWA1840	2/1/2"	64mm	135
DWA1841	2-9/16"	65mm	130
DWA1842	2-5/8"	67mm	130
DWA1843	-	68mm	125
DWA1844	2-3/4"	70mm	125
DWA1846	2-7/8"	73mm	120
DWA1848	3"	76mm	115
DWA1850	3-1/8"	79mm	110
DWA1852	3-1/4"	83mm	105
DWA1854	3-3/8"	86mm	100
DWA1856	3-1/2"	89mm	95

CAT #	SIZE Inches	SIZE Metric	MAX SPEED
DWA1858	3-5/8"	92mm	95
DWA1860	3-3/4"	95mm	90
DWA1862	3-7/8"	98mm	85
DWA1864	4"	102mm	85
DWA1866	4-1/8"	105mm	85
DWA1868	4-1/4"	108mm	80
DWA1872	4-1/2"	114mm	75
DWA1876	4-3/4"	121mm	70
DWA1880	5"	127mm	65
DWA1888	5-1/2"	140mm	60
DWA1896	6"	152mm	55

### 2X™ LONG LIFE PREMIUM SETS

CAT #	DESCRIPTION	INCLUDES
DWA1801	9 Pc. Plumber's Hole Saw Set	3/4", 7/8", 1-1/8", 1-1/2", 1-3/4", 2-1/4", Small Quick Change Mandrel, Large Quick Change Mandrel, Replacement Parts
DWA1802	9 Pc. Electrician's Hole Saw Set	7/8", 1-1/8", 1-3/8", 1-3/4", 2", 2-1/2", Small Quick Change Mandrel, Large Quick Change Mandrel, Replacement Parts
DWA1805	13 Pc. Master Hole Saw Set	3/4", 7/8", 1", 1-1/8", 1-3/8", 1-1/2", 1-3/4", 2", 2-1/8", 2-1/2", Small Quick Change Mandrel, Large Quick Change Mandrel, Replacement Parts



### BI-METAL HOLE SAWS



CAT #	SIZE Inches	SIZE Metric	MAX SPEED
D180009	9/16"	14mm	550
D180010	5/8"	16mm	530
D180011	11/16"	17mm	500
D180012	3/4"	19mm	460
D180098	-	20mm	425
D180013	13/16"	21mm	425
D180014	7/8"	22mm	390
D180015	15/16"	24mm	370
D180016	1"	25mm	350
D180017	1-1/16"	27mm	325
D180018	1-1/8"	29mm	300
D180019	1-3/16"	30mm	285
D180020	1-1/4"	32mm	275

CAT #	SIZE Inches	SIZE Metric	MAX SPEED
D180021	1-5/16"	33mm	260
D180022	1-3/8"	35mm	250
D180023	1-7/16"	37mm	240
D180024	1-1/2"	38mm	230
D180025	1-9/16"	40mm	220
D180026	1-5/8"	41mm	210
D180027	1-11/16"	43mm	205
D180028	1-3/4"	44mm	195
D180029	1-13/16"	46mm	190
D180030	1-7/8"	48mm	180
D180032	2"	51mm	170
D180033	2-1/16"	52mm	165
D180034	2-1/8"	54mm	160

CAT #	SIZE Inches	SIZE Metric	MAX SPEED
D180036	2-1/4"	57mm	150
D180038	2-3/8"	60mm	140
D180040	2/1/2"	64mm	135
D180041	2-9/16"	65mm	130
D180042	2-5/8"	67mm	130
D180043	-	68mm	125
D180044	2-3/4"	70mm	125
D180046	2-7/8"	73mm	120
D180048	3"	76mm	115
D180050	3-1/8"	79mm	110
D180052	3-1/4"	83mm	105
D180054	3-3/8"	86mm	100
D180056	3-1/2"	89mm	95



CAT #	SIZE Inches	SIZE Metric	MAX SPEED
D180058	3-5/8"	92mm	95
D180060	3-3/4"	95mm	90
D180062	3-7/8"	98mm	85
D180064	4"	102mm	85
D180066	4-1/8"	105mm	85
D180068	4-1/4"	108mm	80
D180072	4-1/2"	114mm	75
D180076	4-3/4"	121mm	70
D180080	5"	127mm	65
D180088	5-1/2"	140mm	60
D180096	6"	152mm	55

## SETS

CAT #	DESCRIPTION	INCLUDES
D180001	9 Pc. Plumber's Hole Saw Set	3/4", 7/8", 1-1/8", 1-1/2", 1-3/4", 2-1/4", Small Quick Change Mandrel, Large Quick Change Mandrel, Replacement Parts
D180002	9 Pc. Electrician's Hole Saw Set	7/8", 1-1/8", 1-3/8", 1-3/4", 2", 2-1/2", Small Quick Change Mandrel, Large Quick Change Mandrel, Replacement Parts
D180005	13 Pc. Master Hole Saw Set	3/4", 7/8", 1", 1-1/8", 1-3/8", 1-1/2", 1-3/4", 2", 2-1/8", 2-1/2", Small Quick Change Mandrel, Large Quick Change Mandrel, Replacement Parts
D180004	Door Lock Installation Kit	1", 2-1/8" Holesaws, Mandrel, Adapter, Drill Guide



D180001



D180004

(continued on next page)

## HOLE SAWS (continued)

### MANDRELS



DW1810



DW1803

CAT #	TYPE	SHANK SIZE	CHUCK SIZE	HOLE SAW SIZE
DW1800	Standard	1/4"	1/4"	9/16" to 1-3/16"
DW1801	Standard	3/8"	3/8"	9/16" to 1-3/16"
DW1810	Quick Change	3/8"	3/8"	9/16" to 1-3/16"
DW1818	Standard	3/8"	3/8"	1-1/4" to 3"
DW1805	Quick Change	3/8"	3/8"	1-1/4" to 3"

CAT #	TYPE	SHANK SIZE	CHUCK SIZE	HOLE SAW SIZE
DW1802	Standard	7/16"	1/2"	1-1/4" to 6"
DW1803	Quick Change	7/16"	1/2"	1-1/4" to 6"
DW1807	Short Replacement Pilot Bit	-	-	3"
DW1808	Long Replacement Pilot Bit	-	-	4"

**IMPACT READY**  
IMPACT DRIVER ACCESSORIES

See Page 88 for  
**IMPACT READY®**  
Hole Saw Listings

## BANDSAW BLADES

### BI-METAL PORTABLE BANDSAW BLADES



CAT #	TPI	THICKNESS	LENGTH	HEIGHT	PACK
DW3981	10	.020"	44-7/8"	1/2"	3
DW3981B	10	.020"	44-7/8"	1/2"	100
DW3982	14	.020"	44-7/8"	1/2"	3
DW3982B	14	.020"	44-7/8"	1/2"	100
DW3983	18	.020"	44-7/8"	1/2"	3
DW3983B	18	.020"	44-7/8"	1/2"	100

CAT #	TPI	THICKNESS	LENGTH	HEIGHT	PACK
DW3984	24	.020"	44-7/8"	1/2"	3
DW3984B	24	.020"	44-7/8"	1/2"	100
DW3985	10/14	.020"	44-7/8"	1/2"	3
DW3985B	10/14	.020"	44-7/8"	1/2"	100
DW3986	14/18	.020"	44-7/8"	1/2"	3
DW3986B	14/18	.020"	44-7/8"	1/2"	100

CAT #	TPI	THICKNESS	LENGTH	HEIGHT	PACK
DW3987	10	.025"	44-7/8"	1/2"	3
DW3988	14	.025"	44-7/8"	1/2"	3
DW3989	18	.025"	44-7/8"	1/2"	3
DW3991	10/14	.025"	44-7/8"	1/2"	3
DW3992	14/18	.025"	44-7/8"	1/2"	3

### BI-METAL CORDLESS BANDSAW BLADES

CAT #	TPI	THICKNESS	LENGTH	HEIGHT	PACK
DW3982C	14	.020"	32-7/8"	1/2"	3
DW3986C	14/18	.020"	32-7/8"	1/2"	3
DW3983C	18	.020"	32-7/8"	1/2"	3
DW3984C	24	.020"	32-7/8"	1/2"	3

## JIG SAW BLADES

### T-SHANK



CAT #	DESCRIPTION	CUTTING LENGTH	TPI	QTY.
<b>High Performance WOOD Cutting (HCS) Adapters</b>				
DW3750H2	Fast Cutting	4"	6	2
DW3750H	Fast Cutting	4"	6	5
DW3750H50	Fast Cutting	4"	6	50
DW3753H2	Clean Cutting	4"	6	2
DW3753H	Clean Cutting	4"	6	5
DW3753H50	Clean Cutting	4"	6	50
DW3755H2	Aluminum/Fiberglass	4"	8	2
DW3755H	Aluminum/Fiberglass	4"	8	5
DW3755H50	Aluminum/Fiberglass	4"	8	50
DW3760H2	Fine Cut Smooth Finish	4"	10	2
DW3760H	Fine Cut Smooth Finish	4"	10	5
DW3760H50	Fine Cut Smooth Finish	4"	10	50
DW3762H2	Laminate Down Cutting	4"	10	2
DW3762H	Laminate Down Cutting	4"	10	5
DW3762H50	Laminate Down Cutting	4"	10	50
DW3765H2	Trim Coping	3"	12	2
DW3765H	Trim Coping	3"	12	5

CAT #	DESCRIPTION	CUTTING LENGTH	TPI	QTY.
<b>Cobalt Steel WOOD Cutting</b>				
DW3750-5	Fast Cutting	4"	6	5
DW3751-5	Wide Body	4"	6	5
DW3753-5	Clean Cutting	4"	6	5
DW3755-5	Aluminum/Fiberglass	4"	8	5
DW3760-5	Fine Cut Smooth Finish	4"	10	5
DW3762-5	Laminate Down Cutting	4"	10	5
DW3765-5	Scrolling	3"	12	5
<b>METAL Cutting</b>				
DW3770-5	Metal Cutting	3"	14	5
DW3770B50	Metal Cutting	3"	14	50
DW3774-5	Metal Cutting	3"	18	5
DW3774B50	Metal Cutting	3"	18	50
DW3776-5	Metal Cutting	3"	24	5
DW3776B50	Metal Cutting	3"	24	50
DW3778-5	Metal Cutting	3"	32	5
DW3778B50	Metal Cutting	3"	32	50
<b>MASONRY Cutting</b>				
DW3768-5	Carbide Grit Cobalt Steel	3"	-	5

### T-SHANK SETS

CAT #	DESCRIPTION
DW3795H	5 Pc. T-Shank Jig Saw Blade Set
DW3791	8 Pc. T-Shank Jig Saw Blade Set
DW3741C	10 Pc. T-Shank Jig Saw Blade Set with Case
DW3742C	14 Pc. T-Shank Jig Saw Blade Set with Case



DW3795H



DW3742C

## JIG SAW BLADES *(continued)*

### U-SHANK



CAT #	DESCRIPTION	CUTTING LENGTH	TPI	QTY.
<b>High Performance WOOD Cutting (HCS)</b>				
DW3700H2	Fast Cutting	4"	6	2
DW3700H	Fast Cutting	4"	6	5
DW3700H50	Fast Cutting	4"	6	50
DW3701H2	Fast Cutting	4"	6	2
DW3703H2	Clean Cutting	4"	6	2
DW3703H	Clean Cutting	4"	6	5
DW3703H50	Clean Cutting	4"	6	50
DW3705H	Aluminum/Fiberglass	4"	8	5
DW3710H2	Fine Cut Smooth Finish	4"	10	2
DW3710H	Fine Cut Smooth Finish	4"	10	5
DW3710H50	Fine Cut Smooth Finish	4"	10	50
DW3712H2	Laminate Down Cutting	4"	10	2
DW3712H	Laminate Down Cutting	4"	10	5
DW3715H2	Wood Scrolling	3"	12	2
DW3715H	Wood Scrolling	3"	12	5
<b>WOOD Cutting</b>				
DW3700-5	Fast Cutting	4"	6	5
DW3701-5	Wide Body	4"	6	5
DW3703-5	Clean Cutting	4"	6	5
DW3705-5	Aluminum/Fiberglass	4"	8	5
DW3710-5	Fine Cut Smooth Finish	4"	10	5
DW3712-5	Laminate Down Cutting	4"	10	5
DW3715-5	Scrolling	3"	12	5

CAT #	DESCRIPTION	CUTTING LENGTH	TPI	QTY.
<b>METAL Cutting</b>				
DW3720H2	Thick Metal Cutting	3"	14	2
DW3720-5	Metal Cutting	3"	14	5
DW3720B50	Metal Cutting	3"	14	50
DW3724H2	Medium Metal Cutting	3"	18	2
DW3724-5	Medium Metal Cutting	3"	18	5
DW3724B50	Medium Metal Cutting	3"	18	50
DW3726H2	Thin Metal Cutting	3"	24	2
DW3726-5	Thin Metal Cutting	3"	24	5
DW3726B50	Thin Metal Cutting	3"	24	50
DW3728H2	Sheet Metal Cutting	3"	32	2
DW3728-5	Sheet Metal Cutting	3"	32	5
DW3728B50	Sheet Metal Cutting	3"	32	50
<b>MASONRY Cutting</b>				
DW3718-5	Carbide Grit Cobalt Steel	3"	-	5

### U-SHANK SETS

CAT #	DESCRIPTION
DW3790	8 Pc. U-Shank Jig Saw Blade Set
DW3792H	8 Pc. U-Shank Jig Saw Blade Set
DW3798	15 Pc. U-Shank Jig Saw Blade Set
DW3799	25 Pc. U-Shank Jig Saw Blade Set
DW3744C	10 Pc. U-Shank Jig Saw Blade Set with Case



DW3799



DW3744C

## OSCILLATING BLADES

### CUTTING



DWA4204

CAT #	Description
DWA4203	Oscillating Wood w/Nails Blade
DWA4203-3	3pk Oscillating Wood w/ Nails Blade
DWA4204	Wide Titanium Oscillating Wood with Nails Blade
DWA4205	Oscillating Hardwood Blade
DWA4206	Oscillating Fastcut Wood Blade
DWA4207	Wide Oscillating Fastcut Wood Blade
DWA4208	Oscillating Wood Detail Blade
DWA4209	Oscillating Titanium Metal Blade
DWA4210	Oscillating Semicircle Blade
DWA4211	Oscillating Titanium Semicircle Blade
DWA4212	Oscillating Flush Cut Blade
DWA4212-3	3pk Oscillating Flush Cut Blade
DWA4213	Titanium Oscillating Flush Cut Blade
DWA4214	Oscillating Multi-Material Blade

### SANDING



DWASPTRI

CAT #	Description
DWA4200	Oscillating Sanding Pad
DWASPTRI3**	Dw H&L Triangle Assortment 12 Pk
DWASPTRI223**	Dw H&L Triangle 220G Sdpr 12 Pk
DWASPTRI22*	Dw Pc H&L Triangle 220G Sdpr 12 Pk
DWASPTRI123**	Dw H&L Triangle 120G Sdpr 12 Pk
DWASPTRI12*	Dw Pc H&L Triangl 120G Sdpr 12 Pk
DWASPTRI083**	Dw H&L Triangle 80G Sdpr 12 Pk
DWASPTRI08*	Dw Pc H&L Triangle 80G Sdpr 12 Pk
DWASPTRI*	Dw Pc H&L Triangle Assorted 12 Pk

\* For use with Bosch, Porter-Cable, and DEWALT Pads  
 \*\* For use with Fein, Rockwell, and Dremel Pads

### SCRAPING



DWA4217

CAT #	Description
DWA4217	Oscillating Rigid Scraper Blade
DWA4218	Oscillating Flexible Scraper Blade
DWA4232	Triangular Rigid Scraping Blade

### GROUT REMOVAL



DWA4220

CAT #	Description
DWA4219	Oscillating Carbide Grout Removal Blade
DWA4220	Oscillating Fastcut Carbide Grout Removal Blade
DWA4221	Oscillating Carbide Rasp

### SETS

CAT #	DESCRIPTION
DWA4215	Oscillating 3 PC Set
DWA4216	Oscillating 5 PC Set
DWATFA1	Oscillating Tool-Free Adaptor with 2 Blades



DWA4216



DWATFA1

Bosch® and Dremel® are a registered trademarks of Robert Bosch GmbH. PORTER-CABLE® is a registered trademark of The Black & Decker Corporation. Fein® is a registered trademark of C. & E. Fein GmbH. Rockwell® is a registered trademark of Positec Group Ltd.

**HAND TOOLS & STORAGE**



**GUARANTEED TOUGH.®**

## Measuring Tools

### PREMIUM TAPES

- 13' of blade standout for increased user reach\*
- Extra large end hook grabs construction material from all 4 sides
- 3M® thermoplastic film helps to protect blade from damage

PRODUCT #	LENGTH	WIDTH	STANDOUT	BLADE COATING	SCALE	BLADE LOCK	BELT CLIP	WEIGHT
DWHT33975	25'	1-1/4"	13'	Mylar®	SAE	Yes	Yes	1.35 lbs
DWHT33386	30'	1-1/4"	13'	Mylar®	SAE	Yes	Yes	1.50 lbs
DWHT33387	35'	1-1/4"	13'	Mylar®	SAE	Yes	Yes	1.65 lbs
DWHT33388	8M/26'	1-1/4"	13'	Mylar®	Metric/SAE	Yes	Yes	1.35 lbs



### 1-1/8" WIDE SHORT TAPES

- 10' of blade standout for increased user reach\*
- 1/8" markings to speed up measuring jobs
- Duo-durometer blade-lock for durability and comfort

PRODUCT #	LENGTH	WIDTH	STANDOUT	BLADE COATING	SCALE	BLADE LOCK	BELT CLIP	WEIGHT
DWHT33372	16'	1-1/8"	10'	Anti-Rust Polymer	SAE	Yes	Yes	0.84 lbs
DWHT33373	25'	1-1/8"	10'	Anti-Rust Polymer	SAE	Yes	Yes	1.10 lbs
DWHT33374	30'	1-1/8"	10'	Anti-Rust Polymer	SAE	Yes	Yes	1.30 lbs



### AUTO REWIND STEEL LONG TAPE

- Automatic blade retraction saves time by eliminating manual rewind
- Rust-resistant coating prolongs blade life
- Metal case for heavy-duty use

PRODUCT #	LENGTH	WIDTH	BLADE COATING	SCALE	GEAR RATIO	BELT CLIP	WEIGHT
DWHT34201	100'	3/8"	Lacquer	SAE	Auto Rewind	Yes	1.70 lbs



### CLOSED CASE STEEL LONG TAPE

- 5:1 Gear ratio for 5x faster blade rewind†
- Blade release button for easy blade pull out
- Spring loaded carabiner attachment for easy transportation

PRODUCT #	LENGTH	WIDTH	BLADE COATING	SCALE	GEAR RATIO	BELT CLIP	WEIGHT
DWHT34036	100'	3/8"	Lacquer	SAE	5:1	Yes	1.11 lbs



### OPEN REEL FIBERGLASS LONG TAPES

- 3:1 Gear mechanism for 3x faster blade rewind†
- Water and abrasion resistant blade
- Double-sided print for fractional inch and decimal feet measurements

PRODUCT #	LENGTH	WIDTH	SCALE	GEAR RATIO	BELT CLIP	CASE DESIGN	WEIGHT
DWHT34028	100'	3/4"	SAE & Decimal Foot	3:1	No	X-Shape	2.14 lbs
DWHT34037	100'	1/2"	SAE & Decimal Foot	3:1	No	T-Shape	1.53 lbs
DWHT34038	300'	1/2"	SAE & Decimal Foot	3:1	No	T-Shape	3.39 lbs



\* Standout claim based on maximum performance

† Compared to standard competitor long tapes

3M is a registered trademark of 3M Company  
Mylar® is a registered trademark of DuPont Teijin Films™ U.S. Limited Partnership.

## Marking & Layout

### HEAVY DUTY CHALK REELS/KITS

- 3:1 gear ratio for easy winding
- Open-access door for quick refills and access to internal components
- 100' heavy-duty line resists abrasion and breakage
- Stainless steel hook and crank withstand abuse and resist corrosion
- High-impact ABS housing for durability and light weight
- Over-molded soft grip for comfort and control

PRODUCT #	DESCRIPTION	CONTAINS	WEIGHT
DWHT47142	Chalk Reel	100' Chalk Reel	0.65 lbs
DWHT47143	Chalk Reel Kit	100' Chalk Reel, 4 oz Blue Chalk	0.83 lbs
DWHT47144	Chalk Reel Kit	100' Chalk Reel, 4 oz Red Chalk	0.83 lbs



### PREMIUM CHALK REEL/KIT

- 6:1 gear ratio for smooth and rapid winding
- Helical gears for durability, smooth cranking, and to help decrease line jams and breaks
- Sealed gear system helps protect gears from debris and contamination
- Interlocking hook to easily join lines and help increase productivity
- Cast metal body for durability and long life

PRODUCT #	DESCRIPTION	CONTAINS	WEIGHT
DWHT47270	Chalk Reel	100' Chalk Reel	0.67 lbs
DWHT47246L	Chalk Reel Kit	100' Chalk Reel, 4 oz Red Chalk	0.96 lbs



### COMPACT CHALK REEL KIT

- 3:1 gear ratio for easy winding
- Compact size ideal for secondary or correction reel
- Clutch design for fast and easy unwind
- Belt clip for simple, secure storage
- 30' braided line

PRODUCT #	DESCRIPTION	CONTAINS	WEIGHT
DWHT47257L	Chalk Reel Kit	30' Chalk Reel, 4 oz Blue Chalk	0.51 lbs



### DIE-CAST CHALK REELS/KITS

- Heavy-duty aluminum die-cast body for durability
- Felt gasket helps distribute chalk uniformly
- Stainless steel hook and crank arm withstands abuse and resist corrosion
- Tear-drop shape for use as a plumb bob
- 100' twisted cotton line

PRODUCT #	DESCRIPTION	CONTAINS	WEIGHT
DWHT47256	Chalk Reel	100' Chalk Reel	0.44 lbs
DWHT47255L	Chalk Reel Kit	100' Chalk Reel, 4 oz Red Chalk	0.79 lbs
DWHT47309L	Chalk Reel Kit	100' Chalk Reel, 4 oz Blue Chalk	0.79 lbs



### LARGE CAPACITY CHALK REEL

- 3:1 gear ratio for 3X\* faster rewind
- 1 lb. chalk capacity for large jobs and long distances
- Helical gears for durability, smooth cranking, and to help decrease line jams and breaks
- Rubber over-mold provides comfortable grip
- Ring and hook attachment for multiple tethering options
- 150' braided cotton line

PRODUCT #	DESCRIPTION	CONTAINS	WEIGHT
DWHT47252	Chalk Reel	150' Chalk Reel	2.15 lbs

\*Compared to DEWALT DWHT47256 Chalk Reel



### CHALK

- High-grade chalk to be used with chalk line reels
- Oval-shaped bottle will not roll off of surface
- Tethered easy pouring pop-top spout cap

PRODUCT #	SIZE	COLOR	PERMANENCE RANK	WEIGHT
DWHT47029L	8 oz	White	1	0.50 lbs
DWHT47048L	8 oz	Red	3	0.50 lbs
DWHT47049L	8 oz	Blue	1	0.50 lbs
DWHT47056L	8 oz	Black	3	0.50 lbs
DWHT47069L	8 oz	Red Permanent	4	0.50 lbs
DWHT47076L	8 oz	Orange	2	0.50 lbs
DWHT47079L	8 oz	Violet	0	0.50 lbs
DWHT47057	2.50 lbs	Red	3	2.50 lbs
DWHT47058	2.50 lbs	Blue	1	2.50 lbs
DWHT72716	2.50 lbs	Red Permanent	4	2.50 lbs
DWHT47059	5 lbs	Red	3	5.00 lbs
DWHT47062	5 lbs	Blue	1	5.00 lbs



## Marking & Layout

### MARKING CRAYONS

- Marks on various surfaces and materials

PRODUCT #	COLOR	CRAYONS INCLUDED	WEIGHT
DWHT72719	Blue	2	0.12 lbs
DWHT72720	Red	2	0.12 lbs
DWHT72721	Yellow	2	0.12 lbs



### REPLACEMENT LINE

PRODUCT #	DESCRIPTION	WEIGHT
DWHT47098	100' Replacement Line	0.08 lbs



### TORPEDO LEVEL

- Extruded aluminum body for strength and light weight
- Solid block vials for durability and accuracy (0.0005"/in)
- Rotating vial for identifying and duplicating angles, slopes and pitch

PRODUCT #	LENGTH	# OF VIALS	MAGNETIC	WEIGHT
DWHT43003	9"	3	Yes	0.35 lbs



### BOX BEAM LEVELS

- Large cross section and die-cast aluminum components for 5x stronger level\*\*
- Block vials for durability and accuracy to 0.0005"/in†
- Magnified center vial maximizes vial readability

PRODUCT #	LENGTH	# OF VIALS	MAGNETIC	WEIGHT
DWHT43224	24"	3	No	1.90 lbs
DWHT43025	24"	3	Yes	1.90 lbs
DWHT43248	48"	3	No	3.60 lbs
DWHT43049	48"	3	Yes	3.60 lbs
DWHT43172	72"	3	No	5.10 lbs
DWHT43079	78"	3	Yes	5.60 lbs



\*\* Versus standard competitive levels † Versus tubular vials

### I-BEAM LEVELS

- Robust engineered cross section
- Block vials provide durability and accuracy (0.0005"/in)
- V-groove base for accurate alignment on rounded surfaces and edges

PRODUCT #	LENGTH	# OF VIALS	MAGNETIC	WEIGHT
DWHT42151	24"	3	No	1.67 lbs
DWHT42163	24"	3	Yes	1.74 lbs
DWHT42166	48"	3	No	3.35 lbs
DWHT42167	48"	3	Yes	3.46 lbs
DWHT42169	72"	3	No	4.74 lbs
DWHT42170	72"	3	Yes	5.44 lbs



### PREMIUM RAFTER SQUARES

- Stamped-in contrasting color graduations for better readability
- Extra-thick extruded aluminum body holds up to heavy-duty use, ideal for use as saw guide
- Large base helps provide better grip on materials
- Scribe line notches for marking rip cuts


PRODUCT #	LENGTH	# OF VIALS	MAGNETIC	WEIGHT
DWHT46031	7"	0	No	0.44 lbs
DWHT46032	12"	0	No	0.88 lbs



## Laser Levels

### 360° CROSS LINE LASER

- Self-leveling 360° horizontal line and vertical line simulates functionality of rotary laser, projects bright crossing horizontal and vertical lines
- Durable design with over-molded housing and IP54 water/debris resistance
- Locking pendulum to help prevent damage to internal components
- Full-time pulse mode allows use with DW0892 detector, maintains full brightness for visibility while extending working range of laser
- 1/4" and 5/8" thread and vertical adjust base included for easy set up and fine tune adjustments



PRODUCT #	DESCRIPTION	RANGE	ACCURACY	WEIGHT
DW0811	360° Cross Line Laser	Approx 50' - 165' with Detector*	+/- 5/32"	1.60 lbs

### CROSS LINE/ PLUMB SPOT LASER


- Self-leveling cross line and plumb spots project bright crossing horizontal and vertical lines
- Projects down beam with raised clearance, providing dot visibility and alignment for wall track layout
- 2 bright, self-leveling spot beams provide accurate plumb point transfer
- Locking pendulum to help prevent damage to internal components
- Full-time pulse mode allows use with DW0892 detector, maintains full brightness for visibility while extending working range of laser
- Magnetic pivoting base with integrated 1/4" and 5/8" threads



PRODUCT #	DESCRIPTION	RANGE	ACCURACY	WEIGHT
DW0822	Cross Line/Plumb Spot Laser	Approx 50' - 165' with Detector*	+/- 1/8"	1.10 lbs

### 5 SPOT/ LINE LASER

- Projects 5 bright spot beams for accurate plumb and horizontal point transfer
- Rear projecting horizontal line aids in additional leveling applications
- Projects down beam with raised clearance, providing dot visibility and alignment for wall track layout
- Durable design with over-molded housing and IP54 water/debris resistance
- Integrated magnetic pivoting base with 1/4" and 5/8" thread
- Front and rear mounted magnets allow flush attachment to metal track and steel
- Full-time pulse mode allows use with DW0892 detector, maintains full brightness for visibility while extending working range of laser



PRODUCT #	DESCRIPTION	RANGE	ACCURACY	WEIGHT
DW0851	5 Spot/Line Laser	100' - 165' with Detector*	+/- 1/8"	3.20 lbs

### CROSS LINE LASER

- Self-leveling cross lines project bright crossing horizontal and vertical lines for various leveling and layout applications
- Integrated magnetic pivoting bracket and 1/4" thread
- Rear mounted magnets allow flush attachment to metal track and steel
- Full-time pulse mode allows use with DW0892 detector and maintains full brightness for visibility while extending working range of laser
- Durable design with over-molded housing and IP54 water/debris resistance



PRODUCT #	DESCRIPTION	RANGE	ACCURACY	WEIGHT
DW088K	Cross Line Laser	Approx 50' - 165' with Detector*	+/- 1/8"	3.60 lbs

### CROSS LINE PLUS 90° LASER

- 3 beam line laser to aid in 90° layout
- Integrated magnetic bracket and 1/4" thread
- Rear mounted magnets allow flush attachment to metal track and steel
- Full-time pulse mode allows use with DW0892 detector and maintains full brightness for visibility while extending working range of laser
- Micro adjust knob allows for precise alignment of 90° intersecting lines over greater distances
- Durable design with over-molded housing and IP54 water/debris resistance



PRODUCT #	DESCRIPTION	RANGE	ACCURACY	WEIGHT
DW089K	Cross Line Plus 90° Laser	Approx 50' - 165' with Detector*	+/- 1/8"	4.90 lbs


\*Visible range varies depending on light conditions

## Laser Levels

### 3 SPOT LASER POINTER

- Self-leveling laser projects 3 bright spot beams for accurate plumb and horizontal point transfer
- Projects down beam with raised clearance, provides dot visibility and alignment for wall track layout
- Integrated magnetic pivoting base and 1/4" thread
- Rear mounted magnets allow flush attachment to metal track and steel
- Locking pendulum to help prevent damage to internal components


PRODUCT #	DESCRIPTION	RANGE	ACCURACY	WEIGHT
DW083K	3 Spot Laser Pointer	100'	+/- 3/32"	3.10 lbs



### 5 SPOT LASER POINTER

- Self-leveling laser projects 5 bright spot beams for accurate plumb and horizontal point transfer
- Projects down beam with raised clearance, provides dot visibility and alignment for wall track layout
- Fine tune adjustment knob allows fast alignment over distance
- Integrated magnetic pivoting base with 1/4" thread
- Rear mounted magnets allow flush attachment to metal track and steel
- Locking pendulum to help prevent damage to internal components


PRODUCT #	DESCRIPTION	RANGE	ACCURACY	WEIGHT
DW085K	5 Beam Laser Pointer	100'	+/- 3/32"	3.20 lbs



### ROTARY LASER

- Horizontal self-leveling line for quick and easy set-up
- Enclosed leveling vial and protected head to help prevent damage to internal components
- Vertical mode for quick and easy vertical layout
- IP54 rating for water and debris resistance

PRODUCT #	DESCRIPTION	RANGE	ACCURACY	WEIGHT
DW074KD	Rotary Laser	1500' with Detector	+/- 1/4"	9.00 lbs
DW074KDT	Rotary Laser with Tripod	1500' with Detector	-	-




### ROTARY LASER

- Fully automatic horizontal and vertical self-leveling laser with out-of-level shutoff eliminates user error, ensures accuracy, and reduces set-up time
- Private mode option eliminates remote control interference between multiple rotary lasers on the job site
- Manual single sloping mode allows the user to set grade  $\pm 5^\circ$
- Multi-voltage adapter accepts DEWALT® batteries 9.6V - 18V
- Protected rotary head and weatherproof design deliver interior and exterior job site durability
- Bright, sharp, high power beam delivers maximum visibility, even over long distances
- Wireless (IR) remote control operated scan mode creates a "laser chalk line" between two points for an extremely bright beam over long distances
- Digital laser detector extends interior and exterior range to 1500'

PRODUCT #	DESCRIPTION	RANGE	ACCURACY	WEIGHT
DW079KD	Rotary Laser	1500' with Detector	+/- 1/8"	21.38 lbs
DW079KDT	Rotary Laser with Tripod	1500' with Detector	-	-
DW079KI	Interior Laser	200'	-	-

(1 hour charger, 18V XRP™ battery, Laser target card, Wall mount Wireless (IR) Remote Control, Laser Enhancement Glasses, Kit Box)



## OPTICAL Levels

### 26X AUTO LEVEL

- Magnetically dampened compensator for easy set up with optimum range and accuracy
- 26x magnification for 300'+ range
- $\pm 1/32"$  per 100' accuracy
- 360° horizontal circle with precise measuring of horizontal angles
- Protected leveling vial for job site durability
- Heavy-duty leveling base fast and easy to set up and level
- Includes aluminum tripod with quick adjust legs and 8' aluminum grade rod (feet-inches-eighths)

PRODUCT #	DESCRIPTION	RANGE	ACCURACY	MAGNIFICATION	STADIA RATIO	HORIZONTAL CIRCLE TYPE	WEIGHT
DW096PK	Auto Level	300'	+/- 1/32"	26x	1:100	Continuous Drive	19.70 lbs



\*Visible range varies depending on light conditions

## OPTICAL Levels

### 20X TRANSIT LEVEL

- Transit capability allows user to determine vertical angles
- 20x magnification for 200' + range
- $\pm 1/4"$  per 100' accuracy
- 360° horizontal circle with vernier scale for precise measuring of horizontal angles
- Protected leveling vial for job site durability
- Heavy-duty leveling base for fast and easy set up and leveling
- Includes aluminum tripod with quick adjust legs and 8' aluminum grade rod (feet-inches-eighths)



PRODUCT #	DESCRIPTION	RANGE	ACCURACY	MAGNIFICATION	STADIA RATIO	HORIZONTAL CIRCLE TYPE	WEIGHT
DW092PK	Transit Level	200'	+/- 1/4"	20x	1:100	Continuous Drive	19.70 lbs

### 20X BUILDERS LEVEL

- 20x magnification for 200' + range
- $\pm 1/4"$  per 100' accuracy
- 360° horizontal circle with vernier scale for precise measuring of horizontal angles
- Protected leveling vial for job site durability
- Heavy-duty leveling base for fast and easy set up and leveling
- Includes aluminum tripod with quick adjust legs and 8' aluminum grade rod (feet-inches-eighths)



PRODUCT #	DESCRIPTION	RANGE	ACCURACY	MAGNIFICATION	STADIA RATIO	HORIZONTAL CIRCLE TYPE	WEIGHT
DW090PK	Builders Level	200'	+/- 1/4"	20x	1:100	Continuous Drive	19.70 lbs

## LASER DISTANCE MEASURERS

### LASER DISTANCE MEASURER

- Automatic area and volume calculations make job estimates quick and easy
- Additional triangular area function
- Integrated inclinometer for use as a digital level calculates continuous height and indirect horizontal distances
- Indirect height measurement uses Pythagoras to measure distances even when point A and/or point B is not accessible for linear measurement
- Memory unit stores last 20 measurements
- Multi-functional end piece folds at 90° for edge measurements, extends 180° for measurements from corners
- Large 3-line backlit display helps improve screen visibility in both dim and bright conditions
- Durable design with over-molded housing, 6 ft (2m) drop tested, and IP65 water/debris resistance



PRODUCT #	DESCRIPTION	RANGE	ACCURACY	WEIGHT
DW03101	Laser Distance Measurer	330'	+/- 1/32"	0.34 lbs

### LASER DISTANCE MEASURER

- Automatic area and volume calculations make job estimates quick and easy
- Indirect height measurement uses Pythagoras to measure distances even when point A and/or point B is not accessible for linear measurement
- Memory unit stores last 5 measurements
- Large 2-line backlit display helps improve screen visibility in both dim and bright conditions
- Durable design with over-molded housing, 6 ft (2m) drop tested, and IP65 water/debris resistance



PRODUCT #	DESCRIPTION	RANGE	ACCURACY	WEIGHT
DW03050	Laser Distance Measurer	165'	+/- 1/16"	0.28 lbs

## LASER LEVEL ACCESSORIES

### LINE LASER DETECTOR

- Detects laser line beam indoors and out
- Works over distances or in bright conditions
- Extends the interior and exterior range of the line laser to 165', provides great coverage and distance
- Front and rear LCD displays for easy viewing
- Audible signal with adjustable volume control - high, low, mute
- Automatic shutoff turns off detector if inactive for 5 minutes, conserves battery life when not in use
- Features top mounted magnets allows for attachment ceiling track or steel studs
- Quick release clamp

PRODUCT #	COMPATIBILITY	RANGE	ACCURACY	WEIGHT
DW0892	DW088K, DW089K, DW0851, DW0811, DW0822	165'	+/- 1/8"	1.25 lbs



### ROTARY LASER DETECTOR

- Consistent accuracy, near and far performs regardless of beam size
- Compatible with all rotary lasers extending the operating range of most lasers to over 1000'
- Front and rear LCD displays for easy viewing
- Audible signal with adjustable volume control - high, low, mute
- Automatic shutoff turns off detector if inactive for 5 minutes conserves battery life when not in use
- Heavy-duty clamp for job site durability

PRODUCT #	COMPATIBILITY	RANGE	ACCURACY	WEIGHT
DW0772	DW074, DW079	2000'	+/- 1/8"	1.25 lbs



### CONSTRUCTION GRADE ROD

- Lightweight, durable aluminum construction
- 4 telescoping sections
- Scale on back side for quick overall height measurements

PRODUCT #	DESCRIPTION	LENGTH	MARKINGS	WEIGHT
DW0734	Construction Grade Rod	13'	ft/in/8ths	4.00 lbs



### LASER ENHANCEMENT GLASSES

- Laser enhancement glasses increase visibility of red beam lasers
- Provide additional assistance with outdoor and long distance alignment

PRODUCT #	DESCRIPTION	WEIGHT
DW0714	Laser Enhancement Glasses	0.51 lbs



### LASER TARGET CARD

- Aids in locating the laser by enhancing the visibility of the beam
- Magnetic base for attaching to ceiling grid or steel studs

PRODUCT #	DESCRIPTION	WEIGHT
DW0730	Laser Target Card	0.08 lbs



## LASER LEVEL ACCESSORIES

### 1/4" MOUNTING POLE

- Robust platform, locking mechanism and sections for job site durability
- 360° mounting platform rotation for easy laser positioning after pole is set
- Compatible with all with 1/4" thread – lasers

PRODUCT #	DESCRIPTION	HEIGHT (OPENED)	HEIGHT (CLOSED)	WEIGHT
DW0882	Laser Pole	11'	30" (folded)	4.41 lbs



### 1/4" TRIPOD

- 1/4" x 20 mounting threads
- Quick release legs for fast set up
- Compatible with products with 1/4" thread – lasers and LDMs

PRODUCT #	DESCRIPTION	HEIGHT (OPENED)	HEIGHT (CLOSED)	WEIGHT
DW0881	1/4" Tripod (carrying case included)	69"	27"	2.21 lbs



### HEAVY-DUTY TRIPOD

- Industry standard 5/8" x 11 mounting threads, flat head design
- Quick release legs for fast and easy set up
- Lightweight, durable aluminum construction
- Pointed steel feet are stable on any terrain
- Built-in strap for easy transport

PRODUCT #	DESCRIPTION	HEIGHT (OPENED)	HEIGHT (CLOSED)	WEIGHT
DW0736	Heavy Duty Tripod (carrying case not included)	68"	42"	12.00 lbs



### HEAVY-DUTY TRIPOD

- Industry standard 5/8" x 11 mounting threads, flat head design
- Quick release legs for fast and easy set up
- Lightweight, durable aluminum construction
- Pointed steel feet stable on any terrain
- Built-in strap for easy transport

PRODUCT #	DESCRIPTION	HEIGHT (OPENED)	HEIGHT (CLOSED)	WEIGHT
DW0737	Heavy Duty Tripod (carrying case not included)	60"	38"	8.65 lbs



## Laser Levels Specifications

### LINE AND SPOT LASERS

							
<b>SPECIFICATIONS</b>							
<b>Model #</b>	DW0822	DW0851	DW0811	DW088K	DW089K	DW083K	DW085K
<b>Power Supply</b>	3 AA batteries	3 AA batteries	3 AA batteries	3 AA batteries	4 AA batteries	4 AA batteries	4 AA batteries
<b>Leveling Type</b>	Self-Leveling	Self-Leveling	Self-Leveling	Self-Leveling	Self-Leveling	Self-Leveling	Self-Leveling
<b>Self-Leveling Range</b>	±4°	±4°	±4°	±4°	±4°	±4°	±4°
<b>Accuracy</b>	1/8 in.	1/8 in.	5/32 in.	1/8 in.	1/8 in.	3/32 in.	3/32 in.
<b>IP Rating</b>	IP54	IP54	IP54	IP54	IP54	IP54	IP54
<b>Range with Detector</b>	165 ft.	-	-				
<b>Laser Class</b>	II	II	I	II	II	II	II
<b>Number of Spots</b>	2	5	-	-	-	3	5
<b>Number of Line Lasers</b>	2	1	2 *	2	3	-	-
<b>Includes</b>	3 AA batteries, kit box	3 AA batteries, kit box	3 AA batteries, kit box, vertical adjustable base	3 AA batteries, kit box, acoustic ceiling mount	4 AA batteries, kit box, ceiling mount	4 AA batteries, kit box	4 AA batteries, kit box

### ROTARY LASERS

		
<b>SPECIFICATIONS</b>		
<b>Model #</b>	DW074KD	DW079KD
<b>Power Supply</b>	2 D batteries	9.6V-18V DEWALT <sup>®</sup> batteries
<b>Leveling Type</b>	Self-Leveling	Self-Leveling
<b>Self-Leveling Range</b>	±5°	±5°
<b>Accuracy per 100 ft.</b>	1/4 in.	1/8 in.
<b>IP Rating</b>	IP54	IP54
<b>Rotation Speed</b>	0, 60, & 600 RPM	0, 60, 250, & 600 RPM
<b>Visible</b>	200 ft.	200 ft.
<b>Range with Detector</b>	1500 ft.	1500 ft.
<b>Laser Class</b>	IIIa	IIIa
<b>Includes</b>	DW0742 detector and clamp, target card, DW0740 wall mount, DW0737 tripod, DW0748 8' grade rod, (2) D Alkaline batteries, (1) 9V battery, laser bag	1 hour charger, 18V battery, digital laser detector, wall mount, wireless (IR) remote control, laser target card, laser enhancement glasses, kit box, construction tripod - DW0736

### OPTICS

			
<b>SPECIFICATIONS</b>			
<b>Model #</b>	DW096PK	DW092PK	DW090PK
<b>Leveling Type</b>	Self-Leveling	Manual	Manual
<b>Accuracy per 100 ft.</b>	1/32 in.	1/4 in.	1/4 in.
<b>IP Rating</b>	IP54	IP54	IP54
<b>Range</b>	300 ft.	200 ft.	200 ft.
<b>Magnification</b>	26x	20x	20x
<b>Stadia Ratio</b>	1:100	1:100	1:100
<b>Horizontal Circle Type</b>	Continuous Drive	Continuous Drive	Continuous Drive
<b>Includes</b>	Aluminum tripod w/ quick adjust legs, 8' aluminum grade rod (feet-inches-eighths)	Aluminum tripod w/ quick adjust legs, 8' aluminum grade rod (feet-inches-eighths)	Aluminum tripod w/ quick adjust legs, 8' aluminum grade rod (feet-inches-eighths)



## SCREWDRIVERS


### VINYL GRIP SCREWDRIVERS

- Color-coded handle with tip ID for easy selection
- Cold-formed black oxide tip for precise fit in fasteners
- Chrome-plated bar for corrosion resistance
- Comfortable vinyl grip handles

PRODUCT #	TIP STYLES	TIP SIZE	BAR LENGTH	BOLSTER	WEIGHT
DWHT66368	Standard Stubby	1/4"	1-1/2"	No	0.14 lbs
DWHT66369	Phillips Stubby	2 pt	1-1/2"	No	0.14 lbs
DWHT66382	Standard	3/16"	3"	Yes	0.19 lbs
DWHT66383	Standard	1/4"	4"	Yes	0.28 lbs
DWHT66384	Standard	5/16"	6"	Yes	0.41 lbs
DWHT66387	Standard	3/8"	8"	Yes	0.63 lbs
DWHT66389	Cabinet	3/16"	3"	No	0.18 lbs
DWHT66391	Cabinet	3/16"	3"	No	0.21 lbs
DWHT66393	Cabinet	3/16"	8"	No	0.22 lbs
DWHT66396	Phillips	1 pt	3"	No	0.19 lbs
DWHT66397	Phillips	2 pt	4"	No	0.28 lbs
DWHT66399	Phillips	3 pt	6"	No	0.40 lbs
DWHT66403	Square	1/4"	4"	Yes (w/ Square Bar)	0.31 lbs
DWHT66406	Square	5/16"	6"	Yes (w/ Square Bar)	0.45 lbs
DWHT66407	Square	3/8"	8"	Yes (w/ Square Bar)	0.69 lbs
DWHT66419	Square	1 pt	4"	No	0.20 lbs
DWHT66422	Square	2 pt	5"	No	0.24 lbs
DWHT66423	Square	3 pt	5"	No	0.24 lbs

### Vinyl Grip Screwdriver Sets

DWHT66416	4 Screwdrivers	Standard	1/4"	4"	Yes	1.01 lbs
		Phillips	2 pt	4"	No	
		Square	1 pt, 2 pt	4", 5"	No	
DWHT66496	6 Screwdrivers	Standard	1/4", 5/16"	4", 6"	Yes	1.90 lbs
		Cabinet	3/16"	6"	No	
		Phillips	1 pt, 2 pt, 3 pt	3", 4", 6"	No	
DWHT66409	8 Screwdrivers 1 Tool Roll	Standard	1/4", 1/4", 5/16"	1-1/2", 4", 6"	Yes	2.83 lbs
		Cabinet	3/16"	6"	No	
		Phillips	1 pt, 2 pt, 2 pt, 3 pt	3", 1-1/2", 4", 6"	No	

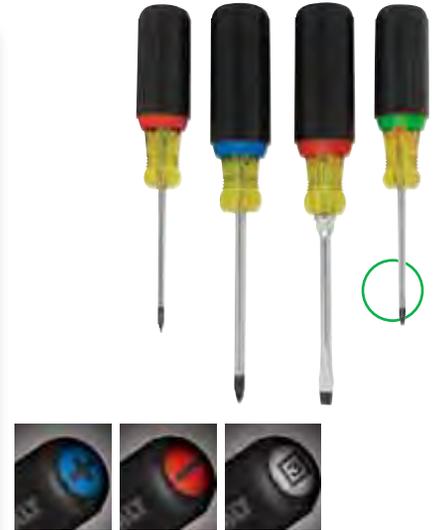

### DEMO DRIVERS

- Steel core transfers force directly from strike cap to tip
- Shatter-resistant cellulose acetate handle tested under heavy load and extreme temperature
- Color-coded handle for easy selection from tool pouch

PRODUCT #	# OF PIECES IN SET	TIP STYLES	TIP SIZE	BAR LENGTH	WEIGHT
DWHT67530	2	Standard	5/16"	5-1/8"	0.92 lbs
		Phillips	2 pt	5-1/8"	



### RATCHETING SCREWDRIVER

- Internal bit storage holds up to 12 bits
- Heavy-duty ratchet mechanism for high torque applications
- Removable bar can also be used in power drills

PRODUCT #	# OF PIECES IN SET	BIT STYLES INCLUDED	WEIGHT
DWHT69233	12 Bits	Standard - 3/16", 1/4", 5/16"	0.72 lbs
	1 Driver	Phillips - 1 pt, 2 pt, 3 pt Square - 1 pt, 2 pt, 3 pt Star - S10, S15, S25	



## SCREWDRIVERS



### SCREWDRIVER SETS

- Magnetic tip holds screw securely
- Color-coded handle for easy selection
- Bi-material quad-lobe handle for torque and comfort
- Precision sand-blasted tip for excellent fit in fasteners

PRODUCT #	# OF PIECES IN SET	TIP STYLES	TIP SIZE	BAR LENGTH	WEIGHT
DWHT62512	4	Standard Cabinet Phillips	1/4" 3/16" 1 pt, 2 pt	4" 4" 3", 4"	0.88 lbs
DWHT62513	10	Standard Cabinet Phillips	1/8", 1/4", 1/4", 3/16" 3/16" 0 pt, 2 pt, 1 pt, 2 pt, 2 pt	3", 1-3/4", 4", 4" 6" 2-1/4", 1-3/4", 3", 4", 6"	1.63 lbs

### VINYL GRIP INSULATED SCREWDRIVER SET

- 1,000V rated, 10,000V tested
- Space saving multi-blade design with quick-release mechanism for secure and easy blade change
- Pouch included for easy organization



PRODUCT #	# OF PIECES IN SET	TIP STYLE	TIP SIZE	WEIGHT
DWHT66417	8 Bars 1 Full Size Handle 1 Precision Handle 1 Tool Pouch	Standard Phillips Square	1/8", 3/16", 1/4" 0 pt, 1 pt, 2 pt 1 pt, 2 pt	1.01 lbs

## Staplers & Staples

### 4-IN-1 MULTI-TACKER

- 4 Tools in 1, uses heavy duty, light duty, round crown cable staples, and 18 gauge brads
- High/Low power switch makes every stapling task easy
- Stapler conveniently hangs from belts and pockets with reversible belt clip

PRODUCT #	FASTENER TYPE	FASTENER LENGTH	WEIGHT
DWHTTR410	Heavy Duty Staples Light Duty Staples Round Crown Staples 18 Gauge Brads	1/4" - 9/16" 1/4" - 3/8" 3/8" - 9/16" 1/2" - 5/8"	1.40 lbs



### 2-IN-1 STAPLE & BRAD TACKER

- Easy squeeze technology helps reduce actuation force
- Uses DEWALT heavy-duty DWHTTA700 series up to 9/16" and 18 gauge brads up to 5/8"

PRODUCT #	FASTENER TYPE	FASTENER LENGTH	WEIGHT
DWHTTR350	Heavy Duty Staples 18 Gauge Brads	1/4" - 9/16" 1/2" - 5/8"	2.00 lbs



## Staplers & Staples

### COMPACT GRIP HEAVY DUTY STAPLER

- Easy squeeze handle has 30% lower angle than the DEWALT DWHTTR350
- Drive staples accurately around cable and wire with the pinpoint staple guide
- Stapler conveniently hangs from belts and pockets with reversible belt clip



PRODUCT #	FASTENER TYPE	FASTENER LENGTH	WEIGHT
DWHTTR130LH	Heavy Duty Staples	1/4" - 1/2"	1.40 lbs

### HEAVY DUTY HAMMER TACKER

- Lightweight die-cast aluminum housing design for durability
- Uses DEWALT heavy-duty staples series DWHTTA700



PRODUCT #	FASTENER TYPE	FASTENER LENGTH	WEIGHT
DWHTTA450	Heavy Duty Staples	5/16"-1/2"	2.50 lbs

### CONTRACTOR PACK STAPLES

- Compatible with most heavy-duty tackers
- DEWALT heavy-duty staples 5,000 pieces per reusable plastic case
- Durable plastic storage box helps prevent rusting and stick breakage



PRODUCT #	LENGTH	PACK SIZE
DWHTTA7045	1/4" (6 mm)	5,000 pcs
DWHTTA7055	5/16" (8 mm)	5,000 pcs
DWHTTA7065	3/8" (10 mm)	5,000 pcs
DWHTTA7085	1/2" (12 mm)	5,000 pcs

## GLUE GUN & RIVETER

### HEAVY-DUTY SWIVEL HEAD RIVETER

- 360° swivel head allows use of tool in any direction, including overhead
- Cast aluminum housing is durable, yet lightweight
- Soft rubber grips are comfortable and prevent slipping during use



PRODUCT #	FASTENER TYPE	FASTENER DIAMETER	WEIGHT
DWHTMR77C	Aluminum and Steel Blind Rivets	3/32", 1/8", 5/32", 3/16"	1.70 lbs

### RAPID HEAT CERAMIC GLUE GUN

- Ready to glue 50% faster with efficient ceramic heating element\*
- High-output design applies over 50 glue sticks per hour\*\*
- Sturdy fold-out stand and rubber base help prevent mishaps



PRODUCT #	HEATING ELEMENT TYPE	GLUE STICK SIZE	CERTIFICATIONS
DWHTGR50	Ceramic	0.45" Diameter	UL Listed

\*To operating temperature of the glue gun versus leading competitor

\*\*Tool outputs on average 50 all-purpose 4" sticks of glue per hour

## Cutting Tools

### FOLDING RETRACTABLE KNIFE

- Retractable blade offers variable cut depth
- Rapid load blade changing system for quick and easy blade change
- Folding feature for quick and easy one-handed opening/closing



PRODUCT #	BLADE STORAGE	RETRACTABLE BLADE	HANDLE LENGTH	WEIGHT
DWHT10035	Yes	Yes	6-1/4"	0.34 lbs

### AUTOLOAD FOLDING KNIFE

- Automatically loads a new blade
- Quick and easy blade loading – intuitively functions as a regular folding knife
- Accepts all standard utility blades – does not require special blade packs



PRODUCT #	BLADE STORAGE	RETRACTABLE BLADE	HANDLE LENGTH	WEIGHT
DWHT10261	Yes	Yes	6-3/4"	0.38 lbs

### RETRACTABLE KNIFE

- Blade storage in handle for convenient access to new blades
- Rapid load blade changing system for quick and easy blade change
- Rugged metal body for exceptional durability and life



PRODUCT #	BLADE STORAGE	RETRACTABLE BLADE	HANDLE LENGTH	WEIGHT
DWHT10046	Yes	Yes	6-3/4"	0.42 lbs

### FIXED BLADE KNIFE

- Easy, tool free open for quick blade change
- Slim nose for accurate cuts
- Rugged metal body for exceptional durability and life



PRODUCT #	BLADE STORAGE	HANDLE LENGTH	WEIGHT
DWHT10246	Yes	6"	0.35 lbs

### FOLDING POCKET KNIFE

- Stainless steel blade with serrated and straight edges
- Tanto tip for piercing tough material
- Thumb stud for easy opening
- Liner lock secures blade in open position
- Designed for heavy duty use



PRODUCT #	BLADE LENGTH	HANDLE LENGTH	WEIGHT
DWHT10272	3-1/2"	4-1/2"	0.29 lbs

### SNAP OFF KNIVES

- Integrated blade snapper makes snapping off used segments convenient and easy
- All metal body is heavy-duty and rust resistant
- Auto-locking blade slider for hassle free blade adjustments



PRODUCT #	BLADE SIZE	CUTTING POINTS	AUTO-LOCKING SLIDE	HANDLE LENGTH	WEIGHT
DWHT10037	9 mm	13	Yes	4-1/4"	0.14 lbs
DWHT10038	18 mm	8	Yes	6"	0.30 lbs
DWHT11726	25 mm	7	Yes	8"	0.46 lbs

## Cutting Tools

### CARBIDE UTILITY BLADES

- Laser deposited carbide lines the blade edge, allowing the rest of blade to remain flexible
- Induction hardened cutting edges last 75% longer than traditional single material blades
- Special grind angles make blade's cutting edge 35% sharper than traditional single material blades

PRODUCT #	BLADE COUNT	BLADE LENGTH
DWHT11131	5 pk	2-1/2"
DWHT11131L	50 pk	2-1/2"



### DRYWALL UTILITY BLADES

- Engineered edge to cut abrasive drywall materials
- S3 technology double hardens blade edge for long life
- DRYWALL call-out is laser etched on blades to help prevent mixing with standard blades

PRODUCT #	BLADE COUNT	BLADE LENGTH
DWHT11133	5 pk	2-1/2"
DWHT11133L	50 pk	2-1/2"



### ROOFING HOOK BLADES

- Engineered edge to withstand cutting roofing materials
- Cuts roofing shingles, felt paper, Tyvek®, foam board, insulation
- ROOF call-out is laser etched on blades to help prevent mixing with standard blades

PRODUCT #	BLADE COUNT	BLADE LENGTH
DWHT11134	5 pk	2-1/2"

*Tyvek is a registered trademark of DuPont*



### HEAVY DUTY UTILITY BLADES

- Grinding geometry provides an edge that is 35% sharper for accurate and precise cuts\*
- Specially heat-treated blades are 20% stronger for exceptional durability\*
- Induction hardened cutting edge gives 75% longer blade life for fewer blade changes\*

PRODUCT #	BLADE COUNT	BLADE LENGTH
DWHT11004	75 pk	2-1/2"

*\*Compared to traditional single material blades*



### SNAP-OFF BLADES

- Snap-off design for easy blade changes
- Ideal for a variety of cutting applications

PRODUCT #	BLADE COUNT	BLADE LENGTH	CUTTING POINTS
DWHT11709	3 pk	9 mm	13
DWHT11719	3 pk	18 mm	8
DWHT11134	3 pk	25 mm	7

## Cutting Tools



### 5-IN-1 HACKSAW

- High tension hacksaw securely holds the blade up to 330 lbs
- Converts to low profile hacksaw for tight spaces, and long reach hacksaw for hard-to-reach places
- Front handle converts to pistol grip jab saw

PRODUCT #	5 FUNCTIONS	BLADE TYPE	BLADE STORAGE	THROAT DEPTH	WEIGHT
DWHT20547L	Standard High Tension Hacksaw 45° Blade Placement Low Profile Hacksaw Long Reach Hacksaw Pistol Grip Jab Saw	Bi-metal Hacksaw Blade – 12 Recip Saw Blade - 6"	Yes	4-3/4"	1.29 lbs

### HACKSAW BLADES

- Best initial sharpness in the market\*
- Bi-metal construction combines flexibility from carbon steel and cutting performance from high speed steel
- Cuts most metals including unhardened tool steel and stainless steel

PRODUCT #	BLADE COUNT	BLADE LENGTH	TEETH PER INCH
DWHT20548	2 pk	10"	18
DWHT20549	2 pk	10"	24
DWHT20550	2 pk	10"	32
DWHT20551	2 pk	12"	18
DWHT20552	2 pk	12"	24
DWHT20553	2 pk	12"	32
DWHT20555	3 pk	10"	18, 24 and 32
DWHT20558	3 pk	12"	18, 24 and 32
DWHT20566	10 pk	12"	18
DWHT20567	10 pk	12"	24
DWHT20568	10 pk	12"	32



\*Compared to leading competitors

### MULTI-PURPOSE SAW

- Works with most standard hacksaw and reciprocating saw blades for wood / metal cutting
- Quick blade change with tension nut
- Ergonomic, bi-material handle for extra comfort and control

PRODUCT #	BLADE TYPE	BLADE LENGTH	POINTS PER INCH	TEETH PER INCH	HANDLE LENGTH	WEIGHT
DWHT20542	Hacksaw Reciprocal	10" 6"	25 8	24 7	5"	0.32 lbs



### STANDARD JAB SAW

- Aggressive tooth design cuts up to 50% faster than traditional tooth designs
- Ideal for use on drywall, plastic and other building materials
- Ergonomic, slip resistant grip

PRODUCT #	BLADE LENGTH	POINTS PER INCH	TEETH PER INCH	HANDLE LENGTH	WEIGHT
DWHT20540	6"	9	8	5-1/2"	0.35 lbs



### 2-IN-1 FOLDING JAB SAW AND RASP

- 2-in-1 design for convenience, cut drywall and plane edges with one tool
- Jab saw has triple ground teeth for fast cutting
- Steel rasp for material removal

PRODUCT #	BLADE LENGTH	POINTS PER INCH	TEETH PER INCH	HANDLE LENGTH	WEIGHT
DWHT20123	Jab-5-1/4", Rasp-4"	9	8	6-1/2"	0.49 lbs



## Cutting Tools



### PANEL SAWS

- Three-sided tooth cuts up to 50% faster than traditional handsaws
- Induction-hardened teeth stay sharp for long life
- ToughCoat™ long-lasting, low-friction coating for less drag

PRODUCT #	BLADE LENGTH	POINTS PER INCH	TEETH PER INCH	WEIGHT
DWHT20544L	15"	9	8	1.30 lbs
DWHT20545L	20"	9	8	1.50 lbs

### FLUSH CUT SAW

- Flexible blade creates perfect flush cuts
- 23-point tooth geometry cuts quickly and cleanly on the pull stroke
- Double-sided blade for making inside cuts from the left or right



PRODUCT #	BLADE LENGTH	POINTS PER INCH	TEETH PER INCH	HANDLE LENGTH	WEIGHT
DWHT20541	5"	24	23	5"	0.34 lbs

### SINGLE EDGE PULL SAW

- Flexible blade for easy flush cuts
- Fine finish teeth for precise cuts
- Ideal for cutting dowels, drywall, limbs, branches, shims, trim, and molding



PRODUCT #	BLADE LENGTH	POINTS PER INCH	TEETH PER INCH	HANDLE LENGTH	WEIGHT
DWHT20215	9"	15	14	10"	0.66 lbs

### DOUBLE EDGE PULL SAW

- Flexible blade for easy flush cuts
- Fine finish teeth on one side for precise cuts
- Coarse teeth on one side for cutting rough materials
- Ideal for cutting dowels, drywall, shims, trim, framing, molding, and cross cutting



PRODUCT #	BLADE LENGTH	POINTS PER INCH	TEETH PER INCH	HANDLE LENGTH	WEIGHT
DWHT20216	5"	Fine 15 Coarse 8	Fine 14 Coarse 7	10"	0.66 lbs

### FLUSH CUT REVERSING BACKSAW

- Reversing blade with push button for left or right handed cutting
- Offset handle for flush cuts and to help protect knuckles
- Induction hardened teeth for long life



PRODUCT #	BLADE LENGTH	POINTS PER INCH	TEETH PER INCH	HANDLE LENGTH	WEIGHT
DWHT20000	10"	15	14	5"	0.64 lbs

## Multi tools

### MT8 MULTI-TOOL

- Compact, lightweight design is perfect for keychains and every day carry
- Easy open tools save time and frustration
- Soft grip panels provide added comfort

PRODUCT #	TOOLS INCLUDED	WEIGHT
DWHT71842	Bottle Opener, Medium Screwdriver, File, Nail Cleaner, Nail File, Key ring Hole, Scissors, Knife Blade	0.17 lbs



### MT16 MULTI-TOOL

- Guaranteed Tough® – Durable construction withstands extreme job site usage
- Tools are accessible from the closed position, saving time and hassle
- Soft grip panels provide added comfort
- Stainless steel tools for longer life and rust resistance

PRODUCT #	TOOLS INCLUDED	WEIGHT
DWHT71843	Spring Loaded Needle Nose Pliers, Spring Loaded Regular Pliers, Spring Loaded Wire Cutter, Regular Knife, Blade, Serrated Knife Blade, Scissors, Wood/Metal File, Wire Stripper, Phillips Screwdriver, Small Screwdriver, Medium Screwdriver, Large, Screwdriver, Fold Out Carabiner/Lanyard Hole, Ruler, Bottle Opener, Can Opener	0.45 lbs



## Clamps

### SMALL BAR CLAMP

- One-handed operation
- Screw release allows for easy conversion to a spreader
- Tough reinforced nylon body
- Removable jaw pads protect work surfaces

PRODUCT #	# CLAMPS INCLUDED	CLAMPING FORCE	THROAT DEPTH	WEIGHT
DWHT83191	4" Clamps	35 lbs	1-1/2"	0.11 lbs



### MEDIUM BAR CLAMPS

- One-handed operation
- Tough reinforced nylon body
- Removable jaw pads protect work surfaces

PRODUCT #	# CLAMPS INCLUDED	CLAMPING FORCE	THROAT DEPTH	WEIGHT
DWHT83139	6" Clamp	100 lbs	2-7/16"	0.75 lbs
DWHT83140	12" Clamp	100 lbs	2-7/16"	0.90 lbs



### LARGE BAR CLAMPS

- One-handed operation
- Quick change button allows for easy conversion to a spreader
- Tough reinforced nylon body
- Removable jaw pads protect work surfaces

PRODUCT #	# CLAMPS INCLUDED	CLAMPING FORCE	THROAT DEPTH	WEIGHT
DWHT83192	6" Clamp	300 lbs	3-1/4"	1.07 lbs
DWHT83193	12" Clamp	300 lbs	3-1/4"	1.26 lbs
DWHT83194	24" Clamp	300 lbs	3-1/4"	1.63 lbs
DWHT83195	36" Clamp	300 lbs	3-1/4"	2.00 lbs



### EXTRA LARGE BAR CLAMPS

- One-handed operation
- Quick change button allows for easy conversion to a spreader
- Tough reinforced nylon body
- Full face removable jaw pads protect work surface

PRODUCT #	# CLAMPS INCLUDED	CLAMPING FORCE	THROAT DEPTH	WEIGHT
DWHT83185	12" Clamp	600 lbs	3-3/4"	2.55 lbs
DWHT83186	24" Clamp	600 lbs	3-3/4"	3.21 lbs
DWHT83187	36" Clamp	600 lbs	3-3/4"	3.86 lbs
DWHT83188	50" Clamp	600 lbs	3-3/4"	4.62 lbs



## Wood Chisels

### SIDE STRIKE CHISELS

- Cutting edge on side of blade for demolition work also allows the chisel to double as a scraper
- Steel strike cap and large side strike surface for durability
- Serrated cutting edge



PRODUCT #	HANDLE MATERIAL	HANDLE LENGTH	CHISEL TIP STYLE	BLADE WIDTH	WEIGHT
DWHT16065	Bi-Material	5-1/4"	Wood/Side Strike	1"	0.74 lbs
DWHT16148	Bi-Material	5-1/4"	Wood/Side Strike	3/4", 1" & 1-1/4"	2.06 lbs

### WOOD CHISEL SET

- Hardened, tempered chrome carbon-steel blade for edge retention
- Hardened strike cap for durability
- Blade lacquered for corrosion protection



PRODUCT #	HANDLE MATERIAL	HANDLE LENGTH	CHISEL TIP STYLE	MALLET REQUIRED	WEIGHT
DWHT16063	Bi-Material	5"	Wood Chisel	Yes	1.78 lbs

## Hammers

### ONE PIECE STEEL HAMMERS

- Optimal weight distribution for more controlled swing
- Side nail puller for efficient nail pulling
- Oval shaped strike face for easy toe nailing
- Magnetic nail starter (Framer only)



PRODUCT #	HANDLE MATERIAL	HANDLE LENGTH	FACE DIAMETER	HEAD WEIGHT	FACE STYLE	HANDLE STYLE	WEIGHT
DWHT51048	Steel	7-1/2"	1-3/8" x 1-1/4"	16 oz	Smooth	Straight	1.5 lbs
DWHT51054	Steel	7-1/2"	1-3/8" x 1-1/4"	20 oz	Smooth	Straight	1.75 lbs
DWHT51064	Steel	8-1/4"	1-3/8"	22 oz	Checkered	Straight	2.0 lbs

### MIG WELD HAMMERS

- MIG weld all steel design for durability and long life
- Lightweight for fast swing and reduced fatigue\*\*
- Magnetic nail starter for easy one handed nail placement



PRODUCT #	HANDLE MATERIAL	HANDLE LENGTH	FACE DIAMETER	HEAD WEIGHT	FACE STYLE	HANDLE STYLE	WEIGHT
DWHT51135X	Steel	14"	2"	12 oz	Smooth	Straight	1.53 lbs
DWHT51138X	Steel	16"	2"	14 oz	Checkered	Straight	1.83 lbs
DWHT51145X	Steel	16"	2"	14 oz	Smooth	Straight	1.83 lbs

### HICKORY HANDLE FRAMING HAMMERS

- Lightweight for fast swing and reduced fatigue\*\*
- Genuine hickory handle for durability and long life
- Available with smooth or checkered face



PRODUCT #	HANDLE MATERIAL	HANDLE LENGTH	FACE DIAMETER	HEAD WEIGHT	FACE STYLE	HANDLE STYLE	WEIGHT
DWHT51411	Hickory	16"	2"	17 oz	Smooth	Axe	1.88 lbs
DWHT51418	Hickory	16"	2"	17 oz	Checkered	Axe	1.88 lbs

\*\* Versus one piece steel framing hammers

## Nail Sets

### BI-MATERIAL NAIL SETS

- Bi-material grip for comfort and shock absorption
- Flared grip helps to protect hand against glancing blows
- Solid steel core for direct energy transfer
- Color coded by tip size for easy identification

PRODUCT #	HANDLE MATERIAL	TIP SIZE	WEIGHT
DWHT58018	Bi-Material	1/32", 2/32" & 3/32"	0.37 lbs
DWHT58019	Bi-Material	1/32"	0.13 lbs



### NAIL SET

- Interchangeable tip for convenience (includes 1/32", 2/32", 3/32", & 2 pt Phillips tips)
- Hexagonal head prevents rolling and can be used as a standard drill chuck – nail set doubles as drill extension
- Knurled locking collar for easy nail release and reversal - accepts standard screwdriver bits for versatility

PRODUCT #	HANDLE MATERIAL	TIP SIZE	WEIGHT
DWHT58503	Comfort Grip	1/32", 2/32", 3/32", & 2 pt Phillips	0.80 lbs



## Pry Bars

### SPRING STEEL FLAT BARS

- Spring steel for strength and durability
- Extra wide prying end for leverage and pry surface
- Pointed beveled end for penetration and nail pulling

PRODUCT #	BAR LENGTH	NUMBER OF NAIL SLOTS	WEIGHT
DWHT55518	12"	3	1.24 lbs
DWHT55528	21"	3	2.17 lbs



### WRECKING BARS

- Rounded 90° prying end for leverage and prying
- Multiple nail pullers for flexibility and nail removal
- Pointed beveled end for penetration and nail pulling

PRODUCT #	BAR LENGTH	NUMBER OF NAIL SLOTS	WEIGHT
DWHT55129	24"	3	4.20 lbs
DWHT55131	36"	3	6.50 lbs
DWHT55132	42"	2	7.20 lbs



### 10" CLAW BAR

- Nail digger exposes the head of a flush nail
- Extra wide strike surface helps user accurately strike the bar
- I-beam shaft provides strength without adding weight

PRODUCT #	BAR LENGTH	NUMBER OF NAIL SLOTS	WEIGHT
DWHT55524	10"	2	0.82 lbs



### 10" MOLDING BAR

- Extra wide head 40% wider than standard molding bars
- Extra wide strike surface and flat prying end helps user accurately strike the bar
- I-beam shaft provides strength without adding weight

PRODUCT #	BAR LENGTH	NUMBER OF NAIL SLOTS	WEIGHT
DWHT55529	10"	2	0.70 lbs



## Pliers

### FENCING PLIERS

- Hammer strike face
- Staple starter and puller
- Wire stretcher and splicer



PRODUCT #	GRIP MATERIAL	HANDLE LENGTH	JAW CAPACITY	JAW TIP SIZE	WEIGHT
DWHT70273	Bi-Material Cushion Handle	9-1/4"	1-1/2"	1"	1.64 lbs

### CRIMPING PLIERS

- Crimps 10 to 22 AWG terminals and connectors
- Chrome vanadium steel forged pliers for strength and durability
- Bi-material cushion handle for strong grip and comfort



PRODUCT #	GRIP MATERIAL	HANDLE LENGTH	JAW CAPACITY	JAW TIP SIZE	WEIGHT
DWHT70272	Bi-Material Cushion Handle	9-1/2"	1"	0.50"	0.71 lbs

### DIAGONAL PLIERS

- Forged chrome vanadium steel for strength and durability
- GripArmor™ helps prevent grips from tearing and provides long life
- Induction hardening helps blades stay sharp



PRODUCT #	LENGTH	GRIP MATERIAL	HANDLE LENGTH	JAW CAPACITY	JAW TIP SIZE	WEIGHT
DWHT71011	6-1/2"	Polyvinyl Chloride	3-1/2"	15/16"	0.13"	0.45 lbs
DWHT70815	6"	Polyvinyl Chloride	4"	3/4"	0.06"	0.40 lbs
DWHT70793	7"	Polyvinyl Chloride	4"	3/4"	0.06"	0.56 lbs
DWHT70794	8"	Polyvinyl Chloride	4-1/2"	1"	0.13"	0.70 lbs
DWHT70795	10"	Polyvinyl Chloride	6"	1-1/4"	0.13"	0.93 lbs



### LINESMAN PLIERS

- Forged chrome vanadium steel for strength and durability
- GripArmor™ helps prevent grips from tearing and provides long life
- Induction hardening helps blades stay sharp



PRODUCT #	LENGTH	GRIP MATERIAL	HANDLE LENGTH	JAW CAPACITY	JAW TIP SIZE	WEIGHT
DWHT70796	7"	Polyvinyl Chloride	4-1/2"	1"	0.13"	0.65 lbs
DWHT70798	8"	Polyvinyl Chloride	5-1/2"	1-3/4"	0.56"	1.19 lbs
DWHT70797	9"	Polyvinyl Chloride	5-1/2"	1-3/4"	0.56"	1.19 lbs



### LONG NOSE PLIERS

- Forged chrome vanadium steel for strength and durability
- GripArmor™ helps prevent grips from tearing and provides long life
- Induction hardening helps blades stay sharp



PRODUCT #	LENGTH	GRIP MATERIAL	HANDLE LENGTH	JAW CAPACITY	JAW TIP SIZE	WEIGHT
DWHT70799	6"	Polyvinyl Chloride	3"	1-3/4"	0.06"	0.36 lbs
DWHT70800	8"	Polyvinyl Chloride	5"	2"	0.06"	0.70 lbs

### END NIPPERS

- Forged chrome vanadium steel for strength and durability
- GripArmor™ helps prevent grips from tearing and provides long life
- Precision machined jaws for gripping and twisting



PRODUCT #	LENGTH	GRIP MATERIAL	HANDLE LENGTH	JAW CAPACITY	JAW TIP SIZE	WEIGHT
DWHT70801	6-1/2"	Polyvinyl Chloride	5"	2"	0.06"	0.70 lbs
DWHT70802	8"	Polyvinyl Chloride	5"	5/8"	1.13"	0.79 lbs
DWHT70803	10"	Polyvinyl Chloride	5-1/2"	1"	1.25"	1.23 lbs

## Pliers

### SLIP JOINT PLIERS

- Forged chrome vanadium steel for strength and durability
- GripArmor™ helps prevent grips from tearing and provides long life
- Precision machined jaws for gripping and twisting



PRODUCT #	LENGTH	GRIP MATERIAL	HANDLE LENGTH	JAW CAPACITY	JAW TIP SIZE	WEIGHT
DWHT71924	6"	Polyvinyl Chloride	3-3/4"	2-1/4"	0.25"	0.44 lbs
DWHT71925	8"	Polyvinyl Chloride	4-11/29"	3-11/29"	0.31"	0.56 lbs

### REBAR PLIERS

- Forged chrome vanadium steel for strength and durability
- GripArmor™ helps prevent grips from tearing and provides long life
- 135° bent handle for additional pulling leverage
- Precision induction hardened jaws and blades



PRODUCT #	DESCRIPTION	GRIP MATERIAL	HANDLE LENGTH	JAW CAPACITY	JAW TIP SIZE	WEIGHT
DWHT84818	Light-Duty	Polyvinyl Chloride (PVC)	6"	1"	0.25"	0.81 lbs
DWHT84720	Heavy-Duty	Polyvinyl Chloride (PVC)	6"	47/50"	0.25"	1.20 lbs

## Wrenches

### WRENCHES

- Improved strength due to increased engagement on teeth and worm gear\*\*
- ToughCoat™ finish helps to prevent chipping
- Jaw movement engineered to facilitate minimal jaw movement between jaws for precise adjustments\*\*



PRODUCT #	DESCRIPTION	MAXIMUM OPENING	LENGTH	WEIGHT
DWHT70289	Black Phosphate Adjustable 6"	0.88"	6"	0.32 lbs
DWHT70290	Black Phosphate Adjustable 8"	1.25"	8"	0.25 lbs
DWHT70291	Black Phosphate Adjustable 10"	1.38"	10"	1.50 lbs
DWHT70292	Black Phosphate Adjustable 12"	1.63"	12"	1.38 lbs
DWHT70293	Black Phosphate Adjustable 15"	1.75"	15"	3.66 lbs
DWHT70295	16" Spud Wrench	1.62"	9-1/2"	10.25 lbs

#### Wrench Set

DWHT70294	Black Phosphate Adjustable 2 pack (Includes: DWHT70289, DWHT70291)			1.82 lbs
-----------	--	--	--	----------

\*\* Versus leading competitor

## Hex Keys

### FOLDING LOCKING HEX KEYS

- Push-button locking feature locks in 3 positions at 90°, 135° and 180°
- Durable steel side plate for high torque applications
- Includes 8 of the most commonly used hex key sizes



LOCKING KEYS

PRODUCT #	HEX KEY SHAPE	METRIC/SAE/USS	WEIGHT
DWHT70262M	Flat End	SAE	0.68 lbs
DWHT70263M	Flat End	Metric	0.68 lbs
DWHT70264	Star	Star	0.68 lbs

### RATCHETING T-HANDLE SETS

- Compact and durable case for easy storage
- Large variety of bits for almost any job (Star, Sockets, Nut Drivers, Phillips and Flat)
- Heavy-duty ratcheting T-handle offers quick-change keys



PRODUCT #	# OF PIECES IN SET	HEX KEY SHAPE	METRIC/SAE/USS	WEIGHT
DWHT70265	31	Flat, Hex, Phillips	Metric & SAE	2.90 lbs
DWHT70808	24	Sockets	Metric & SAE	2.90 lbs
DWHT70838	16	Hex, Nut Drivers	Metric & SAE	2.90 lbs

## Storage

### TOUGHSYSTEM®

- Durable 4 mm thick structural foam box walls give robust structure for the stand alone units
- Integrated water seal in each unit helps protect contents (excludes DWST08225)
- Metal carrier with adjustable foldable brackets allows tailored configuration

PRODUCT #	DESCRIPTION	LOAD CAPACITY	WEIGHT
DWST08201	DS150 - Small Case 44.00 lbs	9.70 lbs	
DWST08225	DS250 - Drawer Unit 22.00 lbs (per drawer)	17.52 lbs	
DWST08203	DS300 - Large Case 66.00 lbs	9.50 lbs	
DWST08204	DS400 - XL Case 88.00 lbs	13.20 lbs	
DWST08210	DS Carrier	Flat 264.00 lbs, Steps 176.00 lbs	34.40 lbs
DWST08212	DS Carrier Bracket (2-Pack)	—	1.35 lbs
DWST38000	Tough Chest™	63 Gallon	



DWST08201



DWST08225



DWST08203



DWST08204



DWST08210



DWST38000

### TSTAK®

- Flexible platform allows different combinations
- Stackable - All units can stack on top of the other, connected with durable slide latches
- Removable covered cups for organization of small parts and accessories

PRODUCT #	DESCRIPTION	LOAD CAPACITY	WEIGHT
DWST17805	TSTAK® Organizer	22.00 lbs	6.17 lbs
DWST17806	TSTAK® Deep Box	44.00 lbs	7.44 lbs
DWST17808	TSTAK® I	22.00 lbs	5.57 lbs
DWST17807	TSTAK® II	22.00 lbs	3.96 lbs
DWST17803	TSTAK® III	22.00 lbs	8.40 lbs
DWST17804	TSTAK® IV	22.00 lbs	9.35 lbs
DWST17889	TSTAK® Cart	220.00 lbs	7.13 lbs
DWST17888	TSTAK® Trolley	Flat 220.00 lbs, Steps 110.00 lbs	16.50 lbs
DWST88801	TSTAK® Foam Insert	—	0.55 lbs

Removable blocks allow for easy customization to needed power tool/equipment  
Works with: DWST17808, DWST17807, DWST17805



DWST17805



DWST17806



DWST17808



DWST17889



DWST17888



DWST17803



DWST17804



DWST17807



DWST88801

## Storage

### MOBILE WORK STATION

- Single front pull-up latch easily opens up the unit
- 4 Work levels – top tool box and tray, mid organizer section, large bottom bin for power tools
- Ideal for on site storage and transportation of equipment

PRODUCT #	LOAD CAPACITY	WEIGHT
DWST20800	Bottom Bin - 44.00 lbs Middle Organizer - 22.00 lbs Top Tool Box - 22.00 lbs	21.42 lbs



### MULTI LEVEL ROLLING WORKSHOP

- Single Pull-Up Latch for quick and easy opening
- Reinforced Telescopic, Metal Pull Handle for easy maneuvering and comfortable hold
- Heavy-Duty Wheels for easy steering on job-site

PRODUCT #	LOAD CAPACITY
DWST20880	88 lbs.



### 15 GALLON CONTRACTOR CHEST

- One-Touch Latch for quick and easy opening
- Telescopic, Metal Pull Handle for easy maneuvering
- Large, 7" Wheels for easy steering on job-site

PRODUCT #	LOAD CAPACITY
DWST33090	15 Gallons



### DEEP PRO ORGANIZERS

- Organizer with integrated carry handle for small parts organization
- Removable cups for inner customization of small tools and parts
- Anti-rust metal latches for long life (only DWST14825)
- Heavy duty lid clear and impact resistant
- Units are stackable for storage and transport
- Integrated water seal (DWST14740 only)

PRODUCT #	NO. OF COMPARTMENTS	LENGTH	WIDTH	HEIGHT	WEIGHT
DWST14740	6	13-6/7"	10-3/14"	4-5/14"	2.66 lbs
DWST14825	10	17-1/2"	14"	4-1/2"	4.77 lbs



DWST14740



DWST14825

### TOTE WITH POWER TOOL CASE

- Heavy duty anti-rust metal latches on top case
- Front push button for easy detaching/attaching of the 2 units
- Top case for power tools and small parts with an integrated handle
- Long metal carry handle for easy grip when carrying
- Heavy-duty design for durable structure

PRODUCT #	HANDLE LENGTH	HOLDING CAPACITY	LATCH	LOCKABLE	MATERIAL TYPE	WATER RESISTANT	WEIGHT CAPACITY	WHEELS	WEIGHT
DWST24070	24-1/5"	3413 in <sup>3</sup>	Metal	Yes	Resin	No	77 lbs	No	7.41 lbs



### TOTE WITH REMOVABLE ORGANIZER

- Heavy duty anti-rust metal latches on top case
- Front push button for easy detaching/attaching of the 2 units
- Top case organizer for small parts with integrated handle
- Long metal carry handle for easy grip when carrying
- Heavy-duty design for durable structure

PRODUCT #	HANDLE LENGTH	HOLDING CAPACITY	LATCH	LOCKABLE	MATERIAL TYPE	WATER RESISTANT	WEIGHT CAPACITY	WHEELS	WEIGHT
DWST24075	24-1/5"	3190 in <sup>3</sup>	Metal	Yes	Resin	No	77 lbs	No	7.40 lbs



## Storage

### ONE TOUCH BOX

- One-handed latch operation allows opening when other hand is occupied
- Integrated water seal to help protect from water and dust
- Soft grip handle for easy grip and carrying
- Integrated V-groove on top lid



PRODUCT #	HANDLE LENGTH	HOLDING CAPACITY	LATCH	LOCKABLE	MATERIAL TYPE	WATER RESISTANT	WEIGHT CAPACITY	WHEELS	WEIGHT
DWST24082	7"	3064 in <sup>3</sup>	Metal	Yes	Resin	Yes	55 lbs	No	5.32 lbs

### STRUCTURAL FOAM WATER SEAL TOOL BOX

- Large capacity designed for volume utility
- All round water seal to help protect contents
- Portable tote tray for storage of large tools and power tools
- Large metal rust proof latches with padlock eye
- Integrated V-groove on top lid



PRODUCT #	HANDLE LENGTH	HOLDING CAPACITY	LATCH	LOCKABLE	MATERIAL TYPE	WATER RESISTANT	WEIGHT CAPACITY	WHEELS	WEIGHT
DWST28001	7-1/10"	2125 in <sup>3</sup>	Metal	Yes	Resin	Yes	100 lbs	No	9.70 lbs

### ADJUSTABLE LEG SAWHORSE

- Unique mechanism with easy slide movements adjusts legs separately for work on uneven surfaces
- High quality combination of metal and plastic for load capacity of up to 2500 lbs per pair
- Rubber inserts on legs and upper ruler for stability



PRODUCT #	HEIGHT	MATERIAL TYPE	WEIGHT CAPACITY	WEIGHT
DWST11031	33"- 34"	Metal / Plastic	2500 lbs per pair	10.64 lbs





## Mechanics Tool Sets

### RATCHETS

- 5 degree arc swing and slim head design for maneuverability in constricted areas
- 72-tooth gear system for high torque ratcheting
- Low profile directional lever helps reduce catch points and for easy one-hand operation

PRODUCT #	DESCRIPTION	OVERALL LENGTH	WEIGHT
DWMT71803	1/4" Drive Pear Head Ratchet	5-5/8"	0.43 lbs
DWMT71804	3/8" Drive Pear Head Ratchet	7-7/8"	0.99 lbs
DWMT71805	1/2" Drive Pear Head Ratchet	9-11/16"	1.67 lbs



### SOCKET SETS

- Knurled beauty rings provide a non-slip gripping surface
- Deep laser etched markings for easy socket size identification
- 5 degree arc swing and slim head design for maneuverability in constricted areas

PRODUCT #	Description	point size	Weight
DWMT72160	23 Pc 1/4" Dr. Socket Set SAE/MM	6 pt	2.24 lbs
DWMT72161	25 Pc 3/8" Dr. Socket Set SAE/MM	6 pt	5.40 lbs
DWMT72162	25 Pc 1/2" Dr. Socket Set SAE/MM	6 pt	8.89 lbs



### COMBINATION WRENCH SETS

- Anti-slip design delivers 400%\* more gripping power to help reduce fastener damage and provide torque
- Long panel forging for reach and leverage

PRODUCT #	Description	Size	Weight
DWMT72166	Metric Combination Wrench Set	10 mm, 11 mm, 12 mm, 13 mm, 14 mm, 15 mm, 16 mm, 17 mm, 18 mm, 19 mm	2.70 lbs
DWMT72167	SAE Combination Wrench Set	3/8", 7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 13/16", 7/8", 15/16"	3.60 lbs



### REVERSIBLE RATCHETING WRENCH SETS

- Anti-slip design delivers 400%\* more gripping power to help reduce fastener damage and provide torque
- Long panel forging for reach and leverage

PRODUCT #	Description	Size	Weight
DWMT72168	Metric Reversible Ratcheting Wrench Set	10 mm, 11 mm, 12 mm, 13 mm, 14 mm, 15 mm, 16 mm, 17 mm, 18 mm, 19 mm	2.90 lbs
DWMT72167	SAE Reversible Ratcheting Wrench Set	3/8", 7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 13/16", 7/8", 15/16"	3.80 lbs



### MECHANICS TOOL SETS

- Knurled beauty rings provide a non-slip gripping surface
- Deep laser etched markings for easy socket size identification
- 5 degree arc swing and slim head design for maneuverability in constricted areas

PRODUCT #	Description	point size
DWMT72163	118 Pc 1/4" & 3/8" Dr. Set SAE/MM	6 pt
DWMT72164	156 Pc 1/4" & 3/8" Dr. Set SAE/MM	6 pt
DWMT72165	204 Pc 1/4", 3/8" & 1/2" Dr. Set SAE/MM	6 pt



\*versus standard combination wrenches

## Mechanics Tool Sets

### 15 PIECE DRIVE ACCESSORY SET

- Removable inner blow molded case - fits into large tool box
- Stackable Set of cases that allows for easy transport
- Adapts sockets for use in drills



#### PRODUCT #

#### Description

DWMT73807

1/4" & 3/8" Drive Accessory Set - 15 Piece

### 34 PIECE DRIVE SOCKET SET

- Removable inner blow molded case - fits into large tool box
- Stackable Set of cases that allows for easy transport
- 5 degree arc swing and slim head design for maneuverability in constricted areas



#### PRODUCT #

#### Description

DWMT73804

1/4" & 3/8" Drive Socket Set - 34 Piece

### 25 PIECE DRIVE SOCKET SET

- Removable inner blow molded case - fits into large tool box
- Stackable Set of cases that allows for easy transport
- Chrome vanadium steel construction for strength & durability



#### PRODUCT #

#### Description

DWMT73805

1/4" Drive Socket Set - 25 Piece

### 10 PIECE METRIC DRIVE DEEP SOCKET SET

- Removable inner blow molded case - fits into large tool box
- Stackable Set of cases that allows for easy transport
- Chrome vanadium steel construction for strength & durability



#### PRODUCT #

#### Description

DWMT73815

Metric 1/2" Drive Deep Socket Set - 10 Piece

### 10 PIECE SAE DRIVE DEEP SOCKET SET

- Removable inner blow molded case - fits into large tool box
- Stackable Set of cases that allows for easy transport
- Chrome vanadium steel construction for strength & durability



#### PRODUCT #

#### Description

DWMT73814

SAE 1/2" Drive Deep Socket Set - 10 Piece

### 20 PIECE DRIVE DEEP SOCKET SET

- Removable inner blow molded case - fits into large tool box
- Stackable Set of cases that allows for easy transport
- Anti-slip design delivers 400%\* more gripping power to help reduce fastener damage and provide torque



#### PRODUCT #

#### Description

DWMT73812

3/8" Drive Deep Socket Set - 20 Piece

### 20 PIECE DRIVE DEEP SOCKET SET

- Removable inner blow molded case - fits into large tool box
- Stackable Set of cases that allows for easy transport
- Anti-slip design delivers 400%\* more gripping power to help reduce fastener damage and provide torque



#### PRODUCT #

#### Description

DWMT73811

1/4" Drive Deep Socket Set - 20 Piece

### 23 PIECE DRIVE SOCKET SET

- Removable inner blow molded case - fits into large tool box
- Stackable Set of cases that allows for easy transport
- Anti-slip design delivers 400%\* more gripping power to help reduce fastener damage and provide torque



#### PRODUCT #

#### Description

DWMT73813

1/2" Drive Socket Set - 23 Piece

\*versus standard combination wrenches

## Mechanics Tool Sets

### 17 PIECE DRIVE BIT SOCKET SET

- Removable inner blow molded case - fits into large tool box
- Stackable Set of cases that allows for easy transport
- Chrome vanadium steel construction for strength & durability

#### PRODUCT #

DWMT73806

#### Description

3/8" Drive Bit Socket Set - 17 Piece



### 71 PIECE BIT AND NUT DRIVER SET

- Removable inner blow molded case - fits into large tool box
- Stackable Set of cases that allows for easy transport
- Vinyl grip handle for maximum comfort

#### PRODUCT #

DWMT73808

#### Description

1/4" Drive Bit and Nut Driver Set - 71 Piece



### 8 PIECE SAE COMBINATION WRENCH SET

- Removable inner blow molded case - fits into large tool box
- Stackable Set of cases that allows for easy transport
- Long panel forging for reach and leverage

#### PRODUCT #

DWMT73809

#### Description

SAE Combination Wrench Set - 8 Piece



### 8 PIECE METRIC COMBINATION WRENCH SET

- Removable inner blow molded case - fits into large tool box
- Stackable Set of cases that allows for easy transport
- Anti-slip design delivers 400%\* more gripping power to help reduce fastener damage and provide torque

#### PRODUCT #

DWMT73810

#### Description

Metric Combination Wrench Set - 8 Piece



### 108 PIECE MECHANICS TOOL SET

- 72 Tooth gear system for high torque ratcheting
- Low profile directional lever helps reduce catch points and for easy one-hand operation
- Durable molded case for easy storage and tool protection

#### PRODUCT #

DWMT73801

#### Description

108 Piece Mechanics Tool Set



### 142 PIECE MECHANICS TOOL SET

- 72 Tooth gear system for high torque ratcheting
- Low profile directional lever helps reduce catch points and for easy one-hand operation
- Durable molded case for easy storage and tool protection

#### PRODUCT #

DWMT73802

#### Description

142 Piece Mechanics Tool Set



### 168 PIECE MECHANICS TOOL SET

- 72 Tooth gear system for high torque ratcheting
- Low profile directional lever helps reduce catch points and for easy one-hand operation
- Durable molded case for easy storage and tool protection

#### PRODUCT #

DWMT73803

#### Description

168 Piece Mechanics Tool Set



\*versus standard combination wrenches

## WRENCHES

### SAE & METRIC COMBINATION WRENCHES

- Anti-slip design delivers 400%\* more gripping power to help reduce fastener damage and provide torque
- Long panel forging for reach and leverage

PRODUCT #	WRENCH SIZE
DWMT721890SP	1/4" SAE
DWMT721910SP	5/16" SAE
DWMT721930SP	3/8" SAE
DWMT721940SP	7/16" SAE
DWMT721950SP	1/2" SAE
DWMT721960SP	9/16" SAE
DWMT721970SP	5/8" SAE
DWMT721980SP	11/16" SAE
DWMT721990SP	3/4" SAE
DWMT722000SP	13/16" SAE
DWMT722010SP	7/8" SAE
DWMT722020SP	15/16" SAE
DWMT751840SP	1" SAE
DWMT751850SP	1-1/16" SAE
DWMT751870SP	1-1/4" SAE
DWMT751880SP	1-1/8" SAE

PRODUCT #	WRENCH SIZE
DWMT751970SP	7 MM
DWMT751980SP	8 MM
DWMT751990SP	9 MM
DWMT722110SP	10 MM
DWMT722120SP	11 MM
DWMT722130SP	12 MM
DWMT722140SP	13 MM
DWMT722150SP	14 MM
DWMT722160SP	15 MM
DWMT722170SP	16 MM
DWMT722180SP	17 MM
DWMT722190SP	18 MM
DWMT722200SP	19 MM
DWMT751920SP	20 MM
DWMT751930SP	21 MM
DWMT751940SP	22 MM



### SAE & METRIC RATCHETING COMBINATION WRENCHES

- Anti-slip design delivers 400%\* more gripping power to help reduce fastener damage and provide torque
- Long panel forging for reach and leverage

PRODUCT #	WRENCH SIZE
DWMT722880SP	1/4" SAE
DWMT722890SP	5/16" SAE
DWMT722910SP	3/8" SAE
DWMT722920SP	7/16" SAE
DWMT722930SP	1/2" SAE
DWMT722940SP	9/16" SAE
DWMT722950SP	5/8" SAE
DWMT722960SP	11/16" SAE
DWMT722970SP	3/4" SAE
DWMT752350SP	13/16" SAE
DWMT752550SP	7/8" SAE
DWMT752380SP	15/16" SAE

PRODUCT #	WRENCH SIZE
DWMT752560SP	8 MM
DWMT752570SP	9 MM
DWMT722980SP	10 MM
DWMT722990SP	11 MM
DWMT723000SP	12 MM
DWMT723010SP	13 MM
DWMT723020SP	14 MM
DWMT723030SP	15 MM
DWMT723040SP	16 MM
DWMT723050SP	17 MM
DWMT723060SP	18 MM
DWMT723070SP	19 MM
DWMT752430SP	20 MM
DWMT752440SP	21 MM
DWMT752450SP	22 MM
DWMT752460SP	24 MM
DWMT752470SP	27 MM
DWMT752500SP	30 MM



### SAE & METRIC RATCHETING FLEX HEAD COMBINATION WRENCHES

- Anti-slip design delivers 400%\* more gripping power to help reduce fastener damage and provide torque
- Long panel forging for reach and leverage

PRODUCT #	WRENCH SIZE
DWMT752100SP	3/8" SAE
DWMT752120SP	7/16" SAE
DWMT752000SP	1/2" SAE
DWMT752130SP	9/16" SAE
DWMT752110SP	5/8" SAE
DWMT752020SP	11/16" SAE
DWMT752090SP	3/4" SAE



PRODUCT #	WRENCH SIZE
DWMT752010SP	10 MM
DWMT752030SP	12 MM
DWMT752040SP	13 MM
DWMT752050SP	14 MM
DWMT752060SP	15 MM
DWMT752070SP	17 MM
DWMT752080SP	19 MM



\*versus standard combination wrenches

## WRENCHES

### SAE FLARE NUT WRENCHES

- Anti-slip design delivers 400%\* more gripping power to help reduce fastener damage and provide torque
- Long panel forging for reach and leverage

PRODUCT #	WRENCH SIZE
DWMT752140SP	1/2" X 9/16" SAE
DWMT752180SP	3/8" X 7/16" SAE
DWMT752190SP	5/8" X 11/16" SAE



### SAE DOUBLE OPEN ENDED WRENCHES

- Anti-slip design delivers 400%\* more gripping power to help reduce fastener damage and provide torque
- Long panel forging for reach and leverage

PRODUCT #	WRENCH SIZE
DWMT752200SP	1/2" X 9/16" SAE
DWMT752210SP	1/4" X 5/16" SAE
DWMT752220SP	3/8" X 7/16" SAE



## 1/4" DRIVE SOCKETS

### SAE & METRIC 6 PT 1/4 DRIVE SOCKETS

PRODUCT #	SOCKETS SIZE
DWMT860210SP	5/32" SAE
DWMT860220SP	3/16" SAE
DWMT860230SP	7/32" SAE
DWMT860240SP	1/4" SAE
DWMT860250SP	9/32" SAE
DWMT860260SP	5/16" SAE
DWMT860270SP	11/32" SAE
DWMT860280SP	3/8" SAE
DWMT860290SP	7/16" SAE
DWMT860300SP	1/2" SAE
DWMT858610SP	9/16" SAE

PRODUCT #	SOCKETS SIZE
DWMT861010SP	4 MM
DWMT861020SP	5 MM
DWMT861030SP	6 MM
DWMT861040SP	7 MM
DWMT861050SP	8 MM
DWMT861060SP	9 MM
DWMT861070SP	10 MM
DWMT861080SP	11 MM
DWMT861090SP	12 MM
DWMT861120SP	13 MM
DWMT861140SP	14 MM



### SAE & METRIC 6 PT 1/4 DRIVE DEEP SOCKETS

PRODUCT #	SOCKETS SIZE
DWMT898200SP	5/32" SAE
DWMT898640SP	3/16" SAE
DWMT860430SP	1/4" SAE
DWMT860440SP	9/32" SAE
DWMT860450SP	5/16" SAE
DWMT860460SP	11/32" SAE
DWMT860470SP	3/8" SAE
DWMT860480SP	7/16" SAE
DWMT860490SP	1/2" SAE

PRODUCT #	SOCKETS SIZE
DWMT889350SP	4 MM
DWMT889360SP	5 MM
DWMT860940SP	6 MM
DWMT860950SP	7 MM
DWMT860960SP	8 MM
DWMT860970SP	9 MM
DWMT860980SP	10 MM
DWMT860990SP	11 MM
DWMT861000SP	12 MM
DWMT861160SP	13 MM
DWMT862890SP	14 MM



\*versus standard combination wrenches

## 3/8" DRIVE Sockets

### SAE & METRIC 6 PT 3/8 DRIVE SOCKETS

PRODUCT #	SOCKETS SIZE
DWMT862560SP	5/16" SAE
DWMT889760SP	3/8" SAE
DWMT889770SP	7/16" SAE
DWMT889780SP	1/2" SAE
DWMT889790SP	9/16" SAE
DWMT889800SP	5/8" SAE
DWMT889810SP	11/16" SAE
DWMT889820SP	3/4" SAE
DWMT889830SP	13/16" SAE
DWMT889840SP	7/8" SAE

PRODUCT #	SOCKETS SIZE
DWMT863030SP	8 MM
DWMT863040SP	9 MM
DWMT863050SP	10 MM
DWMT863060SP	11 MM
DWMT863070SP	12 MM
DWMT863080SP	13 MM
DWMT863090SP	14 MM
DWMT863100SP	15 MM
DWMT863110SP	16 MM
DWMT863120SP	17 MM
DWMT863130SP	18 MM
DWMT863140SP	19 MM



### SAE & METRIC 6 PT 3/8 DRIVE DEEP SOCKETS

PRODUCT #	SOCKETS SIZE
DWMT708400SP	1/4" SAE
DWMT800160SP	5/16" SAE
DWMT889850SP	3/8" SAE
DWMT889860SP	7/16" SAE
DWMT889870SP	1/2" SAE
DWMT889880SP	9/16" SAE
DWMT889890SP	5/8" SAE
DWMT889900SP	11/16" SAE
DWMT889910SP	3/4" SAE
DWMT889710SP	7/8" SAE

PRODUCT #	SOCKETS SIZE
DWMT863220SP	10 MM
DWMT863230SP	11 MM
DWMT863240SP	12 MM
DWMT863250SP	13 MM
DWMT863260SP	14 MM
DWMT863270SP	15 MM
DWMT888250SP	16 MM
DWMT863280SP	17 MM
DWMT949550SP	18 MM
DWMT949610SP	19 MM
DWMT963620SP	21 MM



### SAE & METRIC 12 PT 3/8 DRIVE SOCKETS

PRODUCT #	SOCKETS SIZE
DWMT745270SP	3/8" SAE
DWMT745300SP	7/16" SAE
DWMT745120SP	1/2" SAE
DWMT745320SP	9/16" SAE
DWMT745290SP	5/8" SAE
DWMT745140SP	11/16" SAE
DWMT745260SP	3/4" SAE
DWMT745170SP	13/16" SAE
DWMT745310SP	7/8" SAE

PRODUCT #	SOCKETS SIZE
DWMT745130SP	10 MM
DWMT745150SP	11 MM
DWMT745160SP	12 MM
DWMT745180SP	13 MM
DWMT745190SP	14 MM
DWMT745200SP	15 MM
DWMT745210SP	16 MM
DWMT745220SP	17 MM
DWMT745230SP	18 MM
DWMT745240SP	19 MM



### SAE & METRIC 12 PT 3/8 DRIVE DEEP SOCKETS

PRODUCT #	SOCKETS SIZE
DWMT741430SP	3/8" SAE
DWMT741460SP	7/16" SAE
DWMT741390SP	1/2" SAE
DWMT741480SP	9/16" SAE
DWMT741450SP	5/8" SAE
DWMT741400SP	11/16" SAE
DWMT741420SP	3/4" SAE
DWMT741410SP	13/16" SAE
DWMT741470SP	7/8" SAE

PRODUCT #	SOCKETS SIZE
DWMT745110SP	9 MM
DWMT745020SP	10 MM
DWMT745030SP	11 MM
DWMT745040SP	12 MM
DWMT745050SP	13 MM
DWMT745060SP	14 MM
DWMT745070SP	15 MM
DWMT745080SP	16 MM
DWMT745090SP	17 MM
DWMT745100SP	18 MM



## 3/8" DRIVE Sockets

### SAE 3/8 DRIVE SPARK PLUG SOCKETS

PRODUCT #	SOCKETS SIZE
DWMT863800SP	13/16" SAE
DWMT863810SP	5/8" SAE



### 3/8 DRIVE TORX BIT SOCKETS

PRODUCT #	TORX SIZE
DWMT874040SP	T10
DWMT871410SP	T15
DWMT871420SP	T20
DWMT871430SP	T25
DWMT874060SP	T27
DWMT871440SP	T30
DWMT871450SP	T40
DWMT871460SP	T45



### SAE & METRIC 3/8 DRIVE HEX BIT SOCKETS

PRODUCT #	HEX SIZE	PRODUCT #	HEX SIZE
DWMT863880SP	5/32" SAE	DWMT879710SP	4 MM
DWMT863890SP	3/16" SAE	DWMT879720SP	5 MM
DWMT863910SP	1/4" SAE	DWMT879730SP	6 MM
DWMT863920SP	5/16" SAE	DWMT879740SP	7 MM
		DWMT879750SP	8 MM



### MM 6 POINT 3/8 DRIVE SOCKETS

PRODUCT #	SOCKETS SIZE
DWMT863160SP	21 MM



### SAE 6 POINT 3/8 DRIVE SOCKETS

PRODUCT #	SOCKETS SIZE
DWMT862550SP	1/4" SAE



### SAE 6 POINT 3/8 DRIVE DEEP SOCKETS

PRODUCT #	SOCKETS SIZE
DWMT889920SP	13/16" SAE



## 1/2" DRIVE Sockets

### SAE & METRIC 6 PT 1/2 DRIVE SOCKETS

PRODUCT #	SOCKETS SIZE
DWMT864430SP	7/16" SAE
DWMT864440SP	1/2" SAE
DWMT864450SP	9/16" SAE
DWMT887660SP	5/8" SAE
DWMT864480SP	11/16" SAE
DWMT864490SP	3/4" SAE
DWMT864510SP	13/16" SAE
DWMT864520SP	7/8" SAE
DWMT864530SP	15/16" SAE
DWMT864550SP	1" SAE
DWMT864560SP	1-1/16" SAE

PRODUCT #	SOCKETS SIZE
DWMT865120SP	12 MM
DWMT865130SP	13 MM
DWMT865140SP	14 MM
DWMT865150SP	15 MM
DWMT887380SP	16 MM
DWMT865170SP	17 MM
DWMT865180SP	18 MM
DWMT865190SP	19 MM
DWMT865210SP	21 MM
DWMT865220SP	22 MM
DWMT865240SP	24 MM



### SAE & METRIC 6 PT 1/2 DRIVE DEEP SOCKETS

PRODUCT #	SOCKETS SIZE
DWMT895320SP	7/16" SAE
DWMT889450SP	1/2" SAE
DWMT889460SP	9/16" SAE
DWMT889470SP	5/8" SAE
DWMT889480SP	11/16" SAE
DWMT889490SP	3/4" SAE
DWMT889500SP	13/16" SAE
DWMT889510SP	7/8" SAE
DWMT889520SP	15/16" SAE
DWMT889530SP	1" SAE

PRODUCT #	SOCKETS SIZE
DWMT935280SP	13 MM
DWMT935290SP	14 MM
DWMT935300SP	15 MM
DWMT935310SP	16 MM
DWMT935320SP	17 MM
DWMT935330SP	18 MM
DWMT935340SP	19 MM
DWMT935350SP	21 MM
DWMT935360SP	22 MM
DWMT963700SP	24 MM



### SAE & METRIC 12 PT 1/2 DRIVE SOCKETS

PRODUCT #	SOCKETS SIZE
DWMT745910SP	7/16" SAE
DWMT745650SP	1-1/4" SAE
DWMT745600SP	1/2" SAE
DWMT745930SP	9/16" SAE
DWMT745900SP	5/8" SAE
DWMT745630SP	11/16" SAE
DWMT745860SP	3/4" SAE
DWMT745690SP	13/16" SAE
DWMT745920SP	7/8" SAE
DWMT745720SP	15/16" SAE
DWMT745590SP	1" SAE

PRODUCT #	SOCKETS SIZE
DWMT745670SP	12 MM
DWMT745680SP	13 MM
DWMT745700SP	14 MM
DWMT745710SP	15 MM
DWMT745730SP	16 MM
DWMT745740SP	17 MM
DWMT745750SP	18 MM
DWMT745760SP	19 MM
DWMT745770SP	20 MM
DWMT745780SP	21 MM
DWMT745790SP	22 MM
DWMT745810SP	24 MM



## 1/2" DRIVE Sockets

### SAE & METRIC 12 PT 1/2 DRIVE DEEP SOCKETS

PRODUCT #	SOCKETS SIZE
DWMT745360SP	1/2" SAE
DWMT745580SP	9/16" SAE
DWMT745550SP	5/8" SAE
DWMT745370SP	11/16" SAE
DWMT745540SP	3/4" SAE
DWMT745430SP	13/16" SAE
DWMT745570SP	7/8" SAE
DWMT745460SP	15/16" SAE
DWMT745350SP	1" SAE
DWMT745380SP	1-1/16" SAE

PRODUCT #	SOCKETS SIZE
DWMT745420SP	13 MM
DWMT745440SP	14 MM
DWMT745450SP	15 MM
DWMT745470SP	16 MM
DWMT745480SP	17 MM
DWMT745490SP	18 MM
DWMT745500SP	19 MM
DWMT745510SP	21 MM
DWMT745520SP	22 MM
DWMT745530SP	24 MM



### SAE & METRIC 6 PT 1/2 DRIVE IMPACT SOCKETS

PRODUCT #	SOCKETS SIZE
DWMT751140SP	3/8" SAE
DWMT751200SP	7/16" SAE
DWMT746540SP	1/2" SAE
DWMT751220SP	9/16" SAE
DWMT751180SP	5/8" SAE
DWMT746550SP	11/16" SAE
DWMT751130SP	3/4" SAE
DWMT746610SP	13/16" SAE
DWMT751210SP	7/8" SAE
DWMT751040SP	15/16" SAE
DWMT751190SP	1" SAE
DWMT751230SP	1-1/16" SAE
DWMT751250SP	1-1/8" SAE

PRODUCT #	SOCKETS SIZE
DWMT746600SP	13 MM
DWMT751020SP	14 MM
DWMT751030SP	15 MM
DWMT751050SP	16 MM
DWMT751060SP	17 MM
DWMT751080SP	18 MM
DWMT751090SP	19 MM
DWMT751100SP	20 MM
DWMT751110SP	21 MM
DWMT751120SP	22 MM



### SAE & METRIC 6 PT 1/2 DRIVE DEEP IMPACT SOCKETS

PRODUCT #	SOCKETS SIZE
DWMT739320SP	3/8" SAE
DWMT739330SP	7/16" SAE
DWMT739340SP	1/2" SAE
DWMT739350SP	9/16" SAE
DWMT739360SP	5/8" SAE
DWMT739370SP	11/16" SAE
DWMT739380SP	3/4" SAE
DWMT739390SP	13/16" SAE
DWMT739400SP	7/8" SAE
DWMT739410SP	15/16" SAE
DWMT739420SP	1" SAE
DWMT746560SP	1-1/16" SAE
DWMT746590SP	1-1/8" SAE
DWMT746580SP	1-1/4" SAE
DWMT746570SP	1-1/2" SAE
DWMT751010SP	1-3/8" SAE
DWMT751070SP	1-7/16" SAE

PRODUCT #	SOCKETS SIZE
DWMT739430SP	10 MM
DWMT739440SP	11 MM
DWMT739450SP	12 MM
DWMT739460SP	13 MM
DWMT739470SP	14 MM
DWMT751260SP	15 MM
DWMT739480SP	16 MM
DWMT739490SP	17 MM
DWMT751270SP	18 MM
DWMT739500SP	19 MM
DWMT751280SP	20 MM
DWMT739510SP	21 MM
DWMT739520SP	22 MM
DWMT739530SP	24 MM



## 3/4" DRIVE Sockets

### SAE 12 POINT 3/4 DRIVE SOCKETS

PRODUCT #	SOCKET SIZE
DWMT74611OSP	7/8" SAE
DWMT74602OSP	15/16" SAE
DWMT74607OSP	1" SAE
DWMT74594OSP	1-1/16" SAE
DWMT74596OSP	1-1/8" SAE
DWMT74601OSP	1-5/16" SAE
DWMT74600OSP	1-3/8" SAE
DWMT74604OSP	1-7/16" SAE
DWMT74595OSP	1-1/2" SAE
DWMT74606OSP	1-9/16" SAE
DWMT74603OSP	1-5/8" SAE
DWMT74597OSP	1-11/16" SAE
DWMT74598OSP	1-13/16" SAE
DWMT74605OSP	1-7/8" SAE
DWMT74608OSP	2" SAE



### SAE 6 POINT 3/4 DRIVE IMPACT SOCKETS

PRODUCT #	SOCKET SIZE
DWMT751700SP	3/4" SAE
DWMT751590SP	13/16" SAE
DWMT751780SP	7/8" SAE
DWMT751630SP	15/16" SAE
DWMT751540SP	1" SAE
DWMT751550SP	1-1/16" SAE
DWMT751580SP	1-1/8" SAE
DWMT751600SP	1-3/16" SAE
DWMT751570SP	1-1/4" SAE
DWMT751620SP	1-5/16" SAE
DWMT751610SP	1-3/8" SAE
DWMT751640SP	1-7/16" SAE
DWMT751560SP	1-1/2" SAE



### SAE 6 POINT 3/4 DRIVE DEEP IMPACT SOCKETS

PRODUCT #	SOCKET SIZE
DWMT751450SP	3/4" SAE
DWMT751340SP	13/16" SAE
DWMT751530SP	7/8" SAE
DWMT741380SP	15/16" SAE
DWMT751290SP	1" SAE
DWMT751300SP	1-1/16" SAE
DWMT751330SP	1-1/8" SAE
DWMT751350SP	1-3/16" SAE
DWMT751320SP	1-1/4" SAE
DWMT751370SP	1-5/16" SAE
DWMT751360SP	1-3/8" SAE
DWMT751390SP	1-7/16" SAE
DWMT751310SP	1-1/2" SAE



## Socket ACCESSORIES



### 1/4 DRIVE ACCESSORIES

PRODUCT #	DESCRIPTION
DWMT86006OSP	3" EXTENSION
DWMT86007OSP	6" EXTENSION
DWMT75276OSP	6" FLEX HANDLE
DWMT75277OSP	6" FLEX HANDLE
DWMT86011OSP	UNIVERSAL JOINT
DWMT86002OSP	INCREASING ADAPTER



### 3/8 DRIVE ACCESSORIES

PRODUCT #	DESCRIPTION
DWMT75296OSP	FLEX HANDLE
DWMT86206OSP	3" EXTENSION
DWMT86207OSP	6" EXTENSION
DWMT86208OSP	10" EXTENSION
DWMT86211OSP	UNIVERSAL JOINT
DWMT75310OSP	3/8" X 1/2" INCREASING ADAPTER
DWMT75311OSP	3/8" X 1/4" REDUCING ADAPTER



### 1/2 DRIVE ACCESSORIES

PRODUCT #	DESCRIPTION
DWMT75260OSP	15" FLEX HANDLE
DWMT75261OSP	24" FLEX HANDLE
DWMT86406OSP	2-1/2" EXTENSION
DWMT86407OSP	5" EXTENSION
DWMT86408OSP	10" EXTENSION
DWMT86411OSP	UNIVERSAL JOINT
DWMT75272OSP	1/2" X 3/4" INCREASING ADAPTER
DWMT86414OSP	1/2" X 3/8" REDUCING ADAPTER



### 1/2 DRIVE IMPACT ACCESSORIES

PRODUCT #	DESCRIPTION
DWMT75366OSP	UNIVERSAL JOINT
DWMT75367OSP	3" EXTENSION
DWMT75368OSP	5" EXTENSION
DWMT75369OSP	10" EXTENSION
DWMT75371OSP	1/2" X 3/8" IM REDUCING ADAPTER
DWMT75372OSP	1/2" X 3/4" IM INCREASING ADAPTER



### 3/4 DRIVE ACCESSORIES

PRODUCT #	DESCRIPTION
DWMT75282OSP	16" EXTENSION
DWMT75283OSP	20" HANDLE RATCHET
DWMT75284OSP	20" FLEX HANDLE
DWMT75288OSP	8" EXTENSION
DWMT75291OSP	T-HANDLE 20"
DWMT75293OSP	3/4" X 1/2" REDUCING ADAPTER
DWMT75295OSP	3/4" X 1/2" IM REDUCING ADAPTER
DWMT75313OSP	DWT MAGNETIC TRAY



### 3/4 DRIVE IMPACT ACCESSORIES

PRODUCT #	DESCRIPTION
DWMT75365OSP	4" EXTENSION
DWMT75373OSP	7" EXTENSION
DWMT75374OSP	UNIVERSAL JOINT

## METAL STORAGE

### 6-DRAWER TOP CHEST

- 10 3/8" Deep top lid fits standing 20V DEWALT Drill
- 100-pound auto return drawer slides for heavy duty storage capacity

PRODUCT #	Height	Width	Depth	Weight	Weight Capacity
DWMT73678	23"	35.75"	16"	128.60lbs	600bs



### 5-DRAWER ROLLER CABINET

- Heavy duty casters for increased durability
- 200-pound, extra deep 12" bottom drawer for storage of large tools

PRODUCT #	Height	Width	Depth	Weight	Weight Capacity
DWMT73679	38"	36"	18"	135lbs	600lbs



## AIR TOOLS

### HEAVY DUTY IMPACT WRENCH

- Maximum Torque 650 ft-lb helps break free fasteners that are stubborn or stuck
- Free Speed (90 PSI) 7500 RPM provides high power fastening

PRODUCT #	DESCRIPTION	Air Inlet	Weight	Blows/Min	Maximum Air Flow
DWMT70773L	1/2" Heavy Duty Impact Wrench	1/4"	4.63lbs	1100bpm	5.9CFM



### PALM SANDER

- Composite body design provides durability and lightweight design
- 6" Pad Type Stick On for quick and easy changeover

PRODUCT #	DESCRIPTION	Air Inlet	Weight	Orbit Diameter	Maximum Air Flow
DWMT70781L	Palm Sander	1/4"	2.0lbs	3/32"	2.2CFM



### DRIVE AIR RATCHET

- Closed Head Ratchet Design helps extend life of the tool
- Touch Control trigger allows user to apply the amount of power needed

PRODUCT #	DESCRIPTION	Air Inlet	Weight	Square Drive	Max Torque (ft-lbs)
DWMT70776L	3/8" Drive Air Ratchet	1/4"	2.6lbs	3/8	75ft-lbs



### 3/8" REVERSIBLE DRILL

- Quick- Change Keyless Chuck for easy change over between bits
- Free Speed (90 PSI) 2100 RPM for drilling through durable materials

PRODUCT #	DESCRIPTION	Air Inlet	Weight	Chuck Capacity	Maximum Air Flow
DWMT70786L	3/8" Reversible Drill	1/4"	2.6lbs	3/8"	3.6CFM



### ANGLE DIE GRINDER

- Rear Air exhaust blows exhaust away from the work surface
- Free Speed (90 PSI) 20000 RPM for heavy duty applications

PRODUCT #	DESCRIPTION	Air Inlet	Weight	Collet Diameter	Maximum Air Flow
DWMT70782L	Angle Die Grinder	1/4 NPT"	1.17lbs	1/4"	3.0CFM




## Easy Ordering & Tracking

- Upload your current parts order directly from an Excel or Word document
- Track the status of your order; whether it has just been submitted, being processed, shipped, or back ordered
- Create a “Shopping List” to allow for easy re-order of your top moving parts

## Extensive Library of Schematics & Manuals

- Easy to maneuver diagrams
- Functionality to email diagrams or manuals to yourself or anyone else
- Order your parts directly from the diagram itself

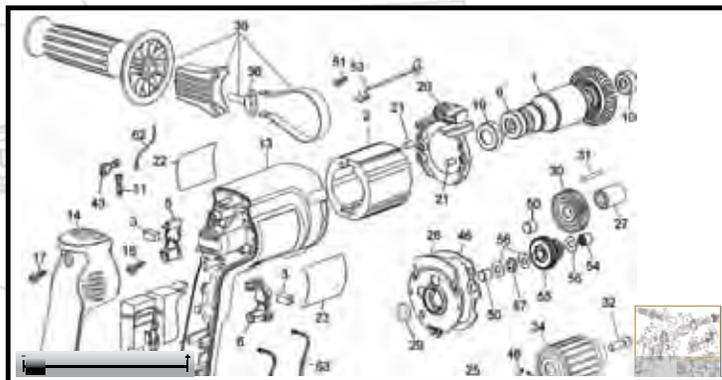

## Parts Pricing & Availability

- Access to your pricing on parts
- Download list price files
- Visibility to part availability before you order it

## Factory & Authorized Service Center Locator

- Easily locate one of our 80+ Factory Owned Service Centers or 1800+ Authorized Service Centers

## 24 / 7 / 365 Access

- Access to all your parts & service information 24 hours a day, 7 days a week, 365 days a year



Register Now at [www.SERVICENET.DEWALT.com](http://www.SERVICENET.DEWALT.com)

\_\_\_\_\_  
Username

\_\_\_\_\_  
Password

To register, go to [www.SERVICENET.DEWALT.com](http://www.SERVICENET.DEWALT.com). Select “Register” in the top right corner. Complete the registration form online. If you have an active account with a Factory Owned Service Center, please allow 48 hours for your registration to be approved. You will receive an email confirmation once your registration is approved. For any questions, please contact your local Factory Owned Service Center.



- Multiple Call Centers: Customer service agents available for fast, friendly support

**DEWALT: 1-800-433-9258**

**PORTER-CABLE: 1-800-223-7278**

- Over 30 Field Service Coordinators
- Professional technical assistance through the Factory Service Centers and Call Centers
- Over 1,800 Authorized Service Providers encompassing the industry's largest service network



- **Safety Testing**—Ensuring your tools are safe to operate
- We perform leakage current test, high pot test, and ground test on all repaired products
- A safety features check confirms that all safety required guarding, shields and handles are available
- OSHA-recognized safety tag placed on all repairs
- **Performance Testing**—Repaired product tested by running through real-life applications prior to approvals
- **Trained Technicians**—Staff of over 250 professionally trained technicians ensure your repair is right the first time
- Plus other specialty tests as needed

## SERVICE GUARANTEE

**90** DAY FULL WARRANTY ON GRC REPAIRS

**90** DAY WARRANTY ON PARTS & LABOR FOR MINOR REPAIRS

**WE'VE GOT YOUR BACK.**



**FACTORY SERVICE**  
TOOL AND EQUIPMENT REPAIR



State/City/Zip	Street	Phone
<b>AK</b>		
Anchorage, 99503	4831 Old Seward Highway, Suite 103	907-561-7181
<b>AL</b>		
Birmingham, 35209	321 Valley Ave., Suite B	205-942-0538
Mobile, 36693	732 Lakeside Dr.	251-602-1000
<b>AR</b>		
North Little Rock, 72113	9600 Maumelle Blvd.	501-372-3040
<b>AZ</b>		
Phoenix, 85040	4001 East Broadway, Suite B-11	602-437-1200
<b>CA</b>		
Hayward, 94545	2512 Tripaldi Way	510-783-3959
San Diego, 92111	7290 Clairemont Mesa Blvd.	858-279-2011
Anaheim, 92806	1119 North Kraemer Blvd.	714-414-0369
North Highlands, 95660	4986 Watt Ave., Suite B	916-344-3520
Ontario, 91761	1352 South Grove Ave., Suite B	909-930-1437
<b>CO</b>		
Denver, 80223	700 West Mississippi Ave., Unit B1	303-922-8325
<b>CT</b>		
Wethersfield, 06109-3001	662 Silas Deane Hwy.	860-563-5800
<b>FL</b>		
Davie, 33314	4343 South State Rte 7, Unit 107	954-321-6635
Tampa, 33634	4909 West Waters Ave.	813-884-0434
Jacksonville, 32205-4898	920 Cassat Ave.	904-781-2253
Orlando, 32807	6100 Hanging Moss Rd., Suite 520	407-657-0474
West Palm Beach, 33415	4645 Gun Club Rd., Suite 27	561-689-3247
<b>GA</b>		
Norcross, 30071	6115-C Jimmy Carter Blvd.	770-246-1710
<b>HI</b>		
Honolulu, 96819	111 Sand Island Access Rd., Suite R-17	808-842-9925
<b>IA</b>		
Des Moines, 50310	3408 Merle Hay Rd., Suite A	515-270-1340
<b>IL</b>		
Tinley Park, 60477	8201 West 183rd St., Suite P	708-614-1596
Bensenville, 60106	800 Thorndale Ave.	630-521-1097
<b>IN</b>		
Indianapolis, 46224-3707	5999 Crawfordsville Rd.	317-243-8308
<b>KS</b>		
Overland Park, 66214	9201 Quivira Rd.	913-495-4330
Wichita, 67213	2333 S. West St.	316-943-1271
<b>KY</b>		
Louisville, 40213	2001 Fern Valley Rd.	502-380-3748
<b>LA</b>		
Metairie, 70001	1801 Airline Dr., Suite D	504-832-2187
Baton Rouge, 70816	10699 Airline Highway, Suite C	225-296-3191
Shreveport, 71108	7702 Jewella Rd.	318-688-1553
<b>MA</b>		
Westwood, 02090	377 University Ave.	781-329-3407
<b>MD</b>		
Baltimore, 21227	1646 Sulphur Spring Rd.	410-536-0722
Capitol Heights, 20743	7957-63 Central Ave.	301-333-0865
<b>MI</b>		
Grandville, 49418	2982 28th St., S.W.	616-261-0425
Madison Heights, 48071	30475 Stephenson Hwy.	248-597-5000
<b>MN</b>		
Eden Prairie, 55344	9709 Valley View Rd., Suite 9709	952-884-9191
<b>MO</b>		
St. Louis, 63146	11477 Page Service Dr.	314-997-9100

State/City/Zip	Street	Phone
<b>NC</b>		
Charlotte, 28208	3557-B Wilkinson Blvd.	704-392-0245
Greensboro, 27407	3402 West Wendover Ave., Suite E	336-852-1300
Raleigh, 27604-3235	2930 Capital Blvd.	919-878-0357
<b>NJ</b>		
Elmwood Park, 07407	213 Route 46 West, Suite #4	201-475-3524
<b>NM</b>		
Albuquerque, 87110-3233	5617 Menaul Blvd. N.E.	505-884-1002
<b>NV</b>		
Las Vegas, 89118	5565 S. Decatur Blvd., Suite 103	702-889-6025
<b>NY</b>		
Buffalo, 14209-1297	881 W. Delavan Ave.	716-884-6220
Woodside, 11377-4741	56-15 Queens Blvd.	718-335-1042
Rochester, 14623-2594	2969 W. Henrietta Rd.	585-424-1310
Hauppauge, 11788	180 Oser Ave., Suite 100	631-952-2008
Latham, 12110-2497	836 Troy-Schenectady Rd.	518-785-1867
<b>OH</b>		
Parma, 44130	12100 Snow Rd., Suite 2	440-842-9100
Cincinnati, 45241-1896	2310 E. Sharon Rd.	513-772-3111
Columbus, 43229	1948 Schrock Rd.	614-895-3112
Maumee, 43537	3661 Briarfield Blvd.	419-867-8561
<b>OK</b>		
Oklahoma City, 73139	8507 South Western	405-634-8403
Tulsa, 74146	11414 East 51st St., Unit C	918-249-8641
<b>OR</b>		
Portland, 97230	14811 North East Airport Way, Suite 600	503-255-6556
<b>PA</b>		
Philadelphia, 19148	2715 South Front St.	215-271-5500
Pittsburgh, 15201	3234 Penn Ave.	412-642-0204
Whitehall, 18052-4522	2242 MacArthur Rd.	610-435-9544
York, 17402	2201 Industrial Highway	717-755-3441
<b>SC</b>		
North Charleston, 29405	4365 Dorchester Rd., Suite 104	843-745-9197
Greenville, 29605	1259 South Pleasantburg Dr., Unit C	864-299-8662
<b>TN</b>		
Memphis, 38133	2686 Kirby-Whitten Rd., Suite 102	901-384-8100
Nashville, 37210	746 Fesslers Lane	615-242-1633
Knoxville, 37917-2699	4118 North Broadway	865-688-0921
<b>TX</b>		
Carrollton, 75006	1300 Interstate 35 North, Suite 112	972-446-2996
Houston, 77040	10245 W. Little York, Suite 300	713-692-7111
San Antonio, 78216	1218 Arion Parkway, Suite 114	210-732-1221
Fort Worth, 76111-5944	721 North Beach St.	817-831-3828
El Paso, 79915-1007	6822 Gateway East	915-778-9769
McAllen, 78501	200 North McColl, Suite H	956-661-1122
Austin, 78758	2219 Braker Lane	512-382-3971
<b>UT</b>		
Salt Lake City, 84104	3060 West California Ave., Suite I	801-486-5828
<b>VA</b>		
Richmond, 23230	2256 Dabney Rd., Suite F	804-353-1197
Virginia Beach, 23455	5760 Northampton Blvd., Suite 110	757-363-0091
<b>WA</b>		
Seattle, 98134	2100 Airport Way S.	206-763-2010
Spokane, 99212	5308 East Sprague Ave.	509-535-9252
<b>WI</b>		
West Milwaukee, 53214	1650 Miller Parkway	414-645-4285
<b>WV</b>		
Charleston, 25312-2495	1638 Sixth Ave.	304-343-0289

For the most up-to-date Authorized Service Center listings, please contact 1-800-433-9258 or visit [www.DEWALT.com](http://www.DEWALT.com).

**DEWALT**<sup>®</sup>  
**GUARANTEED TOUGH.**<sup>®</sup>