

BOSTITCH®



FASTENING CATALOG



TABLE OF CONTENTS

CORDLESS

FINISH NAILERS

| | |
|--|---|
| 18 GA Brad Nailer | 3 |
| 16 GA Straight Finish Nailer | 4 |
| 15 GA "FN" Style Angled Finish Nailer..... | 4 |

FRAMING NAILERS

| | |
|-------------------------------------|---|
| 28° Wire Weld Framing Nailer | 5 |
| 30° Paper Tape Framing Nailer | 6 |

BATTERIES AND CHARGER

| | |
|---|---|
| 20V MAX* Lithium Ion Battery (2.0 Ah) | 6 |
| 20V MAX* Lithium Ion Battery (4.0 Ah) | 6 |
| 20V MAX* Charger..... | 6 |

PNEUMATIC

FINISH TOOLS

| | |
|--|----|
| Smart Point™ 18 GA Brad Nailer | 8 |
| 23 GA Pin Nailer | 9 |
| 18 GA Brad Nailer | 9 |
| 18 GA 2 in 1 Brad Nailer / Narrow Crown Stapler | 9 |
| 18 GA Narrow Crown Stapler..... | 10 |
| Smart Point™ 16 GA Straight Finish Nailer | 10 |
| 16 GA Straight Finish Nailer | 10 |
| Smart Point™ 15 GA "FN" Style Angled Finish Nailer | 11 |
| 15 GA "FN" Style Angled Finish Nailer..... | 12 |
| Smart Point™ 15 GA "DA" Style Angled Finish Nailer..... | 12 |
| 15 GA "DA" Style Angled Finish Nailer | 12 |

FLOORING TOOLS

| | |
|---|----|
| 2 in 1 Flooring Tool | 13 |
| Manual Hardwood Cleat Nailer | 14 |
| Hardwood Flooring Cleat Nailer | 14 |
| Hardwood Flooring Stapler | 14 |
| 20 GA Engineered Flooring Stapler | 15 |
| 18 GA Engineered Flooring Stapler | 15 |

FLOORING TOOL ACCESSORIES

| | |
|--|----|
| 2 in 1 Flooring Jack | 15 |
| FLOORGUARD™ Graphite Hardwood Flooring Mallets | 16 |
| Flooring Cleat Nailer Conversion Kit..... | 16 |
| Pre-Finished Flooring Adaptor Kit..... | 16 |

FRAMING NAILERS

| | |
|---|----|
| 28° Wire Weld Framing Nailer | 17 |
| 28° Wire Weld Framing Nailer | 18 |
| 33° Paper Tape Framing / Metal Connector Nailer | 18 |
| 35° Metal Connector Nailers | 18 |
| 30° Paper Tape Framing / Metal Connector Nailer | 19 |
| 30° Paper Tape Framing Nailer..... | 19 |
| 21° Plastic Collated Round Head Framing Nailer | 20 |
| 21° Plastic Collated Framing / Metal Connector Nailer | 20 |
| 21° Plastic Collated Heavy-Duty Timber Framing Nailer | 20 |
| 15° Coil Framing Nailers | 21 |

ROOFING AND SIDING TOOLS

| | |
|--|----|
| 15° Coil Siding Nailer..... | 22 |
| 15° Coil Sheathing / Siding Nailer | 23 |
| 15° Coil Roofing Nailers | 23 |
| 15° Cap Nailer | 24 |
| 18 GA Cap Stapler | 24 |
| 16 GA Wide Crown Roofing Stapler | 24 |

CONSTRUCTION STAPLERS

| | |
|--|----|
| Heavy-Duty 3/8" Construction Stapler | 25 |
| 7/16" Construction Stapler | 26 |

CONSTRUCTION STAPLER ACCESSORIES

| | |
|----------------------------|----|
| Vinyl Siding Adaptor | 26 |
|----------------------------|----|

SPECIALTY NAILERS

| | |
|--------------------------|----|
| Concrete Nailer | 27 |
| Mini Impact Nailer | 27 |
| Impact Nailer | 27 |

COMPRESSORS

| | |
|--|----|
| 6 Gallon Pancake Compressor..... | 29 |
| 1.2 Gallon High Output Trim Compressor | 30 |
| 26 Gallon Vertical Compressor | 30 |

COMBO KITS

| | |
|------------------------------------|----|
| 3-Tool & Compressor Combo Kit..... | 31 |
| 2-Tool & Compressor Combo Kit..... | 32 |
| 1-Tool & Compressor Combo Kit..... | 32 |

AIR ACCESSORIES

| | |
|---------------------------------|----|
| Industrial Fittings..... | 34 |
| Automotive Fittings | 34 |
| Universal Couplers..... | 34 |
| Compressor Accessories | 35 |
| Reducers and Bushings..... | 35 |
| Repair Accessories | 35 |
| Air Hoses | 36 |
| Air Hose Repair Kits..... | 36 |
| Rebuild Kits | 36 |
| O-Ring Kits..... | 37 |
| Vinyl Siding & Depth Kits | 37 |
| Lubricants..... | 37 |

MANUAL FASTENING TOOLS

TACKERS

| | |
|---|----|
| PowerSlam™ PowerCrown™ Hammer Tacker | 39 |
| PowerCrown™ Hammer Tacker | 40 |
| PowerCrown™ Hammer Tacker with Holster..... | 40 |
| Heavy-Duty Tackers | 40 |

PLIERS

| | |
|---|----|
| PowerCrown™ Stapling Plier | 41 |
| PowerCrown™ Light Wire Stapling Plier | 41 |
| Heavy-Duty Light Wire Stapling Plier | 41 |
| Collated Ring Plier..... | 42 |

STAPLE GUNS

| | |
|---|----|
| Heavy-Duty Staple Gun..... | 42 |
| 2 in 1 Heavy-Duty Staple / Brad Gun | 42 |

FASTENERS

FINISH

| | |
|--|----|
| 23 GA Pin Nails | 44 |
| 18 GA Brad Nails | 44 |
| 18 GA 7/32" Narrow Crown Staples..... | 44 |
| 16 GA Straight Finish Nails | 45 |
| 15 GA "FN" Style Angled Finish Nails | 45 |
| 15 GA "DA" Style Angled Finish Nails | 45 |

FLOORING

| | |
|---|----|
| 18 GA Narrow Crown Flooring Staples | 45 |
| 20 GA Narrow Crown Flooring Staples | 46 |
| 15.5 GA Hardwood Flooring Staples | 46 |
| L-Shaped Hardwood Flooring Cleats..... | 46 |

FRAMING

| | |
|--|-------|
| 30° Paper Tape Framing Nails..... | 46 |
| 28° Wire Weld Framing Nails..... | 47 |
| 35° Paper Collated Metal Connector Nails..... | 47 |
| 21° Plastic Collated Metal Connector Nails | 47 |
| 21° Round Head Framing Nails | 48 |
| 15° Coil Framing Nails | 48-49 |

ROOFING & SIDING

| | |
|--|----|
| 15° Wire Weld Coil Siding Nails | 49 |
| 15° Plastic Inserted Coil Siding Nails | 50 |
| 15° Coil Roofing Nails..... | 50 |
| 18 GA BOSTITCH® Caps and Staples..... | 50 |

SPECIALTY

| | |
|---------------------------|----|
| Concrete "T" Nails | 50 |
| 16 GA Hog "C" Rings | 50 |

STAPLES

| | |
|--|----|
| Heavy-Duty 3/8" Crown Staples | 51 |
| 16 GA 7/16" Crown Construction Staples | 51 |
| 16 GA 1/2" Crown Construction Staples | 51 |
| 16 GA 1" Crown Construction Staples..... | 52 |
| Heavy-Duty PowerCrown™ Staples | 52 |
| Light-Duty PowerCrown™ Staples..... | 52 |
| Light-Wire Staples | 52 |



CORDLESS TOOLS



CORDLESS • FINISH NAILERS

BCN680D1

Cordless 18 GA Brad Nailer



- 1** Narrow nose designed for clear line of sight and accuracy
- 2** Tool-free depth adjustment for precise countersinking of nails
- 3** Tool-free stall release resets the driver blade in the event of a stall
- 4** Adjustable belt hook for left or right attachment
- 5** Multifunctional LED lights help to provide both workspace illumination and tool diagnostics
- 6** Tool-free selector switch for sequential or contact actuation modes
- 7** Tool-free jam release to quickly clear nail jams



| | | |
|------------------------------|-------------------------|---------------|
| 18 GA BRAD NAIL | Fastener Length | 5/8" - 2-1/8" |
| | Magazine Capacity | 110 Nails |
| | Tool Weight (Tool only) | 5.4 lbs. |

Kit Includes: BCN680 18 GA Brad Nailer, (1) 20V MAX* Lithium Ion Battery (2.0 Ah), Charger, and Kit Bag

BCN662D1

Cordless 16 GA Straight Finish Nailer



- 1** Narrow nose designed for clear line of sight and accuracy
- 2** Tool-free jam release to quickly clear nail jams
- 3** Tool-free depth adjustment for precisely countersinking of nails
- 4** Tool-free selector switch for sequential or contact actuation modes

| | | |
|---|-------------------------|-----------------|
| <div>16_{GA}</div> <div>STRAIGHT NAIL</div> | Fastener Length | 1-1/4" - 2-1/2" |
| | Magazine Capacity | 100 Nails |
| | Tool Weight (Tool only) | 5.6 lbs. |



Kit Includes: BCN662 16 GA Straight Finish Nailer, (1) 20V MAX* Lithium Ion Battery (2.0 Ah), Charger, and Kit Bag

BCN650D1

Cordless 15 GA "FN" Style Angled Finish Nailer



- 1** Narrow nose designed for clear line of sight and accuracy
- 2** In-line magazine provides easy use in multiple orientations and tight spaces
- 3** Tool-free depth adjustment for precisely countersinking of nails
- 4** Tool-free selector switch for sequential or contact actuation modes

| | | |
|---|-------------------------|-----------------|
| <div>15_{GA}</div> <div>BOSTITCH NAIL</div> | Fastener Length | 1-1/4" - 2-1/2" |
| | Magazine Capacity | 100 Nails |
| | Tool Weight (Tool only) | 5.8 lbs. |



Kit Includes: BCN650 15 GA "FN" Style Angled Finish Nailer, (1) 20V MAX* Lithium Ion Battery (2.0 Ah), Charger, and Kit Bag





CORDLESS • FRAMING NAILERS

BCF28WWM1

Cordless 28° Wire Weld Framing Nailer



- 1** Tool-free selector switch for sequential or contact actuation modes
- 2** Selectable engine speeds for driving a full range of framing nails
- 3** Stall release lever resets the driver blade in the event of a stall
- 4** Tool-free depth adjustment for precise countersinking of nails
- 5** Tool-free adjustable belt hook for left or right attachment
- 6** Lock-back, rear load magazine
- 7** LED indicator lights for tool diagnostics such as low battery or a stall



| | | |
|--|-------------------------|-----------------|
| | Fastener Length | 2" - 3-1/2" |
| | Magazine Capacity | 55 Nails |
| | Fastener Diameter | 0.118" - 0.131" |
| | Tool Weight (Tool only) | 8.1 lbs. |

Kit Includes: BCF28WW 28° Wire Weld Framing Nailer, (1) 20V MAX* Lithium Ion Battery (4.0 Ah), Charger, and Kit Bag

Also Available: BCF28WWB 28° Wire Weld Framing Nailer (Tool only)

CORDLESS • FRAMING NAILERS

BCF30PTM1

Cordless 30° Paper Tape Framing Nailer



20V^{MAX}*
LITHIUM ION

- 1** Tool-free selector switch for sequential or contact actuation
- 2** Selectable engine speeds for driving full range of framing nails
- 3** Stall release lever resets the driver blade in the event of a stall
- 4** LED indicator lights for tool diagnostics such as low battery or a stall



| | |
|-------------------------|---------------|
| Fastener Length | 2" - 3-1/2" |
| Fastener Diameter | .118" - .131" |
| Magazine Capacity | 55 Nails |
| Tool Weight (Tool only) | 8.1 lbs. |



Kit Includes: BCF30PT 30° Paper Tape Framing Nailer, (1) 20V MAX* Lithium Ion Battery (4.0 Ah), Charger, and Kit Bag

Also Available: BCF30PTB 30° Paper Tape Framing Nailer (Tool only)

BATTERIES AND CHARGER

BCB203

20V MAX* 2.0 Ah Lithium Ion Battery with Fuel Gauge



BCB204

20V MAX* 4.0 Ah Lithium Ion Battery with Fuel Gauge



BCB115

20V MAX* Lithium Ion Battery Charger





PNEUMATIC TOOLS



PNEUMATIC • FINISH NAILERS

BTFP12233

Smart Point™ 18 GA Brad Nailer

- 1** Smart Point™ Technology: Easy nail placement due to smaller nose* and no need to compress the contact tip to actuate tool
- 2** Tool-free selectable trigger system converts from sequential to contact operation
- 3** Tool-free jam release mechanism for easy nail removal
- 4** Oil-free operation reduces risk of oil stains on work surface
- 5** Tool-free Dial-A-Depth® control for precise countersinking of nails
- 6** Adjustable belt hook for left or right attachment



**Compared to BT1855K 18 GA Brad Nailer*

| | | |
|------------------------------|-------------------------|---------------|
| 18 GA BRAD NAIL | Fastener Length | 5/8" - 2-1/8" |
| | Magazine Capacity | 100 Nails |
| | Tool Weight (Tool only) | 3.1 lbs. |

Kit Includes: BTFP12233 18 GA Brad Nailer, 1/4" Air Fitting, Sample Fasteners, (3) No-Mar Tips, Belt Hook, and Carrying Case

PNEUMATIC • FINISH NAILERS

HP118K 23 GA Pin Nailer

- 1** Low profile nosepiece tapers down to contact point for clear line of sight
- 2** Adjustable high/low power control sets pin depth without changing compressor settings
- 3** Adjustable belt hook for left or right attachment
- 4** Side-load magazine for fast loading and easy fastener changeover

23
GA
PIN NAIL

| | |
|-------------------------|----------------|
| Fastener Length | 1/2" - 1-3/16" |
| Magazine Capacity | 200 Nails |
| Tool Weight (Tool only) | 2.3 lbs. |

Kit Includes: HP118K 23 GA Pin Nailer, 1/4" Air Fitting, Sample Fasteners, Belt Hook, and Carrying Case



BT1855K 18 GA Brad Nailer

- 1** Oil-free operation reduces risk of oil stains on work surface
- 2** Tool-free selectable trigger system converts from sequential to contact operation
- 3** Tool-free Dial-A-Depth® control for precise countersinking of nails
- 4** Adjustable belt hook for left or right attachment

18
GA
BRAD NAIL

| | |
|-------------------------|---------------|
| Fastener Length | 5/8" - 2-1/8" |
| Magazine Capacity | 100 Nails |
| Tool Weight (Tool only) | 3.1 lbs. |

Kit Includes: BT1855K 18 GA Brad Nailer, 1/4" Air Fitting, Sample Fasteners, (1) No Mar Tip, Belt Hook, and Carrying Case



SB-2IN1 18 GA 2 in 1 Brad Nailer / Finish Stapler

- 1** Tool-free Dial-A-Depth® control for precise countersinking of nails
- 2** Tool-free adjustable exhaust conveniently directs air away from the user
- 3** 2 in 1 Magazine: Drives both 18 GA brad nails and 18 GA narrow crown staples for versatility

18
GA
BRAD NAIL

| | |
|--------------------|---------------|
| Nail Length | 5/8" - 1-5/8" |
| Staple Length | 1/2" - 1-1/2" |
| Staple Crown Width | 7/32" |

18
GA
BOSTITCH STAPLE

| | |
|-------------------------|--------------------------|
| Magazine Capacity | 100 Nails or 100 Staples |
| Tool Weight (Tool only) | 2.6 lbs |



Kit Includes: SB-2IN1 18 GA Brad Nailer / Finish Stapler, 1/4" Air Fitting, Sample Fasteners, (1) No Mar Tip, and Carrying Case

SX1838K 18 GA Finish Stapler

- 1** Low staple lockout prevents dry firing
- 2** Tool-free selectable trigger system converts from sequential to contact operation
- 3** Oil-free operation reduces risk of oil stains on work surface
- 4** Tool-free Dial-A-Depth® control for precise countersinking of staples

| | | |
|--|-------------------------|---------------|
| <div>18_{GA} BOSTITCH STAPLE</div> | Fastener Length | 1/2" - 1-1/2" |
| | Crown Width | 7/32" |
| | Magazine Capacity | 100 Staples |
| | Tool Weight (Tool only) | 3.0 lbs. |

Kit Includes: SX1838K 18 GA Finish Stapler, 1/4" Air Fitting, Sample Fasteners, Belt Hook, and Carrying Case



BTFP71917 Smart Point™ 16 GA Straight Finish Nailer

- 1** Smart Point™ Technology: Easy nail placement due to smaller nose* and no need to compress the contact tip to actuate tool
- 2** Tool-free Dial-A-Depth® control for precise countersinking of nails
- 3** Oil-free operation reduces risk of oil stains on work surface

| | | |
|--|-------------------------|-----------------|
| <div>16_{GA} STRAIGHT NAIL</div> | Fastener Length | 1-1/4" - 2-1/2" |
| | Magazine Capacity | 100 Nails |
| | Tool Weight (Tool only) | 3.9 lbs. |

Kit Includes: BTFP71917 16 GA Straight Finish Nailer, 1/4" Air Fitting, Sample Fasteners, (3) No-Mar Tips, Belt Hook, and Carrying Case



**Compared to FN1664K 16 GA Straight Finish Nailer*

FN1664K 16 GA Straight Finish Nailer

- 1** Tool-free Dial-A-Depth® control for precise countersinking of nails
- 2** Oil-free operation reduces risk of oil stains on work surface
- 3** Tool-free selectable trigger system converts from sequential to contact operation
- 4** Tool-free jam release mechanism for easy nail removal

| | | |
|--|-------------------------|-----------------|
| <div>16_{GA} STRAIGHT NAIL</div> | Fastener Length | 1-1/4" - 2-1/2" |
| | Magazine Capacity | 100 Nails |
| | Tool Weight (Tool only) | 3.9 lbs. |

Kit Includes: FN1664K 16 GA Straight Finish Nailer, 1/4" Air Fitting, Sample Fasteners, (4) Profile Tips, Belt Hook, and Carrying Case





PNEUMATIC • FINISH NAILERS

BTFP72156

Smart Point™ 15 GA "FN" Style Angled Finish Nailer

- 1** Smart Point™ Technology: Easy nail placement due to smaller nose* and no need to compress the contact tip to actuate tool
- 2** Tool-free Dial-A-Depth® control for precise countersinking of nails
- 3** Oil-free operation reduces risk of oil stains on work surface
- 4** Integrated air blower to clear away debris from work surface
- 5** Tool-free selectable trigger system converts from sequential to contact operation
- 6** Tool-free jam release mechanism for easy nail removal
- 7** Adjustable belt hook for left or right attachment



**Compared to N62FNK-2 15 GA "FN" Style Angled Finish Nailer*

| | | |
|--|-------------------------|-----------------|
| <div style="background-color: #0070C0; color: white; padding: 5px; text-align: center;"> 15 GA BOSTITCH NAIL </div> | Fastener Length | 1-1/4" - 2-1/2" |
| | Magazine Capacity | 129 Nails |
| | Tool Weight (Tool only) | 4.3 lbs. |

Kit Includes: BTFP72156 15 GA "FN" Style Angled Finish Nailer, 1/4" Air Fitting, Sample Fasteners, (3) No-Mar Tips, Belt Hook, and Carrying Case

N62FNK-2

15 GA "FN" Style Angled Finish Nailer

- 1 Tool-free jam release mechanism for easy nail removal
- 2 Oil-free operation reduces risk of oil stains on work surface
- 3 Integrated air blower to clear away debris from work surface
- 4 Tool-free selectable trigger system converts from sequential to contact operation



| | |
|-------------------------|-----------------|
| Fastener Length | 1-1/4" - 2-1/2" |
| Magazine Capacity | 129 Nails |
| Tool Weight (Tool only) | 4.3 lbs. |

Kit Includes: N62FNK-2 15 GA "FN" Style Angled Finish Nailer, 1/4" Air Fitting, Sample Fasteners, (4) Profile Tips, Belt Hook, and Carrying Case



BTFP72155

Smart Point™ 15 GA "DA" Style Angled Finish Nailer

- 1 Smart Point™ Technology: Easy nail placement due to smaller nose* and no need to compress the contact tip to actuate tool
- 2 Tool-free Dial-A-Depth® control for precise countersinking of nails
- 3 Oil-free operation reduces risk of oil stains on work surface



| | |
|-------------------------|-----------------|
| Fastener Length | 1-1/4" - 2-1/2" |
| Magazine Capacity | 100 Nails |
| Tool Weight (Tool only) | 4.2 lbs. |

Kit Includes: BTFP72155 15 GA "DA" Style Angled Finish Nailer, 1/4" Air Fitting, Sample Fasteners, (3) No-Mar Tips, Belt Hook, and Carrying Case



**Compared to DA1564K 15 GA "DA" Style Angled Finish Nailer*

DA1564K

15 GA "DA" Style Angled Finish Nailer

- 1 Tool-free jam release mechanism for easy nail removal
- 2 Oil-free operation reduces risk of oil stains on work surface
- 3 Integrated air blower to clear away debris from work surface
- 4 Tool-free Dial-A-Depth® control for precise countersinking of nails



| | |
|-------------------------|-----------------|
| Fastener Length | 1-1/4" - 2-1/2" |
| Magazine Capacity | 100 Nails |
| Tool Weight (Tool only) | 4.2 lbs. |

Kit Includes: DA1564K 15 GA "DA" Style Angled Finish Nailer, 1/4" Air Fitting, Sample Fasteners, (4) Profile Tips, Belt Hook, and Carrying Case





PNEUMATIC • FLOORING NAILERS

BTFP12569

2 in 1 Flooring Tool

- 1** Drives 15.5 GA 1/2" crown flooring staples or 16 GA L-shaped flooring cleats from 1-1/2" to 2" long
- 2** Mallet-actuated driving action
- 3** Non-marring, interchangeable base plates for 1/2" through 3/4" flooring
- 4** Ergonomically designed, long handle with comfortable rubber grip




| | | |
|------------------------------|-------------------------|---------------------------|
| FC FLOORING CLEAT | Nail Length | 1-1/2" - 2" |
| | Staple Length | 1-1/2" - 2" |
| | Staple Crown Width | 1/2" |
| FS FLOORING STAPLE | Magazine Capacity | 100 Cleats or 100 Staples |
| | Tool Weight (Tool only) | 10.2 lbs |

Kit Includes: BTFP12569 2 in 1 Flooring Tool, Interchangeable Base Plates, Wooden Mallet, 1/4" Air Fitting with Dust Cover, and Wrenches


MFN-201

Manual Hardwood Flooring Cleat Nailer

- 1** Long reach handle
- 2** Ratcheting drive mode allows for multiple blows if cleat is under-driven
- 3** Rubber grip for comfort
- 4** Drives 16 GA L-Shaped flooring cleats from 1-1/2" to 2" long

| | | |
|---|-------------------------|-------------|
|  | Fastener Length | 1-1/2" - 2" |
| | Magazine Capacity | 120 Cleats |
| | Tool Weight (Tool only) | 8.6 lbs. |


Kit Includes: MFN-201 Flooring Cleat Nailer, Graphite Mallet, Interchangeable Base Plates, Hex Wrenches, and Carrying Case

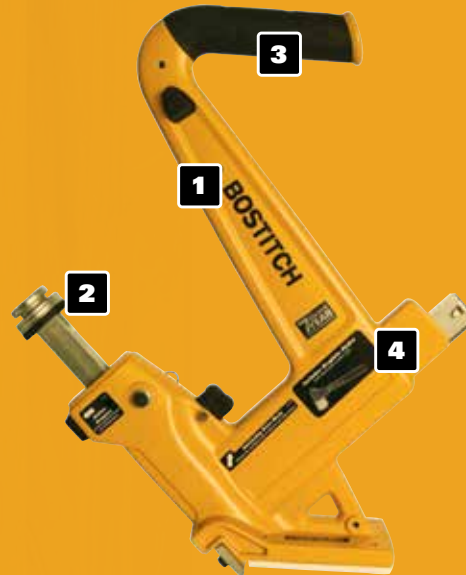

MIIIFN

Hardwood Flooring Cleat Nailer

- 1** Multiple Handle Options: Long reach for comfort, short reach for speed
- 2** Extra-wide, composite base with rollers protects finish, adds stability, and increases productivity
- 3** High-speed, mallet actuated pneumatic operation increases productivity over manual methods
- 4** Precisely drives 16 GA L-shaped flooring cleats at proper depth and angle

| | | |
|---|-------------------------|-------------|
|  | Fastener Length | 1-1/2" - 2" |
| | Magazine Capacity | 110 Cleats |
| | Tool Weight (Tool only) | 11.2 lbs. |


Kit Includes: MIIIFN Flooring Cleat Nailer, Graphite Mallet, Pre-Finished Flooring Adaptor Foot, Long Handle, and Interchangeable Base Plates



MIIIFS

Hardwood Flooring Stapler

- 1** Multiple Handle Options: Long reach for comfort, short reach for speed
- 2** Extra-wide, composite base with rollers protects finish, adds stability, and increases productivity (see MIIIFN)
- 3** High-speed, mallet actuated pneumatic operation increases productivity over manual methods
- 4** Precisely drives 15.5 GA, 1/2" crown flooring staples at proper depth and angle

| | | |
|---|-------------------------|-------------|
|  | Fastener Length | 1-1/2" - 2" |
| | Magazine Capacity | 92 Staples |
| | Tool Weight (Tool only) | 11.2 lbs. |

Includes: MIIIFS Flooring Stapler, Graphite Mallet, Pre-Finished Flooring Adaptor Foot, Long Handle, and Interchangeable Base Plates



PNEUMATIC • FLOORING NAILERS

LHF2025K


20 GA Engineered Flooring Stapler

- 1** Oil-free operation reduces risk of oil stains on work surface
- 2** Adjustable knobs allow tool-free adjustment from 1/4" - 1/2" flooring
- 3** High visibility tongue engagement for fast installation
- 4** Rear exhaust directs air away from user



| | |
|-------------------------|-------------|
| Fastener Length | 1/2" - 1" |
| Crown Width | 3/16" |
| Magazine Capacity | 140 Staples |
| Tool Weight (Tool only) | 2.5 lbs. |

Kit Includes: LHF2025 Flooring Stapler, 1/4" Air Fitting, Sample Fasteners, No-Mar Tips, Installation Blocks, and Carrying Case

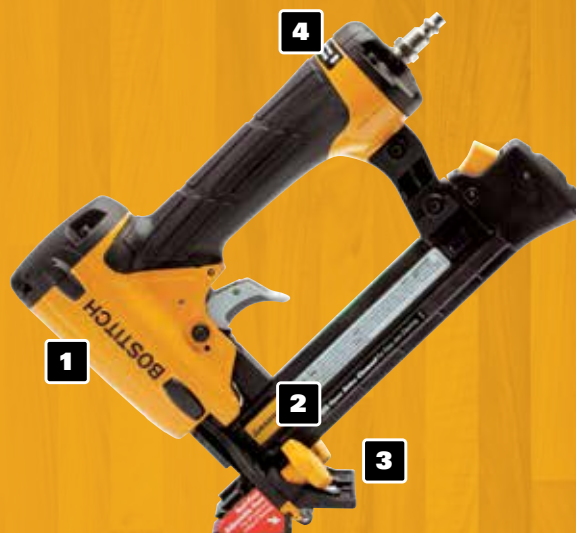

EHF1838K


18 GA Engineered Flooring Stapler

- 1** Oil-free operation reduces risk of oil stains on work surface
- 2** Adjustable knobs allow tool-free adjustment from 5/16" - 5/8" flooring
- 3** High visibility tongue engagement for fast installation
- 4** Rear exhaust directs air away from user



| | |
|-------------------------|-------------|
| Fastener Length | 1" - 1-1/2" |
| Crown Width | 7/32" |
| Magazine Capacity | 100 Staples |
| Tool Weight (Tool only) | 3.4 lbs. |

Kit Includes: EHF1838K Flooring Stapler, 1/4" Air Fitting, Sample Fasteners, No-Mar Tips, Installation Blocks, and Carrying Case

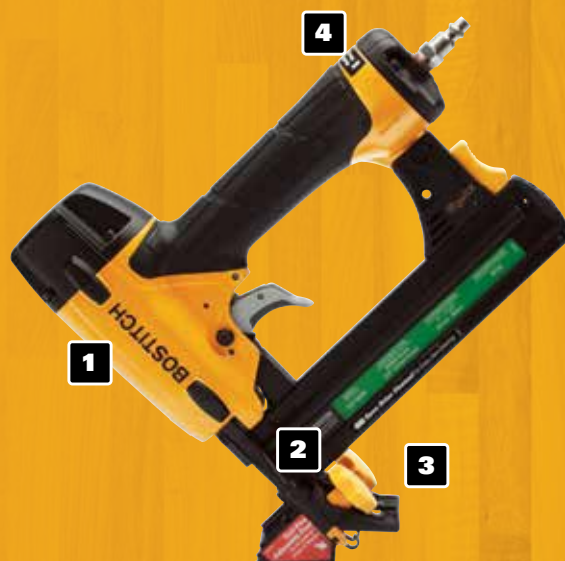

FLOORING ACCESSORIES

MIII-JACK

2 in 1 Hardwood Flooring Jack

- 1** Tool-free rotating knob allows adjustment between application modes
- 2** Angled handle for easy release close to walls
- 3** Non-marring base pad designed for pre-finished flooring
- 4** Over-molded handle designed for comfort and control
- 5** Pre-drilled holes for fast attachment to sub-flooring



MIII-JACK Specifications

| | |
|----------------|-----------------|
| Clamping Power | Up to 2000 lbs. |
| Tool Weight | 7.6 lbs. |

FLOORGUARD™

Graphite Hardwood Flooring Mallet

HFM3 Graphite Mallet

| | |
|-------------|--------|
| Tool Weight | 45 oz. |
| Length | 14.8" |

HFM4 Graphite Mallet

| | |
|-------------|--------|
| Tool Weight | 59 oz. |
| Length | 16.3" |

Also Available:

HFMF-SW Replaceable Mallet Face, Soft White



HFM3



HFMF-SW

MIIFN-KIT Flooring Cleat Nailer Conversion Kit



MIIFOOT-KIT Pre-Finished Flooring Adaptor Kit





PNEUMATIC • FRAMING NAILERS

BT83WW

28° Wire Weld Framing Nailer

- 1** Low profile design with enhanced ergonomics and balance for comfort and control
- 2** Powerful enough to drive into engineered lumber
- 3** Tool-free selectable trigger system for sequential or contact operation
- 4** Adjustable metal rafter hook easily rotates for convenience
- 5** Tool-free Dial-A-Depth® control for precise countersinking of nails
- 6** Industrial-grade aluminum magazine for high volume framing and sheathing applications



| | |
|-------------------------|---------------|
| Fastener Length | 2" - 3-1/4" |
| Fastener Diameter | .113" - .131" |
| Magazine Capacity | 100 Nails |
| Tool Weight (Tool only) | 7.9 lbs. |

F28WW

28° Wire Weld Framing Nailer

- 1 Designed to drive into engineered lumber
- 2 Notched 16" layout indicator on magazine helps achieve correct distance between studs
- 3 Tool-free Dial-A-Depth® control for precise countersinking of nails
- 4 Lightweight, magnesium design for durability

| | | |
|--|-------------------------|---------------|
| <div>28°</div> <div>WIRE WELD NAIL</div> | Fastener Length | 2" - 3-1/2" |
| | Fastener Diameter | .113" - .131" |
| | Magazine Capacity | 100 Nails |
| | Tool Weight (Tool only) | 7.6 lbs. |



Kit Includes: F28WW 28° Wire Weld Framing Nailer and Carrying Case

MCN150

35° Metal Connector Nailer

- 1 Exposed nail tip places fastener point directly into connector holes for fast and precise nailing
- 2 Lightweight design for minimal fatigue
- 3 Compact design fits easily into hard to reach places
- 4 In-line magazine offers balance for maneuverability

| | | |
|---|-------------------------|-------------|
| <div>MC</div> <div>METAL CONNECTOR NAIL</div> | Fastener Length | 1-1/2" |
| | Fastener Diameter | .131"-.148" |
| | Magazine Capacity | 29 Nails |
| | Tool Weight (Tool only) | 4.6 lbs. |



Kit Includes: MCN150 Metal Connector Nailer and Carrying Case

MCN250

35° Metal Connector Nailer

- 1 Exposed nail tip places fastener point directly into connector holes for fast and precise nailing
- 2 Lightweight design for minimal fatigue
- 3 In-line magazine offers balance for maneuverability

| | | |
|---|-------------------------|-----------------|
| <div>MC</div> <div>METAL CONNECTOR NAIL</div> | Fastener Length | 1-1/2" - 2-1/2" |
| | Magazine Capacity | 53 Nails |
| | Tool Weight (Tool only) | 6.0 lbs. |



Kit Includes: MCN250 Metal Connector Nailer and Carrying Case


Also Available: MCN250S Metal Connector with Single Stick Magazine

PNEUMATIC • FRAMING NAILERS

BTF83PT

30° Paper Tape Framing Nailer

- 1** Tool-free Dial-A-Depth® control for precise countersinking of nails
- 2** Powerful enough to drive into engineered lumber
- 3** Tool-free selectable trigger system for sequential or contact operation modes
- 4** Adjustable metal rafter hook for left or right attachment

| | | |
|---|-------------------------|---------------|
|  | Fastener Length | 2" - 3-1/4" |
| | Fastener Diameter | .113" - .131" |
| | Magazine Capacity | 90 Nails |
| | Tool Weight (Tool only) | 7.9 lbs. |





Includes: BTF83PT 30° Paper Tape Framing Nailer

F33PT

33° Paper Tape Framing / Metal Connector Nailer

- 1** Two nailers in one: optional quick change nose pieces (sold separately) to convert tool to either framing or metal connector applications
- 2** Designed to drive into engineered lumber
- 3** Tool-free Dial-A-Depth® control for precisely driving recessed nails

| | | |
|---|-----------------------------|-----------------|
|  | Paper Tape Framing Length | 2" - 3-1/2" |
| | Paper Tape Framing Diameter | .113" - .162" |
|  | Metal Connector Length | 1-1/2" - 2-1/2" |
| | Metal Connector Diameter | .131" - .162" |
| | Magazine Capacity | 80 Nails |
| | Tool Weight (Tool only) | 7.9 lbs. |



Includes: F33PT Paper Tape Framing / Metal Connector Nailer

Also Available: MCN-KIT2 Metal Connector Kit



Pictured: BTF83WW

BTF83PL

21° Plastic Collated Round Head Framing Nailer

- 1** Tool-free Dial-A-Depth® control for precise countersinking of nails
- 2** Powerful enough to drive into engineered lumber
- 3** Tool-free selectable trigger system for sequential or contact operation modes
- 4** Adjustable metal rafter hook rotates easily for convenience



| | |
|-------------------------|---------------|
| Fastener Length | 2" - 3-1/4" |
| Fastener Diameter | .113" - .148" |
| Magazine Capacity | 64 Nails |
| Tool Weight (Tool only) | 7.9 lbs. |



Includes: BTF83PL 21° Plastic Collated Round Head Framing Nailer

F21PL2

21° Plastic Collated Framing / Metal Connector Nailer

- 1** Tool-free Dial-A-Depth® control for precise countersinking of nails
- 2** Designed to drive into engineered lumber



| | |
|-----------------------------------|-----------------|
| Plastic Collated Framing Length | 2" - 3-1/2" |
| Plastic Collated Framing Diameter | .113" - .148" |
| Metal Connector Length | 1-1/2" - 2-1/2" |
| Metal Connector Diameter | .131" - .148" |
| Magazine Capacity | 60 Nails |
| Tool Weight (Tool only) | 8.1 lbs. |



Includes: F21PL2 Plastic Collated Framing / Metal Connector Nailer

Also Available: MCN-KIT2 Metal Connector Kit

BRT130

21° Plastic Collated Heavy-Duty Timber Framing Nailer

- 1** Drives plastic collated framing nails for timber framing and crating
- 2** Tool-free adjustable exhaust directs air away from user
- 3** Smooth trip design for fast cycling
- 4** Secondary handle for ergonomics and control



| | |
|-------------------------|---------------|
| Fastener Length | 4" - 5-1/8" |
| Fastener Diameter | .131" - .165" |
| Magazine Capacity | 50 Nails |
| Tool Weight (Tool only) | 13.7 lbs. |



Kit Includes: BRT130 21° Plastic Collated Heavy-Duty Timber Framing Nailer and Carrying Case

PNEUMATIC • FRAMING NAILERS

BTF83C

15° Coil Framing Nailer

- 1** Industrial-grade design for high volume framing and sheathing applications
- 2** Robust canister design with enhanced durability
- 3** Tool-free Dial-A-Depth® control for precise countersinking of nails
- 4** Light weight and balanced to minimize fatigue

| | | |
|-------------------------------------|-------------------------|---------------|
| <div>15°</div> <div>COIL NAIL</div> | Fastener Length | 2" - 3-1/4" |
| | Fastener Diameter | .099" - .148" |
| | Magazine Capacity | 300 Nails |
| | Tool Weight (Tool only) | 8.2 lbs. |

Includes: BTF83C 15° Coil Framing Nailer



N89C-1

15° High-Power Coil Framing Nailer

- 1** Lightweight magnesium design for durability
- 2** Patented push-button adjustable depth guide sets nails to desired depth quickly and conveniently
- 3** Adjustable exhaust directs air away from user

| | | |
|-------------------------------------|-------------------------|---------------|
| <div>15°</div> <div>COIL NAIL</div> | Fastener Length | 2" - 3-1/2" |
| | Fastener Diameter | .099" - .148" |
| | Magazine Capacity | 300 Nails |
| | Tool Weight (Tool only) | 8.1 lbs. |

Includes: N89C-1 15° High-Power Coil Framing Nailer



N80CB-1

15° Coil Framing Nailer

- 1** Lightweight aluminum design for durability
- 2** Heavy-duty, quick open canister designed to survive falls
- 3** Aggressive toe-nailing teeth grip lumber for slip-free nailing
- 4** Coil magazine holds up to 300 nails for high production applications

| | | |
|-------------------------------------|-------------------------|-----------------|
| <div>15°</div> <div>COIL NAIL</div> | Fastener Length | 1-1/2" - 3-1/4" |
| | Fastener Diameter | .099" - .148" |
| | Magazine Capacity | 300 Nails |
| | Tool Weight (Tool only) | 8.4 lbs. |

Includes: N80CB-1 15° Coil Framing Nailer



Pictured: N75C-1

PNEUMATIC • ROOFING & SIDING

N66C-1 15° Coil Siding Nailer

- 1** Drives wire weld and plastic inserted coil nails
- 2** Adjustable depth guide sets nails to desired depth quickly and conveniently
- 3** Lightweight aluminum design for durability
- 4** Soft rubber foot prevents damage to softer woods
- 5** Tool-free adjustable exhaust conveniently directs air away from user
- 6** Adjustable rafter hook rotates easily for convenience



| | | |
|--|-------------------------|-----------------|
| <div>15°</div> <div>COIL SIDING NAIL</div> | Fastener Length | 1-1/4" - 2-1/2" |
| | Fastener Diameter | .080" - .092" |
| | Magazine Capacity | 300 Nails |
| | Tool Weight (Tool only) | 4.7 lbs. |

Kit Includes: N66C-1 15° Coil Siding Nailer and Carrying Case

PNEUMATIC • ROOFING & SIDING

N75C-1

15° Sheathing / Siding Nailer

- 1** Perfect for high-volume nailing of wall and roof sheathing
- 2** Adjustable depth guide sets nails to desired depth quickly and conveniently
- 3** Lightweight aluminum design
- 4** Drives 15° wire weld and plastic inserted coil nails



| | |
|-------------------------|---------------|
| Fastener Length | 1-1/2" - 3" |
| Fastener Diameter | .090" - .131" |
| Magazine Capacity | 300 Nails |
| Tool Weight (Tool only) | 5.2 lbs. |



Kit Includes: N75C-1 15° Sheathing / Siding Nailer and Carrying Case

RN46-1

15° Coil Roofing Nailer

- 1** Zero nail lockout feature eliminates dry firing and indicates when to reload the magazine
- 2** Nosepiece features carbide inserts for long-life performance
- 3** Aggressive wear guards and skid pads protect the tool from damage on abrasive surfaces
- 4** Adjustable depth guide sets nails to desired depth quickly and conveniently



| | |
|-------------------------|---------------|
| Fastener Length | 3/4" - 1-3/4" |
| Fastener Diameter | .120" |
| Magazine Capacity | 120 Nails |
| Tool Weight (Tool only) | 4.9 lbs. |



Includes: RN46-1 15° Coil Roofing Nailer

BRN175A

15° Coil Roofing Nailer

- 1** Dual door magazine can be closed multiple ways
- 2** Adjustable depth guide sets nails to desired depth quickly and conveniently
- 3** Carbide nose inserts help to protect the nose from wear



| | |
|-------------------------|---------------|
| Fastener Length | 3/4" - 1-3/4" |
| Fastener Diameter | .120" |
| Magazine Capacity | 120 Nails |
| Tool Weight (Tool only) | 5.3 lbs. |




Includes: BRN175A 15° Coil Roofing Nailer

N66BC-1

15° Cap Nailer

- 1 Quick load magazine feature provides fast and easy loading of caps and nails
- 2 Lightweight aluminum design for added durability
- 3 Tool-free Dial-A-Depth® adjustment sets nails to desired depths quickly and conveniently
- 4 Tool-free adjustable exhaust conveniently directs air away from user

| | | |
|--|-------------------------|-----------------|
| <div>15°</div> <div>COIL SIDING NAIL</div> | Fastener Length | 1-1/4" - 2-1/2" |
| | Fastener Diameter | .080" - .092" |
| | Magazine Capacity | 300 Nails |
| | Tool Weight (Tool only) | 5.8 lbs. |

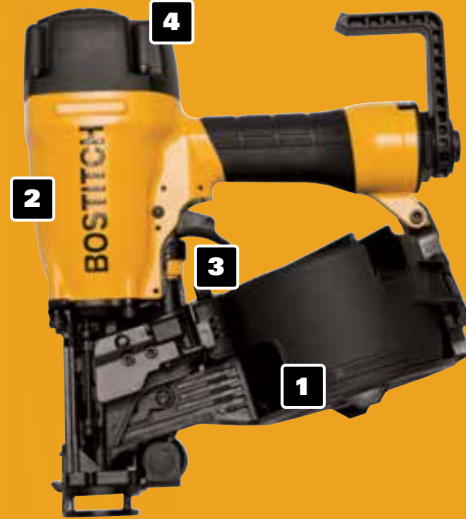

Includes: N66BC-1 15° Cap Nailer

SL1838BC

18 GA Cap Stapler

- 1 Designed to be the preferred method of securing felt, house wrap, and thin foam
- 2 Tool-free Dial-A-Depth® control for precise depth adjustment
- 3 Tool-free selectable trigger system converts from sequential to contact operation
- 4 Includes internal air filter for maximum reliability

| | | |
|---------------------------------------|--------------------------|---------------|
| <div>18 GA</div> <div>SL STAPLE</div> | Staple Length | 3/4" - 1-1/2" |
| | Crown Width | 5/16" |
| | Staple Magazine Capacity | 163 Staples |
| | Cap Magazine Capacity | 100 Caps |
| | Tool Weight (Tool only) | 3.9 lbs. |



Kit Includes: SL1838BC 18 GA Cap Stapler, 1/4" Swivel Air Fitting, Sample Fasteners, and Carrying Case

438S2R-1

16 GA Wide Crown Roofing Stapler

- 1 Anti-Jam™ jam-free magazine
- 2 Nosepiece features carbide inserts for long-life performance
- 3 Aggressive wear guards and skid pads protect the tool from damage on abrasive surfaces
- 4 Power control valve adjusts power by 30%

| | | |
|---|-------------------------|---------------|
| <div>16 GA</div> <div>WIDE CROWN STAPLE</div> | Fastener Length | 1/2" - 1-1/2" |
| | Crown Width | 1" |
| | Magazine Capacity | 160 Staples |
| | Tool Weight (Tool only) | 4.7 lbs. |



Includes: 438S2R-1 16 GA Wide Crown Roofing Stapler




PNEUMATIC • CONSTRUCTION STAPLERS

BTFP71875

Heavy Duty 3/8" Construction Stapler

- 1** Dual trigger design incorporates safety and comfort for all day use
- 2** Drives both heavy duty 3/8" crown staples and 18 GA brad nails for a wide range of applications
- 3** Oil-free operation requires no regular maintenance and reduces the risk of oil stains on work surface
- 4** Durable, lightweight die-cast aluminum design
- 5** Bottom loading for quick reloads

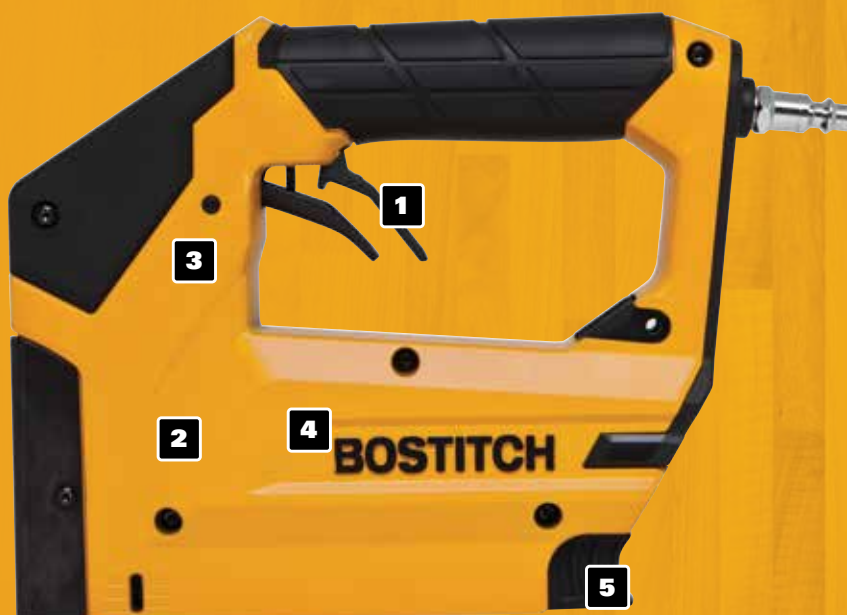

| | |
|--------------------------|--------------|
| Staple Length | 1/4" - 9/16" |
| Crown Width | 3/8" |
| Nail Length | 1/2" - 5/8" |
| Staple Magazine Capacity | 84 Staples |
| Nail Magazine Capacity | 84 Nails |
| Tool Weight (Tool only) | 2.3 lbs. |

Includes: BTFP71875 Heavy Duty 3/8" Construction Stapler and Sample Fasteners

PNEUMATIC • CONSTRUCTION STAPLERS

651S5

7/16" Construction Stapler

- 1** Durable, lightweight aluminum design
- 2** Tool-free jam clearance reduces downtime
- 3** Tool-free Dial-A-Depth® control for precise depth adjustment
- 4** Compatible with optional adaptor for vinyl siding (VSA4)

| | | |
|---|-------------------------|-------------|
| <div>16_{GA}</div> <div>MEDIUM CROWN STAPLE</div> | Fastener Length | 1" - 2" |
| | Crown Width | 7/16" |
| | Magazine Capacity | 120 Staples |
| | Tool Weight (Tool only) | 4.3 lbs. |



Includes: 651S5 7/16" Construction Stapler

CONSTRUCTION STAPLER ACCESSORIES

VSA4

Vinyl Siding Adaptor Kit

- 1** Attaches to nose of BOSTITCH® RN46-1 Coil Roofing Nailer
- 2** Converts roofing nailer into a vinyl siding nailer
- 3** Includes instructions for easy assembly




Pictured: 651S5

PNEUMATIC • SPECIALTY NAILERS

MIII812CNCT Concrete Nailer

- 1** Lightweight aluminum design for added durability
- 2** High-speed pneumatic power increases productivity over other fastening methods
- 3** Makes fastening of wood furring strips to concrete fast and easy
- 4** High-capacity magazine reduces reload time


| | | |
|---|-------------------------|----------------|
|  | Fastener Length | 9/16" - 2-1/4" |
| | Fastener Diameter | .097" |
| | Magazine Capacity | 66 Nails |
| | Tool Weight (Tool only) | 7.2 lbs. |



Includes: MIII812CNCT Concrete Nailer

PN50 Mini Impact Nailer

- 1** Rubber grip designed to insulate and reduce vibration
- 2** Drives most common bulk finish, framing, and timber nails
- 3** 360° swivel fitting for maximum accessibility
- 4** Front exhaust directs air away from user's palm


| | | |
|---|-------------------------|--|
|  | Fastener Type | Bulk Finish Nails Bulk Framing Nails Bulk Timber Nails |
| | Tool Weight (Tool only) | 1.0 lbs. |



Includes: PN50 Mini Impact Nailer

PN100K Impact Nailer

- 1** Heavy duty design hits harder on every stroke, driving nails faster and extending life
- 2** Efficient valving reduces air consumption and strain on compressor
- 3** Magnetic nose with recessed nail slot holds nails stable for accurate fastener placement
- 4** Hardened steel nose for extreme durability

| | | |
|---|-------------------------|--|
|  | Fastener Type | Bulk Finish Nails Bulk Framing Nails Bulk Timber Nails |
| | Tool Weight (Tool only) | 1.0 lbs. |



Kit Includes: PN100 Impact Nailer, Standard Nose, Finish Nail Nose, Large Bore Nose, Leather Comfort Glove, Nose Wrench, Hex Wrench, Tool Lubricant, and Spare O-Rings



COMPRESSORS & COMBO KITS



*Pictured: CAP1512-OF
Tools sold separately.*

COMPRESSORS

BTFP02012 6-Gallon Pancake Compressor

- 1** 150 max PSI, 6-gallon tank, and 2.6 SCFM* at 90 PSI pump enable long air tool runtime with quick recovery
- 2** Long-life, oil-free, maintenance-free pump for convenient use
- 3** BOSTITCH® high-efficiency motor for easy startup in cold weather or extension cord application (14 GA or larger, 50 ft. or less)
- 4** 80 dBA** operational noise level for a quiet work environment
- 5** 29 lb. weight makes unit easy to carry and store
- 6** BOSTITCH® high-flow regulator and two couplers to maximize air tool performance
- 7** Convenient cord wrap for easy storage








Specifications

| | |
|--------------------------|-----------|
| Tank Size | 6 Gallons |
| SCFM* at 90 PSI | 2.6 SCFM |
| Max Tank PSI | 150 PSI |
| Max Horsepower (Running) | 0.8 HP |
| Tool Weight (Tool only) | 29.0 lbs. |

*Tested per ISO 1217

**Tested per ISO 3744

Recommended Tool Capacity

| Application | Number of Tools |
|-------------|---|
| Finish |    |
| Roofing |  |
| Framing |  |

Includes: BTFP02012 6-Gallon Pancake Compressor

CAP1512-OF

1.2-Gallon High Output Trim Compressor

- 1** High-output, oil-free pump delivers 2.8 SCFM* at 90 PSI and 150 max PSI operating pressure for multiple-finish-tool operation
- 2** 1.5 max horsepower (running) motor draws 12 amps for easy start-up without tripping circuit breakers
- 3** 1.2-gallon, compact design weighs 23.5 lbs. for easy portability
- 4** Convenient storage pocket for hand tools, fasteners, and fittings; and an integrated cord wrap for easy storage
- 5** LED ON/OFF switch notifies the user of when the compressor is on to eliminate low-pressure misfires
- 6** Non-marring rubber feet



| Specifications | |
|--------------------------|-------------|
| Tank Size | 1.2 Gallons |
| SCFM* at 90 PSI | 2.8 SCFM |
| Max Tank PSI | 150 PSI |
| Max Horsepower (Running) | 1.5 HP |
| Tool Weight (Tool only) | 23.5 lbs. |

| Recommended Tool Capacity | |
|---------------------------|--|
| Application | Number of Tools |
| Finish |   |

Includes: CAP1512-OF 1.2 Gallon High Output Trim Compressor













BTFP02028

26-Gallon Vertical Compressor

- 1** 4.1 SCFM* at 90 PSI pump, 26-gallon tank, and 150 max PSI enables all household and most professional applications
- 2** Long-life, oil-free pump for ease of operation and no oil maintenance
- 3** BOSTITCH® high-efficiency motor for easy startup in cold weather or extension cord application (12 GA, 50 ft. cord or less)
- 4** Welded pull handle and 10" wheels allow for easy movement
- 5** Vertical tank configuration takes up less space
- 6** Pull handle also serves as cord wrap
- 7** Ball valve drain allows for quick and thorough tank draining



| Specifications | |
|--------------------------|------------|
| Tank Size | 26 Gallons |
| SCFM* at 90 PSI | 4.1 SCFM |
| Max Tank PSI | 150 PSI |
| Max Horsepower (Running) | 1.6 HP |
| Tool Weight (Tool only) | 125.0 lbs. |

| Recommended Tool Capacity | |
|---------------------------|---|
| Application | Number of Tools |
| Finish |     |
| Roofing |     |
| Framing |     |

Includes: BTFP02028 26-Gallon Vertical Compressor

*Tested per ISO 1217

** Tested per ISO 3744



COMBO KITS

BTFP3KIT 3-Tool & Compressor Combo Kit



SB-1850BN

18
GA
BRAD NAIL

**Fastener
Length**
5/8" - 2"

SB-1664FN

16
GA
STRAIGHT NAIL

**Fastener
Length**
1" - 2-1/2"

BTFP71875

HEAVY DUTY
3/8" / 10mm Crown

**Staple
Length**
1/4" - 9/16"

18
GA
BRAD NAIL

**Nail
Length**
1/2" - 5/8"

BTFP02012

Features and Benefits on pg. 27

| | |
|--------------------------|-----------|
| Tank Size | 6-Gallons |
| SCFM *at 90 PSI | 2.6 SCFM |
| Max Tank PSI | 150 PSI |
| Max Horsepower (Running) | 0.8 HP |
| Tool Weight (Tool only) | 29 lbs. |

Kit Includes: BTFP02012 6 Gallon Pancake Compressor, SB-1850BN 18 GA Brad Nailer, SB-1664FN 16 GA Straight Finish Nailer, BTFP71875 3/8" Crown Stapler, 1/4" x 15' Air Hose and Fittings

COMBO KITS

BTFP2KIT 2-Tool & Compressor Combo Kit

SB-1850BN



Fastener Length
5/8" - 2"

SB-1664FN



Fastener Length
1" - 2-1/2"

BTFP02012

Features and Benefits on pg. 27

| | |
|--------------------------|-----------|
| Tank Size | 6-Gallons |
| SCFM* at 90 PSI | 2.6 SCFM |
| Max Tank PSI | 150 PSI |
| Max Horsepower (Running) | 0.8 HP |
| Tool Weight (Tool only) | 29 lbs. |



Kit Includes: BTFP02012 6 Gallon Pancake Compressor, SB-1850BN 18 GA Brad Nailer, SB-1664FN 16 GA Straight Finish Nailer, 1/4" x 15' Air Hose and Fittings

BTFP1KIT 1-Tool & Compressor Combo Kit

SB-1850BN



Fastener Length
5/8" - 2"

BTFP02012

Features and Benefits on pg. 27

| | |
|--------------------------|-----------|
| Tank Size | 6-Gallons |
| SCFM* at 90 PSI | 2.6 SCFM |
| Max Tank PSI | 150 PSI |
| Max Horsepower (Running) | 0.8 HP |
| Tool Weight (Tool only) | 29 lbs. |



Kit Includes: BTFP02012 6 Gallon Pancake Compressor, SB-1850BN 18 GA Brad Nailer, 1/4" x 15' Air Hose and Fittings



AIR ACCESSORIES & HOSES

Industrial Fittings

- 1** Pre-applied thread sealant for airtight connections eliminates need for thread sealant tape and simplifies field installation
- 2** Plated steel construction with drag guard for jobsite durability and reliability (all plugs and couplers)



IC-14M



IP-14M



IP-14F



IC-14F

| SKU | Series | Style | Size | Thread | Pieces |
|-----------|--------|---------------------------|------|--------|--------|
| BTFP72318 | 1/4" | Plug | 1/4" | Male | 1 |
| IP-14M-BM | 1/4" | Plug | 1/4" | Male | 50 |
| BTFP72319 | 1/4" | Plug | 1/4" | Female | 1 |
| IP-14F-BM | 1/4" | Plug | 1/4" | Female | 50 |
| IP-38-38M | 3/8" | Plug | 3/8" | Male | 1 |
| IP-38-38F | 3/8" | Plug | 3/8" | Female | 1 |
| BTFP72333 | 1/4" | Swivel Plug | 1/4" | Male | 1 |
| IC-14M | 1/4" | Coupler | 1/4" | Male | 1 |
| IC-14M-BM | 1/4" | Coupler | 1/4" | Male | 50 |
| IC-14F | 1/4" | Coupler | 1/4" | Female | 1 |
| IC-14F-BM | 1/4" | Coupler | 1/4" | Female | 50 |
| IHKIT-14F | 1/4" | (1) BTFP72319, (1) IC-14F | 1/4" | Female | 2 |

Automotive Fittings

- 1** Pre-applied thread sealant for airtight connections eliminates need for thread sealant tape and simplifies field installation
- 2** Plated steel construction with drag guard for jobsite durability and reliability (all plugs and couplers)



AP-14M



AP-14F



AP-38M



AP-38F

| SKU | Series | Style | Size | Thread | Pieces |
|--------|--------|-------|------|--------|--------|
| AP-14M | 3/8" | Plug | 1/4" | Male | 1 |
| AP-14F | 3/8" | Plug | 1/4" | Female | 1 |
| AP-38M | 3/8" | Plug | 3/8" | Male | 1 |
| AP-38F | 3/8" | Plug | 3/8" | Female | 1 |

Universal Couplers

- 1** Universal couplers accept industrial, automotive, and ARO style plugs
- 2** 6-ball design (1/4" coupler series) and 8-ball design (3/8" coupler series) for balanced, strong, and secure connections



BTFP72321



UC38-14F

| SKU | Series | Style | Size | Thread | Pieces |
|-----------|--------|-----------------|------|--------|--------|
| BTFP72320 | 1/4" | Push-To-Connect | 1/4" | Male | 1 |
| BTFP72321 | 1/4" | Push-To-Connect | 1/4" | Female | 1 |
| UC38-14M | 3/8" | Push-To-Connect | 1/4" | Male | 1 |
| UC38-14F | 3/8" | Push-To-Connect | 1/4" | Female | 1 |

AIR ACCESSORIES

Compressor Accessories



BTFP72330



TIRE-14F



3WAY-RND

| SKU | Description | Size | Thread | Pieces |
|-------------------|--------------------------------|-----------------------------------|--------|--------|
| BTFP72326 | Regulator and Gauge Kit | 1/4" | - | 2 |
| IREGULATOR | Industrial Regulator and Gauge | 1/4" | Female | 1 |
| BTFP72328 | 1-1/2" Pressure Gauge | 1/4" | Female | 2 |
| TIRE-14F | Tire Chuck | 1/4" | Female | 1 |
| TEE-14F | Tee Fitting | 1/4" | Female | 1 |
| BTFP72330 | Safety Blow Gun | 1/4" | Female | 3 |
| BTFP72327 | Ball Type Drain Valve | 1/4" | Male | 1 |
| 3WAY-RND | 3-Way Manifold | 3/8" NPT Inlet to 1/4" NPT Outlet | - | 1 |

Reducers and Bushings

- 1** Pre-applied thread sealant (male connections) for secure connections



14M-14M



38F-38F



38M-14F

| SKU | Description | Size | Thread | Pieces |
|----------------|---------------------|----------------------------|------------------|--------|
| 14M-14M | Hex Nipple | 1/4" | Male | 1 |
| 14F-14F | Hex Coupler | 1/4" | Female | 1 |
| 38M-38M | Hex Nipple | 3/8" | Male | 1 |
| 38M-14F | Hex Reducer Bushing | 3/8" Male to 1/4" Female | Male to Female | 1 |
| 38M-14M | Hex Reducer Nipple | 3/8" Male to 1/4" Male | Male to Male | 1 |
| 38F-14F | Hex Reducer Coupler | 3/8" Female to 1/4" Female | Female to Female | 1 |
| 38F-14M | Hex Adaptor | 3/8" Female to 1/4" Male | Female to Male | 1 |

REPAIR ACCESSORIES

THREADTAPE Thread Sealant Tape

- 1** Acts as a lubricant to efficiently and easily tighten and unscrew pipe threads



Air Hoses

- 1 Designed to withstand the demands of the toughest jobsites



PRO-1450



HOPB38100

| SKU | Description | Size | Length |
|-----------|--|------|---------|
| PRO-1450 | Premium Quality Ribbed Polyurethane Air Hose | 1/4" | 50 ft. |
| PRO-14100 | Premium Quality Ribbed Polyurethane Air Hose | 1/4" | 100 ft. |
| PRO-3850 | Premium Quality Ribbed Polyurethane Air Hose | 3/8" | 50 ft. |
| PRO-38100 | Premium Quality Ribbed Polyurethane Air Hose | 3/8" | 100 ft. |
| HOPB1450 | PVC and Rubber Blend Air Hose | 1/4" | 50 ft. |
| HOPB14100 | PVC and Rubber Blend Air Hose | 1/4" | 100 ft. |
| BTFP72334 | PVC and Rubber Blend Air Hose | 3/8" | 50 ft. |
| HOPB38100 | PVC and Rubber Blend Air Hose | 3/8" | 100 ft. |

Air Hose Repair Kits

- 1 Quickly repair damaged hoses
- 2 Pre-applied thread sealant for a secure connection



PRO-14 REPAIR

| SKU | Description |
|--------------|---|
| PRO-14REPAIR | Repair Kit for 1/4" PROZ-HOSE™ Ribbed Polyurethane Air Hose |
| PRO-38REPAIR | Repair Kit for 3/8" PROZ-HOSE™ Ribbed Polyurethane Air Hose |
| HREPAIR-38 | Repair Kit for 3/8" Round Polyurethane Air Hose |

Rebuild Kits



N62-RK



MIISK

| SKU | Description |
|---------------|--|
| BOSCAP-RK | Rebuild Kit for SB150SLBC and SB-1664FN |
| BT55/SX-38-RK | Rebuild Kit BT1855K, SX1838K, and BTFP12233 |
| B125K-RK | Rebuild Kit for B125K |
| BT200-RK | Rebuild Kit for BT200 |
| FN16250K-RK | Rebuild Kit for BT16250K |
| FN1664K-RK | Rebuild Kit for FN1664K |
| MCN-RK | Rebuild Kit for MCN150 and MCN250 |
| MIISK | Rebuild Kit for MIIIFS, MIIIFN, and MII812CNCT |
| N62-RK | Rebuild Kit for N62 |
| N66C-RK | Rebuild Kit for N66BC, N66C, N66, and N75 |
| RN46-RK | Rebuild Kit for RN46 |
| SX150-RK | Rebuild Kit for SX150 |
| N62FNB-RK | Rebuild Kit for N62FNB |
| DA1564K-RK | Rebuild Kit for DA1564K |

KITS AND LUBRICANTS

O-Ring Kits



N88ORK



ORK1

| SKU | Description |
|---------------|--|
| N88ORK | O-Ring Kit for N88 |
| N89ORK | O-Ring Kit for F21PL, F28WW, F33PT, and N89C |
| ORK1 | O-Ring Kit for N50FN, N59FN, N60FN, T40, and T50 |
| ORK6 | O-Ring Kit for MIIIFS and MIIIFN |
| ORK10 | O-Ring Kit for S32, BT35, BT50, and PC5000 |
| ORK11 | O-Ring Kit for N79, N80, N90, and N95 |
| ORK12 | O-Ring Kit for N63, N64, and SDCN14 |
| ORK13 | O-Ring Kit for for RN45 |
| 120965 | O-Ring Kit for PN100 |
| 186190 | O-Ring Kit for PN50 |

Vinyl Siding and Depth Kits



DS3



VSA4

| SKU | Description |
|---------------|---------------------------------------|
| 108551 | Vinyl Siding Trip for 650S4 |
| 108550 | Vinyl Siding Trip for 438S4 and 538S4 |
| VSA4 | Vinyl Siding Adaptor for RN46 |
| DC3 | N80CB Dial-A-Depth® Kit |

Lubricants

1

BOSTITCH® lubricants and oils are designed for all pneumatic tools requiring oil. In the winter months, our all-season and winter lubricants allow you to get the job done, even in extreme temperatures



WINTEROIL-4OZ



PREMOIL-20OZ

| SKU | Description |
|------------------------|---|
| PREMOIL-4OZ | 4 oz. Premium Grade Pneumatic Tool Lubricant |
| PREMOIL-20OZ | 20 oz. Premium Grade Pneumatic Tool Lubricant |
| WINTEROIL-4OZ | 4 oz. Winter Grade Pneumatic Tool Lubricant |
| WINTEROIL-20OZ | 20 oz. Winter Grade Pneumatic Tool Lubricant |
| PREMCOMOIL-32OZ | Non-Detergent Air Compressor Lubricant |
| SYNCOMOIL-20OZ | All-Season Synthetic Lubricant |
| 9B12147R | Gas Cordless Tool Oil |



MANUAL FASTENING




MANUAL FASTENING • TACKERS

PC2K

PowerSlam™ PowerCrown® Hammer Tacker

- 1** Quick-load magazine holds up to two full sticks of staples
- 2** Long-reach knuckle saver handle with comfortable, non-slip grip
- 3** Die-cast frame and through hardened steel components for durability
- 4** Anti-Jam™ magazine design for maximum productivity

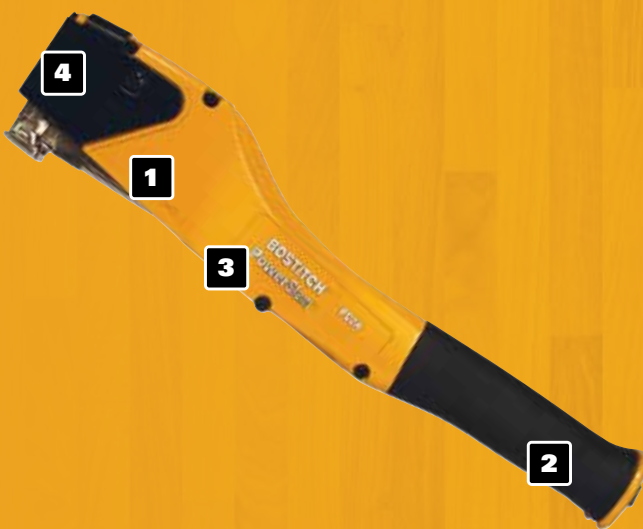

| | |
|-------------------------|-------------|
| Fastener Length | 1/4" - 3/8" |
| Fastener Type | STCR5019 |
| Crown Width | 7/16" |
| Magazine Capacity | 168 Staples |
| Tool Weight (Tool only) | 2.25 lbs. |

Includes: PC2K PowerSlam™ PowerCrown® Hammer Tacker

H30-6 and H30-8 PowerCrown® Hammer Tacker

- 1** Die-cast frame and through hardened steel components for durability
- 2** Quick-load magazine
- 3** Tool-free jam clearing



| | |
|-------------------------|--|
| Fastener Length | 1/4" - 3/8" |
| Fastener Type | H30-6 - STCR2619 H30-8 - STCR5019 |
| Crown Width | 7/16" |
| Magazine Capacity | 84 Staples |
| Tool Weight (Tool only) | H30-6 - 1.7 lbs. H30-8 - 1.8 lbs. |



Includes: PowerCrown® Hammer Tacker

H30-8D6 PowerCrown® Hammer Tacker with Holster

- 1** Die-cast frame and through hardened steel components for durability
- 2** Quick-load magazine
- 3** Tool-free jam clearing



| | |
|--------------------------|-------------|
| Fastener Length | 1/4" - 3/8" |
| Fastener Type | STCR5019 |
| Crown Width | 7/16" |
| Magazine Capacity | 84 Staples |
| Tool Weight with Holster | 2.25 lbs. |



Includes: H30-8 PowerCrown® Hammer Tacker and Holster

T6-80C2, T6-60C2, and T6-8 Heavy-Duty Tackers

- 1** Anti-Jam™ magazine design for maximum productivity
- 2** Patented easy-squeeze mechanism
- 3** Lightweight, die cast aluminum design
- 4** Steel handle with overmolded rubber grip for comfort
- 5** Nickel chrome-plated steel magazine and core provide smooth, durable sliding surfaces for staples



| | |
|-------------------------|---|
| Fastener Length | T6-80C2 & T6-8 - 1/4" - 9/16" T6-60C2 - 1/2" |
| Fastener Type | T6-80C2 & T6-8 - STCR5019 T6-60C2 - STCR2619 |
| Crown Width | 7/16" |
| Magazine Capacity | 84 Staples |
| Tool Weight (Tool only) | T6-80C2 & T6-60C2 - 1.8 lbs. T6-8 - 1.9 lbs. |



Includes: Heavy-Duty Tacker

MANUAL FASTENING • PLIERS

P6C-8

PowerCrown® Stapling Plier

- 1** Case-hardened steel components for durability
- 2** Quick-load magazine
- 3** Ergonomic design and patented easy-squeeze bearing system for ease of use



| | |
|-------------------------|-------------|
| Fastener Length | 1/4" - 3/8" |
| Fastener Type | STCR5019 |
| Crown Width | 7/16" |
| Magazine Capacity | 84 Staples |
| Tool Weight (Tool only) | 1.0 lbs. |

Includes: P6C-8 PowerCrown® Stapling Plier



P6C-6

PowerCrown® Light Wire Stapling Plier

- 1** Case-hardened steel components for durability
- 2** Quick-load magazine
- 3** Ergonomic design and patented easy-squeeze bearing system for ease of use



| | |
|-------------------------|-------------|
| Fastener Length | 1/4" - 3/8" |
| Fastener Type | STCR5619 |
| Crown Width | 7/16" |
| Magazine Capacity | 84 Staples |
| Tool Weight (Tool only) | 1.0 lbs. |

Includes: P6C-6 PowerCrown® Light Wire Stapling Plier




P3-IND

Heavy-Duty Light Wire Stapling Plier

- 1** Case-hardened steel components for durability
- 2** Quick-load magazine
- 3** Ergonomic design and patented easy-squeeze bearing system for ease of use
- 4** Anti-Jam™ magazine design for maximum productivity

| | | |
|---------------|-------------------------|-----------------|
| P3-IND | Fastener Length | 1/4" - 3/8" |
| | Fastener Type | SP191/4 Staples |
| | Magazine Capacity | 208 Staples |
| | Tool Weight (Tool only) | 0.5 lbs. |

Includes: Heavy-Duty Light Wire Stapling Plier

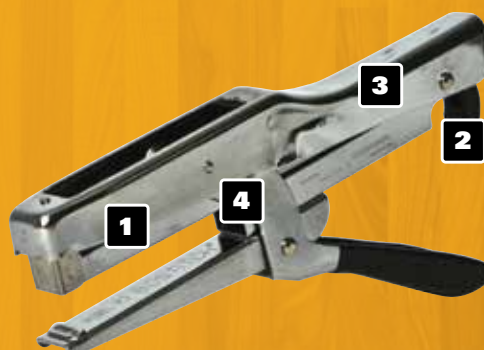

MANUAL FASTENING • PLIERS


P7

Collated Ring Plier

- 1** Case-hardened steel components for durability
- 2** Automatic feed system for ease of use and productivity
- 3** Ergonomic design and patented easy-squeeze bearing system for ease of use



| | |
|-------------------------|----------|
| Fastener Type | C Rings |
| Magazine Capacity | 50 Rings |
| Tool Weight (Tool only) | 0.8 lbs. |

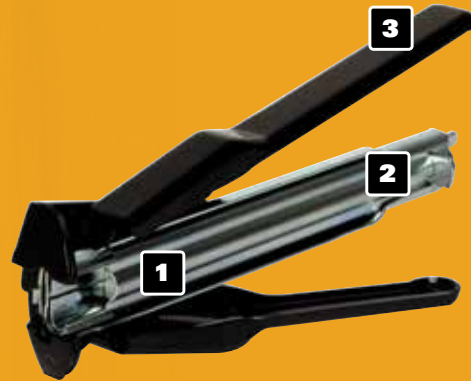

Includes: P7 Collated Ring Plier

MANUAL FASTENING • STAPLE GUNS

BT110

Heavy-Duty Staple Gun

- 1** Convenient handle lock for storage
- 2** Chrome-plated steel construction is durable and weather-resistant
- 3** Bottom-load magazine saves reload time and prevents loss of pusher



| | |
|-------------------------|---------------------|
| Fastener Length | 1/4" - 9/16" |
| Crown Width | 3/8" |
| Fastener Type | BTA700 or Arrow T50 |
| Magazine Capacity | 84 Staples |
| Tool Weight (Tool only) | 1.7 lbs. |



Includes: BT110 Heavy-Duty Staple Gun

BT160HL

2 in 1 Heavy-Duty Staple / Brad Gun


- 1** Aircraft-grade aluminum housing is lightweight and durable
- 2** Easy-squeeze handle reduces fatigue
- 3** Bottom-load magazine saves reload time and prevents loss of pusher
- 4** High/Low power switch for added versatility



| | |
|-------------------------|---------------------|
| Brad Nail Length | 1/2" - 5/8" |
| Staple Length | 1/4" - 9/16" |
| Crown Width | 3/8" |
| Staple Type | BTA700 or Arrow T50 |
| Magazine Capacity | 84 |
| Tool Weight (Tool only) | 1.4 lbs. |



Includes: BT160HL 2 in 1 Heavy-Duty Staple / Brad Gun

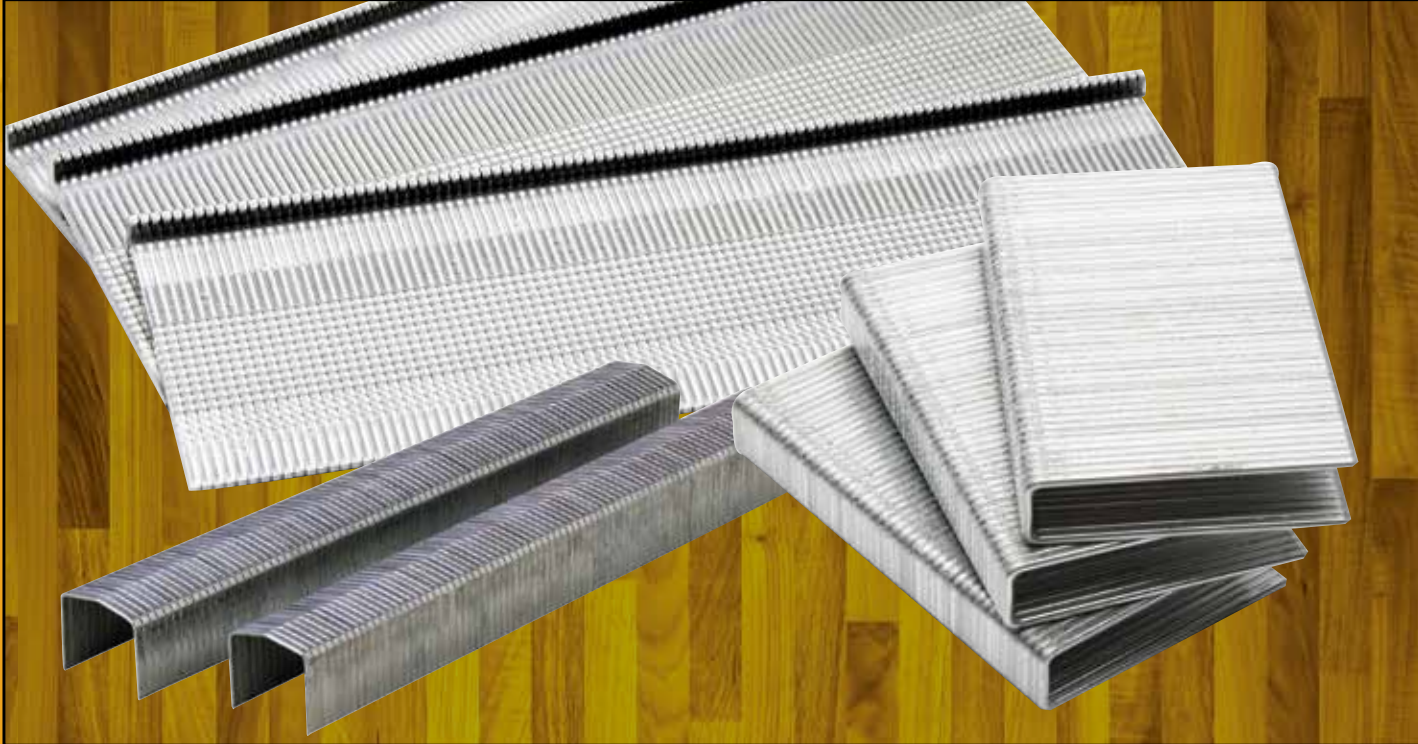

FASTENERS

FASTENERS • FINISH



| SKU | Size | Point Style | Finish | QTY |
|------------|----------------|-------------|--------|----------------|
| PT-2312-3M | 1/2" | Chisel | Coated | 3000 |
| PT-2319-3M | 3/4" | Chisel | Coated | 3000 |
| PT-2325-3M | 1" | Chisel | Coated | 3000 |
| PT-2330-3M | 1-3/16" | Chisel | Coated | 3000 |
| BTPN23PP | 1/2", 3/4", 1" | Chisel | Coated | 900 (300 each) |

FITSTOOLS: **BOSTITCH®** HP118K, BTFP2350K • **DeWALT®** DWFP2350K • **PORTER-CABLE®** PIN100, PIN138 and most other 23 GA Pin Nailers



| SKU | Size | Point Style | Finish | QTY | FITS |
|------------|------------------|-------------|-----------|----------------|--|
| BT1300B-1M | 5/8" | Chisel | Coated | 1000 | BOSTITCH® BTFP12233, BTFP1850K, GBT1850K, SB-1850BN, BT125K-2, SB-2IN1, BT200K-2, BTFP718175, BT1855K, BCN680D1 |
| BT1300B | 5/8" | Chisel | Coated | 3000 | |
| BT1303-1M | 3/4" | Chisel | Coated | 1000 | |
| BT1303B | 3/4" | Chisel | Coated | 3000 | |
| BT1309B-1M | 1" | Chisel | Coated | 1000 | |
| BT1309B | 1" | Chisel | Coated | 3000 | |
| BT1314B-1M | 1-3/16" | Chisel | Coated | 1000 | |
| BT1314B | 1-3/16" | Chisel | Coated | 3000 | |
| BT1332B-1M | 1-1/4" | Chisel | Coated | 1000 | |
| BT1332SS | 1-1/4" | Chisel | Stainless | 500 | |
| BT1335B-1M | 1-3/8" | Chisel | Coated | 1000 | BOSTITCH® BTFP12233, BTFP1850K, GBT1850K, SB-1850BN, SB-2IN1, BT200K-2, BT1855K, BCN680D1 |
| BT1335B | 1-3/8" | Chisel | Coated | 3000 | |
| BT1338B-1M | 1-1/2" | Chisel | Coated | 1000 | |
| BT1338B | 1-1/2" | Chisel | Coated | 2000 | |
| BT1340B | 1-9/16" | Chisel | Coated | 2000 | |
| BT1342B-1M | 1-9/16" | Chisel | Coated | 1000 | |
| BT1345B-1M | 1-5/8" | Chisel | Coated | 1000 | |
| BT1345B | 1-3/4" | Chisel | Coated | 2000 | |
| BT1350B-1M | 2" | Chisel | Coated | 1000 | |
| BT1350SS | 2" | Chisel | Stainless | 500 | |
| BT1350B | 2" | Chisel | Coated | 2000 | |
| BTBN18PP | 3/4", 1-1/4", 2" | Chisel | Coated | 900 (300 each) | |

ALSO FITS: **DeWALT®** DWFP12231, DWFP12233, DC608B, DC608K, DCN680B, DCN680D1 • **PORTER-CABLE®** BN138, BN125A, BN200B, BN200A, BN200C, BN200-5B, PCC790B, PCC790LA and most other 18 GA Brad Nailers



| SKU | Size | Crown | Finish | QTY |
|-----------------|----------------|-------|-----------|----------------|
| SX50353/8G-9M | 3/8" | 7/32" | Coated | 9000 |
| SX50351/2G-7M | 1/2" | 7/32" | Coated | 7000 |
| SX50355/8G | 5/8" | 7/32" | Coated | 5000 |
| SX50535/4G-1M | 3/4" | 7/32" | Coated | 1000 |
| SX50353/4G | 3/4" | 7/32" | Coated | 5000 |
| SX50357/8G | 7/8" | 7/32" | Coated | 5000 |
| SX50351G-1M | 1" | 7/32" | Coated | 1000 |
| SX50351SS-1M | 1" | 7/32" | Stainless | 1000 |
| SX50351 | 1" | 7/32" | Coated | 5000 |
| SX50351-3/16G | 1-3/16" | 7/32" | Coated | 3000 |
| SX50351-1/8G | 1-1/8" | 7/32" | Coated | 3000 |
| SX50351-1/4G | 1-1/4" | 7/32" | Coated | 3000 |
| SX50351-3/8SS1M | 1-3/8" | 7/32" | Stainless | 1000 |
| SX50351-3/8G | 1-3/8" | 7/32" | Coated | 3000 |
| SX503511/2G-1M | 1-1/2" | 7/32" | Coated | 1000 |
| SX503511/2G | 1-1/2" | 7/32" | Coated | 3000 |
| BT SX18PP | 1/2", 3/4", 1" | 7/32" | Coated | 900 (300 each) |

FITSTOOLS: **BOSTITCH®** SX1838K, EHF1838K • **DeWALT®** DWEHF1838K • and most other 18 GA 7/32" Narrow Crown Staplers

FASTENERS • FINISH



| SKU | Size | Point Style | Finish | QTY |
|--------------|--------------------|-------------|-----------|----------------|
| SB16-1.25-1M | 1-1/4" | Chisel | Coated | 1000 |
| SB16-1.5-1M | 1-1/2" | Chisel | Coated | 1000 |
| SB1615SS | 1-1/2" | Chisel | Stainless | 500 |
| SB16-1.50 | 1-1/2" | Chisel | Coated | 2500 |
| SB16-1.75-1M | 1-3/4" | Chisel | Coated | 1000 |
| SB16-2.00-1M | 2" | Chisel | Coated | 1000 |
| SB1620SS | 2" | Chisel | Stainless | 500 |
| SB16-2.00 | 2" | Chisel | Coated | 2500 |
| SB16-2.5-1M | 2-1/2" | Chisel | Coated | 1000 |
| SB1625SS | 2-1/2" | Chisel | Stainless | 500 |
| SB16-2.50 | 2-1/2" | Chisel | Coated | 2500 |
| BTSB16PP | 1-1/4", 2", 2-1/2" | Chisel | Coated | 900 (300 each) |

FITS TOOLS: **BOSTITCH®** GFN1664K, FN16250K, BTFP1664K, FN1664K, BTFP71917, BCN662D1 • **DeWALT®** DWFP71917, DC616K, D51257K • **PORTER-CABLE®** FN250SB, and most other 16 GA straight finish nailers



| SKU | Size | Point Style | Finish | QTY |
|-----------|--------|-------------|--------|------|
| DA-1520 | 1-1/4" | Chisel | Coated | 4000 |
| DA-1524 | 1-1/2" | Chisel | Coated | 4000 |
| DA1524-1M | 1-1/2" | Chisel | Coated | 1000 |
| DA-1532 | 2" | Chisel | Coated | 4000 |
| DA1532-1M | 2" | Chisel | Coated | 1000 |
| DA-1540 | 2-1/2" | Chisel | Coated | 4000 |
| DA1540-1M | 2-1/2" | Chisel | Coated | 1000 |

FITS TOOLS: **BOSTITCH®** DA1564K, BTFP72155 • **DeWALT®** D5127K, D51276K, DC628K, DWFP72155, DCN650B, DCN650D1 • **PORTER-CABLE®** DA250B, DA250C **Hitachi®** NT65GA, NT65MA2, NT65MA4 • **Senco®** FP35, FP41XP, FP42XP, SFN30, Cordless Finish 41, Fusion F-15 • **Ridgid®** R250AFA, R250AF18 and most other 15 GA "DA" style finish nailers



| SKU | Size | Point Style | Finish | QTY |
|-------------|--------------------|-------------|-----------|----------------|
| FN1520-1M | 1-1/4" | Chisel | Coated | 1000 |
| FN1520 | 1-1/4" | Chisel | Coated | 3655 |
| FN1524-1M | 1-1/2" | Chisel | Coated | 1000 |
| FN1524-1MSS | 1-1/2" | Chisel | Stainless | 1000 |
| FN1524 | 1-1/2" | Chisel | Coated | 3655 |
| FN1528 | 1-3/4" | Chisel | Coated | 3655 |
| FN1532-1M | 2" | Chisel | Coated | 1000 |
| FN1532-1MSS | 2" | Chisel | Stainless | 1000 |
| FN1532 | 2" | Chisel | Coated | 3655 |
| FN1536 | 2-1/4" | Chisel | Coated | 3655 |
| FN1540-1M | 2-1/2" | Chisel | Coated | 1000 |
| FN1540-1MSS | 2-1/2" | Chisel | Stainless | 1000 |
| FN1540 | 2-1/2" | Chisel | Coated | 3655 |
| BTFN15PP | 1-1/2", 2", 2-1/2" | Chisel | Coated | 900 (300 each) |

FITS TOOLS: **BOSTITCH®** BTFP72156, BCN650B, BCN650D1, N62FNK-2, N59FN, N60FN, N62FN and most other 15 GA "FN" style angled finish nailers

FASTENERS • FLOORING

18 GA 5/16"
Crown Staples

| SKU | Size | Crown | Finish | QTY |
|--------------|--------|-------|--------|------|
| SL50351G | 1" | 5/16" | Coated | 5000 |
| SL50351-1/2G | 1-1/2" | 5/16" | Coated | 3000 |

FITS TOOLS: **BOSTITCH®** SB1838BC, SL1838BC

FASTENERS • FLOORING



| SKU | Size | Crown | Point Style | Finish | QTY |
|-----------|------|-------|-------------|--------|------|
| SB97-1GLS | 1" | 3/16" | Chisel | Coated | 5000 |

FITS TOOLS: **BOSTITCH®** LHF2025K, LHF97125-2, S3297-LHF-2 • **DeWALT®** DWLHF2025K • **Powernail®** 20FS



| SKU | Size | Crown | Gauge | Point Style | Finish | QTY |
|--------------|--------|-------|-------|-------------|-----------|------|
| BCS1512 | 1-1/2" | 1/2" | 15.5 | Chisel | Coated | 9600 |
| BCS1512-7M | 1-1/2" | 1/2" | 15.5 | Chisel | Coated | 7000 |
| BCS1512-1M | 1-1/2" | 1/2" | 15.5 | Chisel | Coated | 1000 |
| BCS1514 | 1-3/4" | 1/2" | 15.5 | Chisel | Coated | 7728 |
| BCS1516 | 2" | 1/2" | 15.5 | Chisel | Coated | 7728 |
| BCS1516-1M | 2" | 1/2" | 15.5 | Chisel | Coated | 1000 |
| BCS1516SS-1M | 2" | 1/2" | 15.5 | Chisel | Stainless | 1000 |
| BCS1516SQ | 2" | 1/2" | 15.5 | Chisel | Coated | 500 |

FITS TOOLS: **BOSTITCH®** MIIIFS, BTFP12569 • **DeWALT®** DWMIIIFS, DWFP12569 • **Powernail®** 445FS • **Primatech®** 2250A, 245FS • **Freeman®** PFL618BRR
Porta-Nails® 472A • **HUSKY®** OPFIK



| SKU | Size | Gauge | Finish | QTY | Fits |
|-----------|--------|-------|--------|------|---|
| FLN-150 | 1-1/2" | 16 GA | Coated | 1000 | BOSTITCH® MIIIFN, BTFP12569, MFN-201 |
| FLN-175 | 1-3/4" | 16 GA | Coated | 1000 | |
| FLN-200 | 2" | 16 GA | Coated | 1000 | |
| FLN18-150 | 1-1/2" | 18 GA | Coated | 1000 | Powernail® 50P Primatech® Q550 |
| FLN18-175 | 1-3/4" | 18 GA | Coated | 1000 | |
| FLN18-200 | 2" | 18 GA | Coated | 1000 | |

FASTENERS • FRAMING



| SKU | Size | Shank | Point Style | Finish | QTY |
|----------------|----------------|--------|-------------|------------|------|
| PT-6D113FH5 | 2" x .113" | Smooth | Diamond | Coated | 5000 |
| PT-8D113FH5 | 2-3/8" x .113" | Smooth | Diamond | Coated | 5000 |
| PT-8D113GFH2 | 2-3/8" x .113" | Smooth | Diamond | Hot-Dipped | 2000 |
| PT-8DR113FH5 | 2-3/8" x .113" | Ring | Diamond | Coated | 5000 |
| PT-8DR113GFH2 | 2-3/8" x .113" | Ring | Diamond | Hot-Dipped | 2000 |
| PT-10D120FH25 | 3" x .120" | Smooth | Diamond | Coated | 2500 |
| PT-10D120GFH2 | 3" x .120" | Smooth | Diamond | Hot-Dipped | 2000 |
| PT-10D131FH25 | 3" x .131" | Smooth | Diamond | Coated | 2500 |
| PT-10DR120GFH2 | 3" x .120" | Ring | Diamond | Hot-Dipped | 2000 |
| PT-12D120FH25 | 3-1/4" x .120" | Smooth | Diamond | Coated | 2500 |
| PT-12D131FH25 | 3-1/4" x .131" | Smooth | Diamond | Coated | 2500 |
| PT-12D131GFH2 | 3-1/4" x .131" | Smooth | Diamond | Hot-Dipped | 2000 |
| PT-16D131FH2 | 3-1/2" x .131" | Smooth | Diamond | Coated | 2000 |
| PT-16D131GFH2 | 3-1/2" x .131" | Smooth | Diamond | Hot-Dipped | 2000 |

FITS TOOLS: **BOSTITCH®** F33PT, LPF33PT, BCF30PTB, BCF30PTM1, BTF83PT • **DeWALT®** DWF83PT, DCN690M1, DCN692B, DCN692M1
Paslode® F350S, CF325, CF325Li, PF350S, IM350, IM90i • **Hitachi®** NR83AA3, NR90AD, NR90GC • **PORTER-CABLE®** FC350A, FC350B
Senco® SN901XP, SN951XP, FP701XP, FP601 • **Ridgid®** R350CHA • **Max®** SN890CH/34, SN883CH/34 • **Griprite®** GRTCH350, GRTFC83

FASTENERS • FRAMING



| SKU | Size | Shank | Point Style | Finish | QTY | Fits |
|----------------|----------------|--------|-------------|------------|------|--|
| S6D-FH | 2" x .113" | Smooth | Diamond | Coated | 2000 | BOSTITCH® N79WW, N80SB, N86S, N88WB, N100S, F28WW, GF28WW, BCF28WW, BTF23WW |
| S6DGAL-FH | 2" x .113" | Smooth | Diamond | Thickcoat™ | 2000 | |
| S6DR113-FH | 2" x .113" | Ring | Diamond | Coated | 2000 | |
| S6DR113GAL-FH | 2" x .113" | Ring | Diamond | Thickcoat™ | 2000 | |
| S8D-FH | 2-3/8" x .120" | Smooth | Diamond | Coated | 2000 | |
| S8D131-FH | 2-3/8" x .131" | Smooth | Diamond | Coated | 2000 | |
| S8DGAL-FH | 2-3/8" x .120" | Smooth | Diamond | Thickcoat™ | 2000 | |
| S8DR-FH | 2-3/8" x .120" | Ring | Diamond | Coated | 2000 | |
| S8DRGAL-FH | 2-3/8" x .120" | Ring | Diamond | Thickcoat™ | 2000 | |
| S8D131GAL-FH | 2-3/8" x .131" | Smooth | Diamond | Hot-Dipped | 2000 | |
| S10D-FH | 3" x .120" | Smooth | Diamond | Coated | 2000 | |
| S10DGAL-FH | 3" x .120" | Smooth | Diamond | Thickcoat™ | 2000 | |
| S10DR-FH | 3" x .120" | Ring | Diamond | Coated | 2000 | |
| S10DRGAL-FH | 3" x .120" | Ring | Diamond | Thickcoat™ | 2000 | |
| S10DS-FH | 3" x .120" | Screw | Diamond | Coated | 2000 | |
| S10D131-FH | 3" x .131" | Smooth | Diamond | Coated | 2000 | |
| S10D131GAL-FH | 3" x .131" | Smooth | Diamond | Hot-Dipped | 2000 | |
| S12D-FH | 3-1/4" x .120" | Smooth | Diamond | Coated | 2000 | |
| S12DGAL-FH | 3-1/4" x .120" | Smooth | Diamond | Thickcoat™ | 2000 | |
| S12DS-FH | 3-1/4" x .120" | Screw | Diamond | Coated | 2000 | |
| S12DSGAL-FH | 3-1/4" x .120" | Screw | Diamond | Thickcoat™ | 2000 | |
| S12D131-FH | 3-1/4" x .131" | Smooth | Diamond | Coated | 2000 | |
| S12DR131-FH | 3-1/4" x .131" | Ring | Diamond | Coated | 2000 | |
| S12D131GAL-FH | 3-1/4" x .131" | Smooth | Diamond | Hot-Dipped | 2000 | |
| S12DR131GAL-FH | 3-1/4" x .131" | Ring | Diamond | Hot-Dipped | 2000 | |
| S16D131-FH | 3-1/2" x .131" | Smooth | Diamond | Coated | 2000 | BOSTITCH® N79WW, N80SB, N86S, N88WB, N100S, F28WW, GF28WW, BCF28WW |
| S16D131GAL-FH | 3-1/2" x .131" | Smooth | Diamond | Thickcoat™ | 2000 | |
| S20D131 | 4" x .131" | Smooth | Diamond | Coated | 2000 | |

ALSO FITS: DEWALT® DWF83WW • MAX® SN883CH/28 • GRIP RITE® GRTFW83 • HITACHI® NR90AF(S)



| SKU | Size | Shank | Point Style | Finish | QTY | Fits |
|----------------|----------------|--------|-------------|---------------------|------|--|
| PT-MC13115-1M | 1-1/2" x .131" | Smooth | Diamond | Brite, Heat Treated | 1000 | BOSTITCH® F33PT, MCN150, MCN250 |
| PT-MC13115.5M | 1-1/2" x .131" | Smooth | Diamond | Brite | 500 | |
| PT-MC13115G-1M | 1-1/2" x .131" | Smooth | Diamond | Galvanized | 1000 | |
| PT-MC14815-1M | 1-1/2" x .148" | Smooth | Diamond | Brite, Heat Treated | 1000 | |
| PT-MC14815G-1M | 1-1/2" x .148" | Smooth | Diamond | Galvanized | 1000 | |
| PT-MC14815G.5M | 1-1/2" x .148" | Smooth | Diamond | Galvanized | 500 | |
| PT-MC14815B.5M | 1-1/2" x .148" | Smooth | Diamond | Brite, Heat Treated | 500 | |
| PT-MC14825G-1M | 2-1/2" x .148" | Smooth | Diamond | Galvanized | 1000 | BOSTITCH® F33PT, MCN250 |
| PT-MC14825G.5M | 2-1/2" x .148" | Smooth | Diamond | Galvanized | 500 | |
| PT-MC16225G.5M | 2-1/2" x .162" | Smooth | Diamond | Galvanized | 500 | |

ALSO FITS: DEWALT® DVMC150, DCN693MCN • Hitachi® NR65AK • Paslode® F250S-PP • Rap-A-Nail™ RN150, RN250

**21° Plastic
Collated Metal
Connector Nails**

| | | | | | | |
|---------------|----------------|--------|---------|-----------------------------|------|---------------------------------------|
| RH-MC14815G-S | 1-1/2" x .148" | Smooth | Diamond | Thickcoat™, Heat Treated | 1000 | BOSTITCH® N88RH-2MCN, F21PL |
|---------------|----------------|--------|---------|-----------------------------|------|---------------------------------------|



| SKU | Size | Shank | Point Style | Finish | QTY | Fits |
|----------------|----------------|--------|-------------|------------|------|---|
| RH-S6DEP | 2" x .113" | Smooth | Diamond | Coated | 6000 | BOSTITCH® N88RH, F21PL, LPF21PL, BTF83PL |
| RH-S8D113EP | 2-3/8" x .113" | Smooth | Diamond | Coated | 5000 | |
| RH-S8D113HDG | 2-3/8" x .113" | Smooth | Diamond | Hot-Dipped | 5000 | |
| RH-S8DR113HDG | 2-3/8" x .113" | Ring | Diamond | Hot-Dipped | 5000 | |
| RH-S8D131HDG | 2-1/2" x .131" | Smooth | Diamond | Hot-Dipped | 5000 | |
| RH-S10D120EP | 3" x .120" | Smooth | Diamond | Coated | 4000 | |
| RH-S10D120HDG | 3" x .120" | Smooth | Diamond | Hot-Dipped | 4000 | |
| RH-S10DR120HDG | 3" x .120" | Ring | Diamond | Hot-Dipped | 4000 | |
| RH-S10D131EP | 3" x .131" | Smooth | Diamond | Coated | 4000 | |
| RH-S10D131HDG | 3" x .131" | Smooth | Diamond | Hot-Dipped | 4000 | |
| RH-S10DR131HDG | 3" x .131" | Ring | Diamond | Hot-Dipped | 4000 | BOSTITCH® N88RH, F21PL, N88RH-2MCN, N95RHN, LPF21PL, BTF83PL |
| RH-S12D120EP | 3-1/4" x .120" | Smooth | Diamond | Coated | 4000 | |
| RH-S12D131EP | 3-1/4" x .131" | Smooth | Diamond | Coated | 4000 | |
| RH-S12D131HDG | 3-1/4" x .131" | Smooth | Diamond | Hot-Dipped | 4000 | BOSTITCH® F21PL, N79RH, N88RH-2MCN, N88RH, N95RHN, LPF21PL |
| RH-S16D131EP | 3-1/2" x .131" | Smooth | Diamond | Coated | 4000 | |
| RH-S16D131HDG | 3-1/2" x .131" | Smooth | Diamond | Hot-Dipped | 4000 | BOSTITCH® KN85PP, BIGBERTA160, BRT130 |
| S38-100B | 4" x .150" | Smooth | Diamond | Coated | 1250 | |
| S38-115B | 4-1/2" x .150" | Smooth | Diamond | Coated | 1250 | |
| S34S-115B | 4-1/2" x .134" | Screw | Diamond | Coated | 1250 | |
| S38-130B | 5-1/8" x .150" | Smooth | Diamond | Coated | 1250 | |
| S42-130B | 5-1/8" x .165" | Smooth | Diamond | Coated | 660 | BOSTITCH® BIGBERTA160 |
| S42-160B | 6-1/4" x .165" | Smooth | Diamond | Coated | 660 | |

ALSO FITS: DeWALT® DWF83PL • Hitachi® NR83A, NR83A2, NR83A3, NR90AE • PORTER-CABLE® FR350A, FR350B • Senco® SN901XP, SN951XP, FP701XP, FP601 • Ridgid® R350RHE • Max® SN883RH, SN883RH2 • GripRite® GRTRH350, GRTRF83



| SKU | Size | Shank | Point Style | Finish | QTY | Fits |
|--------------|----------------|--------|---------------|------------|------|--|
| CP4STIF | 1-1/2" x .099" | Smooth | Diamond | Stiff | 3600 | BOSTITCH® N75C, N80CB |
| AC4D113BDP | 1-1/2" x .113" | Smooth | Blunt Diamond | Coated | 7500 | |
| C6P99D | 2" x .099" | Smooth | Diamond | Coated | 3600 | BOSTITCH® BTF83C, N80CB, N89C, N100C, N75C, BTF83C |
| C6P99DG | 2" x .099" | Smooth | Diamond | Thickcoat™ | 3600 | |
| C6P99BC | 2" x .099" | Ring | Blunt Chisel | Coated | 3600 | |
| C6R99BCG | 2" x .099" | Ring | Blunt Chisel | Thickcoat™ | 3600 | |
| C6R99BDSS | 2" x .099" | Ring | Blunt Diamond | Stainless | 3600 | |
| C7PSTIF | 2-1/4" x .099" | Smooth | Diamond | Stiff | 3600 | |
| C8P99D | 2-1/2" x .099" | Smooth | Diamond | Coated | 3600 | |
| C8P99DG | 2-1/2" x .099" | Smooth | Diamond | Thickcoat™ | 3600 | |
| C8R99BCG | 2-1/2" x .099" | Ring | Blunt Chisel | Thickcoat™ | 3600 | |
| C8R99BD | 2-1/2" x .099" | Ring | Blunt Diamond | Coated | 3600 | |
| C8R99BDSS | 2-1/2" x .099" | Ring | Blunt Diamond | Stainless | 3600 | |
| C8P120D | 2-1/2" x .120" | Smooth | Diamond | Coated | 2700 | |
| C8P131D-4.5M | 2-1/2" x .131" | Smooth | Diamond | Coated | 4500 | |
| C8PR99D | 2-3/8" x .099" | Smooth | Diamond | Coated | 3600 | |
| C8R131D | 2-1/2" x .131" | Ring | Diamond | Coated | 2700 | |
| C8R131G | 2-1/2" x .131" | Ring | Diamond | Thickcoat™ | 2700 | |
| C8R99BCG | 2-1/2" x .099" | Ring | Blunt Chisel | Thickcoat™ | 2700 | |
| C8R113BD | 2-3/8" x .113" | Ring | Blunt Diamond | Coated | 2700 | |
| C10P120D | 3" x .120" | Smooth | Diamond | Coated | 2700 | BOSTITCH® BTF83C, N80CB, N89C, N100C, N75C, BTF83C |
| C10P120DG | 3" x .120" | Smooth | Diamond | Thickcoat™ | 2700 | |
| C10P131D | 3" x .131" | Smooth | Diamond | Coated | 2700 | |

ALSO FITS: DeWALT® DW325C, DWF83C • Duo-Fast® CNW-75 • Hitachi® NV83A • Makita® AN901 • Max® 890C • Paslode® F275C, P275C, F325C, P325C, 5300C • PORTER-CABLE® Coil350 • Senco® SCN60, SCN65

FASTENERS • FRAMING



Continued from
Page 46

| SKU | Size | Shank | Point Style | Finish | QTY | Fits |
|------------|----------------|--------|-------------|------------|------|--|
| AC10DR | 3" x .120" | Ring | Diamond | Coated | 4500 | BOSTITCH® N80CB, N89C, N75C, BTF83C |
| C10S120DG | 3" x .120" | Screw | Diamond | Thickcoat™ | 2700 | |
| C12P120D | 3-1/4" x .120" | Smooth | Diamond | Coated | 2700 | BOSTITCH® N80CB, N89C, BTF83C |
| C12P120DG | 3-1/4" x .120" | Smooth | Diamond | Thickcoat™ | 2700 | |
| C12R120DSS | 3-1/4" x .120" | Ring | Diamond | Stainless | 2700 | |
| AC12DS | 3-1/4" x .120" | Screw | Blunt | Coated | 4500 | |
| C12S120DG | 3-1/4" x .120" | Screw | Diamond | Thickcoat™ | 2700 | |
| C12P131D | 3-1/4" x .120" | Smooth | Diamond | Coated | 2700 | |
| C16P131D | 3-1/2" x .131" | Smooth | Diamond | Coated | 2700 | BOSTITCH® N89C |
| C16P131DG | 3-1/2" x .131" | Smooth | Diamond | Thickcoat™ | 2700 | |
| C20S120D | 4" x .120" | Screw | Diamond | Coated | 2700 | BOSTITCH® N100CPP |
| C20P131D | 4" x .131" | Smooth | Diamond | Coated | 2700 | |
| C20P131DG | 4" x .131" | Smooth | Diamond | Thickcoat™ | 2700 | |

ALSO FITS: DEWALT® DW325C, DWF83C • Duo-Fast® CNW-75 • Hitachi® NV83A • Makita® AN901 • Max® 890C • Paslode® F275C, P275C, F325C, P325C, 5300C • PORTER-CABLE® Coil350 • Senco® SCN60, SCN65

FASTENERS • ROOFING & SIDING



| SKU | Size | Shank | Point Style | Finish | QTY |
|---------------|-----------------|--------|---------------|---------------|-------|
| AC3D080BDP | 1-1/4" x .080" | Smooth | Blunt Diamond | Coated | 14000 |
| AC3DR080BDP | 1-1/4" x .080" | Ring | Blunt Diamond | Coated | 14000 |
| C3R80BDG | 1-1/4" x .080" | Ring | Blunt Diamond | Thickcoat™ | 4200 |
| C3R90BDSS | 1-1/4" x .090" | Ring | Blunt Diamond | Stainless | 3600 |
| C3R90BDSS-316 | 1-1/4" x .090" | Ring | Blunt Diamond | 316-Stainless | 1800 |
| AC4D080BDP | 1-1/2" x .080" | Smooth | Blunt Diamond | Coated | 14000 |
| AC4DR080BDP | 1-1/2" x .080" | Ring | Blunt Diamond | Coated | 14000 |
| C4R80BDG | 1-1/2" x .080" | Ring | Blunt Diamond | Thickcoat™ | 4200 |
| AC5DR080BDP | 1-3/4" x .080" | Ring | Blunt Diamond | Coated | 14000 |
| C5R80BDG | 1-3/4" x .080" | Ring | Blunt Diamond | Thickcoat™ | 4200 |
| C4R90BDSS | 1-1/2" x .090" | Ring | Blunt Diamond | Stainless | 3600 |
| C4R90BDSS-316 | 1-1/2" x .090" | Ring | Blunt Diamond | 316-Stainless | 1800 |
| C5R90BDSS | 1-3/4" x .092" | Ring | Blunt Diamond | Stainless | 3600 |
| C5R90BDSS-316 | 1-3/4" x .090" | Ring | Blunt Diamond | 316-Stainless | 1800 |
| AC6D090BDP | 2" x .092" | Smooth | Blunt Diamond | Coated | 12000 |
| C6P90BDG | 2" x .092" | Smooth | Blunt Diamond | Thickcoat™ | 3600 |
| AC6DR090BDP | 2" x .092" | Ring | Blunt Diamond | Coated | 12000 |
| C6R90BDG | 2" x .092" | Ring | Blunt Diamond | Thickcoat™ | 3600 |
| C6R90BDSS | 2" x .092" | Ring | Blunt Diamond | Stainless | 3600 |
| C6R90BDSS-316 | 2" x .090" | Ring | Blunt Diamond | 316-Stainless | 1800 |
| C7P90BDG | 2-3/16" x .092" | Smooth | Blunt Diamond | Thickcoat™ | 3600 |
| C7R90BDG | 2-3/16" x .092" | Ring | Blunt Diamond | Thickcoat™ | 3600 |
| C7R90BDSS | 2-3/16" x .092" | Ring | Blunt Diamond | Stainless | 3600 |
| C7R90BDSS-316 | 2-3/16" x .090" | Ring | Blunt Diamond | 316-Stainless | 1800 |
| C8P90BDG | 2-1/2" x .092" | Smooth | Blunt Diamond | Thickcoat™ | 3600 |
| C8R90BDG | 2-1/2" x .092" | Ring | Blunt Diamond | Thickcoat™ | 3600 |
| AC8DRSS | 2-1/2" x .092" | Ring | Blunt Diamond | Stainless | 3600 |
| C8R90BDSS-316 | 2-1/2" x .090" | Ring | Blunt Diamond | 316-Stainless | 1800 |

FITS TOOLS: BOSTITCH® N66BC-1, N66C-1 DEWALT® DW66C-1 • Hitachi® NV65AH • Makita® AN611 • Max® CN565

FASTENERS • ROOFING & SIDING



| SKU | Size | Shank | Point Style | Finish | QTY |
|-------------|----------------|-------|-------------|------------|------|
| ACP5DSALM | 1-3/4" x .099" | Screw | Diamond | Aluminum | 2400 |
| ACP8D090BDG | 2-1/2" x .090" | Ring | Diamond | Galvanized | 3600 |

FITS TOOLS: **BOSTITCH®** N63CP, N65CP, N66C, N66BC, N75C • **DeWALT®** DWV66C-1 • **Hitachi®** NV65AH • **Makita®** AN611 • **Max®** CN565 • **Senco®** SCN55S



| SKU | Size | Shank | Point Style | Finish | QTY |
|----------|--------|--------|-------------|------------|------|
| CR19GAL | 3/4" | Smooth | Diamond | Galvanized | 7200 |
| CR2DCGAL | 7/8" | Smooth | Diamond | Galvanized | 7200 |
| CR2DGAL | 1" | Smooth | Diamond | Galvanized | 7200 |
| CR3DGAL | 1-1/4" | Smooth | Diamond | Galvanized | 7200 |
| CR4DGAL | 1-1/2" | Smooth | Diamond | Galvanized | 7200 |
| CR5DGAL | 1-3/4" | Smooth | Diamond | Galvanized | 7200 |

FITS TOOLS: **BOSTITCH®** BRN175, RN46-1, N66C-1, **DeWALT®** DW45RN • **PORTER-CABLE®** RN175B



| SKU | Description | QTY | Fits |
|-----------|-----------------------------|-----------|--|
| SB-CAPS | BOSTITCH® Caps | 1000 | BOSTITCH® SL1838BC, SB150SLBC, N66BC |
| CAPPAK-1M | BOSTITCH® Caps & 1" Staples | 1000 Each | BOSTITCH® SB150SLBC, SL1838BC |
| CAPPAK-5M | BOSTITCH® Caps & 1" Staples | 5000 Each | |

FASTENERS • SPECIALTY



| SKU | Size | Shank | Point Style | Finish | QTY |
|---------------|----------------|-----------------|-------------|--------|------|
| BT484GXH-2.5M | 9/16" x .097" | Hardened/Coated | Diamond | Smooth | 2500 |
| BT461XH-2.5M | 5/8" x .097" | Hardened | Diamond | Smooth | 2500 |
| BT488XH-2.5M | 3/4" x .097" | Hardened | Diamond | Smooth | 2500 |
| BT490XH-2.5M | 1-1/8" x .097" | Hardened | Diamond | Smooth | 2500 |
| BT471XH-2.5M | 1-1/2" x .097" | Hardened | Diamond | Smooth | 2500 |

FITS TOOLS: **BOSTITCH®** MIII812CNCT

FASTENERS • STAPLES



| SKU | Length | Crown | Point Style | QTY | Fits |
|-----------|--------|-------|-------------|------|--|
| BTA704TLS | 1/4" | 3/8" | Chisel | 1500 | BOSTITCH® BT110, BT160HL, BHT150, BTFP71875 |
| BHT75329 | 1/4" | 3/8" | Chisel | 1250 | |
| BTA705TLS | 5/16" | 3/8" | Chisel | 1500 | BOSTITCH® BT110, BT160HL, BHT150, BHT250, BTFP71875 |
| BTA706TLS | 3/8" | 3/8" | Chisel | 1500 | |
| BHT73531 | 3/8" | 3/8" | Chisel | 1250 | |
| BTA708TLS | 1/2" | 3/8" | Chisel | 1500 | BOSTITCH® BT110, BT160HL, BHT250, BTFP71875 |
| BHT73532 | 1/2" | 3/8" | Chisel | 1250 | |
| BTA709TLS | 9/16" | 3/8" | Chisel | 1500 | BOSTITCH® BT110, BT160HL, BTFP71875 |
| BHT73533 | 9/16" | 3/8" | Chisel | 1250 | |



| SKU | Size | Crown | Point Style | Finish | QTY |
|--------------|--------|-------|-------------|------------------|-------|
| 16S5-16FG10M | 5/8" | 7/16" | Chisel | Flash Galvanized | 10000 |
| 16S5-19FG10M | 3/4" | 7/16" | Chisel | Flash Galvanized | 10000 |
| 16S5-22FG10M | 7/8" | 7/16" | Chisel | Flash Galvanized | 10000 |
| 16S5-25FG10M | 1" | 7/16" | Chisel | Flash Galvanized | 10000 |
| 16S5-31FG10M | 1-1/4" | 7/16" | Chisel | Flash Galvanized | 10000 |
| 16S5-35FG10M | 1-3/8" | 7/16" | Chisel | Flash Galvanized | 10000 |
| 16S5-38FG10M | 1-1/2" | 7/16" | Chisel | Flash Galvanized | 10000 |
| 16S5-45FG10M | 1-3/4" | 7/16" | Chisel | Flash Galvanized | 10000 |
| 16S5-45SG10M | 1-3/4" | 7/16" | Chisel | Spec Galvanized | 10000 |
| 16S5-50FG10M | 2" | 7/16" | Chisel | Flash Galvanized | 10000 |
| 16S5-50SG10M | 2" | 7/16" | Chisel | Spec Galvanized | 10000 |

FITS TOOLS: **BOSTITCH®** 651S5 • **DEWALT®** DW66C-1 • **Hitachi®** NV65AH • **Makita®** AN611 • **Max®** CN565



| SKU | Size | Crown | Point Style | Finish | QTY |
|--------------|--------|-------|-------------|------------------|-------|
| 16S4-12FG10M | 1/2" | 1/2" | Chisel | Flash Galvanized | 10000 |
| 16S4-12SG10M | 1/2" | 1/2" | Chisel | Spec Galvanized | 10000 |
| 16S4-15FG10M | 5/8" | 1/2" | Chisel | Flash Galvanized | 10000 |
| 16S4-19FG10M | 3/4" | 1/2" | Chisel | Flash Galvanized | 10000 |
| 16S4-19SG10M | 3/4" | 1/2" | Chisel | Spec Galvanized | 10000 |
| 16S4-22FG10M | 7/8" | 1/2" | Chisel | Flash Galvanized | 10000 |
| 16S4-25FG10M | 1" | 1/2" | Chisel | Flash Galvanized | 10000 |
| 16S4-25SG10M | 1" | 1/2" | Chisel | Spec Galvanized | 10000 |
| 16S4-28FG10M | 1-1/8" | 1/2" | Chisel | Flash Galvanized | 10000 |
| 16S4-31FG10M | 1-1/4" | 1/2" | Chisel | Flash Galvanized | 10000 |
| 16S4-31SG10M | 1-1/4" | 1/2" | Chisel | Spec Galvanized | 10000 |
| 16S4-34FG10M | 1-3/8" | 1/2" | Chisel | Flash Galvanized | 10000 |
| 16S4-34SG10M | 1-3/8" | 1/2" | Chisel | Spec Galvanized | 10000 |
| 16S4-38FG10M | 1-1/2" | 1/2" | Chisel | Flash Galvanized | 10000 |
| 16S4-38SG10M | 1-1/2" | 1/2" | Chisel | Spec Galvanized | 10000 |
| 16S4-38SS-1M | 1-1/2" | 1/2" | Chisel | Stainless Steel | 1000 |
| 16S4-41FG10M | 1-5/8" | 1/2" | Chisel | Flash Galvanized | 10000 |
| 16S4-41SG10M | 1-5/8" | 1/2" | Chisel | Spec Galvanized | 10000 |
| 16S4-44FG10M | 1-3/4" | 1/2" | Chisel | Flash Galvanized | 10000 |
| 16S4-44SG10M | 1-3/4" | 1/2" | Chisel | Spec Galvanized | 10000 |
| 16S4-50FG10M | 2" | 1/2" | Chisel | Flash Galvanized | 10000 |
| 16S4-50SG10M | 2" | 1/2" | Chisel | Spec Galvanized | 10000 |

FITS TOOLS: **BOSTITCH®** 650S4

FASTENERS • STAPLES

BOSTITCH®




| SKU | Size | Crown | Point Style | Finish | QTY |
|--------------|--------|-------|-------------|------------------|-------|
| 16S2-12FG10M | 1/2" | 1" | Chisel | Flash Galvanized | 10000 |
| 16S2-15FG10M | 5/8" | 1" | Chisel | Flash Galvanized | 10000 |
| 16S2-15SG10M | 5/8" | 1" | Chisel | Spec Galvanized | 10000 |
| 16S2-19FG10M | 3/4" | 1" | Chisel | Flash Galvanized | 10000 |
| 16S2-19SG10M | 3/4" | 1" | Chisel | Spec Galvanized | 10000 |
| 16S2-22FG10M | 7/8" | 1" | Chisel | Flash Galvanized | 10000 |
| 16S2-22SG10M | 7/8" | 1" | Chisel | Spec Galvanized | 10000 |
| 16S2-25FG10M | 1" | 1" | Chisel | Flash Galvanized | 10000 |
| 16S2-25SG10M | 1" | 1" | Chisel | Spec Galvanized | 10000 |
| 16S2-31FG10M | 1-1/4" | 1" | Chisel | Flash Galvanized | 10000 |
| 16S2-31SG10M | 1-1/4" | 1" | Chisel | Spec Galvanized | 10000 |
| 16S2-38FG10M | 1-1/2" | 1" | Chisel | Flash Galvanized | 10000 |
| 16S2-38SG10M | 1-1/2" | 1" | Chisel | Spec Galvanized | 10000 |
| 16S2-50SG10M | 2" | 1" | Chisel | Spec Galvanized | 10000 |

FITS TOOLS: **BOSTITCH®** T40S2



| SKU | Size | Crown | Length | QTY | Fits |
|-----------------|---------------|-------|--------|------|--|
| STCR50191/4-1M | .050" x .019" | 7/16" | 1/4" | 1000 | BOSTITCH® T6-8, H30-8, P6C-8, US056-1 |
| STCR50191/4-6M | .050" x .019" | 7/16" | 1/4" | 6000 | |
| STCR50195/16-5M | .050" x .019" | 7/16" | 5/16" | 5000 | |
| STCR50193/8-1M | .050" x .019" | 7/16" | 3/8" | 1000 | |
| STCR50193/8-5M | .050" x .019" | 7/16" | 3/8" | 5000 | |
| STCR50191/2-1M | .050" x .019" | 7/16" | 1/2" | 1000 | BOSTITCH® T6-8, T6-80C2, PC3000, US056-1 |
| STCR50191/2-4M | .050" x .019" | 7/16" | 1/2" | 4000 | BOSTITCH® T6-8, T6-80C2, US056-1 |
| STCR50199/16-1M | .050" x .019" | 7/16" | 9/16" | 1000 | BOSTITCH® T6-8, T6-80C2, US056-1 |
| STCR50199/16-4M | .050" x .019" | 7/16" | 9/16" | 4000 | |



| SKU | Size | Crown | Length | QTY | Fits |
|--------------|---------------|-------|--------|------|--|
| STCR26191/4 | .026" x .019" | 7/16" | 1/4" | 5000 | BOSTITCH® H30-6, T5-6, P6C-6 |
| STCR26195/16 | .026" x .019" | 7/16" | 5/16" | 5000 | |
| STCR26193/8 | .026" x .019" | 7/16" | 3/8" | 5000 | |
| STCR26191/2 | .026" x .019" | 7/16" | 1/2" | 5000 | BOSTITCH® T5-6, PC30000C2, T6-60C2 |

Light-Wire
Staples

| SKU | Size | Crown | Length | QTY |
|---------|-------|-------|--------|------|
| SP191/4 | .190" | 3/8" | 1/4" | 5000 |

FITS TOOLS: **BOSTITCH®** P3-IND

BOSTITCH®

[www **BOSTITCH**.com](http://www.BOSTITCH.com)

701 E. Joppa Rd. • Towson, MD 21286

Customer Service 1-800-556-6696 • Fax 1-800-842-9360