


metabo **HPT**

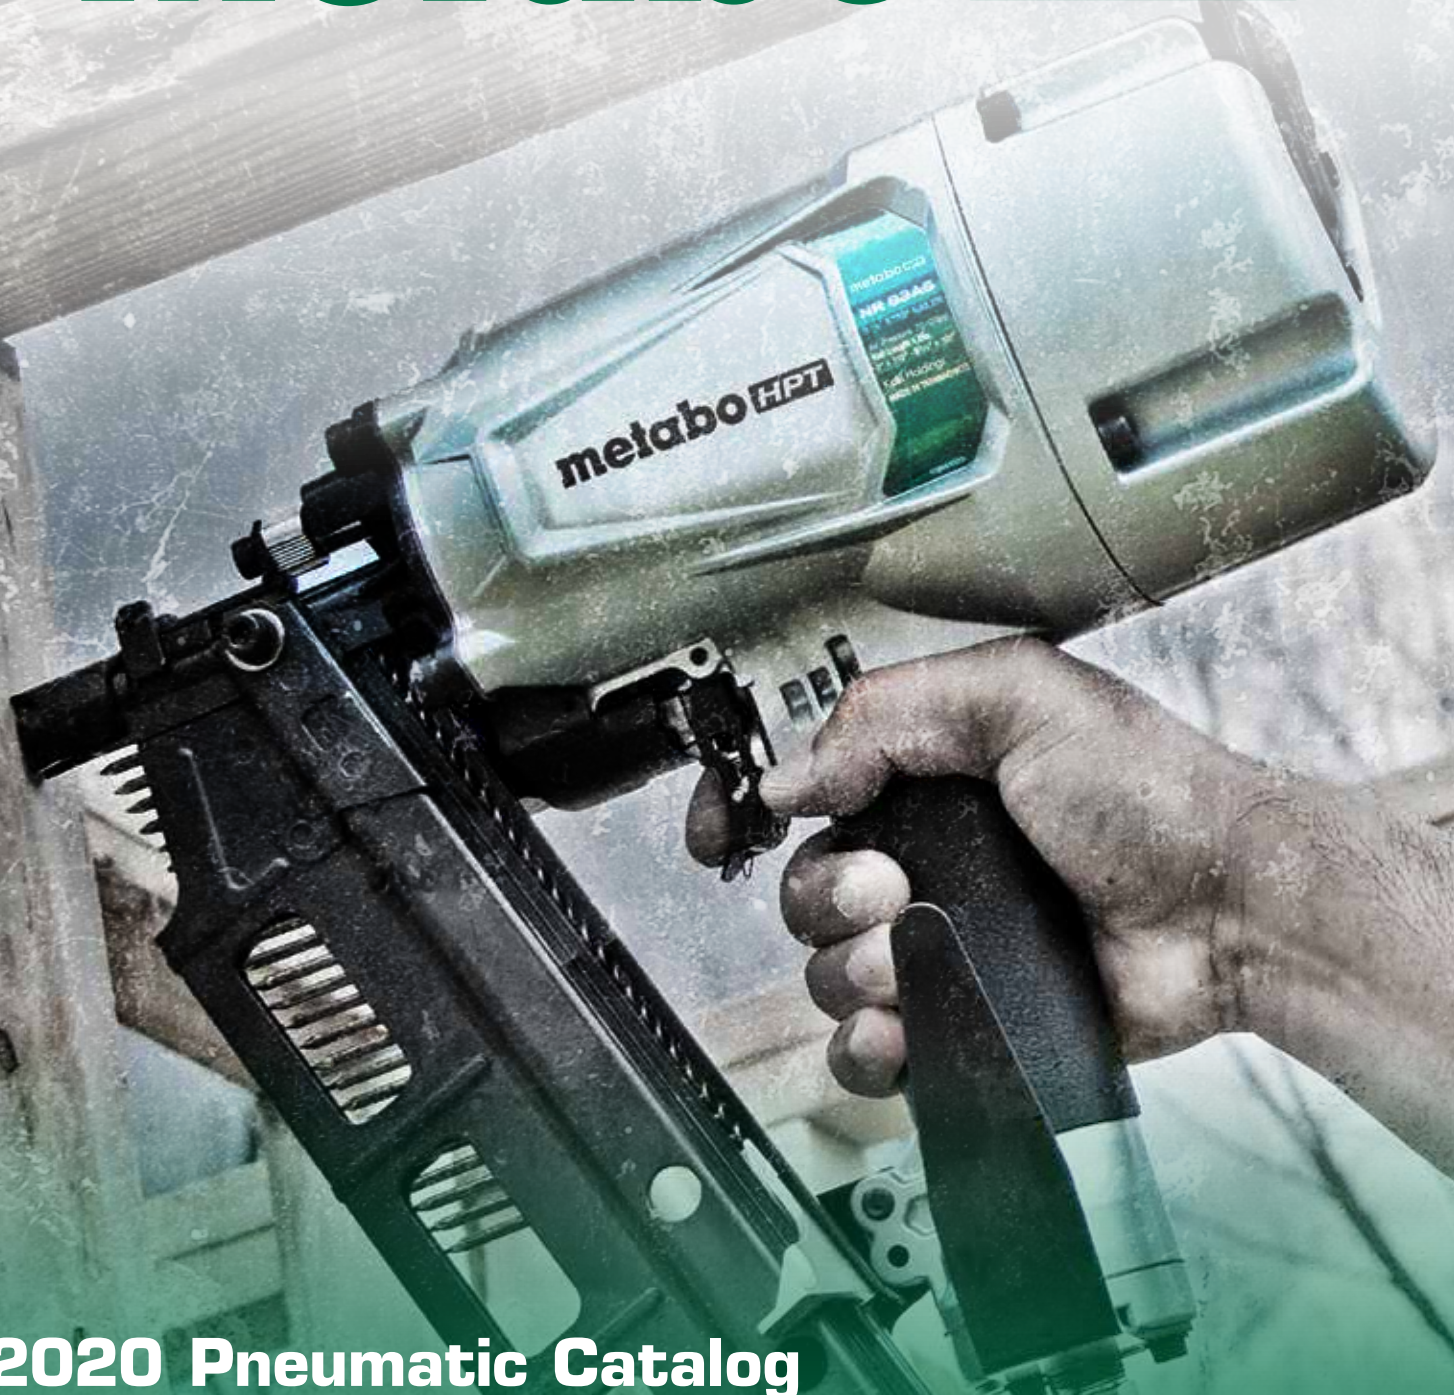

2020 Pneumatic Catalog

- Pneumatic Nailers & Staplers
- Cordless Nailers
- Compressors
- Fasteners

HITACHI
HITACHI POWER TOOLS



metabo HPT
DURABILITY FIRST



EP9018

HITACHI
HITACHI POWER TOOLS



metabo **HPT**
DURABILITY FIRST



The world is changing, and so is our company as we are pleased to make the change with Hitachi Power Tools renaming to Metabo HPT.

Over the last 70 years, Hitachi Power Tools has become a trusted everyday partner for many of our customers who use our tools on the job and have no time to waste. Metabo HPT will continue that legacy. Products will retain current brand identity: same color, same model numbers, same warranties and the same battery interchangeability. They will be made by the same people, in the same factories, with the same specifications and focus on innovation that customers have come to expect.

We will stay committed to continuous innovation and improvement through learning from experience. We will continue to support the construction industry professionals in doing what they do best – building things that last.

We put experience at the core of our brand philosophy because experience is the best teacher.

Meet Metabo HPT.



YOUR EXPERIENCE MATTERS. COUNT ON THE TOOLS THAT WON'T LET YOU DOWN.



NV45AB2
1 3/4" Coil Roofing Nailer
• Asphalt Shingles, Fiberglass Shingles, Insulation Boards



NR63A5
3 1/4" Plastic Collated Framing Nailer
• Framing, Decking, Fencing, Roof & Floor Sheathing




NR189ODR
3-1/2" Plastic Strip Framing Nailer
• Framing, Decking, Fencing, Roof & Floor Sheathing



NV65AH2
2 1/2" Coil Siding Nailer
• Siding, Wood Fencing



NT1865DMA
18V Li-Ion 15-Gauge Cordless Finish Nailer
• Window Trimming
Finish Applications
• Lifetime Tool Warranty



N3808AP
1-1/2" Cap Stapler
• Siding, Framing, Decking, Fencing, Roof & Floor Sheathing



N4004AB
1/4" Crown Flooring Stapler
• Hardwood & Engineered Hardwood Flooring Installation



KNT50AB
Finish Combo Kit
• Trim, Molding, Window & Door Casings, Staircases



NT50A5
2" 18-Gauge PRO Brad Nailer
• Moldings, Trim, Cabinets, and Furniture



Compressors



Pneumatic Nailers & Staplers




Cordless Nailers

FOR FULL WARRANTY INFO
SEE PAGE 26...



The Metabo HPT *DIFFERENCE* CYLINDER VALVE DRIVING SYSTEM

- Provides Faster Action • Just Like Original NR83

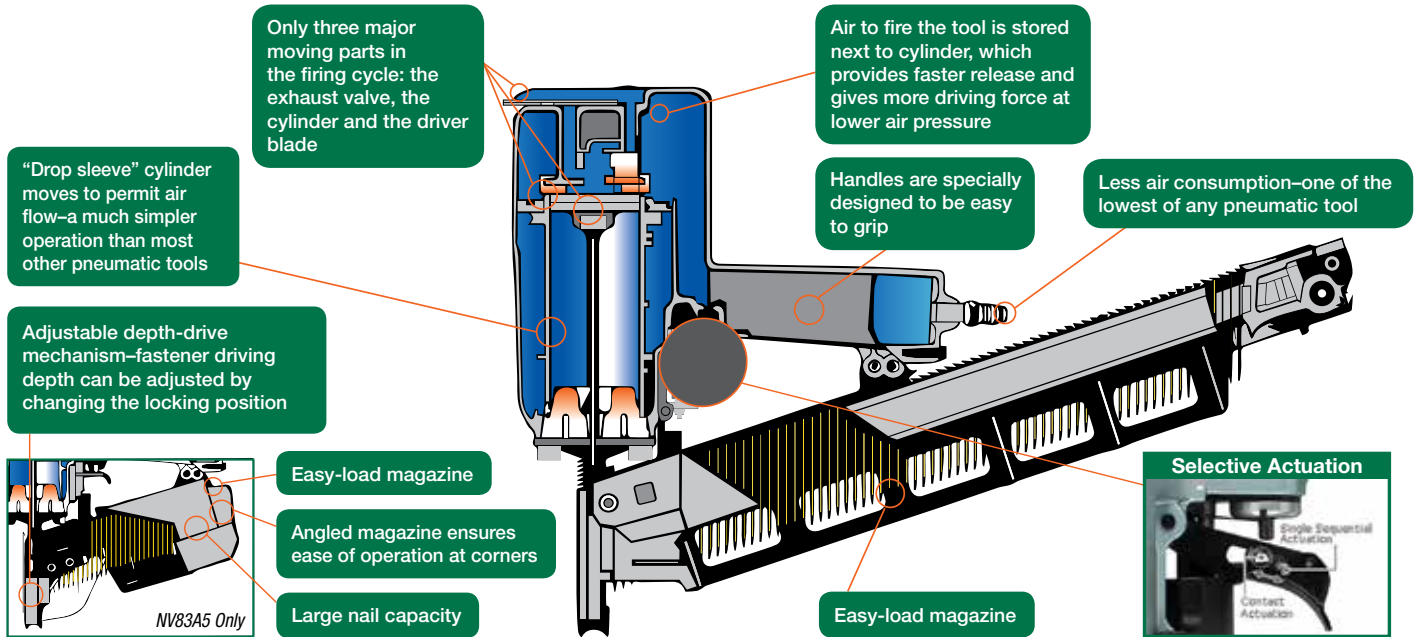

*Available on select pneumatic nailers

GENUINE METABO HPT FASTENERS

SAME FASTENERS


NEW NAME

- CONSISTENT QUALITY • ICC RECOGNIZED
- CONTRACTOR PREFERRED

For the full line of genuine Metabo HPT fasteners see pages 19-24

CORDLESS NAILERS

TOTAL FREEDOM

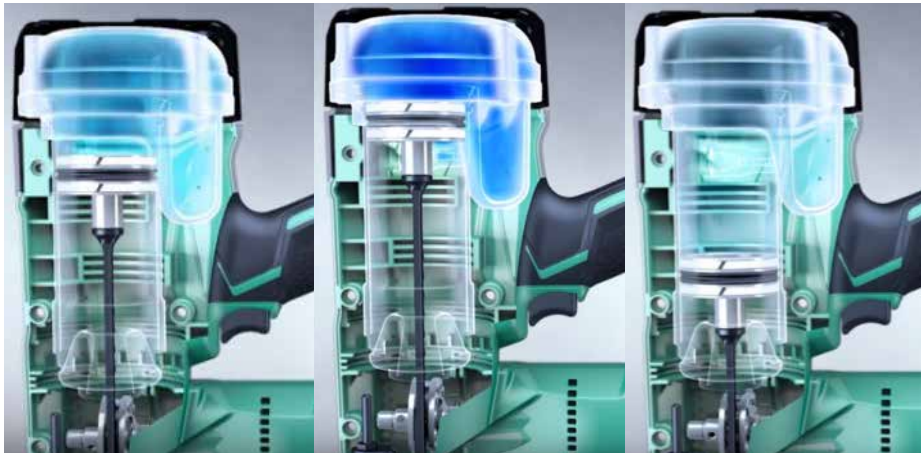

1) At Rest 2) Start of Drive Cycle 3) Driving

Featuring Metabo HPT's

AIR SPRING DRIVE SYSTEM

Similar performance to a pneumatic nailer!

Uses Compressed Air to Drive Each Nail

- Zero ramp up time
- 2-3 nails per second
- Recoil that feels like a pneumatic nailer
- No refilling of air tank required*

* Air tank does not require refill unless there is a malfunction of material components that require service center attention

COMPATIBLE WITH...



1.5Ah

COMPACT
3.0Ah

18V/5.0Ah
36V/2.5Ah

18V/8.0Ah
36V/4.0Ah



18V 8.0 Ah/36V 4.0 Ah
Li-Ion Battery

metabo HPT \$14.88 per Ah	COMPETITOR 1 \$22.11 per Ah	COMPETITOR 2 \$22.11 per Ah
---	--	--



Backward Compatibility
18V ⚡ **36V**
PROFESSIONAL POWER



18V 5.0 Ah/36V 2.5 Ah
Li-Ion Battery

metabo HPT \$17.80 per Ah	COMPETITOR 1 \$27.81 per Ah	COMPETITOR 2 \$25.80 per Ah	COMPETITOR 3 \$25.80 per Ah
---	--	--	--

* Comparing Metabo HPT battery vs competitor's battery sold at retail as of June 2019



NR83A5 NR83A5(S)

3-1/4" Plastic Strip Collated Framing Nailer




NR83A5(S)
Without Depth
Adjustment



- Cylinder Valve Drive System for rapid response and increased durability
- Tool-less depth of drive adjustment for flush fastening in varying materials (NR83A5 only)
- Selective actuation on trigger allows for either sequential or contact nailing
- Rubber grip for control and comfort during use
- Rafter hook included for convenience

Plastic Strip Collation, 21°



Specifications

Nail Capacity	50-70
Magazine Angle	21°
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight (w/o hook)	8.8 lbs

Includes

Rafter Hook (Ass'y)	889661M
Safety Glasses	875769

Optionals

No Mar Nose Cap	884080
-----------------	--------




NR90AC5

3-1/2" Plastic Strip Collated Framing Nailer



- Capable of driving up to 3-1/2" x 0.162" fasteners
- Selective actuation switch allows for quick transitions between sequential and contact nailing with the simple flip of a switch
- Tool free depth of drive adjustment to flush drive or countersink into varying material
- Two-step nail loading makes fastener replenishment quick and easy, reducing downtime

Plastic Strip Collation, 21°



Specifications

Nail Capacity	64-70
Magazine Angle	21° +/- 1°
Fitting	1/4" Industrial
Operating Pressure	70 - 120 PSI
Weight (w/o hook)	9 lbs

Includes

Rafter Hook (Ass'y)	889661M
Safety Glasses	875769

Optionals

No Mar Nose Cap	884080
-----------------	--------



FRAMING NAILERS




NR90AES1

3-1/2" Plastic Strip Collated Framing Nailer



- Lightweight and well-balanced for easy maneuverability
- Tool free depth of drive adjustment to flush drive or countersink into varying material
- Selective actuation for either sequential or contact nailing with a simple flip of a switch for tool-less transitions
- Two step nail loading for quick and easy reloads

Plastic Strip Collation, 21°



Specifications	
Nail Capacity	64-70
Magazine Angle	21°
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight	7.5 lbs

Includes	
Safety Glasses	875769

Optionals	
No Mar Nose Cap	886401



NR1890DR

3-1/2" 18V Lithium Ion Plastic Strip Framing Nailer




Also available
NR1890DRQ4
(Bare tool only)



- Air Spring Drive System delivers similar performance to a pneumatic tool
- Brushless motor for longer run time per charge, less maintenance and increased durability
- 400 Nails Per Charge using Metabo HPT's compact 3.0Ah Li-Ion battery
- Tool-less depth of drive
- Dry-fire lockout
- Selective actuation: Contact and sequential modes
- Battery charge indicator

Plastic Strip Collation, 21°



Specifications	
Volts	18
Nail Capacity	37
Magazine Angle	21°
Nails Per Charge	400
Battery Type	Lithium Ion Slide
Weight (with BSL1830C battery)	9.9 lbs

Includes	
(1) 18V Compact 3.0Ah Battery	339782M
BSL1830C	
Rapid Charger	UC18YFSL
Safety Glasses	875769
Carrying Bag	372294M



NR83AA5


3-1/4" Paper Collated Framing Nailer



CLIPPED & OFFSET ROUND HEAD

- Cylinder Valve Drive System for rapid response and increased durability
- Selective actuation on trigger allows for either sequential or contact nailing
- Open nose design for easy extraction should a nail jam
- Rafter hook included for convenience

Paper Strip Collation,
Clipped & Offset Round Head, 30°



Specifications	
Nail Capacity	68-94
Magazine Angle	30°
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight (w/o hook)	9.0 lbs

Includes	
Rafter Hook (Ass'y)	889661M
Safety Glasses	875769

Optionals	
No Mar Nose Cap	886401



NR90ADS1


3-1/2" Paper Collated Framing Nailer



CLIPPED & OFFSET ROUND HEAD

- Lightweight and well-balanced for easy maneuverability
- Tool free depth of drive adjustment to flush drive or countersink into varying material
- Selective actuation for either sequential or contact fire nailing with a simple flip of a switch for tool-less transitions
- Two step nail loading for quick and easy reloads

Paper Strip Collation,
Clipped & Offset Round Head, 30°



Specifications	
Nail Capacity	50-74
Magazine Angle	30°
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight	7.0 lbs

Includes	
Safety Glasses	875769

Optionals	
No Mar Nose Cap	886401



NR1890DC

3-1/2" 18V Lithium Ion Paper Strip Framing Nailer




Also available
NR1890DCQ4
(Bare tool only)

- Air Spring Drive System delivers similar performance to a pneumatic tool
- Brushless motor for longer run time per charge, less maintenance and increased durability
- 400 Nails Per Charge using Metabo HPT's compact 3.0Ah Li-Ion battery
- Selective actuation: contact and sequential modes
- Battery charge indicator

CLIPPED & OFFSET ROUND HEAD

Paper Strip Collation,
Clipped & Offset Round Head, 30°



Specifications

Volts	18
Nail Capacity	47
Magazine Angle	30°
Nails Per Charge	400
Battery Type	Lithium Ion Slide
Weight (with BSL1830C battery)	9.9 lbs

Includes

(1) 18V Compact 3.0Ah Battery	339782M
BSL1830C	
Rapid Charger	UC18YFSL
Safety Glasses	875769
Carrying Bag	372294M




NR90AFS1

3-1/2" Wire Weld Framing Nailer



- Selective actuation for either sequential or contact fire nailing with a simple flip of a switch for tool-less transitions
- Tool-free depth of drive adjustment provides simplicity and flexibility for perfectly flush fastening in various materials
- Dry-fire lockout prevents the nailer from firing when nail count is too low
- Two step nail loading for quick and easy reloads

Wire Weld Collation,
Offset Round Head, 28°



Specifications

Nail Capacity	100
Magazine Angle	28°
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight	7.3 lbs

Includes

Safety Glasses	875769
----------------	--------

Optionals

No Mar Nose Cap	886401
-----------------	--------



NR1890DC
3-1/2" 18V Lithium Ion Paper Strip Framing Nailer

SPECIALTY NAILERS




NH90AB

3-1/2" Palm Nailer



- Rubber grip for added comfort and reduced vibration
- 360° swivel plug for maximum flexibility
- Magnetic nose holds nail securely for precise fastener placement
- Drives most common bulk nails including finish, framing and timber



Specifications	
Nail Capacity	1
Fitting	1/4" Industrial
Operating Pressure	80-100 psi
Weight	1.3 lbs

Includes	
Safety Glasses	875769




NR38AK

1-1/2" Strap-Tite® Fastening System Strip Nailer



- Narrow design for ease of use in tight spaces
- Sequential firing mechanism ensures precision nail placement
- Unique positive safety allows tool to use nails as a guide without damaging collation



Specifications	
Nail Capacity	29
Magazine Angle	36°
Fitting	1/4" Industrial
Operating Pressure	80-120 psi
Weight	4.6 lbs

Includes	
Safety Glasses	875769




NR65AK2 NR65AK2S

2-1/2" Strap-Tite® Fastening System Strip Nailer



- Narrow design for ease of use in tight spaces
- Sequential firing mechanism ensures precision nail placement
- Unique positive safety allows tool to use nails as a guide without damaging collation

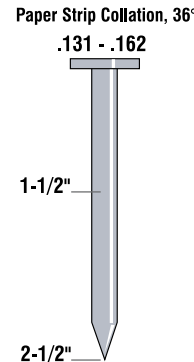

Specifications	
Nail Capacity	44
Nail Capacity NR65AK2(S)	22
Magazine Angle	36°
Fitting	1/4" Industrial
Operating Pressure	80-120 psi
Weight	6.4 lbs
Weight NR65AK2(S)	5.7 lbs

Includes	
Safety Glasses	875769

Optional	
Long Magazine Assembly	883456
Short Magazine Assembly	883469




NV45AB2

1-3/4" Coil Roofing Nailer



- Side loading magazine, convenient and easy for quick fastener replenishment
- Tool-less depth of drive adjustment for precision nailing/flush driving
- Carbide tipped push lever reduces wear
- Pneumatic nail feed mechanism powers both the nail advance and return for consistent operation even in the harshest of conditions



Specifications	
Nail Capacity	120
Magazine Angle	16°
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight	5.7 lbs

Includes	
Safety Glasses	875769

Optional	
Power Pack Set	877908






NV65AH2

2-1/2" Coil Siding Nailer



- Drives both wire collated and plastic sheet collated nails for added flexibility
- Tool-less depth of drive adjustment for precision nailing/flush driving
- Plastic shield deflects wire collation for added safety
- Adjustable air deflector directs the air exhaust in any direction

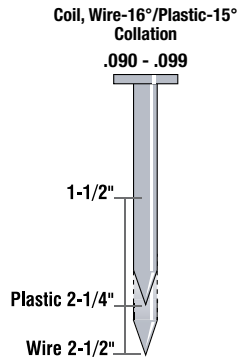

Specifications

Nail Capacity	200-300
Magazine Angle	16° (Wire) / 15° (Plastic)
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight	4.9 lbs

Includes

No Mar Nose Cap	878344
Safety Glasses	875769




NV50A1

2" Coil Utility Nailer



- High capacity canister holds up to 400 nails for less downtime
- Open magazine canister to quickly check nail quantity
- Angled magazine for ease of use in corner applications
- Plastic shield deflects wire collation for added safety



Specifications

Nail Capacity	400
Magazine Angle	16°
Air Inlet	3/8"
Operating Pressure	70-120 psi
Weight	4.2 lbs

Includes

Safety Glasses	875769
----------------	--------




NV75A5

3" Coil Siding/Framing Nailer



- Drives wire and plastic collated nails
- Side-load, tilt-bottom magazine for fast and easy reloads
- Tool free depth adjustment
- Selective actuation switch
- 360° adjustable exhaust
- Rafter hook

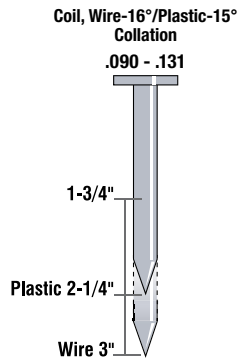

Specifications

Nail Capacity	200-300
Magazine Angle	16±1°
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight	5.7 lbs

Includes

Rafter Hook (Ass'y)	889661M
No Mar Nose Cap	883106
Safety Glasses	875769



NV65AH2
2-1/2" Coil Siding Nailer



NV65AN NV65ANS


2-1/2" Coil Pallet Nailer



NV65ANS
Single Sequential
Actuation Trigger

- 360° adjustable air deflector directs the air exhaust in any direction and away from the user
- Side load magazine for fast and easy reloads
- Open nose design for easy jam removal
- Clear plastic shield deflects wire collation away from the user for added safety
- Lightweight and well balanced at just 5.9 lbs. for less fatigue

Coil, Wire Collation, 16°
.080 - .099



Specifications	
Nail Capacity	200-300
Magazine Angle	16±1°
Fitting	1/4" Industrial
Operating Pressure	80-120 psi
Weight	5.9 lbs

Includes	
Sequential Trip Mechanism (NV65AN Only)	888451
Safety Glasses	875769




NV75AN(S1)

3" Coil Pallet Nailer



- Flat nose (safety push lever) for rapid driving as nailer slides across pallet
- Tool-less depth of drive adjustment for precision nailing/flush driving
- 360° adjustable air deflector directs the air exhaust away from the user
- Side load magazine for fast and easy reloads
- Plastic shield deflects wire collation for added safety

Coil, Wire Collation, 16°
.099 - .131



Specifications	
Nail Capacity	200-300
Magazine Angle	16±1°
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight	6.3 lbs

Includes	
Safety Glasses	875769
Sequential Trip Mechanism	888451
No Mar Nose Cap	888782




NV75AN

3" Coil Siding/Framing Nailer



- Drives both wire collated and plastic sheet collated nails for added flexibility
- Tool-less depth of drive adjustment for precision nailing/flush driving
- 360° adjustable air deflector directs the air exhaust away from the user
- Side load magazine for fast and easy reloads
- Plastic shield deflects wire collation for added safety

Coil, Wire-16°/Plastic-15°
Collation
.090 - .131



Specifications	
Nail Capacity	200-300
Magazine Angle	16±1°
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight	6.3 lbs

Includes	
Safety Glasses	875769
Sequential Trip Mechanism	888451
No Mar Nose Cap	888782




NV83A5

3-1/4" Coil Framing Nailer



- Cylinder Valve Drive System for rapid response and increased durability
- Tool-less depth of drive adjustment for flush fastening in varying materials
- Selective actuation on trigger allows for either sequential or contact nailing
- Side load pop-out magazine for fast and easy reloads
- Open nose design for easy nail removal
- Rafter hook included for convenience

Coil, Wire Collation, 16°
.099 - .131



Specifications	
Nail Capacity	200-300
Magazine Angle	16°
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight (w/o hook)	9.1 lbs

Includes	
Safety Glasses	875769
Hook Ass'y	889661






NV90AGS

3-1/2" Coil Framing Nailer



- Selective actuation switch allows for either sequential or contact nailing with the simple flip of a switch
- Tool-less depth of drive dial adjusts for flush fastening in varying materials
- Side load, tilt bottom magazine for fast and easy reloads
- Lightweight and well balanced

Coil, Wire Collation, 16°



Specifications

Nail Capacity	200-300
Magazine Angle	16°
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight	7.7 lbs

Includes

Safety Glasses	875769
----------------	--------

Optional

No Mar Nose Cap	883106
-----------------	--------




NT65MA4(S)

2-1/2" 15-Gauge Angled Finish Nailer with Air Duster



- Equipped with a non-slip elastomer grip trigger and ergonomically designed simple flip selective actuation switch
- Integrated air duster button allows air from the compressor to clear away dust and debris from the work surface in preparation for the nail
- Selective actuation switch lets the user easily select contact or sequential fire modes
- Depth of drive adjustment for accurate nail depth in varying materials

15-Gauge, 34°



Specifications

Nail Capacity	100
Magazine Angle	34°
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight	4.2 lbs

Includes

Safety Glasses	875769
Case	884340



NT1865DMA


2-1/2" 18V Lithium Ion 15-Gauge Angled Finish Nailer



Also available
NT1865DMAQ4
(Bare tool only)

- Air Spring Drive System delivers similar performance to a pneumatic tool
- Powered by Metabo HPT's Compact 3.0Ah Lithium Ion slide-type battery for fade free power
- 1,100 Nails per charge using compact 3.0Ah battery
- Selective actuation switch lets the user easily select contact or sequential nailing
- Tool-less depth of drive adjustment
- Integrated belt hook so the tool is always close at hand
- Built-in LED light
- Dry-fire Lockout

15-Gauge, 34°



Specifications

Volts	18
Nail Capacity	100
Magazine Angle	34°
Nails Per Charge	1,100 Nails
Battery Type	Lithium Ion Slide
Weight (with BSL1830C battery)	7.5 lbs

Includes

(1) 18V Compact 3.0Ah Battery BSL1830C	339782
Rapid Charger	UC18YFSL
No Mar Nose Cap	371094
Safety Glasses	875769
Carrying Bag	371108



NT65MA4(S)
2-1/2" 15-Gauge Pro Finish Nailer




NT65A5

2-1/2" 16-Gauge Pro Finish Nailer

NEW!
INCLUDES
RAFTER
HOOK



- Cylinder valve drive system for rapid response and increased durability
- Accepts 3 strips of nails at a time and a locking feeder system makes replenishment quick and easy
- High grade aluminum and steel magazine provides exceptional durability and protects against jams
- Selective actuation allows for quick changes between sequential and contact nailing
- 360 degree adjustable hook can be mounted in any direction for user preference



Specifications

Nail Capacity	150
Magazine Angle	Straight
Operating Pressure	70-120 PSI
Weight (without circle)	4.9 lbs

Includes

Safety Glasses	875679
No Mar Tip	881751
Carrying Bag	371108
Hook Ass'y	889661M




NT65M2(S)

2-1/2" 16-Gauge Finish Nailer with Air Duster



- Equipped with a non-slip elastomer grip trigger and ergonomically designed simple flip actuation switch
- Integrated air duster button allows air from the compressor to clear away dust and debris
- Selective actuation switch lets the user easily select contact or sequential fire modes
- Depth of drive dial allows the user to easily adjust the drive depth for a professional finish



Specifications

Nail Capacity	100
Magazine Angle	Straight
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight	3.7 lbs

Includes

Safety Glasses	875679
Case	885676




NT1865DM

2-1/2" 18V Lithium Ion 16-Gauge Straight Finish Nailer



Also available
NT1865DMQ4
(Bare tool only)

- Powered by Metabo's HPT Compact 3.0Ah Lithium Ion slide-type battery for fade free power
- Selective actuation switch lets the user easily select contact or sequential nailing
- Tool-less depth of drive adjustment
- Integrated belt hook so the tool is always close at hand
- Built-in LED light
- Dry-fire Lockout



Specifications

Volts	18
Nail Capacity	100
Magazine Angle	Straight
Nails Per Charge	1,500 Nails
Battery Type	Lithium Ion Slide
Weight (with BSL1830C battery)	7.3 lbs

Includes

(1) 18V Compact 3.0Ah Battery BSL1830C	339782
Rapid Charger	UC18YFSL
Safety Glasses	875679
Carrying Bag	371108




NT50A5

2" 18-Gauge Pro Brad Nailer

NEW!



- Integrated air duster that is easily thumb operated to clear away dust and debris
- Tool-less depth of drive adjustment to countersink or flush drive into a variety of materials
- Automatic dry-fire lockout prevents the nailer from operating when no nails are in the magazine
- Selective Actuation for quick changes between sequential and contact nailing with the simple flip of a switch



Specifications

Nail Capacity	100
Magazine Angle	Straight
Fastener Length	5/8" - 2"
Operating Pressure	70-120 psi
Weight	2.9 lbs

Includes

Safety Glasses	875679
No Mar Tip	885887
Carrying Bag	372210






NT50AE2(S)

2" 18-Gauge Brad Nailer



- Equipped with a non-slip elastomer grip trigger and ergonomically designed simple flip selective actuation switch
- Selective actuation switch lets the user easily select contact or sequential fire modes
- Tool-less, easy-to-clear nose for quick and simple nail extraction should a nail jam during use
- Depth of drive dial allows the user to easily adjust the drive depth for a professional finish



Specifications

Nail Capacity	100
Magazine Angle	Straight
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight	2.2 lbs

Includes

Safety Glasses	875769
No Mar Tip	885887
Case	885902




NT1850DE

2" 18V Lithium Ion 18-Gauge Brad Nailer



Also available
NT1850DEQ4
(Bare tool only)

- Air Spring Drive System offers similar performance to a pneumatic nailer
- Powered by Metabo HPT's Compact 3.0Ah Lithium Ion slide-type battery for fade free power
- 1,650 nails per charge with compact 3.0Ah battery
- Selective actuation switch lets the user contact or sequential nailing
- Tool-less depth of drive adjustment for flush drives into various materials
- Integrated belt hook so tool is close at hand
- Built-in LED light



Specifications

Volts	18
Nail Capacity	100
Magazine Angle	Straight
Nails Per Charge	1,650
Battery Type	Lithium Ion Slide
Weight (with BSL1830C battery)	7.3 lbs

Includes

(1) 18V Compact 3.0Ah Battery BSL1830C	339782
Rapid Charger	UC18YFSL
No Mar Nose Cap	886846
Safety Glasses	875769
Carrying Bag	371108




N3808AP

1-1/2" 18-Gauge Cap Stapler



- Ideal for: roof felt, house wrap and foamboard installation
- 200 cap & staple capacity allows for fewer reloads & more productivity
- Quick-clear jam release increases user efficiency
- Depth of drive adjustment
- Lightweight & compact for easier maneuverability



Specifications

Staple Gauge	18
Staple & Cap Capacity	200 each
Magazine Angle	Straight
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight	4.8 lbs

Includes

Safety Glasses	875769
Contact (Bump) Trigger	889390



NT50AE2(S)
2" 18-Gauge Brad Nailer



NP50A


2" 23-Gauge Pro Pin Nailer

NEW!

INCLUDES RAFTER HOOK



- Trigger Lock Switch protects against unintentional use
- Depth of Drive Adjustment to countersink or flush drive into a variety of materials
- Automatic Dry-fire Lockout prevents the nailer from operating with 6 nails or less in the magazine
- High Grade Aluminum Magazine provides exceptional durability and protects against jams
- Sequential Actuation with Dual Triggers ensures accurate pin placement every time



Specifications

Nail Capacity	100
Magazine Angle	Straight
Operating Pressure	64-100 PSI
Air Inlet	1/4"
Weight (without hook)	3.3 lbs

Includes

Safety Glasses	875769
No Mar Tip (x2)	889621
Lubricant Oil	877153
Carrying Case	889639




NP35A

1-3/8" 23-Gauge Micro Pin Nailer



- Large fastener capacity for fewer reloads and less downtime
- Dual trigger for safe and accurate placement of fasteners
- Rear exhaust directs oil and debris away from the work surface
- Depth adjustment for flush drives into a variety of surfaces
- Reload indicator for easy visual recognition of low nail quantities to avoid dry firing



Specifications

Nail Capacity	100
Magazine Angle	Straight
Operating Pressure	65-100 PSI
Air Inlet	1/4"
Weight	2.0 lbs

Includes

Safety Glasses	887574
Case	887572
Lubricant Oil	877153




NP18DSAL

1-3/8" 18V Lithium-Ion 23-Gauge Pin Nailer



Also available NP18DSALQ4 (Bare tool only)

- Powered by Metabo HPT's Compact 3.0Ah Lithium Ion slide-type battery for fade free power
- Tool-less depth of drive adjustment for flush drives into various materials
- Dry-fire lockout prevents nail activation when pin count is low
- No push tip reduces marring & provides a clean finish



Specifications

Volts	18
Nail Capacity	100
Magazine Angle	Straight
Nails Per Charge	~3,000
Battery Type	Lithium Ion Slide
Weight (with BSL1830C battery)	4.4 lbs

Includes

(1) 18V Compact 3.0Ah Battery BSL1830C	339782
Charger	UC18YFSL
Safety Glasses	875769
Carrying Bag	371108



NP35A
1-3/8" 23-Gauge Micro Pin Nailer






N3804A5

1-1/2" Narrow Crown Pro Finish Stapler

NEW!



- Integrated air duster that is easily thumb operated to clear away dust and debris
- Tool-less depth of drive adjustment to countersink or flush drive into a variety of materials
- High grade steel magazine provides exceptional durability and protects against jams
- Selective actuation allows for quick changes between sequential and contact nailing with flip of a switch
- Quick release nose provides easy access to the nail chamber should a nail jam



Specifications	
Staple Gauge	18
Staple Capacity	100
Magazine Angle	Straight
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight	2.7 lbs

Includes	
Safety Glasses	875769
No Mar Tip	885969
Carrying Bag	372210M




N3804AB3

1/4" Narrow Crown Stapler



- Equipped with a non-slip elastomer grip trigger
- Ergonomically designed simple flip actuation switch allows for either sequential or contact nailing
- Tool free depth adjustment allows for a professional finish with varying materials
- Tool-less, easy to clear nose for quick and simple staple extraction



Specifications	
Staple Gauge	18
Staple Capacity	100
Magazine Angle	Straight
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight	2.3 lbs

Includes	
Safety Glasses	875769
No Mar Tip	885969
Carrying Case	885902




N5008AC2

7/16" Standard Crown Stapler



- Cylinder Valve Drive System for rapid response and increased durability
- High capacity magazine allows for fewer staple replenishments
- Quick-clear jam release increases user efficiency
- Depth of drive adjustment to countersink or flush drive staples



Specifications	
Staple Gauge	16
Staple Capacity	157
Magazine Angle	Straight
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight	4.4 lbs

Includes	
Safety Glasses	875769
Hex Bar Wrench (4mm)	944458

Optional	
Sequential Trip Mechanism	876762




N5010A

1/2" Standard Crown Stapler



- Cylinder Valve Drive System for rapid response and increased durability
- High capacity magazine allows for fewer staple replenishments
- Depth of drive control for flush drives into various materials
- Tool-less, easy to clear nose for quick and simple staple extraction



Specifications	
Staple Gauge	16
Staple Capacity	150
Magazine Angle	Straight
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight	4.4 lbs

Includes	
Safety Glasses	875769
Hex Bar Wrench (4mm)	944458

Optional	
Sequential Trip Mechanism	876762



STAPLERS / FLOORING STAPLERS




N5021A

15/16" Wide Crown Stapler



- Cylinder Valve Drive System for rapid response and increased durability
- High capacity magazine allows for fewer staple replenishments
- Depth of drive control for flush drives into various materials
- Tool-less, easy to clear nose for quick and simple staple extraction



Specifications	
Staple Gauge	16
Staple Capacity	150
Magazine Angle	Straight
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight	4.7 lbs

Includes	
Safety Glasses	875769

Optional	
Sequential Trip Mechanism	876762




N5024A2

1" Wide Crown Stapler



- Cylinder Valve Drive System for rapid response and increased durability
- High capacity magazine allows for fewer staple replenishments
- Depth of drive control for flush drives into various materials
- Tool-less, easy to clear nose for quick and simple staple extraction



Specifications	
Staple Gauge	16
Staple Capacity	157
Magazine Angle	Straight
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight	4.7 lbs

Includes	
Safety Glasses	875769

Optional	
Sequential Trip Mechanism	876762




N4004AB

1/4" Crown Flooring Stapler

NEW!



- Tool-less depth adjustable base from 5/16" to 7/16" for solid hardwood and from 1/2" to 5/8" for engineered hardwoods
- High grade composite magazine provides exceptional durability and protects against jams while minimizing overall tool weight
- Sequential actuation ensures accurate staple placement every time
- 360° adjustable exhaust allows air exhaust to be pointed in any direction



Specifications	
Staple Gauge	18
Staple Capacity	100
Magazine Angle	Straight
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight	3.1 lbs

Includes	
Safety Glasses	875769
Hex Bar Wrench (3mm)	943277
Hex Bar Wrench (4mm)	944458
Air Tool Oil	877153




N5010AB

1/2" Crown Flooring Stapler

NEW!



- Tool-less depth adjustable base between 1/2" and 3/4" make this the ideal tool for solid hardwood and engineered hardwood installations
- Top-loading, aluminum magazine provides exceptional durability and allows for quick and easy reloads
- Mallet actuated pneumatic operation ensures easy and accurate staple placement every time
- Detachable long reach handle provides tool control and end-user comfort while operating tool



Specifications	
Staple Gauge	15.5
Staple Capacity	102
Fitting	1/4" Industrial
Operating Pressure	70-100
Weight	11.2 lbs

Specifications	
Mallet	330631
Hex Bar Wrench (3mm)	943277
Hex Bar Wrench (4mm)	944458
Hex Bar Wrench (5mm)	944459
Hex Bar Wrench (6mm)	872422
Air Tool Oil	877153
Safety Glasses	875769





EC28M

1 Gallon Quiet Compressor



- Ultra quiet operation at only 59 dB's
- Quiet industrial oil-free pump provides high durability with no maintenance
- Motor Overload Protection stops the motor in a possible overload situation
- Stainless steel braided discharge hose resist corrosion and remains flexible
- Compact and lightweight for easy transport

Specifications

Power Output	0.5 Run HP
Tank Capacity	1 Gallon
Amps	2.8
Max Pressure	125 PSI
CFM	0.8 @ 90 PSI
Weight	25.2 lbs



EC99S

Portable 4 Gallon Twin Stack Air Compressor



- Motor Thermal Overload Protection stops the motor in a possible overheating situation
- Cast iron, oil lubricated pump for cooler operation and greater longevity
- 15 Amp direct drive induction motor for efficient and reliable performance
- Locking regulator ensures the proper pressure is delivered to your tool
- Industrial air pressure gauges, encased in steel for higher durability
- 105 On/135 Off pressure switch for less cycling
- Universal quick coupler for fast tool changes

Specifications

Power Output	2.0 Run HP
Tank Capacity	4 Gallon
Amps	15
Max Pressure	135 PSI
CFM	3.1 @ 90 PSI
Weight	52.9 lbs

Includes

Synthetic Oil (SAE15W40 8oz.)	115337
Oil Dipstick	881469



EC2510E

8 Gallon Gas Powered Wheeled Air Compressor



- Powered by a professional grade Honda GX engine
- Solid cast iron cylinder provides industry recognized premium material for long life, consistent compression and low oil carryover
- Oversized oil level site glass allows everyone to monitor the oil level for the pump avoiding pump damage due to lock up from inadequate oil supply

* The power rating of the engine indicated in this document is the net power output tested on a production engine for the engine model and measured in accordance with SAE J1349 at a specified rpm. Mass production engines may vary from this value. Actual power output for the engine installed in the final machine will vary depending on numerous factors, including the operating speed of the engine in application, environmental conditions, maintenance, and other variables.

Specifications

Power Output	5.5 Net HP* @ 3,600 RPM
Tank Capacity	8 Gallon
Pump RPM	1,700
Motor RPM	3,640 RPM
Max Pressure	145 PSI
CFM	@ 90 PSI 9.3
Weight	190 lbs

Includes

Breather Pipe Plug	885483
Wheel	160616



EC2610E

8 Gallon Gas Powered Wheeled Air Compressor



- Powered by a professional grade Honda GX engine
- Solid cast iron cylinder provides industry recognized premium material for long life, consistent compression and low oil carryover
- Oversized oil level site glass allows everyone to monitor the oil level for the pump avoiding pump damage due to lock up from inadequate oil supply

* The power rating of the engine indicated in this document is the net power output tested on a production engine for the engine model and measured in accordance with SAE J1349 at a specified rpm. Mass production engines may vary from this value. Actual power output for the engine installed in the final machine will vary depending on numerous factors, including the operating speed of the engine in application, environmental conditions, maintenance, and other variables.

Specifications

Power Output	5.5 Peak HP* @ 3,600 RPM
Tank Capacity	8 Gallon
Pump RPM	1,000
Motor RPM	3,600 RPM
Max Pressure	145 PSI
CFM	9.5 @ 90 PSI
Weight	170 lbs

Includes

Breather Pipe Plug	888895
Wheel	160616

COMPRESSOR KIT / RESERVE AIR TANK



KNT50AB (EC710S)

6 Gallon Pancake Air Compressor + Finish Nailer Combo Kit



NT50AE2(S)

- Motor Thermal Overload Protection stops the motor in a possible overheating situation
- Industrial oil-free pump provides high durability with no-maintenance
- Industrial air pressure gauges, encased in steel, for higher durability
- Two universal quick couplers for fast tool changes
- 2.8 CFM @ 90 PSI, 150 Max PSI

Specifications (EC710 Compressor)

Power Output	1.0 Run HP
Tank Capacity	6 Gallon
Amps	12
Max Pressure	150 PSI
CFM	2.8 @ 90 PSI
Weight	36.5 lbs

Specifications (NT50AE2S)

See page 13

Includes

Pancake Compressor	EC710S
NT50AE2 2" 18Ga Finish Nailer	
25' Premium Hybrid Hose	11515B
Safety Glasses	875769



UA3810AB

10 Gallon ASME Certified Reserve Air Tank



- Industrial Ball (Shut-off) Valve on Input allows tank to be filled and disconnected from compressor without it draining itself
- 5 Quick Connect Couplers allow for easy one handed connections of hoses and/or splitters
- Roll Cage Design protects regulator and gauges
- Industrial Pressure Gauges are encased in steel for high durability
- Angled Steel Legs provide additional support, stability, and increase durability despite the abuse endured by hostile jobsite use
- Professional 1 Year Warranty for peace of mind

Specifications

Tank Type	Keg
Tank Capacity	10 Gallon
Max Pressure	175 PSI
No. of Outputs	5
No. of Inputs	1
Dimensions (L x W x H)	23" x 13" x 20"
Weight	39.5 lbs

Includes

(4) 1/4" Universal Couplers



EC28M
1 Gallon Quiet Compressor



Fastener Coating Key:

- Basic Bright
- Heat Treated / Hardened
- Electro Galvanized
- Hot Dipped Galvanized
- Stainless Steel

Fastener Description Key:

- AL = Aluminum
- BS = Basic Bright
- EG = Electro Galvanized
- HDG = Hot Dipped Galvanized
- HT = Heat Treated or Hardened
- SS = Stainless Steel
- SM = Smooth Shank
- RG = Ring Shank
- SC = Screw Shank
- FC = Fiber Cement Nail
- BL = Blunt Point
- DP = Diamond Point

21° (+/- 1°) FULL ROUND HEAD PLASTIC STRIP NAILS

Item Code	Description	Boxes Per Ctn	M's Per Box	M's Per Ctn	Ctns/Skid
○ 1000HPT	1-1/2" x .148 SM BS	-	-	5	48
○ 10100HPT	2" x .113 SM BS	-	-	6	48
○ 10122HPT	2" x .113 RG BS	-	-	6	48
○ 10134HPT	2-1/8" x .148 SM BS	-	-	4	48
○ 10135HPT	2-1/4" x .148 SM BS	-	-	4	48
○ 10102HPT	2-3/8" x .113 SM BS	-	-	5	48
○ 10102MHPT	2-3/8" x .113 SM BS	-	-	2	96
○ 10103HPT	2-3/8" x .113 RG BS	-	-	5	48
○ 10103MHPT	2-3/8" x .113 RG BS	-	-	2	96
○ 10203HPT	2-3/8" x .113 SC BS	-	-	5	48
○ 20103SHPT	2-3/8" x .113 RG BS	4	1	4	60
○ 10143HPT	2-3/8" x .148 SM BS	-	-	4	48
○ 10143MHPT	2-3/8" x .148 SM BS	-	-	2	96
○ 10144HPT	2-3/8" x .148 RG BS	-	-	4	48
○ 10244HPT	2-3/8" x .148 SC BS	-	-	4	48
○ 20143SHPT	2-3/8" x .148 SM BS	4	1	4	48
○ 10131HPT	2-1/2" x .131 RG BS	-	-	5	48
○ 10132HPT	2-1/2" x .131 SM BS	-	-	5	48
○ 10132MHPT	2-1/2" x .131 SM BS	-	-	2	96
○ 20132SHPT	2-1/2" x .131 SM BS	4	1	4	60
○ 20127HPT	2-3/4" x .120 SC BS	-	-	4	48
○ 10105HPT	3" x .120 SM BS	-	-	4	48
○ 10105MHPT	3" x .120 SM BS	-	-	2	96
○ 10124HPT	3" x .120 SC BS	-	-	4	48
○ 10133HPT	3" x .120 RG BS	-	-	4	48
○ 20105SHPT	3" x .120 SM BS	4	1	4	48
○ 10110HPT	3" x .131 SM BS	-	-	4	48
○ 10110MHPT	3" x .131 SM BS	-	-	2	96
○ 10186HPT	3" x .131 RG BS	-	-	4	48
○ 20110SHPT	3" x .131 SM BS	4	1	4	48
○ 10136HPT	3" x .148 SM BS	-	-	4	48
○ 10107HPT	3-1/4" x .120 SM BS	-	-	4	48
○ 10109HPT	3-1/4" x .131 SC BS	-	-	4	48
○ 10111HPT	3-1/4" x .131 SM BS	-	-	4	48
○ 10111MHPT	3-1/4" x .131 SM BS	-	-	2	96
○ 20111SHPT	3-1/4" x .131 SM BS	4	1	4	48
○ 10138HPT	3-1/4" x .148 SM BS	-	-	3	48
○ 10138MHPT	3-1/4" x .148 SM BS	-	-	2	96
○ 20138SHPT	3-1/4" x .148 SM BS	4	1	4	48
○ 10120HPT	3-1/2" x .131 SM BS	-	-	4	48
○ 10140HPT	3-1/2" x .162 SM BS	-	-	3	48
● 10198HPT	2-1/4" x .120 SC HT	-	-	5	48
● 10199HPT	2-1/4" x .120 SM HT	-	-	5	48
● 10123HPT	2" x .113 RG EG	-	-	6	48
● 10104HPT	2-3/8" x .113 SM EG	-	-	5	48
● 10112HPT	2-3/8" x .113 RG EG	-	-	5	48
● 10155HPT	2-1/2" x .131 SM EG	-	-	5	48
● 10106HPT	3" x .120 SC EG	-	-	4	48
● 10113HPT	3" x .120 SM EG	-	-	4	48
● 10117HPT	3" x .120 RG EG	-	-	4	48
● 10115HPT	3" x .131 SM EG	-	-	4	48
● 10119HPT	3-1/4" x .120 SC DP EG	-	-	4	48
● 10116HPT	3-1/4" x .131 SM EG	-	-	4	48

21° (+/- 1°) FULL ROUND HEAD PLASTIC STRIP NAILS

Item Code	Description	Boxes Per Ctn	M's Per Box	M's Per Ctn	Ctns/Skid
● 10171MHPT	2" x .113 RG HDG	-	-	2	96
● 20171SHPT	2" x .113 RG HDG	4	1	4	60
● 10301HPT	2-1/4" x .148 SM HDG	-	-	4	48
● 10159HPT	2-3/8" x .113 SC DP HDG	-	-	5	48
● 10160HPT	2-3/8" x .113 SM HDG	-	-	5	48
● 10161HPT	2-3/8" x .113 RG HDG	-	-	5	48
● 10161MHPT	2-3/8" x .113 RG HDG	-	-	2	96
● 20161SHPT	2-3/8" x .113 RG HDG	4	1	4	60
● 10307HPT	2-3/8" x .148 SM HDG	-	-	4	48
● 10168HPT	2-1/2" x .131 SM HDG	-	-	4	48
● 10311HPT	2-1/2" x .131 RG HDG	-	-	4	48
● 10165HPT	3" x .120 SC DP HDG	-	-	4	48
● 10165MHPT	3" x .120 SC DP HDG	-	-	2	96
● 10300HPT	3" x .120 SM HDG	-	-	4	48
● 10302HPT	3" x .120 RG HDG	-	-	4	48
● 10302MHPT	3" x .120 RG HDG	-	-	2	96
● 20302SHPT	3" x .120 RG HDG	4	1	4	48
● 10162HPT	3" x .131 SM HDG	-	-	4	48
● 10162MHPT	3" x .131 SM HDG	-	-	2	96
● 10167HPT	3" x .148 SM HDG	-	-	4	48
● 10166HPT	3-1/4" x .120 SC DP HDG	-	-	4	48
● 10166MHPT	3-1/4" x .120 SC DP HDG	-	-	2	96
● 10309HPT	3-1/4" x .120 RG HDG	-	-	4	48
● 10309MHPT	3-1/4" x .120 RG HDG	-	-	2	96
● 10163HPT	3-1/4" x .131 SM HDG	-	-	4	48
● 10163MHPT	3-1/4" x .131 SM HDG	-	-	2	96
● 10306HPT	3-1/4" x .131 SC HDG	-	-	4	48
● 20163SHPT	3-1/4" x .131 SM HDG	4	1	4	48
● 10164HPT	3-1/2" x .131 SM HDG	-	-	4	48
● 10303HPT	3-1/2" x .162 SM HDG	-	-	3	48

21° (+/- 1°) PLASTIC STRIP BALLISTIC FASTENERS

● 17640HPT	8 x 1-3/4" Threaded SC EG	4	1	4	48
● 17641HPT	8 x 2" Threaded SC EG	4	1	4	48
● 17644HPT	8 x 2-1/4" Threaded SC EG	4	1	4	48
● 17642HPT	8 x 2-1/2" Threaded SC EG	4	1	4	48
● 17643HPT	8 x 2-3/4" Threaded SC EG	4	1	4	48
● 17645HPT	8 x 3" Threaded SC EG	4	1	4	48



NR83A5
3-1/4" Plastic Strip Framing Nailer

ALSO FITS:

- NR83A2
- NR83A3
- NR83A3(S)
- NR90AE(S1)
- NR1890DR

Fits most round head plastic strip collated framing nailers

Fastener Coating Key:

- Basic Bright
- Heat Treated / Hardened
- Electro Galvanized
- Hot Dipped Galvanized
- Stainless Steel

Fastener Description Key:

- AL = Aluminum
- BS = Basic Bright
- EG = Electro Galvanized
- HDG = Hot Dipped Galvanized
- HT = Heat Treated or Hardened
- SS = Stainless Steel
- SM = Smooth Shank
- RG = Ring Shank
- SC = Screw Shank
- FC = Fiber Cement Nail
- BL = Blunt Point
- DP = Diamond Point

35° (+/- 2°) CLIPPED HEAD PAPER TAPE NAILS

Item Code	Description	Boxes Per Ctn	M's Per Box	M's Per Ctn	Ctns/Skid
○ 15111MHPT	2" x .113 SM BS	-	-	2	120
○ 15112MHPT	2" x .113 RG BS	-	-	2	120
○ 15116HPT	2" x .120 RG BS	-	-	4.8	80
○ 15102MHPT	2-3/8" x .113 SM BS	-	-	2	120
○ 15103MHPT	2-3/8" x .113 RG BS	-	-	2	120
○ 15100HPT	2-3/8" x .120 SM BS	-	-	4.8	80
○ 15101HPT	2-3/8" x .120 RG BS	-	-	4.8	80
○ 15104HPT	2-3/4" x .120 RG BS	-	-	4.8	80
○ 15105HPT	3" x .120 SM BS	-	-	2.5	84
○ 15125HPT	3" x .120 RG BS	-	-	2.5	84
○ 15108HPT	3" x .131 RG BS	-	-	2.5	84
○ 15109HPT	3" x .131 SM BS	-	-	2.5	84
○ 15107HPT	3-1/4" x .120 SM BS	-	-	2.5	84
○ 15110HPT	3-1/4" x .131 SM BS	-	-	2.5	84
○ 15126HPT	3-1/2" x .131 SM BS	-	-	2.5	84
● 15130MHPT	2" x .113 RG HDG	-	-	2	120
● 15131MHPT	2" x .113 SM HDG	-	-	2	120
● 15132HPT	2-3/8" x .120 SM HDG	-	-	4.8	80
● 15133HPT	2-3/8" x .120 RG HDG	-	-	4.8	80
● 25133SHPT	2-3/8" x .120 RG HDG	4	1	4	60
● 15136HPT	3" x .120 SM HDG	-	-	2.5	84
● 15137HPT	3" x .120 RG HDG	-	-	2.5	84
● 25137SHPT	3" x .120 RG HDG	4	1	4	60
● 15138HPT	3" x .131 SM HDG	-	-	2.5	84
● 15139HPT	3" x .131 RG HDG	-	-	2.5	84
● 15140HPT	3-1/4" x .120 SM HDG	-	-	2.5	84
● 15141HPT	3-1/4" x .120 RG HDG	-	-	2.5	84
● 15142HPT	3-1/4" x .131 SM HDG	-	-	2.5	84
● 15143HPT	3-1/4" x .131 RG HDG	-	-	2.5	84
● 15144HPT	3-1/2" x .131 SM HDG	-	-	2.5	84
● 15145HPT	3-1/2" x .131 RG HDG	-	-	2.5	84

35° (+/- 2°) OFFSET ROUND HEAD PAPER TAPE NAILS

Item Code	Description	Boxes Per Ctn	M's Per Box	M's Per Ctn	Ctns/Skid
○ 15202MHPT	2-3/8" x .113 SM BS	-	-	2	96
○ 15203MHPT	2-3/8" x .113 RG BS	-	-	2	96
○ 15200HPT	2-3/8" x .120 SM BS	-	-	4.8	80
○ 15201HPT	2-3/8" x .120 RG BS	-	-	4.8	80
○ 15205HPT	3" x .120 SM BS	-	-	2.5	84
○ 15209HPT	3" x .131 SM BS	-	-	2.5	84
○ 15210HPT	3-1/4" x .131 SM BS	-	-	2.5	84
● 15230MHPT	2" x .113 RG HDG	-	-	2	96
● 15231MHPT	2-3/8" x .113 RG HDG	-	-	2	96
● 15233HPT	2-3/8" x .120 RG HDG	-	-	4.8	80
● 15237HPT	3" x .120 RG HDG	-	-	2.5	84
● 15238HPT	3" x .131 SM HDG	-	-	2.5	84
● 15242HPT	3-1/4" x .131 SM HDG	-	-	2.5	84



NR83AA5
3-1/4" Paper Collated Framing Nailer

ALSO FITS:

- NR83AA4
- NR90AD(S1)
- NR1890DC

Fits most clipped head paper collated framing nailers

36° (+/- 1°) PAPER TAPE STRAP TITE NAILS


Item Code	Description	Boxes Per Ctn	M's Per Box	M's Per Ctn	Ctns/Skid
● 17121HPT	1-1/2" x .131 SM HT BS	-	-	4	96
● 17124HPT	1-1/2" x .148 SM HT BS	-	-	3	96
● 17126HPT	2-1/2" x .131 SM HT BS	-	-	2.5	96
● 17127HPT	2-1/2" x .148 SM HT BS	-	-	2.5	96
● 17130HPT	2-1/2" x .162 SM HT BS	-	-	2	96
● 17100HPT	1-1/2" x .131 SM HT EG	-	-	4	96
● 17104HPT	1-1/2" x .148 SM HT EG	-	-	3	96
● 17131HPT	1-1/2" x .131 SM HT HDG	-	-	4	96
● 17134HPT	1-1/2" x .148 SM HT HDG	-	-	3	96
● 17136HPT	2-1/2" x .131 SM HT HDG	-	-	2.5	96
● 17137HPT	2-1/2" x .148 SM HT HDG	-	-	2.5	96
● 17140HPT	2-1/2" x .162 SM HT HDG	-	-	2	96



NR65AK2
2-1/2" Strap-Tite System Strip Nailer

ALSO FITS:

- NR65AK2(S)
- NR38AK

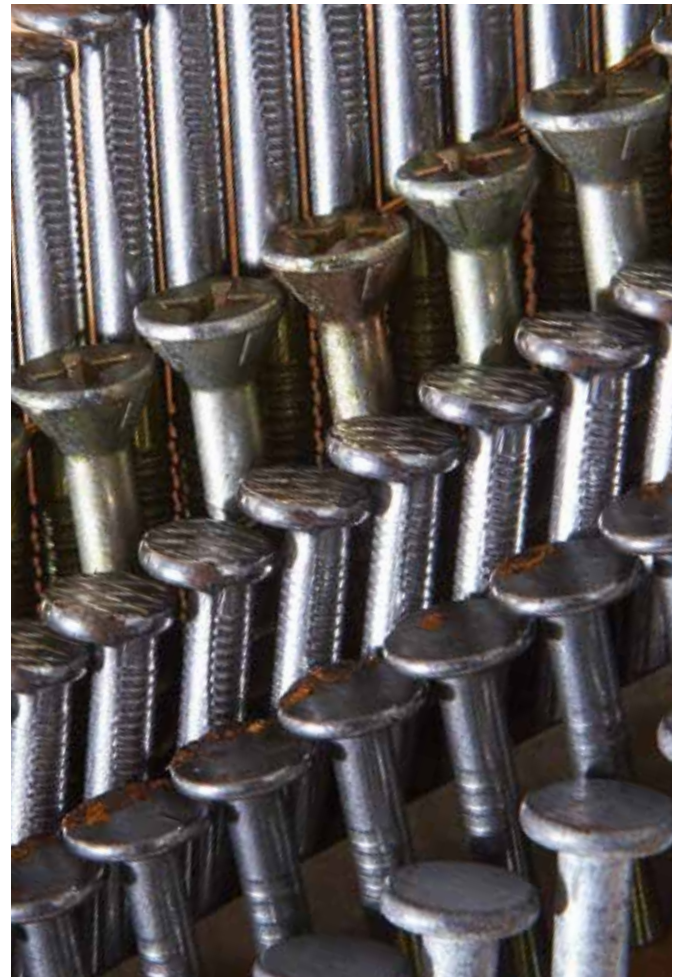

Fastener Coating Key:

- Basic Bright
- Heat Treated / Hardened
- Electro Galvanized
- Hot Dipped Galvanized
- Stainless Steel

16° (+/- 1°) ROUND HEAD WIRE COIL ROOFING NAILS

Item Code	Description	Boxes Per Ctn	M's Per Box	M's Per Ctn	Ctns/Skid
12108HPT	7/8" x .120 SM EG	-	-	7.2	56
12100HPT	1" x .120 SM EG	-	-	7.2	56
12101HPT	1-1/4" x .120 SM EG	-	-	7.2	48
12111HPT	1-1/4" x .120 SM EG, High Wire	-	-	7.2	48
12102HPT	1-1/2" x .120 SM EG	-	-	7.2	40
12103HPT	1-3/4" x .120 SM EG	-	-	7.2	40
12112HPT					
12113HPT					



NV45AB2
1-3/4" Coil Roofing Nailer

Fits most full round head wire coil roofing nailers

16° (+/- 1°) ROUND HEAD MINI WIRE COIL NAILS

12301HPT	1-1/4" x .083 RG BS	-	-	16	40
12305HPT	1-1/2" x .083 SM BS	-	-	16	40
12306HPT	1-1/2" x .083 RG BS	-	-	16	40
12311HPT	1-3/4" x .083 RG BS	-	-	16	40
12315HPT	2" x .083 SM BS	-	-	12	40
12316HPT	2" x .083 RG BS	-	-	12	40
12302HPT	1-1/4" x .083 RG EG	-	-	16	40
12307HPT	1-1/2" x .083 RG EG	-	-	16	40
12312HPT	1-3/4" x .083 RG EG	-	-	16	40
12317HPT	2" x .083 RG EG	-	-	12	40
12322HPT	1-1/2" x .083 RG 304 SS	4	1.4	5.6	36
12321HPT	2" x .083 RG 304 SS	4	1.4	5.6	36



NV50A1
2" Coil Utility Nailer

Fits most round head mini wire coil nailers

16° (+/- 1°) PLASTIC-CAP ROUND HEAD WIRE COIL NAILS

12343HPT	1-1/4" x .083 RG EG	-	-	2.8	75
----------	---------------------	---	---	-----	----

16° (+/- 1°) METAL-CAP ROUND HEAD WIRE COIL NAILS

12345HPT	2" x .083 RG EG	-	-	2.8	75
----------	-----------------	---	---	-----	----

FITS:

NV50AP2
NV50AP3

Fastener Description Key:

- AL = Aluminum
- BS = Basic Bright
- EG = Electro Galvanized
- HDG = Hot Dipped Galvanized
- HT = Heat Treated or Hardened
- SS = Stainless Steel
- SM = Smooth Shank
- RG = Ring Shank
- SC = Screw Shank
- FC = Fiber Cement Nail
- BL = Blunt Point
- DP = Diamond Point

15° (+/- 1°) ROUND HEAD PLASTIC SHEET COIL NAILS

Item Code	Description	Boxes Per Ctn	M's Per Box	M's Per Ctn	Ctns/Skid
13310HPT	1-7/8" x .092 RG AL	-	-	6	30
13304HPT	1-3/4" x .086 RG EG	-	-	6	30
13306HPT	1-7/8" x .099 SM EG	-	-	6	30
13313HPT	2" x .092 RG EG	-	-	6	30
13321HPT	2-1/4" x .092 SM EG	-	-	4.8	30
13320HPT	2-1/4" x .092 RG EG	-	-	4.8	30
13305HPT	1-3/4" x .092 RG HDG	-	-	6	30
13375HPT	2" x .092 SM HDG FC	-	-	6	30
13376HPT	2" x .092 RG HDG FC	-	-	6	30
13385HPT	2-1/4" x .092 RG HDG FC	-	-	4.8	30
13388HPT	2-1/4" x .092 SM HDG FC	-	-	4.8	30
13389HPT	2-1/2" x .092 SM HDG FC	-	-	4.8	30
13390HPT	2-1/2" x .092 RG HDG FC	-	-	4.8	30
13391HPT	3" x .113 SM HDG FC	-	-	4.8	30
13392HPT	3" x .113 SM HDG FC	-	-	3.6	30
13386HPT	2-1/4" x .092 SM 304 SS FC	2	2.4	4.8	30
13387HPT	2-1/4" x .092 RG 304 SS FC	2	2.4	4.8	30

16° (+/- 1°) ROUND HEAD WIRE COIL SIDING NAILS

13334HPT	1-3/4" x .092 RG EG	-	-	3.6	60
13333HPT	2" x .092 SM EG	-	-	3.6	60
13335HPT	2" x .092 RG EG	-	-	3.6	60
13338HPT	2-1/4" x .092 RG EG	-	-	3.6	60
13339HPT	2-1/4" x .092 SM EG	-	-	3.6	60
13340HPT	2-1/2" x .092 RG EG	-	-	3.6	60
13361HPT	1-1/4" x .092 RG HDG	-	-	3.6	60
13362HPT	1-1/2" x .092 RG HDG	-	-	3.6	60
13363HPT	1-3/4" x .092 RG HDG	-	-	3.6	60
13364HPT	2" x .092 SM HDG	-	-	3.6	60
13365HPT	2" x .092 RG HDG	-	-	3.6	60
13366HPT	2-1/4" x .092 SM HDG	-	-	3.6	60
13367HPT	2-1/4" x .092 RG HDG	-	-	3.6	60
13369HPT	2-1/2" x .092 RG HDG	-	-	3.6	60
13348HPT	1-1/4" x .090 RG 304 SS	4	0.9	3.6	48
13349HPT	1-1/2" x .090 RG 304 SS	4	0.9	3.6	48
13350HPT	1-3/4" x .090 RG 304 SS	4	0.9	3.6	48
13355HPT	2" x .090 RG 304 SS	4	0.9	3.6	48
13352HPT	2-1/4" x .090 RG 304 SS	4	0.9	3.6	48
13356HPT	2-1/2" x .090 RG 304 SS	4	0.9	3.6	48



NV65AH2
2-1/2" Coil Siding Nailer

ALSO FITS:

NV65AH
NV75AG
NV75A5

Fits most round head coil siding nailers

18 GA 7/16" PLASTIC-CAP STAPLES

31102SHPT	7/16" x 7/8" x 18GA	-	-	2	24
31105SHPT	7/16" x 1-1/4" x 18GA	-	-	2	24
31107SHPT	7/16" x 1-1/2" x 18GA	-	-	2	24



N3808AP
1-1/2" Cap Stapler

Fits most cap staplers



Fastener Coating Key:

- Basic Bright
- Heat Treated / Hardened
- Electro Galvanized
- Hot Dipped Galvanized
- Stainless Steel

Fastener Description Key:

- BS = Basic Bright
- EG = Electro Galvanized
- HDG = Hot Dipped Galvanized
- HT = Heat Treated or Hardened
- SS = Stainless Steel
- SM = Smooth Shank
- RG = Ring Shank
- SC = Screw Shank
- BL = Blunt Point
- DP = Diamond Point

Screw Coating Key:

- Clear Zinc
- Phosphate
- Yellow Zinc
- GrabberGuard
- Stainless Steel

Screw Description Key:

- BH = Bugle Head
- SVH = Scavenger Head
- FH = Flat Head
- TH = Trim Head
- SP = Sharp Type Point
- DW = Drywall
- SD = Self Drilling
- FT = Fine Thread
- CT = Coarse Thread
- CZ = Clear Zinc
- PHOS = Phosphate
- YZ = Yellow Zinc
- STL = Steel
- SS = Stainless Steel
- GG = Grabber Guard

16° (+/- 1°) ROUND HEAD WIRE COIL NAILS

Item Code	Description	Boxes Per Ctn	M's Per Box	M's Per Ctn	Ctns/Skid
○ 12200HPT	2" x .099 SM BS	-	-	9	40
○ 12201HPT	2" x .099 RG BS	-	-	9	40
○ 12209HPT	2" x .099 SC BL DP BS	-	-	9	40
○ 12205HPT	2" x .099 SC BL CHS BS	-	-	9	40
○ 12203HPT	2" x .113 SM BS	-	-	5	56
○ 12226HPT	2" x .113 RG BS	-	-	5	56
○ 12206HPT	2-1/4" x .099 SC BL CHS BS	-	-	9	40
○ 12210HPT	2-1/4" x .099 SC BL DP BS	-	-	9	40
○ 12210DHPT	2-1/4" x .099 SC DP BS	-	-	9	40
○ 12210HHPT	2-1/4" x .099 SC BL DP BS	-	-	9	40
○ 12219HPT	2-3/8" x .099 RG BS	-	-	9	40
○ 12221HPT	2-3/8" x .113 SM BS	-	-	5	48
○ 12211HPT	2-3/8" x .113 RG BS	-	-	5	48
○ 12211HHPT	2-3/8" x .113 RG BS	-	-	2.7	72
○ 12218HPT	2-1/2" x .099 SC BL CHS BS	-	-	9	40
○ 12236HPT	2-1/2" x .131 SM BS	-	-	4.5	48
○ 12236HHPT	2-1/2" x .131 SM BS	-	-	2.4	72
○ 12213HPT	3" x .120 SM BS	-	-	4	45
○ 12213HHPT	3" x .120 SM BS	-	-	2.4	60
○ 12231HPT	3" x .120 SC BS	-	-	4	45
○ 12216HPT	3" x .131 SM BS	-	-	4	45
○ 12216HHPT	3" x .131 SM BS	-	-	2.4	60
○ 12246HPT	3" x .131 RG BS	-	-	4	45
○ 12215HPT	3-1/4" x .120 SM BS	-	-	4	45
○ 12214HPT	3-1/4" x .120 SC BS	-	-	4	45
○ 12217HPT	3-1/4" x .131 SM BS	-	-	4	45
○ 12217HHPT	3-1/4" x .131 SM BS	-	-	2.4	60
● 12400HPT	1-1/2" x .099 SM BS HT	-	-	4.5	48
● 12400HHPT	1-1/2" x .099 SM BS HT	-	-	3	96
● 12410HPT	1-1/2" x .113 SM BS HT	-	-	4.5	48
● 12406HPT	2-1/4" x .099 SM BS HT	-	-	4.5	48
● 12406HHPT	2-1/4" x .099 SM BS HT	-	-	3	72
● 12416HPT	2-1/4" x .113 SM BS HT	-	-	4.5	48
● 12202HPT	2" x .099 RG EG	-	-	9	40
● 12227HPT	2" x .113 RG EG	-	-	5	56
● 12207HPT	2-3/8" x .099 RG EG	-	-	9	40
● 12228HPT	2-3/8" x .113 RG EG	-	-	5	48
● 12249HPT	2-1/2" x .099 SM EG	-	-	9	40
● 12233HPT	2-1/2" x .131 RG EG	-	-	4.5	48
● 12232HPT	3" x .120 SC EG	-	-	4	45
● 12235HPT	3" x .120 RG EG	-	-	4	45
● 12229HPT	3" x .131 SM EG	-	-	4	45
● 12230HPT	3-1/4" x .131 SM EG	-	-	4	45
● 12239HPT	3-1/4" x .131 RG EG	-	-	4	45
● 12700HPT	2" x .099 RG HDG	-	-	5	48
● 12703HPT	2" x .113 RG HDG	-	-	4	56
● 12703HHPT	2" x .113 RG HDG	-	-	2.7	96
● 12701HPT	2-3/8" x .099 RG HDG	-	-	5	48
● 12705HPT	2-3/8" x .113 RG HDG	-	-	4	48
● 12705HHPT	2-3/8" x .113 RG HDG	-	-	2.7	72
● 12711HPT	2-1/2" x .131 SM HDG	-	-	4	48
● 12712HPT	2-1/2" x .131 RG HDG	-	-	4	48
● 12707HPT	3" x .120 RG HDG	-	-	4	45
● 12707HHPT	3" x .120 RG HDG	-	-	2.4	60
● 12708HPT	3" x .120 SC HDG	-	-	4	45
● 12713HPT	3" x .131 SM HDG	-	-	4	45

16° (+/- 1°) ROUND HEAD WIRE COIL NAILS (CONT.)

Item Code	Description	Boxes Per Ctn	M's Per Box	M's Per Ctn	Ctns/Skid
● 12709HPT	3-1/4" x .120 SM HDG	-	-	4	45
● 12710HPT	3-1/4" x .120 SC HDG	-	-	4	45
● 12714HPT	3-1/4" x .131 SM HDG	-	-	4	45
● 12714HHPT	3-1/4" x .131 SM HDG	-	-	2.4	60
● 12605HPT	2-3/8" x .113 RG 304 SS	2	1	2	60
● 12607HPT	3" x .120 RG 304 SS	4	1	4	45



NV83A5
3-1/4" Plastic Strip Coiling Framing Nailer

ALSO FITS:

NV83A4
NV90AG
NV90AG(S)

Fits most round head wire coil framing nailers

SUPER DRIVE PLASTIC COLLATED SCREWS

Item Code	Description	Recess	M's Per Box	M's Per Ctn
● 17251SHPT	8 x 1-3/4" Wood to Wood SP CT YZ	#3 Lox	1	6
● 17252SHPT	8 x 2" Wood to Wood SP CT YZ	#3 Lox	1	6
● 17314SHPT	8 x 2" Wood to Wood or 16-25 GA SHL. SP FT YZ	#2 Lox	1	6
● 17802BHPT	6 x 1-1/4" BH FT Drywall to Metal Collated, Phos	#2 Phil	1M	Bucket
● 17812BHPT	6 x 1-1/4" BH CT Drywall to Wood Collated, Phos	#2 Phil	1M	Bucket
● 17813BHPT	6 x 1-5/8" BH CT Drywall to Wood Collated, Phos	#2 Phil	1M	Bucket
● 17817BHPT	8 x 1-3/4" FH CT Subfloor Collated, YZ	#2 Sq	1M	Bucket
● 17820BHPT	8 x 2" FH CT Decking Collated, Exterior	#2 Sq	1M	Bucket
● 17825BHPT	8 x 2-1/2" FH CT Decking Collated, Exterior	#2 Sq	.8M	Bucket
● 17830BHPT	8 x 3" FH CT Decking Collated, Exterior	#2 Sq	.8M	Bucket



W6VB3SD2
SuperDrive Collated Screw System (2,600 RPM)

ALSO FITS:

W6V4SD2
SuperDrive Collated Screw System (4,500 RPM)

SuperDrive®



Fastener Coating Key:

- Basic Bright
- Heat Treated / Hardened
- Electro Galvanized
- Hot Dipped Galvanized
- Stainless Steel

23 GA HEADLESS PINS

Item Code	Description	Blisters Per Ctn	M's Per Blister	M's Per Ctn	Ctns/Skid
● 22999SHPT	1/2" x 23 GA EG	10	2	20	350
● 23000SHPT	5/8" x 23 GA EG	10	2	20	350
● 23001SHPT	3/4" x 23 GA EG	10	2	20	300
● 23002SHPT	1" x 23 GA EG	10	2	20	300
● 23003SHPT	1-3/16" x 23 GA EG	10	2	20	250
● 23004SHPT	1-3/8" x 23 GA EG	10	2	20	250
● 23006SHPT	1-3/4" x 23 GA EG	10	2	20	-
● 23005SHPT	1-9/16" x 23 GA EG	10	2	20	-
● 23007SHPT	2" x 23 GA EG	10	2	20	-



NP18DSAL
1-3/8" 18V Lithium Ion
23 GA Pin Nailer



NP50A
2" 23-GA Pin Nailer

ALSO FITS:
NP35A

**Fits most 23 gauge
headless pin nailers**

18 GA BRAD NAILS

● 14100SHPT	5/8" x 18 GA EG	20	5	100	48
● 24100THPT	5/8" x 18 GA EG	10	1	10	400
● 14101MHPT	3/4" x 18 GA EG	20	5	100	48
● 24101THPT	3/4" x 18 GA EG	10	1	10	400
● 14102SHPT	1" x 18 GA EG	20	5	100	48
● 24102THPT	1" x 18 GA EG	10	1	10	400
● 14106SHPT	1-1/4" x 18 GA EG	20	5	100	48
● 24106THPT	1-1/4" x 18 GA EG	10	1	10	280
● 14107SHPT	1-1/2" x 18 GA EG	10	5	50	48
● 24107THPT	1-1/2" x 18 GA EG	10	1	10	280
● 14103SHPT	1-5/8" x 18 GA EG	10	5	50	48
● 14105SHPT	1-3/4" x 18 GA EG	10	5	50	48
● 24105THPT	1-3/4" x 18 GA EG	10	1	10	180
● 14108SHPT	2" x 18 GA EG	10	5	50	48
● 24108THPT	2" x 18 GA EG	10	1	10	180



NT50A5
2" 18 GA Pro Brad Nailer



NT1850DE
2" 18 GA
Cordless Brad Nailer

ALSO FITS:
NT50GSP9
NT50AE2

**Fits most
18 gauge
brad nailers**

16 GA STRAIGHT FINISH NAILS

● 14200HPT	1" x 16 GA EG	12	5	60	48
● 14201HPT	1-1/4" x 16 GA EG	8	5	40	48
● 44201SHPT	1-1/4" x 16 GA EG	10	1	10	175
● 14202HPT	1-1/2" x 16 GA EG	12	2.5	30	48
● 44202SHPT	1-1/2" x 16 GA EG	10	1	10	175
● 14203HPT	1-3/4" x 16 GA EG	12	2.5	30	48
● 44203SHPT	1-3/4" x 16 GA EG	10	1	10	120
● 14204HPT	2" x 16 GA EG	12	2.5	30	48
● 44204SHPT	2" x 16 GA EG	10	1	10	120
● 14206HPT	2-1/2" x 16 GA EG	8	2.5	20	48
● 44206SHPT	2-1/2" x 16 GA EG	10	1	10	100



NT65A5
2-1/2" 16-Gauge Pro
Finish Nailer



NT1865DM
2-1/2" 16 GA
Cordless Finish Nailer

ALSO FITS:
NT65GSP9
NT65M2S

**Fits most 16 gauge
straight finish nailers**

Fastener Description Key:

- AL = Aluminum
- BS = Basic Bright
- EG = Electro Galvanized
- HDG = Hot Dipped Galvanized
- HT = Heat Treated or Hardened
- SS = Stainless Steel
- SM = Smooth Shank
- RG = Ring Shank
- SC = Screw Shank
- FC = Fiber Cement Nail
- BL = Blunt Point
- DP = Diamond Point

20° (+/- 1°) 16 GA ANGLED FINISH NAILS

Item Code	Description	Boxes Per Ctn	M's Per Box	M's Per Ctn	Ctns/Skid
● 14412HPT	1-1/4" x 16 GA EG	6	2	12	126
● 14413HPT	1-1/2" x 16 GA EG	6	2	12	126
● 14418HPT	2-1/2" x 16 GA EG	6	2	12	84



NT65GSP9
2-1/2" Gas Powered 16 GA
Straight Finish Nailer

**Fits most 16 gauge
angled finish nailers**

15 GA "DA" ANGLE FINISH NAILS (33°-36°)

○ 14302HPT	1-1/4" x 15 GA BS	4	4	16	80
○ 14303HPT	1-1/2" x 15 GA BS	4	4	16	80
○ 14304HPT	1-3/4" x 15 GA BS	4	4	16	60
○ 14305HPT	2" x 15 GA BS	4	4	16	60
○ 14306HPT	2-1/4" x 15 GA BS	4	4	16	60
○ 14308HPT	2-1/2" x 15 GA BS	4	3	12	60
○ 14307HPT	2-1/2" x 14 GA BS	4	3	12	60
● 24201SHPT	1-1/4" x 15 GA EG	10	1	10	105
● 14313HPT	1-1/2" x 15 GA EG	4	4	16	60
● 24202SHPT	1-1/2" x 15 GA EG	10	1	10	105
● 24203SHPT	1-3/4" x 15 GA EG	10	1	10	104
● 14315HPT	2" x 15 GA EG	4	4	16	60
● 24204SHPT	2" x 15 GA EG	10	1	10	104
● 14318HPT	2-1/2" x 15 GA EG	4	3	12	60
● 24206SHPT	2-1/2" x 15 GA EG	10	1	10	78
● 14334HPT	2" x 15 GA 304 SS	4	4	16	60
● 14335HPT	2-1/4" x 15 GA 304 SS	4	4	16	60
● 14336HPT	2-1/2" x 15 GA 304 SS	4	3	12	60



NT65MA4
2-1/2" 15 GA
Angled Finish Nailer



NT1865DMA
2-1/2" 15 GA Cordless
Angled Finish Nailer

ALSO FITS:
NT65GAP9

**Fits most 15 gauge
"DA" style angled
finish nailers**

Fastener Coating Key:

- Basic Bright
- Heat Treated / Hardened
- Electro Galvanized
- Hot Dipped Galvanized
- Stainless Steel

Fastener Description Key:

- AL = Aluminum
- BS = Basic Bright
- EG = Electro Galvanized
- HDG = Hot Dipped Galvanized
- HT = Heat Treated or Hardened
- SS = Stainless Steel
- SM = Smooth Shank
- RG = Ring Shank
- SC = Screw Shank
- FC = Fiber Cement Nail
- BL = Blunt Point
- DP = Diamond Point

18 GA 1/4" NARROW CROWN FINISH STAPLES

Item Code	Description	Boxes Per Ctn	M's Per Box	M's Per Ctn	Ctns/Skid
11099SHPT	1/4" x 1/2" x 18 GA EG	10	5	50	69
11100SHPT	1/4" x 5/8" x 18 GA EG	10	5	50	60
21100SHPT	1/4" x 5/8" x 18 GA EG	10	1	10	240
11101SHPT	1/4" x 3/4" x 18 GA EG	6	5	30	84
21101SHPT	1/4" x 3/4" x 18 GA EG	10	1	10	240
11102SHPT	1/4" x 7/8" x 18 GA EG	10	5	50	43
11103SHPT	1/4" x 1" x 18 GA EG	6	5	30	69
21103SHPT	1/4" x 1" x 18 GA EG	10	1	10	150
11104SHPT	1/4" x 1-1/8" x 18 GA EG	6	5	30	60
11105SHPT	1/4" x 1-1/4" x 18 GA EG	10	5	50	36
21105SHPT	1/4" x 1-1/4" x 18 GA EG	10	1	10	150
11107SHPT	1/4" x 1-1/2" x 18 GA EG	6	5	30	48
21107SHPT	1/4" x 1-1/2" x 18 GA EG	10	1	10	150



N3804A5
1-1/2" Narrow Crown Pro Finish Stapler



N4004AB
1/4" Crown Flooring Stapler

ALSO FITS:
NP35A
N3804AB3

Fits most 1/4 inch narrow crown staplers

16 GA 7/16" STANDARD CROWN STAPLES

11200HPT	7/16" x 1" x 16 GA EG	-	-	10	60
11201HPT	7/16" x 1-1/4" x 16 GA EG	-	-	10	60
11203HHPT	7/16" x 1-1/2" x 16 GA EG	-	-	10	60
11205HHPT	7/16" x 1-3/4" x 16 GA EG	-	-	10	60
11206HPT	7/16" x 2" x 16 GA EG	-	-	10	60



N5008AC2
7/16" Standard Crown Stapler

Fits most 7/16 inch standard crown staplers

16 GA 1/2" MEDIUM CROWN STAPLES

11501HPT	1/2" x 7/8" x 16 GA EG	-	-	10	60
11503HPT	1/2" x 1" x 16 GA EG	-	-	10	60
11506HPT	1/2" x 1-1/4" x 16 GA EG	-	-	10	60
11504HPT	1/2" x 1-1/2" x 16 GA EG	-	-	10	60
11508HPT	1/2" x 2" x 16 GA EG	-	-	10	60



N5010A
1/2" Medium Crown Stapler

Fits most 1/2 inch wide crown staplers

16 GA 15/16" WIDE CROWN STAPLES

Item Code	Description	Boxes Per Ctn	M's Per Box	M's Per Ctn	Ctns/Skid
11401HPT	15/16" x 7/8" x 16 GA EG	-	-	10	60
11403HPT	15/16" x 1-1/4" x 16 GA EG	-	-	10	60
11404HPT	15/16" x 1-1/2" x 16 GA EG	-	-	10	60
11406HPT	15/16" x 2" x 16 GA EG	-	-	10	75



N5021A
15/16" Wide Crown Stapler

Fits most 15/16 inch wide crown staplers

16 GA 1" WIDE CROWN STAPLES

11300HPT	1" x 5/8" x 16 GA EG	-	-	10	60
11301HPT	1" x 7/8" x 16 GA EG	-	-	10	60
11305HHPT	1" x 3/4" x 16 GA EG	-	-	10	60
11302HHPT	1" x 1" x 16 GA EG	-	-	10	60
11303HHPT	1" x 1-1/4" x 16 GA EG	-	-	10	60
11304HHPT	1" x 1-1/2" x 16 GA EG	-	-	10	60
11306HPT	1" x 1-3/4" x 16 GA EG	-	-	5	75
11307HPT	1" x 2" x 16 GA EG	-	-	5	75



N5024A2
1" Wide Crown Stapler

Fits most 1 inch wide crown staplers

20 GA 7/16" CROWN HAMMER TACKER STAPLES

11801HPT	7/16" x 5/16" x 20 GA EG	20	5	100	60
11802HPT	7/16" x 3/8" x 20 GA EG	20	5	100	60

Fits most 7/16" crown A11 staplers

20 GA 1/2" CROWN HAMMER TACKER STAPLES

11699HPT	1/2" x 5/16" x 20 GA EG	20	5	100	60
----------	-------------------------	----	---	-----	----

Fits most 1/2" crown DF-5000 staplers

15.5 GA 1/2" CROWN FLOORING STAPLES

04722HHPT	1/2" x 2" x 15.5 GA EG	-	-	7.7	60
04723HHPT	1/2" x 1-3/4" x 15.5 GA EG	-	-	7.7	60
04724HHPT	1/2" x 1-1/2" x 15.5 GA EG	-	-	9.6	60




N5010AB
1/2" Crown Flooring Stapler

Fits most 1/2 inch wide crown flooring staplers




AIR HOSES

POLY AIR HOSE

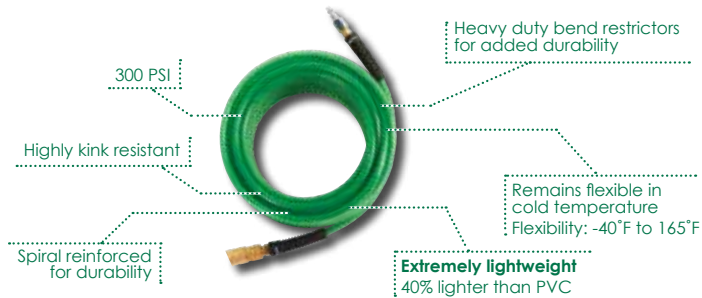

ITEM #	HOSE DIA.	LENGTH	FITTING	INNER QTY.
115155M	1/4"	50'	1/4" Industrial	6
115156M	1/4"	100'	1/4" Industrial	6

HYBRID AIR HOSE

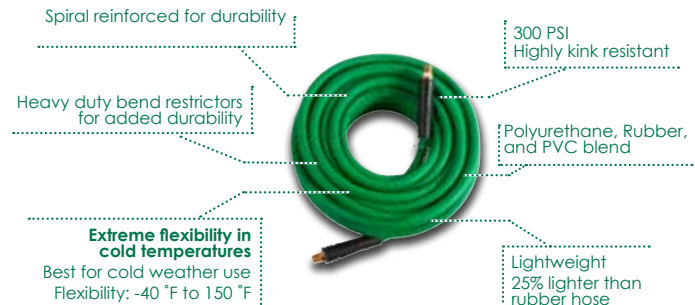

ITEM #	HOSE DIA.	LENGTH	FITTING	INNER PACK QTY.
115318M	3/8"	100'	N/A	4
115320M	1/4"	100'	N/A	6

FITTINGS

Industrial Couplers & Plugs

- 6 Ball bearing construction for longer life
- Tubular valve design provides higher flow
- NBR seal for longer life
- High quality brass for corrosion resistance



ITEM #	STYLE	NPT SIZE	THREAD	INNER QTY.
115323M	Plug	3/8"	Female	4
115327M	Coupler	3/8"	Female	4
115140M	Plug	1/4"	Male	25
115148M	Coupler	1/4"	Male	25
115142M	Plug	3/8"	Male	25
115147M	Couple	1/4"	Female	25

Automotive Couplers & Plugs

- Hardened steel locking ball bearings ensure connection holds tight
- Plugs are zinc plated for longer life
- NBR seal for longer life
- Zinc plated steel construction for longer life



ITEM #	STYLE	NPT SIZE	THREAD	INNER QTY.
115332M	Plug	1/4"	Male	4
115391M	Plug	3/8"	Male	25
115393M	Plug	3/8"	Male	25
115394M	Plug	1/4"	Female	25
115307M	Coupler	3/8"	Male	4
115398M	Coupler	1/4"	Female	10

OTHER ACCESSORIES

Hose Repair Kits

ITEM #	SIZE	DESCRIPTION	INNER QTY.
115164M	1/4"	Hose Repair Splicers	4
115313M	1/4"	Poly Hose Repair Splicers	4

Oil

ITEM #	SIZE	DESCRIPTION	INNER QTY.
115337M	8 oz	Synthetic Compressor Oil	12
115338M	4 oz	All Season Air Tool Oil	12

MANIFOLDS

ITEM #	SIZE	DESCRIPTION	INNER QTY.
115315M	1/4"	Straight Manifold w/ 4 Couplers/Plugs	4
115334M	3/8" in/1/4" out	Round Manifold, 3-Way	4



Full Line-up Pneumatic Accessories on www.metabo-hpt.com

30-DAY SATISFACTION GUARANTEE

All Metabo HPT products (hereinafter the "Metabo HPT Product/s") are inspected before they leave the factories to ensure the highest quality for all customers. If you are not satisfied with any Metabo HPT product within 30 days of purchase, please return the product, complete with retail packaging and components, with receipt to the original place of purchase for a refund or replacement. This guarantee covers power tools only (excludes 2-cycle & 4-cycle gas powered equipment, which carry a 10-day Satisfaction Guarantee). See the Metabo HPT "Limited Warranty" for accessories, parts and further warranty information.

PROFESSIONAL 5-YEAR LIMITED WARRANTY

This warranty extends to the original purchaser of the Metabo HPT Product. Metabo HPT products are warranted to the original purchaser to be free from defect in materials and workmanship for a period of five (5) years from the original purchase date. (See exceptions below)

EXCEPTIONS INCLUDE:

LIFETIME LITHIUM ION TOOL WARRANTY

The product categories listed below are warranted to the original purchaser to be free from defect in materials and workmanship for a lifetime from the original purchase date. Lifetime is defined as the serviceable life of the product. This is defined as the period during which all components are available.

- Cordless Lithium Ion Band Saws • Cordless Lithium Ion Blowers • Cordless Lithium Ion Circular Saws • Cordless Lithium Ion Driver Drills • Cordless Lithium Ion Hammer Drills
- Cordless Lithium Ion Impact Drivers • Cordless Lithium Ion Impact Wrenches • Cordless Lithium Ion Jig Saws • Cordless Lithium Ion Mini Grinders • Cordless Lithium Ion Nailers
- Cordless Lithium Ion Nibblers • Cordless Lithium Ion Oscillating Tools • Cordless Lithium Ion Planers • Cordless Lithium Ion Reciprocating Saws
- Cordless Lithium Ion Right Angle Drills • Cordless Lithium Ion Shears

TWO YEAR WARRANTY

The product categories listed below are warranted to the original purchaser to be free from defect in materials and workmanship for a period of two (2) years from the original purchase date.

- Benchtop Band Saws • Benchtop Belt & Disc Sanders • Benchtop Metal Dry-Cut Saws • Benchtop Drill Presses • Benchtop Planers • Benchtop Scroll Saws • Lithium Ion Batteries • Table Saws • Cordless Table Saws

ONE YEAR WARRANTY

The product categories listed below are warranted to the original purchaser to be free from defect in materials and workmanship for a period of one (1) year from the original purchase date.

- Air Compressors • Chargers • Concrete Cutters • Corded Grinders • Corded Hammer Drills • Corded Rotary Hammers • Corded Vacuums • Cordless Gas Powered Nailers
- Cordless Grinders • Cordless Lithium Ion Vacuums • Cordless Rotary Hammers • Demolition Hammers • Gas Powered Cut Off Saw • Generators • Heat Guns • NiCd & NiMH Batteries • Portable Cut Off Saws • Radios • Reserve Air Tank • SuperDrive

90-DAY WARRANTY

The product categories listed below are warranted to the original purchaser to be free from defect in materials and workmanship for a period of ninety (90) days from the original purchase date.

- Bumpers • Driver Blades • Hammer Tackers • O-Rings

30-DAY WARRANTY

The product category listed below is warranted to the original purchaser to be free from defect in materials and workmanship for a period of thirty (30) days from the original purchase date.

- Accessory Products (*Excludes Fasteners*)

Warranty coverage is conditioned upon the purchaser furnishing Metabo HPT or its Authorized Service Center with adequate written proof of the original purchase date.

OWNER'S REGISTRATION CARD

The return of the Owner's Registration Card (whether by mail or online) by the original purchaser within (10) days after the original purchase date is not a condition precedent to coverage under this warranty.

WARRANTY COVERAGE

This Metabo HPT is warranted by Metabo HPT against defective materials or workmanship.

This warranty is void if: defects in materials or workmanship or damages result from repairs or alterations which have been made or attempted by others or the unauthorized use of nonconforming parts; the damage is due to normal wear and tear, the damage is due to abuse (including overloading of the Metabo HPT Product beyond capacity), failure to operate the unit in the manner specified by the owners manual, improper maintenance, improper set up or altered products, neglect or accident, improper adjustments, operation at engine speeds above Metabo HPT recommendations, operation of product with incorrect fuel to oil ratio, failures due to contaminated fuel, cutting attachments i.e.: nylon line, blades etc: the damage is due to use of the Metabo HPT Product after partial failure or use with improper accessories.

This warranty does not cover repair or replacement of maintenance items including but not limited to, hoses, spark plugs, starter rope, air and fuel filters, clutch shoes, vibration isolators, throttle cables, lubricants, belts and all cutting attachments, etc. Normal maintenance and adjustments to the magneto, carburetor, and spark plugs are not considered the responsibility of Metabo HPT under this warranty.

WARRANTY PERFORMANCE

DURING THE ABOVE WARRANTY PERIOD, SHOULD YOUR METABO HPT PRODUCT EXHIBIT A DEFECT IN MATERIALS OR WORKMANSHIP, SUCH DEFECT WILL BE REPAIRED WHEN THE COMPLETE METABO HPT PRODUCT AND PROOF OF PURCHASE IS RETURNED, POSTAGE PREPAID AND INSURED, TO A METABO HPT AUTHORIZED SERVICE CENTER. OTHER THAN THE POSTAGE AND INSURANCE REQUIREMENT, NO CHARGE WILL BE MADE FOR REPAIRS COVERED BY THIS WARRANTY.

WARRANTY DISCLAIMERS

NO WARRANTY, ORAL OR WRITTEN, EXPRESSED OR IMPLIED, OTHER THAN THE ABOVE WARRANTY IS MADE WITH REGARD TO THIS METABO HPT PRODUCT. METABO HPT DISCLAIMS ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR USE OR PURPOSE, AND ALL OTHER WARRANTIES. IN NO EVENT SHALL METABO HPT BE LIABLE FOR ANY INCIDENTAL, SPECIAL, CONSEQUENTIAL OR PUNITIVE DAMAGES, OR FOR ANY COSTS, ATTORNEY FEES, EXPENSES, LOSSES OR DELAYS ALLEGED TO BE AS CONSEQUENCE OF ANY DAMAGE TO, FAILURE OF, OR DEFECT IN ANY PRODUCT INCLUDING, BUT NOT LIMITED TO, ANY CLAIMS FOR LOSS OF PROFITS.

LIMITATIONS ON WARRANTY DISCLAIMERS

Some states do not allow limitations on how long an implied warranty lasts, so the above limitations may not apply to you. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

Please consult Metabo HPT's website for USA: www.metabo-hpt.com 1-800-829-4752 and for CANADA: www.metabo-hpt.ca 1-800-970-2299 to locate your nearest service facility for warranty and non-warranty service on a Metabo HPT Product.



metabo **HPT**

**Follow. Tweet. Subscribe.
Review. Watch.**

Connect with Hitachi Power Tools



@metabohpt



@MetaboHPT



@metabohptusa



@MetaboHPT



@metabo-hpt



Read + Write Tool Reviews
www.metabo-hpt.com

HITACHI
HITACHI POWER TOOLS



metabo **HPT**
DURABILITY FIRST



Please visit our website at
www.metabo-hpt.com

For the dealer nearest you, call
1-800-546-1666

For more information, call or email
1-800-706-7337
reachcustomerservice@metabo-hpt.com

For technical service, call
1-866-775-9429

Koki Holdings America Ltd.
1111 Broadway Avenue
Braselton, GA, 30517, USA

Koki Holdings Co., Ltd.
Shinagawa Intercity Tower A, 20th Floor
15-1, Konan 2-chome
Minato-ku, Tokyo 108-6020, Japan



7 54005 09018 3

EP9018