



# MAASDAM 2017

**MAASDAM**  
POW'R-PULL<sup>®</sup>

**E-Z WINCH**<sup>™</sup>  
BY MAASDAM

**MAASDAM**  
JACKALL

**MAASDAM**  
LOAD BIND'R<sup>™</sup>

**MAASDAM**  
POW'R LIFT

Maasdam — The Original.  
Often Imitated...Never Duplicated<sup>™</sup>



Maasdam — The Original.  
Often Imitated...Never Duplicated™

## Table of Contents

Cable Pow'R Pulls . . . . .	3
Long Haul Rope Pow'R Pulls . . . . .	4
Strap Pow'R Pulls . . . . .	4
CAL Series . . . . .	5
JackAll . . . . .	5
Jack Accessories . . . . .	5
Post Puller . . . . .	6
Fencing Tools . . . . .	6
Replacement Rope & Straps . . . . .	6
Pow'R Reach . . . . .	6
Replacement Kits . . . . .	7
Cable Puller Parts . . . . .	7
Strap Puller Parts . . . . .	7
Load Binders . . . . .	8
Manual Chain Hoists . . . . .	9
Lever Hoist . . . . .	9
Auto Jacks . . . . .	10
Jack Stands . . . . .	10
Bottle Jacks . . . . .	11



Maasdam – The Original.  
Often Imitated...Never Duplicated™

## Cable Pow'R Pulls

**LIFETIME WARRANTY**

MADE IN THE USA  
OF U.S. AND  
IMPORTED PARTS

### 1 Ton Cable Puller

**Model #: 144S-6 ▲**


Weight: 7.63 lbs  
Cable Length: 12 ft.  
Cable Lift: 12 ft.  
Cable Diameter: 3/16-in.  
Leverage: 15:1



### 2 Ton Cable Puller

**Model #: 144SB-6 ▲**


Weight: 8.75 lbs  
Cable Length: 12 ft.  
Cable Lift: 6 ft.  
Cable Diameter: 3/16-in.  
Leverage: 30:1

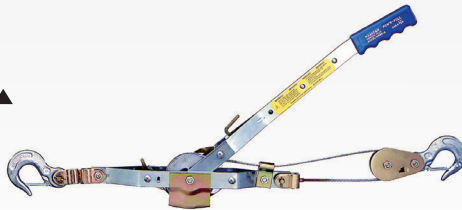

### 1 & 2 Ton Cable Puller

**Model #: 144C-6 ▲**

Weight: 9.13 lbs  
Cable Length: 12 ft. (1 & 2 Ton)  
Cable Lift: 12 ft. (1 Ton), 6 ft (2 Ton)  
Cable Diameter: 3/16-in.  
Leverage: 15:1 (1 Ton), 30:1 (2 Ton)

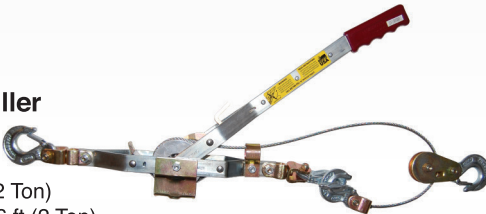

### 3/4 Ton Cable Puller

**Model #: 264S-5 ▲**

Weight: 7.86 lbs  
Cable Length: 22 ft.  
Cable Lift: 22 ft.  
Cable Diameter: 5/32-in.  
Leverage: 15:1



For over 60 years, Maasdam® has produced Pow'R-Pulls to exacting standards. Using only premium components, we produce the finest quality winch/puller available, backed by a full Lifetime Warranty - a first for domestic winches.

#### Features:

- 1 piece, aluminum alloy ratchet wheel
- High strength, electro-plated steel parts
- "Notch-at-a-time" letdown
- Drop forged steel slip hooks
- Non-slip plastic grip
- OSHA recommended safety latches
- Uses galvanized, aircraft quality cable

## Heavy-Duty Pow'R Pulls


**LIFETIME WARRANTY**

MADE IN THE USA  
OF U.S. AND  
IMPORTED PARTS

### 3 Ton Cable Puller

**Model #: 6000S ▲**


Weight: 29.0 lbs  
Cable Length: 12 ft.  
Cable Lift: 12 ft.  
Cable Diameter: 5/16-in.  
Leverage: 35:1

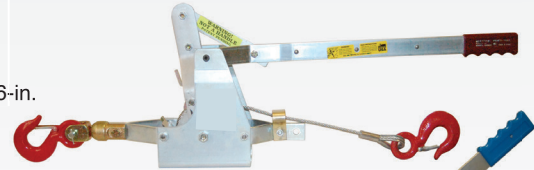

### 4 Ton Cable Puller

**Model #: 8000SB ▲**

Weight: 34 lbs  
Cable Length: 6 ft.  
Cable Lift: 6 ft.  
Cable Diameter: 5/16-in.  
Leverage: 65:1

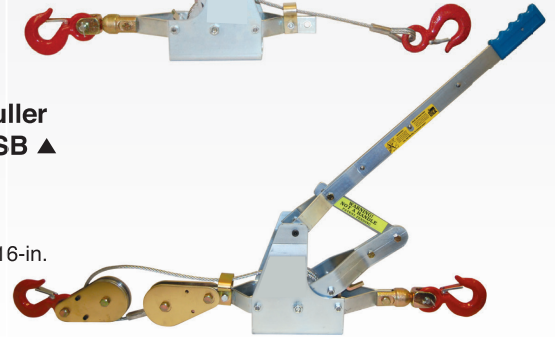

#### Features:

- 1 piece, aluminum alloy ratchet wheel
- High strength, electro-plated steel parts
- Galvanized 5/16" Aircraft Cable
- "Notch-at-a-time" letdown
- Drop forged steel slip hooks
- Permanent, non-slip plastic grip
- 8000SB has patented compound lever

#### Suggested Applications:

- Lifting construction material
- Erecting buildings and towers
- Moving, placing and installing heavy equipment
- Tightening conveyor belts
- Clearing debris

## Aircraft Cable Ratings



#### Cable Swaging

Method of securely inserting aircraft cable into terminal end for everlasting bond.

#### AIRCRAFT CABLE RATINGS

- Based on military specs
- 7-in. x 19-in. galvanized aircraft cable

Cable Diameter	Minimum Breaking Strength Tested
3/16-in.	4,200 lbs.
5/32-in.	2,800 lbs.
1/8-in.	2,000 lbs.

**⚠ WARNING:** This product can expose you to di(2-ethylhexyl) phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

Pull'R Holding Company, LLC., parent company of Bucket Boss®, Dead On Tools® & Maasdam®

1-888-797-7855 • [www.maasdam.com](http://www.maasdam.com) • [www.pullr.com](http://www.pullr.com)





Maasdam — The Original.  
Often Imitated...Never Duplicated™

## Long Haul Rope Pow'R Pulls


**LIFETIME  
WARRANTY**

MADE IN THE USA  
OF U.S. AND  
IMPORTED PARTS

### 3/4 Ton Rope Puller

**Model #: A-0 ▲**

Weight: 7.0 lbs.  
Rope Length: No Rope  
Rope Lift: No Rope  
Rope Diameter: No Rope.  
Leverage: 10:1



### 3/4 Ton Rope Puller

**Model #: A-20 ▲**


Weight: 8.8 lbs  
Rope Length: 20 ft.  
Rope Lift: 20 ft.  
Rope Diameter: 1/2-in.  
Leverage: 10:1



### 3/4 Ton Rope Puller

**Model #: A-50 ▲**

Weight: 11.25 lbs  
Rope Length: 50 ft.  
Rope Lift: 50 ft.  
Rope Diameter: 1/2-in.  
Leverage: 10:1

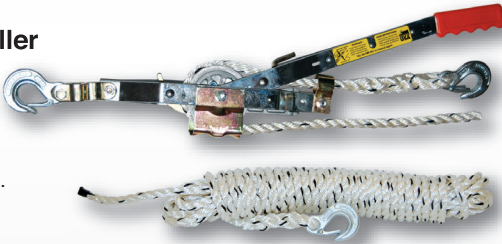

### 3/4 Ton Rope Puller

**Model #: A-100 ▲**

Weight: 14.31 lbs  
Rope Length: 100 ft.  
Rope Lift: 100 ft.  
Rope Diameter: 1/2-in.  
Leverage: 10:1



#### Features:

- Manufactured to the same exacting standards as our cable pullers
- Uses highway approved, 1/2" diameter wear resistant Dacron® polyester rope - twisted or braided
- Can accommodate an unlimited length of rope

#### Suggested Applications:

- Recovering vehicles
- Securing material to trucks
- Handling logs, trees and stumps
- Moving boats and trailers
- Transporting furniture
- Clearing debris

## Strap Pow'R Pulls

**LIFETIME  
WARRANTY**

MADE IN THE USA  
OF U.S. AND  
IMPORTED PARTS

### 1 Ton Strap Puller

**Model #: WS-1 ▲**


Weight: 7.22 lbs  
Strap Length: 12 ft.  
Strap Lift: 11 ft. 6-in.  
Strap Width: 1-in.  
Leverage: 10:1



### 2 Ton Strap Puller

**Model #: WS-2 ▲**

Weight: 8.33 lbs  
Strap Length: 12 ft.  
Strap Lift: 5 ft. 8-in.  
Strap Width: 1-in.  
Leverage: 20:1

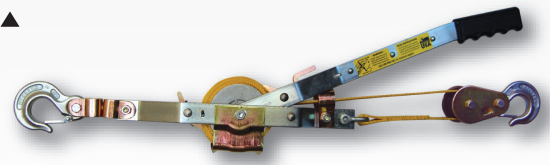

### 1 Ton Strap Puller

**Model #: WS-25 ▲**

Weight: 7.67 lbs  
Strap Length: 25 ft.  
Strap Lift: 10 ft.  
Strap Width: 1-in.  
Leverage: 10:1



#### Features:

- Flexible strapping material conforms to and controls the load - non-conductive properties
- Precision-cast aluminum alloy ratchet wheel - one piece construction
- Interlocking, precision fit, steel alloy pawls with safety spacer sleeve
- Cold rolled, high strength, tempered steel frame and handle
- Drop-forged steel slip hooks with OSHA recommended safety latches
- Heavy gauge steel, reinforced ratchet guard
- Aircraft-type, heat treated bolts
- High tensile, fully rotating steel swivel
- Trouble free, "Notch-at-a-time" letdown
- Permanent, comfortable, non-slip grip

#### Suggested Applications:

- Vehicle recovery/rescue
- Securing motorcycles/ATV's
- Race car/auto tie down
- Animal loading assistance
- Furniture/appliance moving

**⚠ WARNING:** This product can expose you to di(2-ethylhexyl) phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

Pull'R Holding Company, LLC., parent company of Bucket Boss®, Dead On Tools® & Maasdam®  
1-888-797-7855 • [www.maasdam.com](http://www.maasdam.com) • [www.pullr.com](http://www.pullr.com)





Maasdam — The Original.  
Often Imitated...Never Duplicated™


## CAL Series

### EZ Winch Unit Features:

- 1/2 – 1 ton capacity, 5 – 10 foot reach
- Portable fold away unit takes up very little space, convenient storage, dimensions: 12-in. x 4-in. x 9-in.
- Easy storage plastic molded case - No loose metal parts to mar or scratch
- OSHA approved safety latches so hooks stay connected
- Snap block included for easy conversion from 1,000 to 2,000 lb. pull.

#### EZ2000 ▲ 1/2 to 1 Ton Capacity

Weight: 7.34 lbs  
Cable Length: 5 - 10 ft.  
Cable Lift: 5 ft. (max.)  
Cable Diameter: 3/16-in.

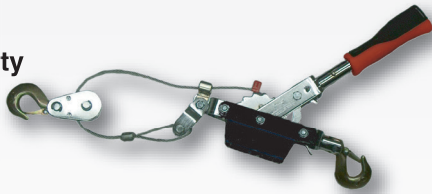

### CAL Unit Features:

- Galvanized, aircraft quality cable
- Double locking drive pawls
- Drop-forged steel frame galvanized against rust
- Forged steel hooks with OSHA recommended safety latches
- Oversized steel safety guard
- Reliable stainless steel springs
- Automatic let-down with safety catch
- Cable guide guards against excessive wear

#### CAL-1 ▲ 1 Ton Capacity

Weight: 7.5 lbs.  
Cable Length: 12 ft.  
Cable Lift: 12 ft.  
Cable Diameter: 3/16-in.




#### CAL-2 ▲ 2 Ton Capacity

Weight: 9.0 lbs  
Cable Length: 12 ft.  
Cable Lift: 6 ft.  
Cable Diameter: 3/16-in.



#### CAL-3 ▲ 3 Ton Capacity

Weight: 9.5 lbs  
Cable Length: 6 ft.  
Cable Lift: 6 ft.  
Cable Diameter: 3/16-in.

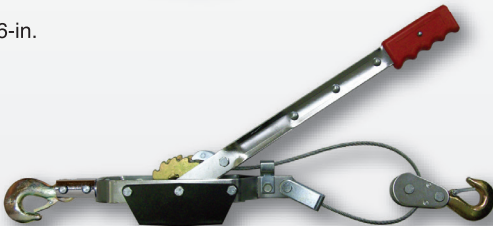

#### CAL-4 ▲ 4 Ton Capacity

Weight: 10.5 lbs  
Cable Length: 6 ft.  
Cable Lift: 6 ft.  
Cable Diameter: 1/4-in.



#### Model #: 1130 ▲

Size: 48-in.  
Weight: 28.5 lbs.

#### Model #: 1235 ▲

Size: 60-in.  
Weight: 29.0 lbs.



Maasdam®'s **8,000 lb. Capacity Jacks**, like all our pullers and products, are the best available. Built with a designed "Safety Link," the Maasdam Jackall® is the "Jack with More"! Larger base for greater stability. "Safety Link" mechanism that prevents abuse, misuse and makes operations safer. When safety and dependability matter most, continue to rely on Maasdam®.

#### Features:

- Lift, pull, winch, push, hoist from 50 up to 8000 lbs. (4 tons)\*
- Precision cast components, long life & trouble free operating
- Hot roll-formed, alloy steel beam is made strong and reliable
- Beam holes accommodate attachment of clevis pins, chains, bolts, ropes, etc.
- Hollow, special high tensile steel handle locks against beam for convenient storage
- Extra large 38-1/2 sq. in. base is heavily ribbed for strength and load stability

\*Maximum capacity reached within 12-in. of base.  
Capacity decreases as distance from base increases.

## Jack Accessories

#### Model #: 1313 ▲

Jack Rack  
Weight: 2.7 lbs.



#### Model #: 1323 ▲

Jack Quick Clamp  
Weight: 1.6 lbs.



#### Model #: 1390 ▲

Jack Adapter  
Weight: 1.0 lbs.



#### Model #: 1333 ▲

Jack Maintenance Kit  
Weight: 1.0 lbs.

**▲ WARNING:** This product can expose you to di(2-ethylhexyl) phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

Pull'R Holding Company, LLC., parent company of Bucket Boss®, Dead On Tools® & Maasdam®  
1-888-797-7855 • [www.maasdam.com](http://www.maasdam.com) • [www.pullr.com](http://www.pullr.com)



Maasdam — The Original.  
Often Imitated...Never Duplicated™

All dimensions given as length x width x height

## Post Puller

### Model #: PP-100 ▲

Dimensions: 36.5-in. x 6-in. x 5-in.  
Weight: 14.0 lbs.

- Easy to use—attaches to most posts or stakes in seconds
- Perfect balance maximizes the user's leverage while minimizing effort
- Pulls post straight out of the ground—does not bend post, so it can be reused
- Cost effective—no need to rent or buy heavy equipment



## Replacement Ropes & Straps



Rope Only - Supplied with 1/4-in. hook

Part No.	Length	Diameter W	Weight
3973 ▲	20 ft. 1	1/2-in.	1.81 lbs.
3973-50 ▲	50 ft. 1	1/2-in.	4.25 lbs.
3973-100 ▲	100 ft. 1	1/2-in.	5.63 lbs.



Strap Only - Supplied with 1/4-in. hook

Part No.	Length	Width	Weight
6010-1WS ▲	12 ft. 1	-in.	0.75 lbs.
6010-25WS ▲	25 ft. 1	-in.	1.1 lbs.
6010-2WS (no hook) ▲	12 ft. 1	-in.	0.75 lbs.

## Fencing Tools

### Fence Stretcher

#### Model #: 8060 ▲

Dimensions: 17.37-in. x 1-in. x 4-in.  
Weight: 2.0 lbs.

- Tightens tension bar toward end of post for easy tie-off
- Self locking action allows easier two handed tie-off
- Universal adjustment for posts from 1-3/8-in. - 4-in.



### Fence Pull Chain

#### Model #: 8035-10 ▲

Chain length: 58-in.  
Weight: 4.9 lbs.

- Perfect Pow'R-Pull accessory for stretching chain link fence - 1/2 ton (1000 lbs.) rating
- Grab lock fits tension bars
- Adjustable 53-in. grade 30 proof coil chain



### Wire Grip

#### Model #: 8050-10 ▲

Dimensions: 7.25-in. x 3.25-in. x .87-in.  
Weight: 4.9 lbs.

- Handles smooth or barbed wire as small as 5/32-in.
- Cam action insures tighter lock
- Shields and protects hand from barbed wire
- 1000 lb. (1/2 ton) capacity
- Cast malleable iron, plated to prevent rusting



### 10-in. Fence Pliers Round Nose

#### Model #: 8090 ▲

Dimensions: 10.25-in. x 1.5-in. x .63-in.  
Weight: 1.1 lbs.

- Smooth working action
- Forged construction
- Wire cutters



## Pow'R Reach

### Pow'R-Reach Cable Extender

#### Model #: 8106 ▲

Size: 6-ft.  
Weight: 0.75 lbs.

- Extensions for cable Pow'R-Pulls
- 3/16-in. vinyl coated aircraft cable with cable eye on each end



### Pow'R-Reach Cable Extender

#### Model #: 8112 ▲

Size: 12-ft.  
Weight: 1.2 lbs.

- Extensions for cable Pow'R-Pulls
- 3/16-in. vinyl coated aircraft cable with cable eye on each end



### Pow'R-Reach Strap Extender

#### Model #: SC12 ▲

Size: 12-ft.  
Weight: 0.5 lbs.

- Extensions for strap Pow'R-Pulls
- Loops on both end - use loop-to-hook or as a slip knot
- Idea for wrapping around posts or trees



**▲ WARNING:** This product can expose you to di(2-ethylhexyl) phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

Pull'R Holding Company, LLC., parent company of Bucket Boss®, Dead On Tools® & Maasdam®  
1-888-797-7855 • [www.maasdam.com](http://www.maasdam.com) • [www.pullr.com](http://www.pullr.com)




## Replacement Kits

### Handle Assembly Replacement Kit Model #: MPPHRK ▲

Kit includes:


- A - 9000 - Handle assembly
- B - 7968AU - Leaf Spring
- C - 7968B - Screw

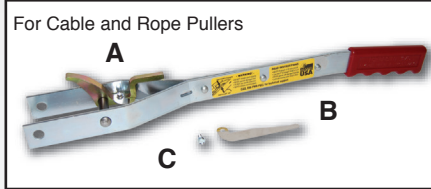

### Frame Assembly Replacement Kit Model #: MPPFRK ▲

Kit includes:


- D - 9100 - Frame assembly
- E - 7978 - Cable guide
- F - 7981 - Guide bolt
- G - 7981A - Nut

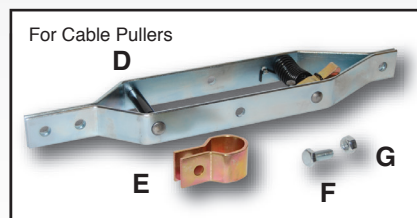

### Ratchet Wheel Replacement Kit Model #: MPPRWRK ▲

Kit includes:


- H - 7963X - Ratchet wheel
- I - 7963A - Set Screw
- J - 7985 - Cable retainer spring
- K - 7988 - Ratchet wheel bolt
- L - 7981A - Nut
- M - 7987 - Ratchet wheel spacer sleeve



### Rope Puller Replacement Kit Model #: MPPRPRK ▲

Kit includes:


- N - 3961 - Frame Assembly
- O - 3962 - Ratchet Wheel
- P - 3965 - Guide
- Q - 7981 - Guide bolt
- R - 7981A - Nut
- S - 7987 - Ratchet wheel spacer sleeve
- T - 7988 - Ratchet wheel bolt

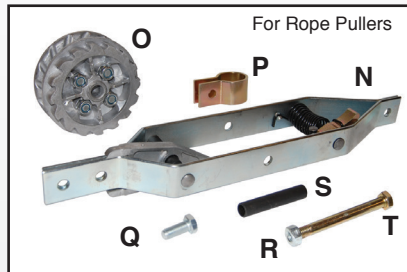

### Strap Puller Replacement Kit Model #: MPPSPRK ▲

Kit includes:

- U - 6000W - Ratchet Wheel
- V - 7988 - Ratchet wheel bolt
- W - 7981A - Nut
- X - 7987 - Ratchet wheel spacer sleeve



## Cable Puller Parts

### Model #: 9700BX ▲

12-ft. cable for 144-S, SB, C & D  
Weight: 1.0 lbs.



### Model #: 9704BX ▲

22-ft. cable for 264S-5  
Weight: 1.25 lbs.



### 1/4-in. Hook Kit


#### Model #: 7977J ▲

7973 - 1/4-in. Hook  
7977A - Yoke  
7980 - Swivel body bolt & nut  
Weight: 0.54 lbs.




#### Model #: 7975J ▲

Swivel 1/4-in. hook assembly for 1 ton unit  
Weight: 0.88 lbs.

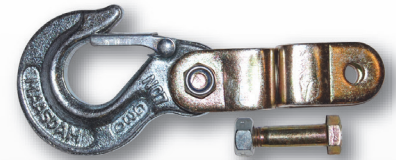


#### Model #: 7975JA ▲

Swivel 5/16-in. hook assembly for 2 ton unit  
Weight: 1.0 lbs.

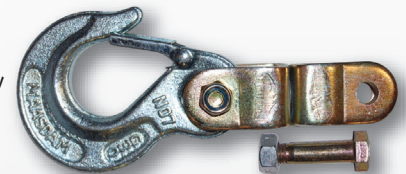

#### Model #: 8049 ▲

Snap block with 5/16-in. hook  
Use with Cable Puller  
Weight: 1.25 lbs.

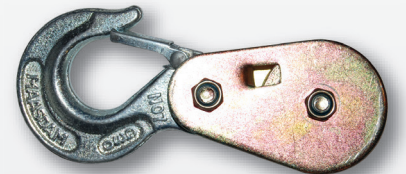

## Strap Puller Parts

### Model #: 6020 ▲

Snap block with 5/16-in. hook - Strap Puller  
Weight: 1.25 lbs.





## Load Binders

### Mini Bind'R Features:

- Forged steel mini binder, for use with cable, chain or rope.
- Swivel hook
- 7 inch handle

#### Mini Tightener Bind'R 175# Model #: 48979M ▲

Weight: 1.1 lbs.  
Min-Max Chain Size: 1/4-in.  
Take Up: 3.5-in.  
Handle Length: 7-in.

WLL: 175 lbs.  
Proof Load: 350 lbs.  
Ultimate Strength: 525 lbs.



#### Mini Tightener Bind'R 250# Model #: 48919M ▲

Weight: 1.1 lbs.  
Min-Max Chain Size: 1/4-in.  
Take Up: 3.5-in.  
Handle Length: 7-in.

WLL: 250 lbs.  
Proof Load: 500 lbs.  
Ultimate Strength: 750 lbs.



#### Mini Tightener Bind'R 375# Model #: 48949M ▲

Weight: 1.25 lbs.  
Min-Max Chain Size: 1/4-in.  
Take Up: 3.5-in.  
Handle Length: 7-in.

WLL: 375 lbs.  
Proof Load: 750 lbs.  
Ultimate Strength: 1,500 lbs.




### Pro Load Bind'R Features:

- Forged steel, quenched and tempered
- Ball and socket swivel joints at hook assemblies permit a straight line pull
- Binder toggles away from the load
- Extra heavy construction at leverage points to prevent spreading

#### 1/4-in. Malleable Pro Load Binder Model #: 48304M ▲

Weight: 2.75 lbs.  
Min-Max Chain Size: 1/4-in.  
Take Up: 4-in.  
Handle Length: 11-in.

WLL: 2,600 lbs.  
Proof Load: 5,200 lbs.  
Ultimate Strength: 9,200 lbs.



#### 3/8-in. Malleable Pro Load Binder Model #: 48305M ▲

Weight: 6.55 lbs.  
Min-Max Chain Size: 5/16-in. to 3/8-in.  
Take Up: 4.5-in.  
Handle Length: 16-in.  
WLL: 5,400 lbs.  
Proof Load: 10,800 lbs.  
Ultimate Strength: 19,000 lbs.



#### 1/2-in. Pro Load Binder Model #: 48306M ▲

Weight: 10.5 lbs.  
Min-Max Chain Size: 3/8-in. to 1/2-in.  
Take Up: 4.5-in.  
Handle Length: 16.5-in.  
WLL: 9,200 lbs.  
Proof Load: 18,400 lbs.  
Ultimate Strength: 33,000 lbs.



### Pro Ratchet Load Bind'R Features:

- Continuous take-up feature, infinite adjustment gets the last link of chain
- One-piece assembly, no nuts and bolts to loosen
- Ratchet spring rust proofed
- All load bearing or holding parts forged
- Easy operating positive ratchet


#### 1/4-in. Pro Ratchet Load Binder Model #: 48364M ▲

Weight: 3.7 lbs.  
Min-Max Chain Size: 1/4-in.  
Take Up: 6.5-in.  
Handle Length: 8.5-in.  
WLL: 2,600 lbs.  
Proof Load: 5,200 lbs.  
Ultimate Strength: 9,200 lbs.




#### 1-1/2-in. Pro Ratchet Load Binder Grade 70 Model #: 48070M ▲

Weight: 11.95 lbs.  
Min-Max Chain Size: 3/8-in. - 1/2-in.  
Take Up: 8-in.  
Handle Length: 14-in.  
WLL: 9,200 lbs.  
Proof Load: 18,400 lbs.  
Ultimate Strength: 33,000 lbs.

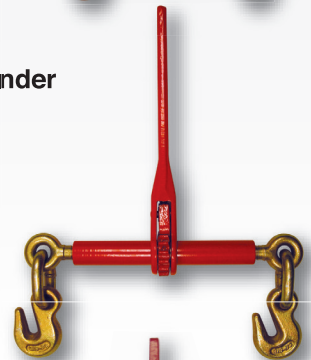

#### 3/8-in. Pro Ratchet Load Binder Model #: 48810M ▲

Weight: 10.75 lbs.  
Min-Max Chain Size: 3/8-in.  
Take Up: 8.63-in.  
Handle Length: 8.63-in.  
WLL: 5,400 lbs.  
Proof Load: 10,800 lbs.  
Ultimate Strength: 19,000 lbs.

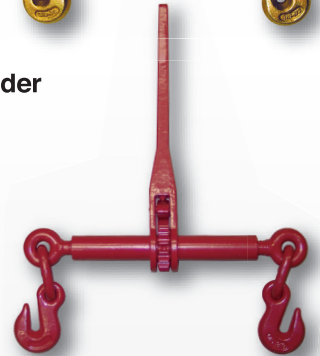

### Transport Bind'R Features:

- Forged steel, quenched and tempered
- Ball and socket swivel joints at hook assemblies permit a straight line pull
- Binder toggles away from the load
- Extra heavy construction at leverage points to prevent spreading

#### 3/8-in. Transport Binder Model #: 48311M ▲

Weight: 7.45 lbs.  
Min-Max Chain Size: 1/2-in. to 5/8-in.  
Take Up: 4.75-in.  
Handle Length: 21-in.  
WLL: 5,400 lbs.  
Proof Load: 10,800 lbs.  
Ultimate Strength: 19,000 lbs.



**▲ WARNING:** This product can expose you to di(2-ethylhexyl) phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).



Maasdam — The Original.  
Often Imitated...Never Duplicated™

### Applications:

For low headroom use:

- Automotive engines, riding lawn mowers, snowmobiles, industrial equipment, machinery, generators, heavy scenery, sound equipment and many more!

All dimensions given as length x width x height

## Manual Chain Hoists

### Manual Chain Hoist Features:

- Economical hand chain hoist designed for years of trouble free service.
- Steel construction with powder coating.
- Lightweight, compact design for tight applications.
- Needle bearing for smooth operations.
- Completely enclosed brake system for precise load spotting.
- Conforms to ANSI/ASME B30.21-1999

#### 48500 ▲ 1/2 Ton Capacity

Weight: 22.0 lbs.  
Lift: 10 ft.  
Hook size: 1-1/8-in.  
Housing dimensions:  
5.75-in. x 5-in. x 6.25-in.  
Housing and Hook length: 10.5-in.



#### 48510 ▲ 1 Ton Capacity

Weight: 22.75 lbs.  
Lift: 10 ft.  
Hook size: 1-1/8-in.  
Housing dimensions:  
5.75-in. x 5-in. x 6.25-in.  
Housing and Hook length: 10.5-in.



#### 48520 ▲ 2 Ton Capacity

Weight: 32.0 lbs.  
Lift: 10 ft.  
Hook size: 1-1/4-in.  
Housing dimensions:  
6.75-in. x 6-in. x 7.25-in.  
Housing and Hook length: 13.25-in.



## Lever Hoists

### Lever Chain Hoist Features:

- Automatic brake system holds load in any position
- Freewheeling feature without load for quick load attachment
- All steel construction with durable powder-coat finish
- Drop forged hooks with heavy-duty safety latches swivel 360° for easy rigging
- Conforms to ANSI/ASME B30.21-1999

#### 48600 ▲ 3/4 Ton Capacity

Weight: 15.25 lbs.  
Lift: 5 ft.  
Hook size: 1-1/4-in.  
Housing dimensions:  
5-in. x 3.75-in. x 4.75-in.  
Handle length: 12-in.



#### 48610 ▲ 1-1/2 Ton Capacity

Weight: 26.5 lbs.  
Lift: 5 ft.  
Hook size: 1-3/8-in.  
Housing dimensions:  
6-in. x 4.5-in. x 5.25-in.  
Handle length: 16.75-in.



**⚠ WARNING:** This product can expose you to di(2-ethylhexyl) phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).



Maasdam — The Original.  
Often Imitated...Never Duplicated™

All dimensions given as length x width x height

## Trolley Jack



### MPL4136 ▲ 2 Ton Capacity Trolley Jack

Maximum Load Capacity: 2 Tons (4000 lbs.)  
Lifting Range: 3 in. to 13 in.  
Saddle Dimensions: 1.875 in. diameter  
Size: 17-1/2 in. x 7-3/4 in. x 5-1/2 in.  
Weight: 18.3 lbs.

#### Features:

- Small frame for easy maneuverability and lightweight design
- Removable pump handle for easy storage and ease of lowering jack
- Swivel casters for maneuvering and smooth positioning
- Swiveling saddle to adjust placement for stability
- Carrying handle for easy portability
- Meets ANSI/ASME standard requirements



### MPL1449-HD ▲ 3 Ton Capacity Commercial Grade SUV/Equipment Jack (Foot Pump w/Sleeve)

Maximum Load Capacity: 3 Tons (6000 lbs.)  
Lifting Range: 7.5 in. to 21 in.  
Saddle Dimensions: 2.28 in. diameter  
Size: 25 in. x 10 in. x 7-1/2 in.  
Weight: 45 lbs.

#### Features:

- 360° swivel saddle for solid load contact, adjustable saddle height
- Rust resistant finish for long life
- Heavy gauge steel frame provides strength and durability
- Ball bearing swivel casters for easy jack positioning
- Handle with extra large grip for added comfort
- Meets ANSI/ASME standard requirements

## Jack Stands

### MPL4117 ▲ 2 Ton Jack Stand

Maximum Load Capacity: 2 Tons (4,000 lbs.)  
Lifting Range: 10.5-in. to 17-in.  
Base Dimensions: 7-in. x 7.5-in.  
Weight: 11 lbs.

- Heavy-duty steel base with anti-sink feet
- Use with SUV, light truck and automobiles
- Iron saddle
- Extended reach
- Meets ANSI/ASME standard requirements



### MPL4124-HD ▲ 3 Ton Jack Stand

Maximum Load Capacity: 3 Tons (6,000 lbs.)  
Lifting Range: 12-in. to 17.5-in.  
Base Dimensions: 7.5-in. x 8.25-in.  
Weight: 12 lbs. (6 lbs. each)

- Heavy-duty steel base with anti-sink feet
- Use with SUV, light truck and automobiles
- Iron saddle
- Extended reach
- Meets ANSI/ASME standard requirements



**WARNING:** This product can expose you to di(2-ethylhexyl) phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

Pull'R Holding Company, LLC., parent company of Bucket Boss®, Dead On Tools® & Maasdam®  
1-888-797-7855 • [www.maasdam.com](http://www.maasdam.com) • [www.pullr.com](http://www.pullr.com)



All dimensions given as length x width x height

## Bottle Jacks

### MPL2B

Maximum Load Capacity: 2 Tons (4,000 lbs.)  
Lifting Range: 7-1/2-in. to 13-9/16-in.  
Saddle Dimensions: 3/4-in. diameter  
Weight: 6.5 lbs.


- Adjustable load saddle
- Meets ANSI standard requirements



### MPL8B

Maximum Load Capacity: 8 Tons (16,000 lbs.)  
Lifting Range: 8-1/2-in. to 17-in.  
Saddle Dimensions: 1-3/8-in. diameter  
Weight: 13.5 lbs.

- Adjustable load saddle
- Meets ANSI standard requirements
- Carrying handle

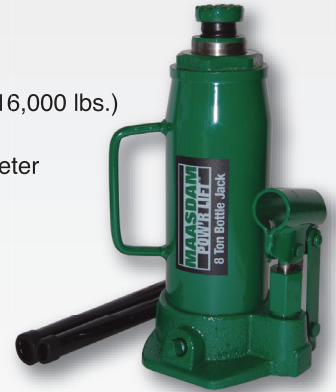

### MPL4B

Maximum Load Capacity: 4 Tons (8,000 lbs.)  
Lifting Range: 7-5/8-in. to 14-5/8-in.  
Saddle Dimensions: 1 in. diameter  
Weight: 8.0 lbs.

- Adjustable load saddle
- Meets ANSI standard requirements



### MPL12B

Maximum Load Capacity: 12 Tons (24,000 lbs.)  
Lifting Range: 9-1/2-in. to 18-7/16-in.  
Saddle Dimensions: 1-5/8-in. diameter  
Weight: 13.1 lbs.

- Adjustable load saddle
- Meets ANSI standard requirements
- Carrying handle



### MPL6B

Maximum Load Capacity: 6 Tons (12,000 lbs.)  
Lifting Range: 8-1/2-in. to 16-1/4-in.  
Saddle Dimensions: 1-1/4-in. diameter  
Weight: 7.9 lbs.

- Adjustable load saddle
- Meets ANSI standard requirements



### MPL20B

Maximum Load Capacity: 20 Tons (40,000 lbs.)  
Lifting Range: 9-1/2-in. to 17-in.  
Saddle Dimensions: 1-7/8-in. diameter  
Weight: 19.2 lbs.

- Adjustable load saddle
- Meets ANSI standard requirements
- Carrying handle



**⚠ WARNING:** This product can expose you to di(2-ethylhexyl) phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

**Maasdam®**  
Pull'R Holding Company, LLC  
415 East State Parkway, Schaumburg, IL 60173  
www.maasdam.com · 888-797-7855

2017

