
Renew Collection 50 Inch Renew Fan WH

330100WH (White)

The state of the s

Dimensions

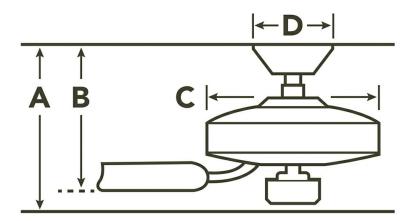

Downrod	Α	В	С	D
1.00 OD X 4.00	12.75	10.50	11.75	5.90
FLUSH MOUNT	9.25	7.00	11.75	5.90

Available Finishes

	Finish	Fixture	Glass	Blade 1	Blade 2	
--	--------	---------	-------	---------	---------	--

Project Name:
Location:
Туре:
Qty:
Comments:

Product Information

Product ID	330100WH
Finish	White
Blade Finish	White/White
Collection	Renew Collection

Airflow, Power and Efficiency

Speed	RPM	CFM	CFM/ Watt	Amps	Watts
High	214	5685	87	.58	66
Med	160	4337	123	.43	35
Low	70	2102	217	.23	10

Specifications

opodinoationo	
Number of Blades	5
Blades Included	Yes
Blade Pitch	12 Degrees
Blade Sweep	50"
Blades Reversible	No
Blade Material	WOOD
Optional Blades Available	No
Downrod 1	1.00 OD X 4.00
Downrod 2	FLUSH MOUNT
Primary Control System	Pull Chain - In project applications using multiple ceiling fans, alternative remote controls may be required. Please contact Kichler Advanced Product Solutions at 844-542-4537 to confirm your project requirements.
Remote Included	No
Wall Control Included	No
Low Ceiling Adaptable	Yes, Dual Mount Included
Lead Wire Length	78.00"
Motor Size	153MM X 15MM
Motor Type	AC

Downlight

Optional Light Kit Available N

Safety Listings & Certifications

Safety Rated	Dry
Warranty	www.kichler.com/warranty




7711 East Pleasant Valley Road Cleveland, Ohio 44131-8010 Toll free: 866.558.5706 or kichler.com

Notes

Information provided is subject to change without notice.

All values are design or typical values when measured under laboratory conditions.





Renew Collection 50 Inch Renew Fan WH

330100WH (White)

Brushed Stainless Steel	330100BSS	N/A	DARK OAK	MEDIUM OAK
Brushed Nickel	330100NI	N/A	CHERRY	WALNUT
Oil Brushed Bronze	330100OBB	N/A	CHERRY	WALNUT
Tannery Bronze	330100TZ	N/A	TEAK	DARK CHERRY
White	330100WH	N/A	WHITE	WHITE
Matte White	330100MWH		MATTE WHITE	MATTE WHITE
Sterling Gold	330100SGD		WALNUT	STERLING GOLD

\sim		\sim	4.5
COD	rnoi	(In	tione
CULI	LI OI	$\mathbf{O}\mathbf{D}$	tions

Product ID	Descr
337001WH	Universal Remote Control
337012ALM	4 Speed Fan Slide Control
337012IV	4 Speed Fan Slide Control
337012WH	4 Speed Fan Slide Control
337214	Limited Function Cooltouch
370039MUL	Wall Control System L-Function
370040	4 Speed Rotary Switch 10 AMP

Project Name:	
Location:	
Туре:	
Qty:	
Comments:	

Installation	
Installation requirements	The electrical junction box and support structure must be securely mounted and capable of reliably supporting a minimum of 50 pounds. Use only ETL/UL listed electrical junction boxes marked ""For Fan Support""
Electrical Requirements	120V 60Hz AC
Hanging Weight	25.3 LBS
Minimum Distance Between Bottom Of Fan Blade To Floor	7.5 feet