

ITEM NO.	CATALOG NO. ²	INSULATION COLOR	WIRE SIZE	NEMA Tab Size	WIDTH (W)	LENGTH (L)	WIRE STRIP LENGTH	FIG. NO.
10001487	QN10F25X03D	YELLOW	10 - 12 AWG	.250 X .032	.25 [6]	.95 [24]	3/8"	1
10001485 ⁴	QN10F18X02D	YELLOW	10 - 12 AWG	.187 X .020	.19 [5]	.84 [21]	3/8"	2
10001478	QN14F25X03D	BLUE	14 - 16 AWG	.250 X .032	.25 [6]	.87 [22]	3/8"	1
10001474	QN14F18X02D	BLUE	14 - 16 AWG	.187 X .020	.19 [5]	.79 [20]	3/8"	2
30009055	QN14F11X02D	BLUE	14 - 16 AWG	.110 X .020	.11 [3]	.77 [20]	3/8"	3
10001457	QN18F25X03D	RED	16 - 22 AWG	.250 X .032	.25 [6]	.87 [22]	3/8"	1
10001453	QN18F18X02D	RED	16 - 22 AWG	.187 X .020	.19 [5]	.79 [20]	3/8"	2
30009054	QN18F11X02D	RED	16 - 22 AWG	.110 X .020	.11 [3]	.77 [20]	3/8"	3

REV	DATE	DESCRIPTION	ECO	BY	CH'K.
E	02/14/2012	CHANGE WIRE RANGE FROM 18 -22AWG TO 16 - 22AWG	30440	PM	MB

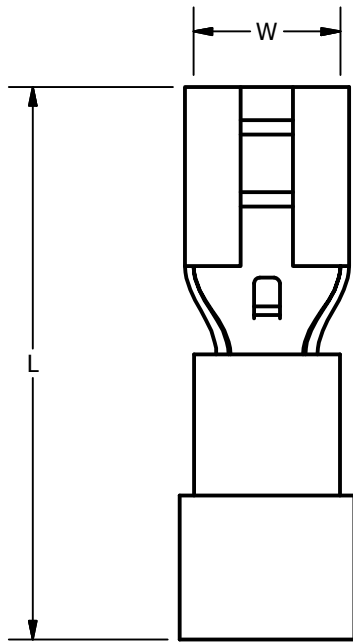


FIG. 1

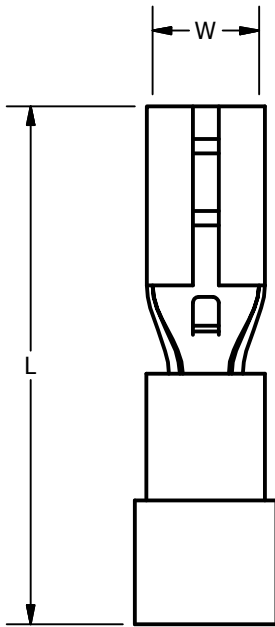
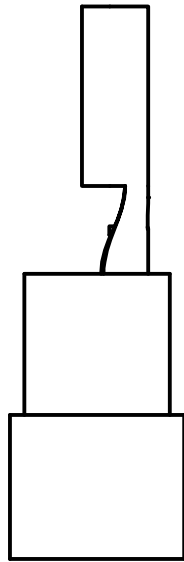


FIG. 2



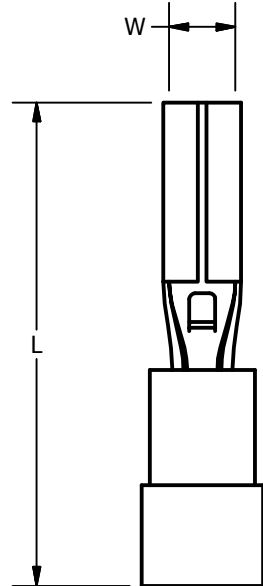


FIG. 3

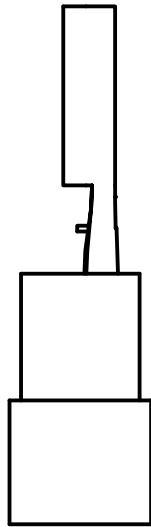

NOTES:

- DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS, ROUNDED OFF TO THE NEAREST MILLIMETER AND ARE FOR REFERENCE ONLY, UNLESS OTHERWISE SPECIFIED.
- SUFFIX "D" DENOTES DISTRIBUTOR PACKAGING. REPLACE SUFFIX "D" WITH "B" FOR BULK PACKAGING.
- CONNECTORS ARE cULus LISTED FOR USE IN CANADA AND THE U.S.
- THIS CONNECTOR IS NOT cULus LISTED.
- INSTALLATION TOOLING: MRE1022NV, Y10D, Y1022.

TO ORDER BURNDY® PRODUCTS CALL				NYLON INSULATED DISCONNECTS			
UNITED STATES 1-800-346-4175 (LONDONDERRY, NH)				ITEM NO: SEE TABLE			
CANADA: 1-800-361-6975 (QUEBEC) 1-800-387-6487 (ALL OTHER PROVINCES)				CAT. NO: QN--F-- (SEE TABLE)			
FOR PRODUCT INFO: http://www.burndy.com				DRAWN BY: E.MARTIN 01/25/2012			
				CHECKER: --			
				DSN APRVL: E.MARTIN			
				MEG APRVL: --			
				QA APRVL: --			
				MKT APRVL: --			
				PROD FAM: CM&R			
				PROJECT #:			
				DOCUMENT TYPE: SALES			
				REL LEVEL: Released			
				DRAWING NO			
				SIZE			
				50000754			
				SHEET 1 OF 1			
				REV			
				E			