

Location: _____




FS1740-FL

12" X 12" X 10" FLOOR AREA AND INDIRECT SANITARY WASTE DRAIN WITH FLANGE

Specification: MIFAB Series FS1740-FL, 12" x 12" x 10" deep cast iron floor area and indirect sanitary waste drain complete with white acid resistant porcelain enamel coated interior, loose set grate and anchor flange with weepholes. Anti-splash aluminum dome strainer included.

Function: Used in kitchens, restaurants, grocery stores, hospitals, schools, and other areas that require a large volume sanitary drain. Also suitable for indirect waste applications. The anchor flange is engineered to receive water proofing membrane. Membrane clamps are recommended for use with the anchor flange (Suffix -C). The light duty grate is not recommended for foot traffic.

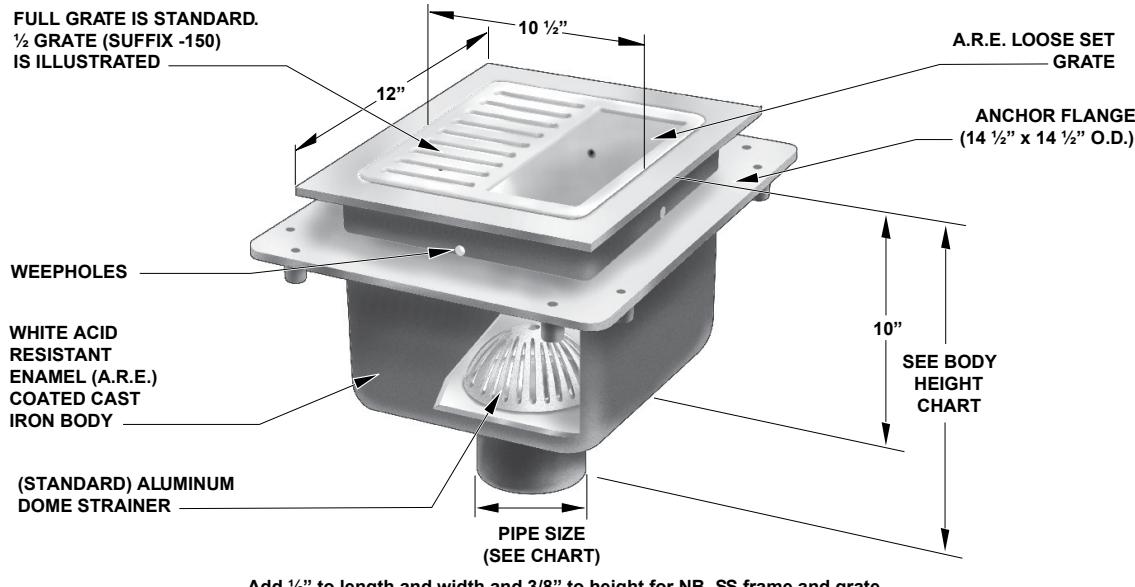

| PIPE SIZE | BODY HEIGHT | | | | |
|-----------|-------------------|----------------|----------------|------------------|-----------------------|
| | NO HUB (STANDARD) | PUSH ON (P) | THREADED (T) | INSIDE CAULK (X) | PVC (-30) / ABS (-31) |
| 2" (51) | 11 1/2" (292) | 11 1/2" (292) | *12 1/2" (318) | *14" (356) | *13 1/4" (337) |
| 3" (76) | 11 1/2" (292) | 11 1/2" (292) | *12 7/8" (327) | 12 5/8" (321) | *13 1/4" (337) |
| 4" (102) | 11 1/2" (292) | *12 7/8" (327) | *12 7/8" (327) | 12 5/8" (321) | *13 1/4" (337) |

*Indicates outlet size and connection available with transition outlet body only.

Outlet sizes indicated by the * are available with the transition outlet body only.

| SUFFIX | OPTIONAL VARIATIONS | SUFFIX | OPTIONAL VARIATIONS |
|---------------|--|------------|--|
| -1 | Nickel bronze frame and grate | -90 | Threaded side outlet |
| -3 | Stainless steel frame and grate | -90NH | No hub side outlet |
| -5 | Sediment bucket | -95 | Client logo (-1, -3 only) |
| -6 | Security screws (1, -3 only, T-20 Torx and pin) | -150 | 1/2" PVC grate |
| -7 | 1/2" trap seal primer connection | -175 | 3/4" PVC grate |
| -8 | Backwater valve (2", 3" or 4" only) | -BA | Buy American Act compliant product |
| -9 | Hinged grate (-3 only) | (Standard) | No hub outlet |
| -21 | Secondary flat stainless steel strainer | -F4 | 4" round funnel |
| -22 | Less grate | -F6 | 6" round funnel |
| see FS1940-FL | Stainless steel body (Type 304) | -G | 4" x 9" oval funnel |
| see FS1940-FL | Stainless steel body (Type 316) | -J | 3" x 1" oval funnel |
| -30 | PVC outlet | -P | Push on outlet |
| -31 | ABS outlet | -PA | Pennsylvania Steel Act compliant product |
| -32 | Deep seal trap with flushing connection | -T | Threaded outlet |
| -50 | A.R.E. coated cast iron funnel | X | Inside caulk outlet |
| -51 | 2 1/2" round center hole in grate (-1, -3 only) | -Z | Extended wide elastomeric flange (with -FL only) |
| -69 | Stainless steel sediment bucket | -C | Membrane Clamps |
| -83 | Stainless steel mesh screen over sediment bucket | | |

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____
 Section No: _____
 Schedule No: _____

Page No: _____
 Contractor: _____
 Purchase Order No: _____