


3ft Shop Light Bar

54255142

Part # SH-3-18-840-SV

SPECIFICATIONS

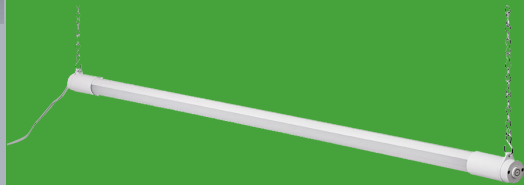


The ETi 3ft Shoplight Bar offers exceptional performance as a high quality replacement for traditional fluorescent light sources. Using only 18 watts of power to deliver 1500 lumens and lasting more than 5 times longer than fluorescent alternatives. They are UL listed for use in damp locations and are RoHS compliant with no lead or mercury.

Designed to be used anywhere a traditional fluorescent fixture is used. Typically used in work shops, garages and utility rooms. Other common applications in commercial, office, retail, restaurants, schools, hospitals and hotel/motel locations.

KEY FEATURES & BENEFITS

- 18W
- 1500lm
- 4000K
- 120V
- CRI≥80
- Non Dimmable
- Wet Locations
- 50,000 rated life
- 5 years Warranty
- Operating Temperature: -40°F~113°F

FIXTURE DIMENSIONS



Part # SH-3-18-840-SV
 Dimension A=36"
 Dimension B=1.16"

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. For FCC Part 15 user information, Please see www.etissl.us/fcc15b

3ft Shop Light Bar

54255142

Part # SH-3-18-840-SV

SPECIFICATION DATA

Item Number	Description	Watts	Input Voltage (VAC)	Average Rated Life ¹	Typical Lumens ²	CCT ³	CRI ⁴	Power Factor	R9	Beam Angle	Operating Frequency
54255142	3ft Shop Light Bar	18	120	50,000 hours	1500	4000	≥80	>0.9	NA	220	50/60Hz

¹ Hours lifetime with 70% lumen maintenance

² Thermally stable typical lumens

³ in compliance with ANSI C77.378 201X

⁴ Color rendering index/Ra

SHIPPING INFORMATION

Item Number	Item UPC	Item Dimensions (L x W x H)	Item Weight (lbs)	Inner Pack Qty	Inner Carton Bar Code	Inner Carton Dimensions (L x W x H)	Inner Pack Weight (lbs) Dimensions (L x W x H)	Master Pack QTY	Master Carton Bar Code	Master Dimensions (H x L x W)	Master Pack Weight (lbs)
54255142	849489 001609	1.42"x36"x1.16"	0.71	NA	NA	NA	NA	6	5084948 9001604	3.39"x45.1" x4.88"	4.88



The Americas Headquarters
 720 Corporate Woods Parkway
 Vernon Hills, IL 60061
 855-384-7754
www.etissl.com

Commercial Electric

LED lighting facts
A Program of the U.S. DOE

Light Output (Lumens)	1500
Watts	18
Lumens per Watt (Efficacy)	83.33

Color Accuracy Color Rendering Index (CRI)	83
--	-----------

Light Color Correlated Color Temperature (CCT)	4000 (Bright White)
--	----------------------------

2700K 3000K 4500K 6500K

All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the Label Reference Guide.

Registration Number: YN84-XAHJRA (4/24/2015)
 Model Number: 542551XX(X)41-50
 Type: Luminaire - Linear