2711



Color: Black-White

UPC Code: 078477808351

Country Of Origin: United States

NEMA: L14-30P



Locking Plug, 30 Amp, 125/250 Volt, Industrial Grade - Black & White

30 Amp, 125/250 Volt, NEMA L14-30P, 3P, 4W, Locking Plug, Industrial Grade, Grounding - Black/White

Leviton's Black & White line of industrial grade plugs, connectors, flanged inlets, and outlets offer superior performance, long lasting reliability and features that are backed by a lifetime warranty:

- One piece contacts reduce friction and overheating
- Unique cord clamp accepts wide range of cord sizes (.245"-.700")
- Rugged nylon construction resists impact, sunlight, chemicals, and rough use
- Industry exclusive lifetime warranty
- Made proudly in the USA

Technical Information

AC Horsepower Ratings

At Rated Voltage: 2 HP L-L / 2 HP L-N

Electrical Specifications

Amperage: 30 A

Current Interrupting: Certified for current interrupting at full rated current

Dielectric Voltage: Withstands 2000V per UL498

Grounding: Grounding

Pole: 3

Temperature Rise: Max 30C after 250 cycles OL at 200 percent rated current

Voltage: 125/250 VAC

Wire: 4

Environmental Specifications

Environment: Dry

Flammability: Rated HB or better UL94

Operating Temperature: -40°C to 60°C

Material Specifications

Assembly Screws: Steel, Zinc Plated

Back Cover: Thermoplastic

Blades/Contacts: Solid Brass

Body Material: Impact Modified Nylon

Clamp Insert: Nylon

Color: Black-White

Cord-Clamp: Nylon

Terminal Screws: Brass

Wire Module: Nylon

Mechanical Specifications

Cord Range: 0.560 to 1.050

Product ID: Ratings are permanently marked on device

Terminal Accom.: 18-10 AWG

Terminal ID: Brass-Hot, Green-Ground, Silver-Neutral

Wire Gauge: 14-8 AWG

Product Features

Brand: Black and White

Color: Black-White

Device Type: Locking Plug

NEMA: L14-30P

Standards and Certifications

ANSI: C-73

CSA C22.2 No. 42: File LR-406

NEMA: WD-6


NOM: 057

UL Fed Spec WC-596: File E13393

UL498: File E13393

Warranty: Limited Lifetime Warranty

Dimensional Diagram

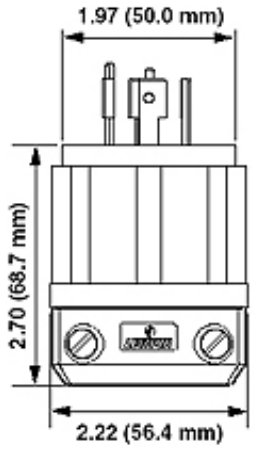

SPECIFICATION SUBMITTAL

JOB NAME:		CATALOG NUMBERS:	
JOB NUMBER:			

Leviton Manufacturing Co., Inc.
201 North Service Road, Melville, NY 11747
Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): +1-800-824-3005

Leviton Manufacturing of Canada, Ltd.
165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 · FAX: +1-800-824-3005 · www.leviton.com/canada

Leviton S. de R.L. de C.V.
Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-1797 · www.leviton.com.mx

ISO 9001 REGISTERED Quality Manufacturer

Visit our Website at: www.leviton.com
© 2018 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

Leviton has a global presence.
If you would like to know where your local Leviton office is located please go to:
www.leviton.com/international/contacts/