

Adhesive Accessories

Hole-Cleaning Brushes

Brushes are used for cleaning drilled holes prior to adhesive anchor installation. Brushes have a twisted wire handle with nylon bristles.



ETB

Description	Model No.	For Anchor/Rebar Diameter (in.)	For Hole Diameter (in.)	Carton Quantity
½" x 3" brush (8" total length)	ETB4	¼" – ⅝"	⅜" – 7⁄₁₆"	24
¾" x 4" brush (16" total length)	ETB6	⅜" – ⅝"	½" – ¾"	24
1" x 4" brush (16" total length)	ETB8	¾"	1⅜" – 7⁄8"	24
1" x 4" brush (24" total length)	ETB8L	¾"	1⅜" – 7⁄8"	24
1¼" x 4" brush (29" total length)	ETB10	7⁄8" – 1"	1" – 1⅛"	24
1⅝" x 6" brush (34" total length)	ETB12	1¼"	1⅜" – 1⅝"	24

Adhesive Shear Tubes

Used in conjunction with anchoring adhesive and screen tubes, adhesive shear tubes transfer anchor shear loads over a larger area, reducing localized crushing in unreinforced masonry installations. Required for through-bolt applications per ICC-ES's unreinforced masonry anchorage "Configuration C" detail. For detailed installation instructions, refer to the appropriate adhesive anchor ICC-ES report.

MATERIAL: Steel


FINISH: Zinc-plated



Adhesive Shear Tube

Description (in.)	Model No.	For use with Simpson Screen Model No. ¹	Drill Bit Diameter (in.)	Threaded Rod Diameter (in.)	Carton Quantity
1⅜" x 8	AST800	ETS758, ATS758	1	⅝"	1

1. Screens sold separately. Not for use with Simpson Strong-Tie® screen ETS758P or ATS758P plastic Opti-Mesh screen tubes.

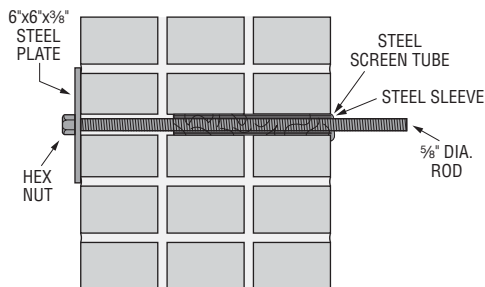

Configuration C