

EQUINOX MULTI



LAMINATE | CARPET | HARDWOOD | LUXURY VINYL

12mm Water Resistant Laminate with AtroGuard Technology and a Embossed-In-Registered Finish



NEW!

CHEM28965
Gatehouse



NEW!

CHEM28963
Chateau



NEW!

CHEM1000
Schooner




NEW!


CHEM1271
Stonehill




CHGUARDIAN810
Stellar

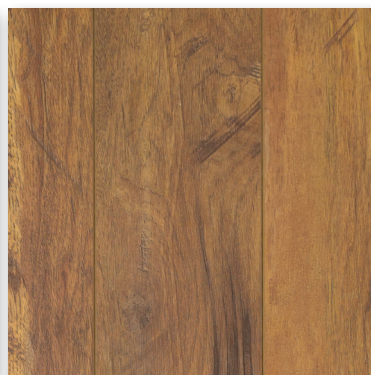

CHGUARDIAN770
Countryside

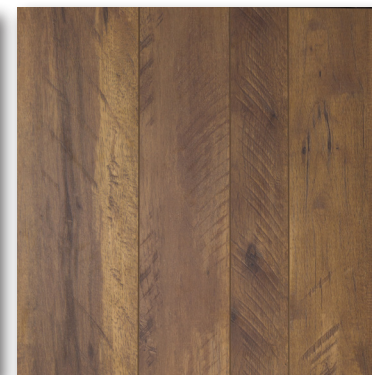

CHGUARDIAN773
Riviera

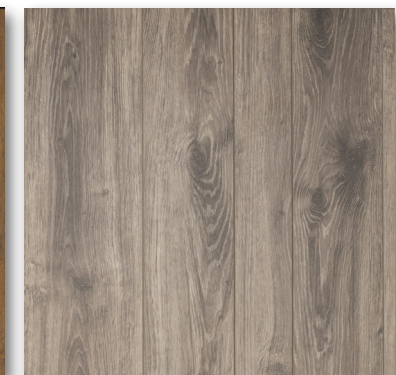

CHGUARDIAN846
Cardigan

SPECIFICATIONS:

Dimensions: 12mm thick x 3.5", 5.5" & 7.5" wide x 48" length

Packaging: 22.54 sf/ctn, 33 ctn/pal, 743.82 sf/plt, 54 lbs/ctn

Finish: Embossed-In-Register, Wire Brushed, AC4 Wear Layer

Profile: 4-Sided Micro-Beveled Edges

Installation: TightLock (drop & tap) + 1.5mm Attached Pad

Recommended Cleaner: FreshFloors by WF Taylor

Warranty: Lifetime Residential, 15yr Light Commercial/Multi-Family

Our AtroGuard Core is more dense, more flexible and more resistant to swelling.

TightLock blocks water from penetrating the floor for at least 72 hours.

Sound deadening attached pad reduces noise and adds comfort underfoot.

Cleanable with a wet-mop!

Equinox Multi can be installed over 4,000 sf with no expansion moldings



Installation Fast Facts:

- Radiant Heat: Approved (Hydro Systems ONLY)
- Acclimation: 48 hrs unopened carton
- Moisture Content: Not to Exceed 2.5%
- Expansion Space: 3/8" gap
- Transitions not required in rooms up to 66' w or 66' long
- Inspect flooring prior to installation
- Use floor protection for furniture

Read Complete Instructions Before Installing