



ELECTRICAL CATALOGUE



VISION. PERFORMANCE. SERVICE.

SINCE 1916

FOUNDATION FOR FUTURE GROWTH

J. Walter Becker founded IDEAL in 1916 and made a promise that is still an important part of the way IDEAL operates today: "An IDEAL product will provide a value greater than the price paid for it. Service is a part of the product." Becker's founding principle represents our everyday commitment to you. It's the driving force behind our partnerships with the world's leading distributors, a state of the art delivery system, outstanding customer and technical support and variety of operational benefits designed to save time and money. It means we're proud of the way we do business. IDEAL's headquarters are located in Sycamore, Illinois with European operations in the UK, Germany and France.



Product innovation, performance, ease-of-use and safety have been at the heart of IDEAL since the beginning. As we approach our 100th anniversary, we are focused on continuing our success through several initiatives. First, an aggressive growth plan through acquisitions; second, expansion into alternative energy markets; third, through geographical expansion.



PRATT-READ® Tools, LLC

A Subsidiary of IDEAL INDUSTRIES, INC.



Growth Through Acquisitions

Electrical connectors have been at the heart of IDEAL's business for more than seven decades. Constant innovation in new connection technologies has positioned IDEAL as one of the world's leading manufacturers producing billions of wire connectors every year. Wire connectors remain a core part of IDEAL's business strategy, however expansion into other product categories and markets offers up the opportunity for significant future growth.

The recent acquisition of 3 US companies, **Western Forge**, based in Colorado Springs, **Pratt-Read Tools, LLC**, based in Sycamore, Pennsylvania and Colorado Springs and **S-K Hand Tools, LLC**, based in Sycamore now positions IDEAL as one of the largest tool manufacturers in the US.



TABLE OF CONTENTS

Wire Termination

Twist-on Wire Connectors	A-2
WeatherProof™ Wire Connectors	A-3
In-Sure™ Push-In Wire Connectors	A-4
SpliceLine™ In-Line Wire Connectors	A-5
Crimp Terminals, Disconnects & Splices	A-6

A

Tools & Supplies

Fish Tapes & Accessories	B-2
Cable Pulling Rods	B-4
Wire Pulling Lubricant & Accessories	B-5
Conduit Benders	B-8
Wire Strippers	B-9
Miscellaneous Pliers	B-10
Cable Cutters	B-11
Screwdrivers	B-12
Insulated Hand Tools	B-13
General Hand Tools	B-15
Saws	B-16
Tool Carriers & Bags	B-17
Cable Ties	B-19
Wire Marker Booklets	B-22

B

Power Tool Accessories

Carbide Tipped Hole Cutters	C-2
Step Drill Bits	C-4
Hole Saws & Arbors	C-5
Reciprocating Blades	C-8
Wood Boring Bits	C-9
Flexible Drill Bits	C-11

C

Electrical Safety

Lockout/Tagout Kits	D-3
Padlocks & Hasps	D-4
Lockout Devices	D-5
Lockstations, Tags & Accessories	D-6

D

Test & Measurement

Clamp Meter & Multimeter Selection Guides	E-2
Clamp Meters	E-3
Multimeters	E-5
Voltage Testers	E-7
Insulation Testers / Ground Resistance Meters	E-8
Installation Tester	E-9
Circuit Tracers	E-10
Circuit Breaker Finder / Voltage Performance Monitor	E-11
Thermal Imagers	E-12
Speciality Testers	E-14
Test Lead & Accessories	E-15

E

Network Tools & Testers

Testers	F-2
Compression Tools	F-8
Compression Connectors	F-9
Crimp Tools	F-11
Modular Plugs & IDC's	F-12
Strippers & Cutters	F-13

F

Connectors designed for every application



Twister® Wire Connectors


Accommodating the majority of common wiring configurations from 0.5mm² - 10.0 mm², the ribbed cap provides a secure grip and swept wings offer extra leverage. A patented square-wire spring provides safe, secure connections. Conforming to BS EN 60998 Twister® wire connectors fully comply with BS 7671:2008 (17th Edition Wiring Regulations).

A cost-effective and flexible solution, Twister® connectors are rated up to 57 Amps, will accept solid and stranded wire and have the added advantage of being re-usable, making them the obvious alternative to terminal blocks.

In-Sure™ Push-In Wire Connectors

The fastest, easiest, push-in connector on the market, the In-Sure™ push-in wire connector can reduce installation time by up to 50% compared to more traditional connection methods. Our 2, 3 & 4 port connectors are uniquely rated to 32 Amps making them suitable for a broad range of wiring applications.

Classified as Maintenance Free, In-Sure™ connectors are the perfect replacement for crimped splices. Conforming to BS EN 60998 In-Sure™ wire connectors fully comply with BS 7671:2008 (17th Edition Wiring Regulations).

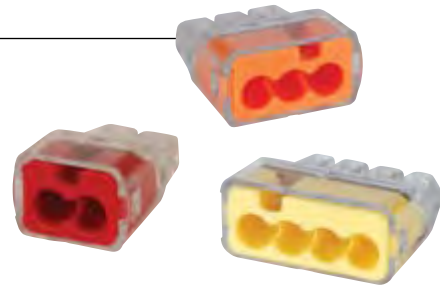

WeatherProof™ Wire Connectors

Connected and Protected in one easy step. Designed specifically for above ground, interior/exterior connections exposed to damp/wet and corrosive environments. Each connector is pre-filled with 100% silicone-based sealant which gives them their IP55 rating. Several models handle a variety of wire sizes from 1.5mm² - 4.0mm², making them ideal for use in gardens, garages and patio areas, as well as in commercial and industrial environments.


Conforming to BS EN 60998 WeatherProof™ wire connectors fully comply with BS 7671:2008 (17th Edition Wiring Regulations).

SpliceLine™ Wire Connectors

SpliceLine™, a revolutionary in-line wire connector. Utilising patented push-in technology, the unique design provides a crimp-free, solderless butt splice making applications easier and faster. The 2-port model supports a wide range of either stranded or solid wires, allowing one connector to cover the same wire range as multiple butt splices.

The end-to-end connection of SpliceLine™ is a great solution for today's pre-fab operations and also makes it perfect for lengthening short wires in tight spaces. It easily passes through standard knock-outs and the transparent polycarbonate allows for visual inspection, assuring a secure connection every time.

Classified as Maintenance Free as per BS 7671:2008, SpliceLine™ is set to change the way you join wires.

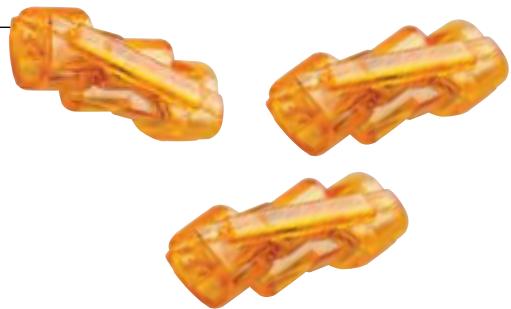

WIRE TERMINATION



Twister® Wire Connectors

- BS 7671:2008 (17th Edition) Compliant
- Exceptional wire-range capacity – three colour-coded models handle wire combinations from as small as 0.5 mm² to as large as 10.0 mm²
- Accept solid and stranded wire
- Ribbed cap provides a secure grip and fast fingertip starts
- Swept wings offer extra leverage and less effort for large wire combinations
- Flame retardant shell
- Hexagonal shape accommodates standard nutdriver for tool installation
- Live-action, square-wire spring locks onto wire for safe, secure connections
- Deep skirt helps protect against flash-over and turned-back strands for maximum dielectric protection
- Reusable
- Cost effective replacement for terminal blocks
- Conform to EN 60998-1:2004, EN 60998-2-4:2005 connecting device standards




Model	Colour	Wire Combination Range (mm)	Quantity	Cat. No.
340°	Lt. Blue	32A / 450V 0.5mm ² to 4.0mm ² Min. 2 x 0.5mm ² Max. 2 x 4.0mm ²	Box of 100	30-340
			Jar of 500	30-640J
341°	Tan	41A / 600V 0.5mm ² to 6.0mm ² Min. 3 x 0.5mm ² Max. 2 x 6.0mm ²	Box of 100	30-341
			Jar of 400	30-441J
342°	Grey	57A / 600V 2.5mm ² to 10.0mm ² Min. 3 x 2.5mm ² Max. 2 x 10.0mm ²	Box of 50	30-342



Twister® PRO Wire Connectors

- BS 7671:2008 (17th Edition) Compliant
- Exceptional wire range and capacity; up to max. 4 x 4.0 mm²
- SureGrip™ overmoulding provides better grip for improved leverage, more torque and faster connections
- Accept solid & stranded wire
- Re-usable
- Comfortable swept wings designed to help reduce hand fatigue
- Expanding square-wire spring provides a secure connection every time
- Tough, UL 94V-2 flame-retardant shell rated at 105°C (221°F)
- Conform to EN 60998-1:2004, EN 60998-2-4:2005 connecting device standards

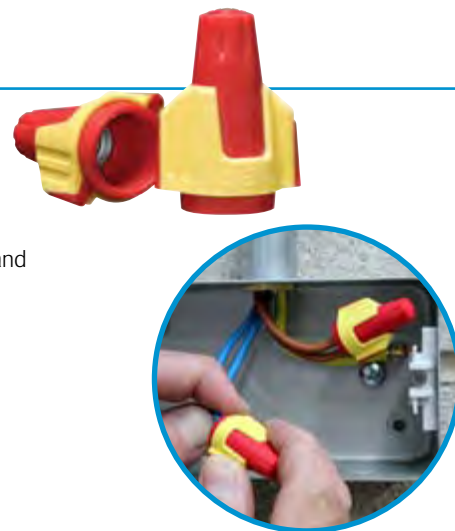

Model	Colour	Wire Combination Range (mm)	Quantity	Cat. No.
344°	Red/Yellow	32A / 600V 0.5mm ² to 4.0mm ² Min. 3 x 0.5mm ² Max. 4 x 4.0mm ²	Box of 50	30-144
			Jar of 250	30-244J
			Jar of 500	30-644J



WeatherProof™ Wire Connectors

- BS 7671:2008 (17th Edition) Compliant
- Silicone-based sealant protects against moisture and corrosion
- IP55 rated for use in damp/wet locations
- Easy to apply, pre-filled twist-on wire connectors
- Accept solid and stranded wire
- Handle wire sizes from 1.5mm² to 4.0mm² copper conductors
- Tough, UL 94V-2 flame-retardant shell rated at 105°C (221°F)
- Conform to EN 60998-1:2004, EN 60998-2-4:2005 connecting device standards

WeatherProof™ – suitable for interior and exterior electrical connections exposed to rain or damp conditions.



WeatherProof™ Wire Connectors

Model	Colour	Wire Combination Range (mm ²)	Quantity	Cat. No.
61	Blue/Orange	24A / 450V / IP55 1.5mm ² to 2.5mm ² Min. 1 x 1.5mm ² Max. 2 x 2.5mm ²	Card of 25	30-161
			Box of 100	30-261
62	Blue/Red	32A / 450V / IP55 1.5mm ² to 4.0mm ² Min. 2 x 1.5mm ² Max. 4 x 4.0mm ²	Card of 20	30-162
			Box of 100	30-262
63	Blue/Dr. Blue	32A / 450V / IP55 2.5mm ² to 4.0mm ² Min. 3 x 2.5mm ² Max. 6 x 4.0mm ²	Card of 15	30-163
			Box of 100	30-263



Twister® & WeatherProof™ Kits

Ordering Information

Model	Description	Qty.	Cat. No.
	Twister® & WeatherProof™ Connector Premium Kit	40 x Model 340° 40 x Model 341° 25 x Model 342° 25 x Model 344° 20 x Model 61 12 x Model 62 12 x Model 63	30-5000EU
	Twister® & WeatherProof™ Connector Starter Kit	30 x Model 340° 30 x Model 341° 15 x Model 344° 15 x Model 62	30-5001EU




Spin-Twist® Wire Connector Socket

- Speeds installation of IDEAL Wire Connectors
- For use with electric corded or cordless drill drivers
- 1/4 in. chuck fits most drills or drive sockets



Description	Cat. No.
Compatible with Twister® and WeatherProof™ Connectors	30-902

The silicone-based sealant protects electrical connections against harsh conditions, eliminating the need for heat-shrink or water-proof enclosures in many applications.



In-Sure™ Push-In Wire Connectors

- BS 7671:2008 (17th Edition) Compliant
- Fits any combination of 0.75mm² - 4.0mm² solid / 1.5mm² - 2.5mm² copper wire or tin bonded stranded wire
- 32 Amp rating on 2, 3 and 4 port models
- High quality, secure connections
- Clear shell gives visual verification of connection
- Ergonomic design for easy grip and comfort
- Low insertion force for fast connections
- Continuity test port
- Colour coded for easy identification
- Maintenance Free
- Conform to EN 60998-1 and EN 60998-2-2 connecting device standards



Specifications

	Wire Type	Model 32 Red 2-Port	Model 33 Orange 3-Port	Model 34 Yellow 4-Port	Model 87 Grey 5-Port	Model 88 Blue 6-Port Stacked	Model 90 Black 8-Port
Wire Combination Range	Solid	0.75mm ² to 4.0mm ²			0.75mm ² to 4.0mm ²		
	Stranded*	1.5mm ² to 2.5mm ²			1.5mm ² to 2.5mm ²		

* Stranded wire is limited to ≤ 7 strands

Ordering Information



Model	Colour	Ports	Length		Width		Height		Quantity	Cat. No.
			In.	mm	In.	mm	in.	mm		
32	Red	2	0.78	19.81	0.52	13.21	0.38	9.65	Box of 100	30-1032
33	Orange	3	0.78	19.81	0.69	17.53	0.38	9.65	Box of 100	30-1033
34	Yellow	4	0.78	19.81	0.82	20.83	0.38	9.65	Box of 100	30-1034
87	Gray	5	.355	9.02	.907	23.03	.729	18.52	Box of 50	30-087
88	Blue	6 Stacked	.607	15.42	.603	15.32	.729	18.52	Box of 50	30-088
90	Black	8	.355	9.02	1.38	35.03	.717	18.21	Box of 50	30-090

COPPER TO COPPER ONLY. Do not use on aluminum.
Temperature rating: 105°C (221°F) maximum



In-Sure™ Push-In Wire Connector Kits

Ordering Information for Kits including In-Sure™ Push-In Connectors


Model	Description	Qty.	Cat. No.
	In-Sure™ Push-In Connector Premium Kit	50 x Model 32 50 x Model 33 50 x Model 34 40 x Model 87 20 x Model 88 15 x Model 90 30 x Model 341® (FOC)	30-5020EU
	In-Sure™ Push-In Connector Starter Kit	30 x Model 32 30 x Model 33 30 x Model 34 20 x Model 88	30-5021EU



SpliceLine™ In-Line Wire Connectors

The SpliceLine™ in-line wire connector provides a crimp-free, solderless butt splice. Classified as "Maintenance Free" as per BS7671:2008, the two-port model accepts up to 2.5mm² wire, allowing one connector to do the job of multiple butt splices. Its end-to-end connection is also a great solution for pre-fab operations.

- BS 7671:2008 (17th Edition) Compliant
- Crimp-free, push-in butt splice
- Easily passes through standard knockouts
- End-to-end connection ideal for pre-fab operations
- Transparent polycarbonate window for visual inspection of connection
- Wide wire range of: 0.5mm² to 2.5mm² solid
- Conform to EN 60998-1 and EN 60998-2-2 connecting device standards

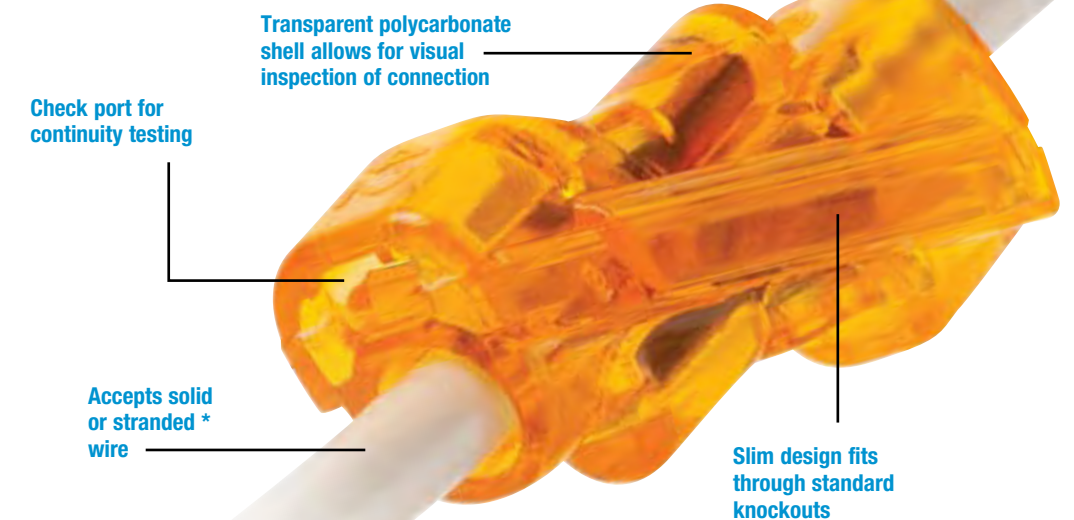

A GREAT PRE-FAB SOLUTION

Model	Colour	Rating	Wire Range	Quantity	Cat. No.
42	Orange	24A / 450V 105°C	Solid: 0.5mm ² to 2.5mm ²	Box of 100	30-1042

* Stranded wire is limited to ≤ 7 strands




Insulated Crimp Terminals-Rings, Disconnects and Splices

- Butted seam-construction prevents splitting under maximum pressure
- Internal barrel serrations grip wires tightly to resist pull-out and reduce electrical resistance
- Tin-plated brass construction for corrosion resistance
- Shouldered barrel insulation quickly positions terminal for proper crimping
- Expanded insulation entry accommodates a wide variety of insulation diameters and provides additional insulation support
- Colour-coded insulation and wire range stamped on terminal for easy identification
- See product packaging for recommended crimp tools

Ring & Spade Terminals

Vinyl Insulated Ring Terminals

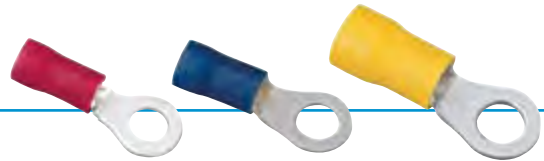


Wire Range	Stud Size mm	Quantity	Cat. No.
0.5-1.0mm ²	3.5mm	25	83-2121
	4.0mm	25	83-2131
	5.0mm	25	83-2141
	6.4mm	25	83-2151
1.5-2.5mm ²	3.5mm	25	83-2221
	4.0mm	25	83-2231
	5.0mm	25	83-2241
4.0-6.0mm ²	6.0mm	25	83-2251
	4.0mm	25	83-2331
	5.0mm	25	83-2341
	6.0mm	25	83-2351
4.0-6.0mm ²	8.0mm	25	83-2361
	10.5mm	25	83-2371

75° C/600 Volts max.



Vinyl Insulated Spade Terminals

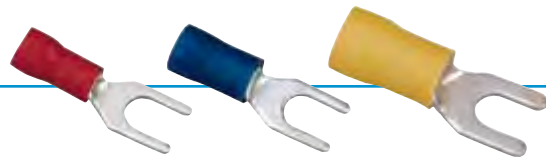


Wire Range	Stud Size mm	Quantity	Cat. No.
0.5-1.0mm ²	3.5mm	25	83-7111
	4.0mm	25	83-7121
	5.0mm	25	83-7131
1.5-2.5mm ²	3.5mm	25	83-7151
	4.0mm	25	83-7161
	5.0mm	25	83-7171
4.0-6.0mm ²	3.5mm	25	83-7201
	4.0mm	25	83-7211
	5.0mm	25	83-7221
	6.0mm	25	83-7231

75° C/600 Volts max.



Disconnects

Nylon Fully-Insulated Female Disconnects

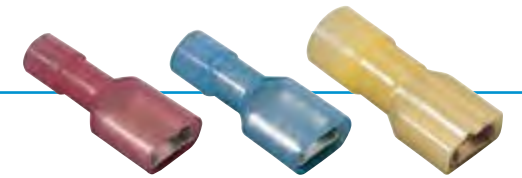


Wire Range	Tab Size mm	Quantity	Cat. No.
0.5-1.0mm ²	6.3mm x 0.8mm	25	83-9771
1.5-2.5mm ²	6.3mm x 0.8mm	25	83-9781
4.0-6.0mm ²	6.3mm x 0.8mm	25	83-9791

105° C/300 Volts max.



Nylon Fully-Insulated Male Disconnects

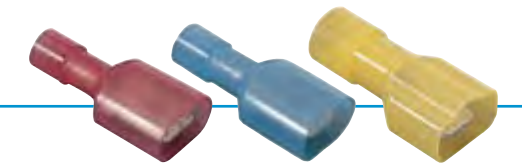

Wire Range	Tab Size mm	Quantity	Cat. No.
0.5-1.0mm ²	6.3mm x 0.8mm	25	83-9911
1.5-2.5mm ²	6.3mm x 0.8mm	25	83-9921
4.0-6.0mm ²	6.3mm x 0.8mm	25	83-9931

105° C/300 Volts max.



Vinyl Insulated Bullet Disconnects




Wire Range	Quantity	Cat. No.
0.5-1.0mm ²	25	83-8001
1.5-2.5mm ²	25	83-8011

75° C/300 Volts max.



Vinyl Fully-Insulated Receptacle Disconnects




Wire Range	Quantity	Cat. No.
0.5-1.0mm ²	25	83-8101
1.5-2.5mm ²	25	83-8111

75° C/300 Volts max.



Disconnects & Butt Splices

Vinyl Insulated Multi-Stack Disconnects

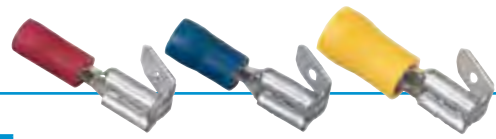

Wire Range	Tab Size mm	Quantity	Cat. No.
0.5-1.0mm ²	6.3mm x 0.8mm	25	83-9611
1.5-2.5mm ²	6.3mm x 0.8mm	25	83-9621
4.0-6.0mm ²	6.3mm x 0.8mm	25	83-9631

75° C/300 Volts max.



Vinyl Insulated Female Disconnects



Wire Range	Tab Size mm	Quantity	Cat. No.
0.5-1.0mm ²	2.8mm x 0.5mm	25	83-9511
1.5-2.5mm ²	2.8mm x 0.5mm	25	83-9521
0.5-1.0mm ²	4.8mm x 0.5mm	25	83-9541
1.5-2.5mm ²	4.8mm x 0.5mm	25	83-9551
0.5-1.0mm ²	6.3mm x 0.8mm	25	83-9571
1.5-2.5mm ²	6.3mm x 0.8mm	25	83-9581
4.0-6.0mm ²	6.3mm x 0.8mm	25	83-9601

75° C/300 Volts max.



Vinyl Insulated Male Disconnects




Wire Range	Tab Size mm	Quantity	Cat. No.
0.5-1.0mm ²	6.3mm x 0.8mm	25	83-9971
1.5-2.5mm ²	6.3mm x 0.8mm	25	83-9981
4.0-6.0mm ²	6.3mm x 0.8mm	25	83-9991

75° C/300 Volts max.



Vinyl Insulated Butt Splices

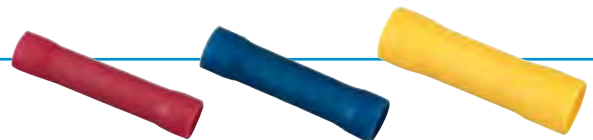

Wire Range	Quantity	Cat. No.
0.5-1.0mm ²	25	83-9281
1.5-2.5mm ²	25	83-9291
4.0-6.0mm ²	25	83-9301

75° C/600 Volts max.



TOOLS & SUPPLIES



Tuff-Grip™ Pro... Industry's Leading Fish Tape!

Etched in (12") increments to provide instant conduit length.

Tuff-Cuff™ tape retaining feature keeps tape properly positioned in the opening.

Full-perimeter handle band helps keep dirt and moisture out, prolonging life.

Tuff-Grip™ Handle
Large, comfortable ergonomically-designed, grasp from the top or side. Allows for use with gloves.

Superior pull-out and rewind characteristics.

Exceptionally Durable Case and Handle

Fish Tape Materials

Blued Steel™

- Laser etched in 12" increments to provide instant conduit length
- Unique finish is non-oily and resists rust
- Multiple options in width, length and eyelet for ease of use
- Industry's straightest wire
- Stiffer for long runs
- Highest grade carbon steel
- Tensile strength 725 kg (1,600 lbs.)



**Length marked!
Now laser etched
in 12" increments
to provide instant
conduit length.**

Zoom™


- 19 strands of stainless steel
- Ultra hard nylon jacket adds slipperiness, protects cables and user's hands
- Excellent for corrugated plastic conduit
- 19 strand twisted radial steel core encased in high molecular density outer jacket.
- Excellent for multiple bends or wet/corrosive work environment
- The only one in the industry

Volt-Guard™

- Non-conductive to 1000V
- Rectilinear profile for superior pushing power
- Designed for use around live circuits

Blued-Steel™ Fish Tapes


- Laser etched in 12" increments to provide instant conduit length
- High column strength for longer runs
- Non-oily finish resists rust

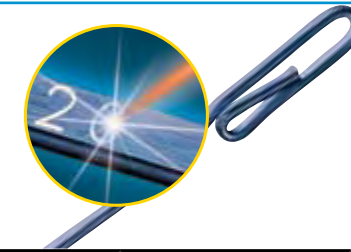

Length (m/ft.)	Width & Thickness mm / in	Case Diameter	End Type	Tuff-Grip™ Pro	Replacement Tapes
Blued Steel™					
18 / 60	3.2 x 1.5 / 1/8 x .060	30 cm / 12 in.	Formed hook	31-055	31-035
36 / 120	3.2 x 1.5 / 1/8 x .060	30 cm / 12 in.	Formed hook	31-056	31-036
73 / 240	3.2 x 1.5 / 1/8 x .060	30 cm / 12 in.	Formed hook	31-057	31-038

Zoom™ Fish Tapes



- Great for hard to navigate conduit with multiple bends
- Nylon jacket protects the steel core while adding to the slipperiness of Zoom™



Length (m/ft.)	Width & Thickness mm / in.	Case Diameter	End Type	Tuff-Grip™ Pro	Replacement Tapes
Zoom™ Nylon Jacketed Stainless Steel					
15 / 50	4.8 / 3/16 diameter	30 cm / 12 in.	Eyelet	31-090	31-091
30 / 100	4.8 / 3/16 diameter	30 cm / 12 in.	Eyelet	31-092	31-093
60 / 200	4.8 / 3/16 diameter	40 cm / 16 in.	Eyelet	31-096	31-097

Volt-Guard™ Fish Tapes

- Non-conductive up to 1000V
- Elliptical design gives the Volt-Guard™ greater pushing power

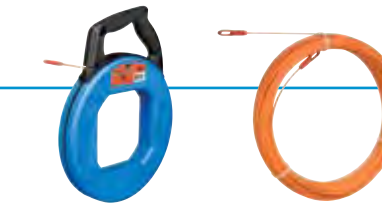


Length (m/ft.)	Width & Thickness mm / in.	Case Diameter	End Type	Tuff-Grip™ Pro	Replacement Tapes
Fibreglass					
18 / 60	4.8 x 2.4 / .1875 x .094	30 cm / 12 in.	Eyelet	31-542	31-552
36 / 120	4.8 x 2.4 / .1875 x .094	30 cm / 12 in.	Eyelet	31-544	31-554

Multi-Wire Pulling Leader


- Pulls multiple wires at one time
- Staggered connection points prevent bunching or hang-ups in tight bends
- 227 kg / 500 lb. working strength at main eyelet and up to 68 kg / 150 lbs. with each individual eyelet

Description	Cat. No.
Multi-Wire Pulling Leader – 4-loop	31-147

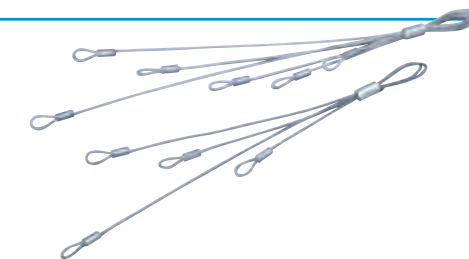

Tuff-Rod™ Cable Pulling Rods

- Strong, lightweight, flexible extendable fiberglass rod kits
- Use to reach and pull wires over suspended ceilings, in cable trays or through interior walls
- Packaged in clear tubes for protection and long-term storage

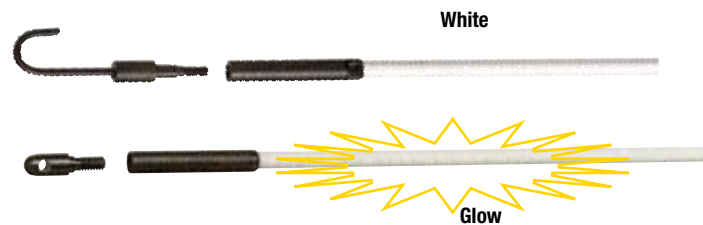

Tuff-Rod™ Regular Flex

- 6 mm / 1/4 in. white fiberglass
- Extra stiffness for added control when maneuvering wires

Description	Cat. No.
3.6 m / 12 ft. kit with fixed bullet nose and threaded J hook (3 ea. 1.22 m / 4 ft. sections)	31-611
7.3 m / 24 ft. kit with fixed bullet nose and threaded bullet nose (4 ea. 1.83 m / 6 ft. sections)	31-612
12 pack of 1.22 m (4 ft.) Regular Flex Replacement Rods	31-643
12 pack of 1.83 m (6 ft.) Regular Flex Replacement Rods	31-644

Accessory Kits

- Includes replacement heads, one threaded bullet nose, one threaded J hook and one threaded wisk




Description	Cat. No.
4.8 mm / 3/16 in. Accessory kit	31-651
6 mm / 1/4 in. Accessory kit	31-652



Tuff-Rod™ Extra Flex Glow

- 4.8 mm / 3/16 in. pale green luminescent fiberglass
- Glow-in-the-dark material for easy use in attics, basements and other dim lit areas

Description	Cat. No.
3.6 m (12 ft.) kit with fixed bullet nose and threaded J hook (3 ea. 1.22 m (4 ft.) sections)	31-631
9.15 m / 30 ft. kit with fixed bullet nose and threaded bullet nose (5 ea. 1.83m (6 ft.) sections)	31-633
12 pack of 1.22 m (4 ft.) Extra Flex Glow Replacement Rods	31-647
12 pack of 1.83 m (6 ft.) Extra Flex Glow Replacement Rods	31-648

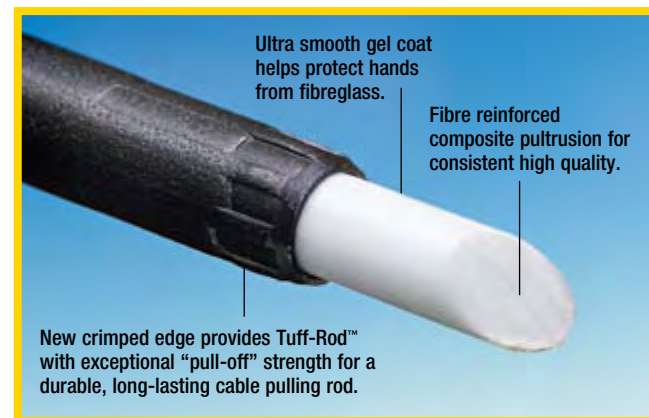

Select-a-Lubricant

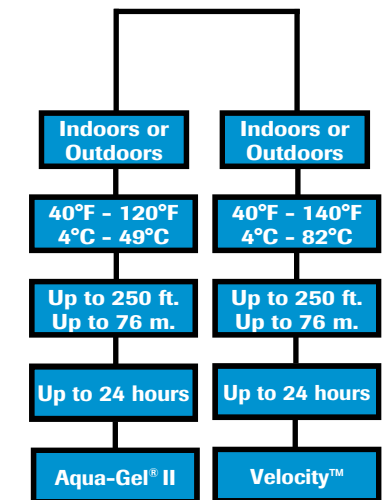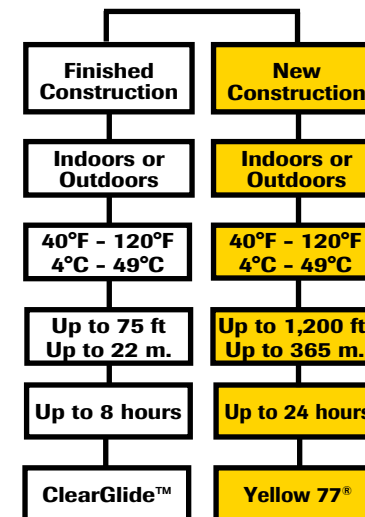

Wire Pulling Lubricant Selection Guide



	ClearGlide™ Wire Pulling Lubricant	Yellow 77® Wire Pulling Lubricant	Aqua-Gel® II Wire Pulling Lubricant	Velocity™ Wire Pulling Lubricant
Colour	Clear	Yellow	Blue	Cream
Base	Polymer	Wax	Polymer	Polymer
Average Coefficient of Friction*	.23	.17	.19	.16
Safe Storage	32°F - 180°F (0°C - 82°C)	32°F - 130°F (0°C - 54°C)	32°F - 180°F (0°C - 82°C)	40°F - 140°F (4°C - 82°C)
Application Temperature Range	40°F - 100°F (4°C - 38°C)	40°F - 100°F (4°C - 38°C)	40°F - 100°F (4°C - 38°C)	25°F - 140°F (-3.9°C - 60°C)
COMPATIBILITY (Cable Types):				
Rubber	•	•	•	•
Neoprene	•	•	•	•
Nylon	•	•	•	•
PVC	•	•	•	•
High-density or cross-linked polyethylene	•	•	•	•
Low-density polyethylene	•	•	•	•
Semiconducting jacket	•	•	•	•
Hypalon	•	•	•	•

*Results from NEETRAC, an independent testing laboratory affiliated with The Georgia Institute of Technology.



Cable Pulling Rods

Lubricants

Aqua-Gel® II Cable Pulling Lubricant

- Polymer-based formula provides maximum tension reduction in high-stress electrical and communication cable-pulling operations
- Compatible with all cable types except composite rubber
- Cleans up easily with soap and water
- Clings to cable throughout long pulls
- Remains stable over wide temperature range – usable from -2°C to 88°C (28°F to 180°F)
- Dries to a semi-fluid film that won't clog conduit
- Easy to apply by hand, brush or pump
- Environmentally safe – non-toxic, non-flammable and non-corrosive
- For outdoor use only



Description	Cat. No.
0.95 litre / 1-qt. Squeeze bottle	31-378
3.79 litre / 1-gal. Bucket	31-371

Yellow 77® Wire Pulling Lubricant

- The no. 1 brand of wire pulling lubricant since 1959 – the perfect general purpose lube
- Wax-based formula provides superior lubricity
- Safe to use with most cable types except low-density polyethylene and semi-conducting jackets
- Clings to cable throughout long pulls, even where moisture is present
- Won't break down or separate after repeated exposure to freezing temperatures
- Dries to a thin, non-conductive film
- Easy to apply by hand or brush
- Creamy texture applies easily and uniformly
- Homogeneous blend requires no mixing
- Won't dry out – surface coat forms to control evaporation
- Environmentally safe – non-toxic, non-flammable and non-corrosive



Description	Cat. No.
0.95 litre / 1-qt. Squeeze bottle	31-358
3.79 litre / 1-gal. Bucket	31-351
18.93 litre / 5-gal. Bucket	31-355

ClearGlide™ Wire Pulling Lubricant

- Clear and colourless for quick and easy clean-up – great for indoor and retrofit pulls
- Exceptional lubricity for super-fast pulls
- Polymer-based formula is perfect for all electrical and datacomm applications
- Safe to use with all cable types
- Controlled evaporation rate is ideal for shorter runs
- Remains stable over wide temperature ranges – usable from -1°C to 82°C (30°F to 180°F)
- Dries to a semi-fluid film that won't clog conduit
- Easy to apply by hand, brush or pump
- Environmentally safe – non-toxic, non-flammable and non-corrosive



Description	Cat. No.
0.95 litre / 1-qt. Squeeze bottle	31-388
3.79 litre / 1-gal. Bucket	31-381
18.93 litre / 5-gal. Bucket	31-385

Velocity™ Wire Pulling Lubricant

- High cling factor
- Maximum friction reduction
- Specification grade
- Compatible with all popular cable types
- Temperature stable
- Non-combustible residue
- Environmentally safe – non-toxic, non-flammable and non-corrosive



Description	Cat. No.
0.95 litre / 1-qt. Squeeze bottle	31-276
3.79 litre / 1-gal. Bucket	31-277

Duct Seal

- Seals around junction boxes, flashings and service entrances
- Permanently soft, non-toxic compound can be painted immediately after application
- Won't adversely affect other plastic materials or corrode metals



Description	Cat. No.
0.45 kg / 1 lb. Block (10/carton)	31-601
2.27 kg / 5 lb. Block (10/carton)	31-605

Noalox® Anti-Oxidant

- Anti-oxidant and anti-seizing compound improves efficiency and service life of aluminum-to-aluminum and aluminum-to-copper electrical connections
- Suspended zinc particles penetrate and cut aluminum oxide
- Provides additional inter-strand and inter-conductor current paths for improved conductivity and cooler connections
- Carrier material excludes air to prevent further oxidation
- For use with all types of pressure-type wire connectors including screw-on, tap, service entrance and split-bolt
- Reduces galling and seizing and promotes good ground continuity on aluminium conduit joints



Description	Cat. No.
118 ml / 4-oz. Squeeze bottle	30-026
236 ml / 8-oz. Brush cap	30-031

Conduit Benders

- Exceptionally durable materials for extra strength
- Reinforced at stress points for longer life
- Markings are raised and cast into the bender body on both sides for easy visibility
- Deeply serrated step helps prevent slippage when applying force
- Grooved internal hook surface helps prevent conduit from slipping
- Flat hook surface provides stable starting point
- Desirable Benfield bending system
- Much lower cost than stand mounted benders
- Takes up minimal space in vehicle
- Simple to use with no set-up required



Ductile Iron

- Withstands a lifetime of heavy use
- Ductile iron material is stronger than malleable iron or aluminium



Ductile Iron Head & Handle Complete


Conduit Type and Size	Cat. No.
20 mm / 3/4 in. steel conduit	74-027
25 mm / 1 in. steel conduit	74-028

Ductile Iron Head Only

Conduit Type and Size	Cat. No.
20 mm / 3/4 in. steel conduit	74-002
25 mm / 1 in. steel conduit	74-003

Handles for Benders

- Rugged, steel construction for long-term durability
- Baked-on blue enamel finish resists corrosion and enhances visibility
- Convenient bending guide for offset bends

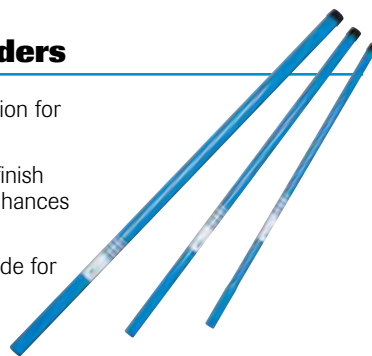

Conduit Type and Size	Cat. No.
20 mm / 3/4 in. steel conduit	74-019
25 mm / 1 in. steel conduit	74-020

Aluminium

- Lightweight aluminium for easy handling
- Strong enough for every day use



Aluminum Head & Handle Complete

Conduit Type and Size	Cat. No.
20 mm / 3/4 in. steel conduit	74-047

Aluminum Head Only

Conduit Type and Size	Cat. No.
20 mm / 3/4 in. steel conduit	74-032



T[®]-Stripper Wire Strippers


- Form-ground, knife-type blades for accurate, easy stripping without nicking insulation
- Built-in wire cutter and looping holes
- Convenient plier nose for extra gripping strength
- Laser-etched wire gauge for easy-to-read visibility
- Spring-loaded automatic opening
- Corrosion-resistant, black oxide finish
- Tough steel construction



Description	Solid	Stranded	Cat. No.
T [®] -Stripper Wire Stripper – Metric	0.75-6.0mm ²		45-120-341
T [®] -Stripper Wire Stripper – Metric		0.5-4.0mm ²	45-125-341

7-in-1 Stripper


- Versatile, seven-function tool features precision-ground stripping blades, cushioned grips and plier nose
- Strips 1.5mm² - 6.0mm² solid and 0.5mm² - 4.0mm² stranded wire
- Crimps bare and insulated terminals from 0.5mm²-5.0mm² wire, RG-59 coax connectors and 7 to 8mm auto ignition connectors
- Cuts unhardened wire, bolts and screws and reforms threads
- Reams and de-burrs conduit
- Gauges and loops wire

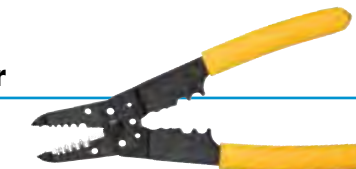

Description	Cat. No.
7-in-1 Stripper	45-777

Lil' Ripper Stripper™

- Rips Twin & Earth outer jacket cleanly and quickly
- Clips outer sheathing to remove excess jacket
- Strips inner conductor wires
- Looping holes loop wire for screw-on connections
- Twist-Assist™ tightens most popular sizes of winged twist-on connectors
- Injection moulded elastomer grip provides a comfortable, slip resistant grip
- Strip length measuring scale allows for quick and easy measurements
- Conveniently fits in your pocket



Description	Cat. No.
Lil' Ripper Stripper™	45-025

Reflex™ Premium T[®]-Stripper Wire Strippers




- Ergonomic design for maximum comfort
- Curved handles reduce wrist fatigue
- Sleeves extend to stripping head to cushion thumb and fingers
- Textured, no-slip sleeves provide a sure, easy grip

Description	Solid	Stranded	Cat. No.
Reflex™ Premium T [®] -Stripper – Metric	0.5mm ² -4.0mm ²		45-425-341

Twin & Earth Cable Stripper

- Self-adjusting stripping blades automatically select proper position
- Strips Twin and Earth cable
- Open-throat construction allows unlimited strip length
- Neatly removes outer cable sheath and inner wire sheathing to desired lengths
- Lightweight, ergonomic design reduces user fatigue

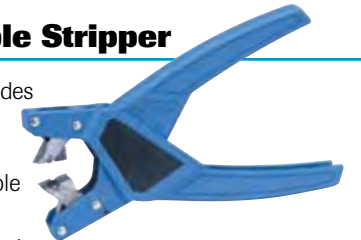

Description	Cat. No.
Twin & Earth Cable Stripper	45-235



Stripmaster® Wire Stripper

- One-step stripping enhances productivity
- Spring-action motion increases leverage and reduces operator fatigue
- Precision-ground, knife-type blades provide clean, accurate stripping
- Sturdy die-cast frame provides long-term durability
- Wire gripper holds wire securely in position



Knife-Type Blades for Metric Wire

Stripping Hole Diameter mm						Cat. No.
0.75 mm ²	1.0 mm ²	1.5 mm ²	2.5 mm ²	4.0 mm ²	6.0 mm ²	
1.3	1.6	1.9	2.4	3	3.6	45-292-341


Aviation Tin Snips

- Chrome-molybdenum steel forged blades for greater strength and durability
- Serrated edges provide a stable hold when cutting
- Labour-saving design for easier cutting
- Comfortable non-slip dual durometer grips



Description	Cat. No.
Straight-Cut Aviation Tin Snips	35-001


Waterpump Pliers

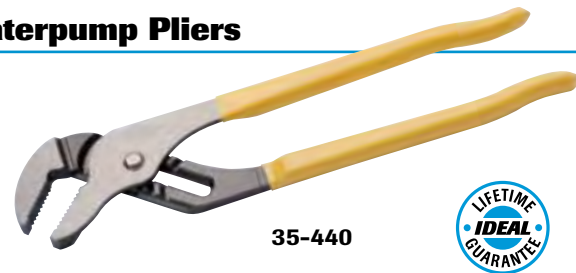

Description (Dipped Handles)	Jaw Opening (mm/inches)	(Inches)
250 mm / 10 in. Tongue & Groove Pliers	50 mm / 2"	35-430
300 mm / 12 in. Tongue & Groove Pliers	57 mm / 2-1/4"	35-440

Multi-Crimp Strip Tool

- Cuts wire
- Crimps insulated and non-insulated wires
- Cuts bolts
- Strips 0.5mm² - 4.0mm² (10-22 AWG) wire

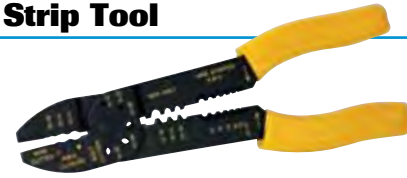

Description	Cat. No.
Multi-Crimp Strip Tool	45-778

Ratchet Crimp Tool

- Crimps insulated or bare terminals and splices on 0.5mm² - 4.0mm² (10-22 AWG) wire
- Ratchet action prevents release prior to crimp connection – helps ensure uniform crimps
- Vinyl-coated handles provide a solid, comfortable grip



Description	Cat. No.
Ratchet Crimp Tool	83-001

Adjustable Wrenches

- Narrow profile head reaches into tight spaces
- Tight tolerance on thumbscrew won't loosen or wobble with use
- Extra wide jaw capacity with metric and imperial markings
- Forged steel construction
- Tempered and hardened for lifetime service




Description	Jaw Capacity	Cat. No.
200 mm / 8 in. Adjustable Wrench	29 mm / 1-1/8 in.	35-020
300 mm / 10 in. Adjustable Wrench	33 mm / 1-5/16 in.	35-021

PowerBlade™ Cable Cutter

- Extremely versatile: fits almost any drill (12V minimum)
- Cuts copper up to 5 cm (2 in.) diameter or 380 mm² (750 MCM) or aluminum up to 5 cm (2 in.) diameter or 507 mm² (1000 MCM)
- Heavy-duty gears and specially hardened blades for professional quality
- Rounded blade design minimises cable distortion during cutting
- No need to mess with battery packs or special chargers; this tool works with the drill you already carry!



(Drill not included)




(Folding handle for storage.)

Description	Cat. No.
PowerBlade™ Cable Cutter	35-078
PowerBlade™ Replacement Handle	K-8947R
PowerBlade™ Replacement Blades (pair)	K-8906R
PowerBlade™ Replacement Torque Arm Assembly	K-8909
PowerBlade™ Replacement Carrying Case	K-8926

*Max. Jaw Opening - 5 cm (2 in.)



Cable Cutters

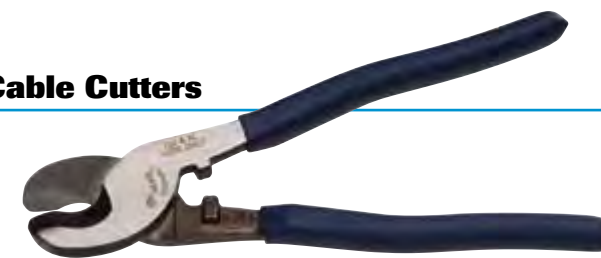

Description (Dipped Handles)	Cat. No.
230 mm (9 in.) Cable Cutter	35-5052

Ratcheting Cable Cutter

- 380 mm² (750 KCMIL) Ratcheting Cable Cutter is designed to cut 380 mm² (750 KCMIL (MCM) and smaller hard-drawn copper and aluminum cables
- Hardened steel blades ensure consistent cuts and long-term durability
- Rounded blade design minimizes cable distortion during cutting
- Quick release mechanism simplifies blade back-out
- Locking mechanism keeps handles closed for easy storage
- Moulded-in foot provides stability and leverage when making multiple cuts




Description	Cat. No.
380 mm ² / 750 KCMIL (MCM) Ratcheting Cable Cutter*	35-053
Replacement blade (moveable side only)	35-057

*Max. Jaw Opening - 5 cm / 2 in.

Long-Arm Cable Cutter

- High strength forged blades for ultimate durability
- Precision-ground jaws make clean cuts with minimal cable distortion
- Replaceable blades
- For copper and aluminium only.



Description	Length	Cat. No.
250 MCM (14.6 mm Dia.) Long-Arm Cable Cutter	350 mm/14"	35-031
500 MCM (20.7 mm Dia.) Long-Arm Cable Cutter	560 mm/22"	35-032
1000 MCM (29.3 mm Dia.) Long-Arm Cable Cutter	810 mm/32"	35-033

CAUTION: Comfort-grip handles are not designed for protection against electrical shock. Do not use on live circuits.

Data T®-Cutter Wire Cutter


- Cuts round communication cable and maintains cable geometry for better cable performance
- Cuts multi-pair cable up to 12.7 mm (.500 in.) and coaxial cable up to RG-9/U
- Suitable for soft cables (not steel re-inforced)
- Steel reinforced centre conductors can be trimmed with bolt cutting holes
- Cushioned comfort grip handles
- Locking latch keeps tool closed in pouch



Description	Cat. No.
Data T®-Cutter	45-074

Twist-a-Nut™ Screwdriver/Nutdriver


Textured Santoprene™ grip provides excellent torque and resists perspiration, water, oil and chemicals

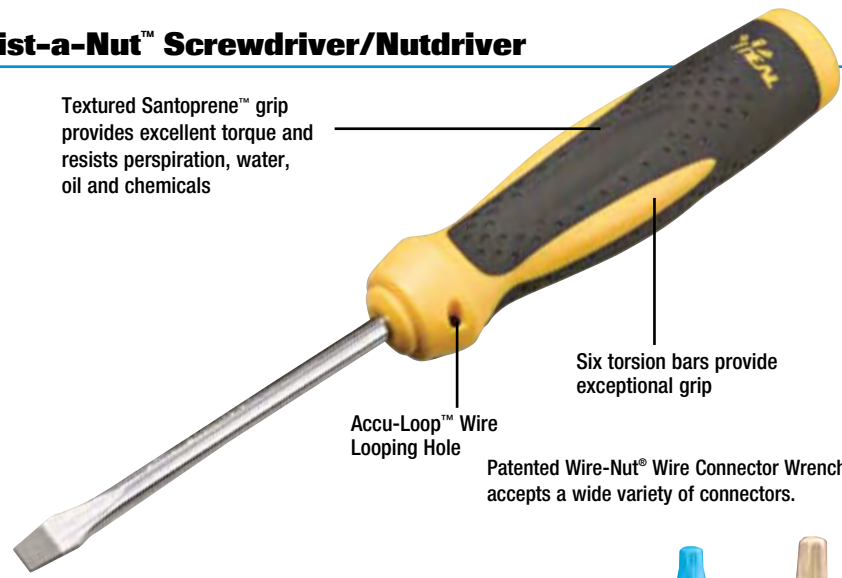

Six torsion bars provide exceptional grip

Accu-Loop™ Wire Looping Hole

Patented Wire-Nut® Wire Connector Wrench accepts a wide variety of connectors.



Patented Wire-Nut® Wire Connector Wrench accepts a wide variety of connectors.



Accu-Loop™ Wire looping holes

21-in-1 Twist-a-Nut™ Screwdriver

- Wire connector wrench prevents finger fatigue and gets in tight spots
- Premium screwdriver ratchet mechanism can handle high torque without failure
- Ergonomic, slip-free comfort grip
- Multiple bit storage unit and wire-looping hole in handle
- Includes: #1 Phillips, #2 Phillips, #3 Phillips, 4.5 mm slotted, 6 mm slotted, 8 mm slotted, #1 square, #2 square, #15 star, #20 star, #25 star, #30 star, 3/32" hex, 1/8" hex, 3/16" hex, 5/32" hex, 1/4" nut, 5/16" nut and 7/16" nut



Multiple bit storage unit

Description	Cat. No.
21-in-1 Twist-a-Nut™ Screwdriver	35-688

9-in-1 Ratch-a-Nut™ Screwdriver

- Ratcheting wire connector wrench prevents finger fatigue and gets in tight spots
- Premium screwdriver ratchet mechanism can handle high torque without failure
- Ergonomic, slip-free comfort grip
- Accepts Twist-a-Nut™ replacement bits
- Includes: 4.5 mm and 6 mm slotted, #1 & #2 Phillips, 1/4 in., 5/16 in., 7/16 in. nutdrivers, ratcheting screwdriver end, ratcheting wire connector wrench and wire-looping hole in handle



(Lifetime warranty excludes bits)

PREMIUM RATCHET HIGH TORQUE



(Lifetime warranty excludes bits)

All-Metal Ratchet

- Pro-quality, 28 tooth double action, twin-tooth ratchet
- 102 kg / 225 lbs. of torque (stronger than human wrist can torque)



RATCHETS AT BOTH ENDS



Description	Cat. No.
9-in-1 Ratch-a-Nut™ Screwdriver	35-988

Volt-Guard™ Insulated Tools


The IDEAL insulated tool line creates a perfect blend of safety, comfort and precision functionality. Each tool features double insulated Santoprene® handles with a soft, easy-to-grip outer surface. In addition to the ergonomic qualities found in our tools, the insulated coating process acts as an 'at-a-glance' safety check. If the orange outer coating reveals any of the inner yellow surface, an electrician will know that this tool needs to be replaced.

- UL tested and listed
- 1000 Volt certified (1000V AC, 1500V DC)
- Meets ASTM F1505-01 and IEC 60 900 standards
- Meets HSE requirements for insulated tools
- Every 1000V insulated tool is individually tested to ensure no failure when subjected to live current



Pliers only

Insulated Pliers

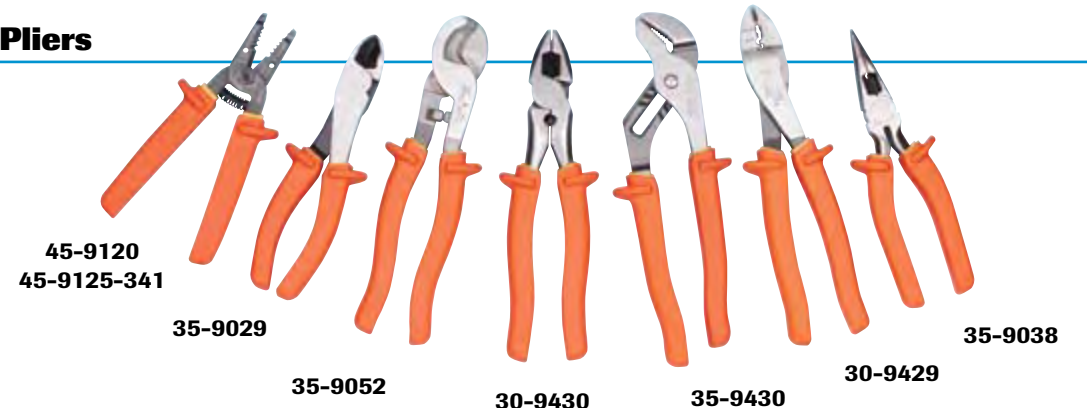

Description	Cat. No.
Premium T®-Stripper Wire Stripper - 10-18 AWG	45-9120
Premium T®-Stripper Wire Stripper - Metric 0.5mm ² -4.0mm ²	45-9125-341
200 mm / 8 in. Diagonal Cutting Pliers w/angled head	35-9029
240 mm / 9-1/2 in. High-Leverage Cable Cutter	35-9052

Description	Cat. No.
235 mm / 9-1/4 in. Side Cutting Linesman Pliers	30-9430
255 mm / 10 in. Waterpump Pliers	35-9430
250 mm / 9-3/4 in. Multi-Crimp/Cutter	30-9429
215 mm / 8-1/2 in. Long-Nose Pliers	35-9038

Safe-T-Grip® Fuse Pullers



- Maximum efficiency and convenience for removing or replacing cartridge-type fuses
- Three sizes accommodate fuses ranging from 0 to 600A
- Fully insulated, high-dielectric, glass-filled polypropylene construction
- Notched handles provide safe, no-slip grip
- Clearly marked amperage ranges
- Exceed MIL specifications

Description	Cat. No.
Small Puller for 250V, 0.7 cm (9/32 in.) to 1.3 cm (1/2 in.) dia. fuses; 13 cm (5 in.) long	34-001
Medium Puller for 0 to 100A/250V & 600V, 1.3 cm (1/2 in.) to 2.5 cm (1 in.) dia. fuses; 19 cm (7-1/2 in.) long	34-002
Large Puller for 31 to 600A/250V & 31 to 400A/600V, 1.9 cm (3/4 in.) to 6.3 cm (2-1/2 in.) dia. fuses; 30 cm (11-3/4 in.) long	34-003

Insulated Hand Tools

- UL tested and listed
- 1000 Volt certified (1000V AC, 1500V DC)
- Meets ASTM F1505-01 and IEC 60 900 standards
- Meets HSE requirements for insulated tools
- Every 1000V insulated tool is individually tested to ensure no failure when subjected to live current

High-Leverage Cable Cutter

- Form-ground, knife-type blades for accurate, easy stripping without nicking insulation
- Drop-forged, high carbon steel construction
- Designed for maximum leverage with minimum effort
- Precision-ground, hardened cutting edges provide accurate cuts without cable distortion
- Cuts 2/0 copper and 4/0 aluminum



Description	Cat. No.
240 mm / 9-1/2 in. High-Leverage Cable Cutter	35-9052

Waterpump Pliers

- Patented undercut tongue and groove design ensures solid grip
- Patented reinforced flange protects against breakage
- Laser-hardened teeth remain sharp longer
- Drop-forged, high-carbon steel construction withstands toughest applications



Description	Cat. No.
255 mm / 10 in. Tongue and Groove Pliers	35-9430

Side Cutting Linesman Pliers

- Cuts hardened wire, bolts and ACSR
- Unique reverse rivet protects smooth action of plier movement
- High-leverage design provides 40% more cutting power
- Induction-hardened blades and serrated jaws for long-term durability
- Drop-forged, high-carbon steel construction withstands toughest applications
- Crimps bare and insulated terminals



Description	Cat. No.
235 mm / 9-1/4 in. Side Cutting Linesman Pliers	30-9430

Premium T[®]-Stripper Wire Stripper

- Form-ground, knife-type blades for accurate, easy stripping without nicking insulation
- Built-in wire cutter and looping holes
- Convenient plier nose for extra gripping strength
- Laser-etched wire gauge for easy-to-read visibility
- Spring-loaded automatic opening
- Corrosion-resistants, black oxide finish
- Locking tabs keep spring in place



Description	Cat. No.
Premium T [®] -Stripper Wire Stripper - 10-18 AWG	45-9120
Premium T [®] -Stripper Wire Stripper - Metric 0.5mm ² -4.0mm ²	45-9125-341

Insulated Multi-Crimp/Cutter

- Crimps bare or insulated terminals and splices on 0.5mm² - 4.0mm² wire
- Knife-to-anvil blades never need sharpening
- Excellent leverage for easy crimping and cutting
- Drop-forged, high-carbon steel construction



Description	Cat. No.
250 mm / 9-3/4 in. Multi-Crimp Tool	30-9429

Diagonal Cutting Pliers

- Knife-to-anvil blades never need sharpening
- High-leverage design provides 40% more cutting power
- Induction-hardened blades cut hardened wire, bolts and ACSR
- A convenient angled head for hard-to-reach areas and knocking out nails
- Drop-forged, high-carbon steel construction withstands toughest applications



Description	Cat. No.
200 mm / 8 in. Diagonal Cutting Pliers w/angled head	35-9029

Long-Nose Pliers


- Narrow profile head designed for working in tight areas
- Serrated jaws provide secure gripping surface
- Knife-to-anvil blades never need sharpening
- Induction-hardened blades cut hardened wire, bolts and ACSR
- Drop-forged, high-carbon steel construction withstands toughest applications



Description	Cat. No.
215 mm / 8-1/2 in. Long-Nose Pliers	35-9038

Torpedo Level

- 230 mm / 9 in. aluminum frame with magnetic and V-grooved edges
- Windows provide easy reading of plumb level and 45° mitre in dim lighting
- Three rare earth magnets for strong cling to conduit



Description	Cat. No.
230 mm / 9 in. Torpedo Level	35-205

Drop-Forged Handled Hammer

- High quality
- One-piece drop-forged, tempered-steel polished head and handle
- Long, straight claws simplify removal of electrical fixtures
- Comfortable, perforated anti-vibe grips
- Elongated neck for hitting inside boxes



Description	Cat. No.
18 oz. (510 g) x 12-1/2 in. (31.75 cm) Drop-Forged Handled Hammer	35-210

Lever™ Snips Electrician's Scissors with Stripping Notches

- Ergonomic design gives added leverage
- Spring-action, mechanical advantage increases stripping leverage and reduces operator fatigue
- Double plated for added rust protection
- Extra-deep serrations grip wire better



Description	Cat. No.
Electrician's Scissors with Stripping Notches	35-087

Hex-Key Sets

- 8650 grade steel construction
- Dual-durometer, slip-resistant grip



Description	Cat. No.
4 in. handle w/nine 3-in. keys (5/64 in., 7/64 in., 1/8 in., 9/64 in., 5/32 in., 3/6 in., 7/32 in. & 1/4 in.)	35-146

Utility Knife

- Quick-change retractable blade system – no disassembly required
- Built in pull-line cutter
- Includes three blades in storage compartment



Description	Cat. No.
Utility Knife	35-300
Replacement blades - Universal (5/pack)	35-301

Electrician's Knife

- 57 mm screwdriver blade
- 57 mm / 2-1/4 in. screwdriver blade locks in position
- High carbon stainless steel blade construction for extra strength and durability
- Durable Buyrate® non-slip handle
- Brass liners





Description	Cat. No.
Electrician's Knife w/spearpoint and screwdriver blade	35-285

Jab Saw



- Includes replaceable bi-metal wallboard blade
- Holds all reciprocating blades and hacksaw blades
- Ergonomic grip



Description	Cat. No.
Jab Saw	35-275
Replacement Blade	36-088

Ergonomic Hacksaw




- Angled handle for easier cutting
- Blade can easily be adjusted for flush cutting
- Easy tensioning wing-nut keeps blades tight for straighter cuts
- Cushioned ergonomic grip for performance and comfort
- Includes 300 mm / 12 in. x 24T bi-metal blade

Description	Cat. No.
Ergonomic Hacksaw	35-261


Hacksaw Blades

- Bi-metal blades provide strength, flexibility and longer life

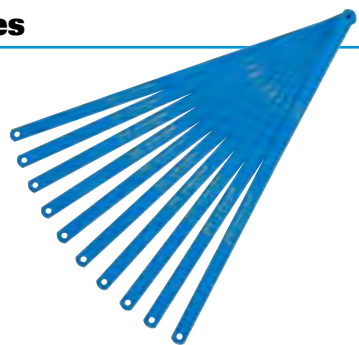


Description	Qty./Pack	Cat. No.
300 mm / 12 in. x 18T Blades	10	35-271
300 mm / 12 in. x 24T Blades	10	35-272
300 mm / 12 in. x 32T Blades	10	35-273

Heavy-Duty Hacksaw

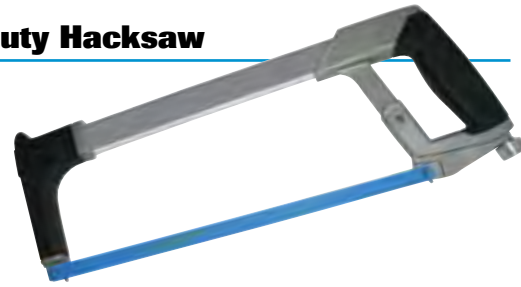

- Cushioned ergonomic grip for performance and comfort
- Rugged frame provides lightweight rigidity and exceptional control
- Stores up to nine extra blades
- Blades can be adjusted to 55° angle for flush cutting and tensioned to 30,000 psi
- Includes 300 mm / 12 in. x 24T bi-metal blade



Description	Cat. No.
Heavy-Duty Hacksaw	35-260

Mini Hacksaw



- Heavy-duty die cast frame
- Non-slip rubber comfort grip
- Accepts all standard hacksaw blades
- Supplied with 300mm/12" bi-metal hacksaw blade

Description	Cat. No.
Mini Hacksaw	35-259

Tuff-Tote™ Ultimate Tool Carrier

- 200 mm / 8 in. square tool carrier features 2 divided inside compartments with 6 screwdriver loops each, 1 large centre compartment, 4 outside pockets and 8 outside tool loops
- Exclusive leather-wrapped grab handle for carrying comfort
- Removable shoulder strap helps relieve lower back strain
- Unique stand-alone design keeps tools standing upright for easy identification and access
- Rust-resistant, plated-steel hardware and heavy, lock-stitched nylon thread for long-term durability
- Oil and moisture-resistant reinforced bottom
- Constructed from top grain, natural cowhide, tanned for added strength and durability
- The colour will age to a deep tan over the years



Description	Cat. No.
Leather Carrier w/shoulder strap	35-325

Tool Belt

- Nickel-plated hardware for long-term durability and corrosion resistance
- Constructed from top grain, natural cowhide, tanned for added strength and durability
- The colour will age to a deep tan over the years



Description	Cat. No.
Leather Belt - 45 mm / 1-3/4 in. x 1168 mm / 46 in.	35-316

Electrician's Tool Pouch

- 7 - pocket tool pouch
- Full length belt tunnel
- Chain tape lanyard
- Constructed of top-grain, natural cowhide and tanned for added strength and durability
- The colour will age to a deep tan over the years



Description	Cat. No.
Electrician's Leather Tool Pouch	10-466

Tuff-Tote™ Tool Pouch

- 8-pocket, belt-mounted pouch features large utility compartment with 2 dividers and 6 screwdriver loops, 7 outside pockets, release snaps and tape chain
- Exclusive leather grab handle for carrying comfort
- Removable shoulder strap helps relieve lower back strain
- Rust-resistant, plated-steel hardware and heavy, lock-stitched nylon thread for long-term durability
- Tunnel belt loop accommodates belts up to 57 mm / 2-1/4 in. wide
- Constructed from top grain, natural cowhide, tanned for added strength and durability
- The colour will age to a deep tan over the years



Description	Cat. No.
Leather Pouch w/shoulder strap	35-311

Ergo Tool Pouch

- Compact ergonomic design for versatility and superior comfort
- Large tool holding capacity
- Constructed from top grain, natural cowhide, tanned for added strength and durability
- The colour will age to a deep tan over the years



Description	Cat. No.
Leather ERGO Tool Pouch	35-312

Large Mouth Bags



- Top opens completely for easy access to large tools – reinforced to hold itself open
- Measures 230 mm / 9 in. wide x 300 mm / 12 in. deep with outside and inside pockets for convenient hand tool storage
- Rugged zipper closure helps prevent tool loss
- Removable shoulder strap
- Durable multi-ply construction

Description	Cat. No.
Large Mouth Bag - 330 mm / 13 in. long	35-410
Large Mouth Bag - 450 mm / 18 in. long	35-427

Note: Tools sold separately.

Journeyman Electrician's Tote™ Tool Bag



- Compact and versatile design
- Carry as a hand-tote, shoulder-tote or tool-belt
- Includes removable shoulder strap and belt
- Durable multi-ply construction

Description	Cat. No.
Journeyman Electrician's Tote™	35-462

Master Electrician's Tote™ Tool Bag

- Spacious and durable design
- Organizes and displays tools for fast access
- Includes removable shoulder strap
- Durable multi-ply construction



Description	Cat. No.
Master Electrician's Tote™	35-441

IDEAL Cable Tie Catalogue Numbering System


IT - 2 - S - MB - C - 0

IT	2	S	MB	CC	0
IT = IDEAL Powr-Tie™ Cable Ties	Size	Tensile Strength	Style	Qty. Per Package	Colour
	Approximate Bundle Diameter for ties	M = Miniature (18 lbs.) I = Intermediate (40 lbs.) S = Standard (50 lbs.) LH = Light-Heavy Duty (120 lbs.) H = Heavy Duty (175 lbs.) EH = Extra Heavy-Duty (250 lbs.)	— = Standard Tie ID = Identification MB = Mounting Base MP = Mounting Pad	L = 50 C = 100	— = Natural 0 = UV Black

Powr-Tie™ Cable Ties


Quality Construction

- One-piece design for added strength
- Superior locking mechanism
- Exceeds industry tensile strength ratings




Low Insertion Force

- Tapered thin tip reduces initial friction
- Lowest insertion force with the highest tensile strength
- Reduces installation fatigue




No Burrs or Sharp Edges

- Smooth corners provide added safety
- Rounded edges eliminate insulation damage




Stepped Tail Gripper

- Tapered tail grip assures positive threading
- Stepped tail allows for easier grabbing and tightening once engaged



Angled Tail

- Provides quicker initial insertion
- Lowers installation costs



Material Selection

- **ROHS Compliant**
- **Natural General Purpose 6/6 Nylon**
 - Suitable for most applications
 - Meets UL 94V-2 flammability ratings
 - 85°C/185°F working temperature
- **UV Black Nylon 6/6**
 - Suitable for most applications with continuous or extended exposure to outdoor elements
 - Weather-resistant grade, able to endure ultraviolet (UV) light
 - Meets UL 94V-2 flammability ratings
 - 85°C/185°F working temperature



Miniature (18 lb.) Ties Natural & UV Black

Description	Length	Width	Thickness	Max. Bundle	Tensile Strength	Mil-Spec Reference	Qty./Bag	Cat. No.
Natural Nylon	4.0 in./102mm	.094 in./2.39mm	.042 in./1.06mm	1/16 - 7/8 in.	18 lbs.	MS3367-4-9	100	IT1M-C
UV Black Nylon						MS3367-4-0	100	IT1M-C0
Natural Nylon	6.1 in./154mm	.094 in./2.39mm	.042 in./1.06mm	1/16 - 3-1/2 in.	18 lbs.	—	100	IT1_5M-C
UV Black Nylon							100	IT1_5M-C0
Natural Nylon	8.1 in./206mm	.094 in./2.39mm	.042 in./1.06mm	1/16 - 2-3/16 in.	18 lbs.	—	100	IT2M-C
UV Black Nylon							100	IT2M-C0

Intermediate (40 lb.) Ties Natural & UV Black

Description	Length	Width	Thickness	Max. Bundle	Tensile Strength	Mil-Spec Reference	Qty./Bag	Cat. No.
Natural Nylon	5.7 in./145mm	.140 in./3.56mm	.049 in./1.24mm	1/16 - 1-7/16 in.	40 lbs.	MS3367-5-9	100	IT1_5I-C
UV Black Nylon						MS3367-5-0	100	IT1_5I-C0
Natural Nylon	8.8 in./224mm	.140 in./3.56mm	.049 in./1.24mm	1/16 - 2-3/8 in.	40 lbs.	MS53367-5-9	100	IT2I-C
UV Black Nylon						MS53367-5-0	100	IT2I-C0
Natural Nylon	11.5 in./292mm	.142 in./3.60mm	.055 in./1.40mm	1/16 - 3-3/8 in.	40 lbs.	—	100	IT3I-C
UV Black Nylon						—	100	IT3I-C0
Natural Nylon	14.5 in./368mm	.142 in./3.60mm	.055 in./1.40mm	1/16 - 4 in.	40 lbs.	—	100	IT4I-C
UV Black Nylon						—	100	IT4I-C0



*1M, 1_5 & 2I Series

Standard (50 lb.) Ties Natural & UV Black

Description	Length	Width	Thickness	Max. Bundle	Tensile Strength	Mil-Spec Reference	Qty./Bag	Cat. No.
Natural Nylon	7.5 in./190mm	.178 in./4.52mm	.053 in./1.34mm	1/16 - 1-7/8 in.	50 lbs.	MS3367-1-9	100	IT2S-C
UV Black Nylon						MS3367-1-0	100	IT2S-C0
Natural Nylon	11.2 in./284mm	.178 in./4.52mm	.053 in./1.34mm	1/16 - 3-1/16 in.	50 lbs.	MS3367-7-9	100	IT3S-C
UV Black Nylon						MS3367-7-0	100	IT3S-C0
Natural Nylon	14.5 in./368mm	.178 in./4.52mm	.053 in./1.34mm	1/16 - 4-1/8 in.	50 lbs.	MS3367-2-9	100	IT4S-C
UV Black Nylon						MS3367-2-0	100	IT4S-C0
Natural Nylon	17.0 in./432mm	.190 in./4.82mm	.053 in./1.34mm	1/16 - 4-3/4 in.	50 lbs.	—	100	IT5S-C
UV Black Nylon						—	100	IT5S-C0



*2S, 3S & 4S Series

UL Listed Nylon 6/6 cable ties are suitable for use in Air Handling Spaces (Plenums) in accordance with Section 300-22(C) & (D) of the National Electrical Code and Rules 12-010 (3), (4) & (5) and 12-020 of the Canadian Electrical Code, Part 1.

Light Heavy-Duty, Heavy-Duty & Extra Heavy-Duty Ties Natural & UV Black


Description	Length	Width	Thickness	Max. Bundle	Tensile Strength	Mil-Spec Reference	Qty./Bag	Cat. No.
Natural Nylon	8.7/220.9mm	.300 in./7.62mm	.076 in./1.93mm	2-1/16 in.	120 lbs.	—	100	IT2LH-C
UV Black Nylon						—	100	IT2LH-C0
Natural Nylon	15.1 in./384mm	.300 in./7.62mm	.075 in./1.90mm	3/16-4-1/16 in.	120 lbs.	MS3367-3-9	50	IT4LH-L
UV Black Nylon						MS3367-3-0	50	IT4LH-L0
Natural Nylon	17.8 in./451mm	.300 in./7.62mm	.075 in./1.90mm	3/16-5-1/4 in.	120 lbs.	—	50	IT5LH-L
UV Black Nylon						—	50	IT5LH-L0
Natural Nylon	24.2 in./614mm	.300 in./7.62mm	.075 in./1.90mm	3/16-7 in.	120 lbs.	—	50	IT7LH-L
UV Black Nylon						—	50	IT7LH-L0
Natural Nylon	25.3 in./642mm	.340 in./8.64mm	.090 in./2.29mm	3/16-7-3/16 in.	175 lbs.	MS3367-10-9	50	IT7H-L
UV Black Nylon						MS3367-10-0	50	IT7H-L0
Natural Nylon	37.1 in./942mm	.340 in./8.64mm	.090 in./2.29mm	3/16-11 in.	175 lbs.	MS3367-13-9	50	IT11H-L
UV Black Nylon						MS3367-13-0	50	IT11H-L0
Natural Nylon	47.8 in./1214mm	.340 in./8.64mm	.090 in./2.29mm	3/8-14-1/2 in.	175 lbs.	MS3367-16-9	50	IT14H-L
UV Black Nylon						MS3367-16-0	50	IT14H-L0
UV Black Nylon	22.8 in./579mm	.50 in./12.7mm	.080 in./2.03mm	3/16-6 in.	250 lbs.	—	100	IT6EH-C0



*4LH, 7H, 10H, 11H, 14H Series

Identification Ties


- Write-on surface
- Bundle and identify at the same time

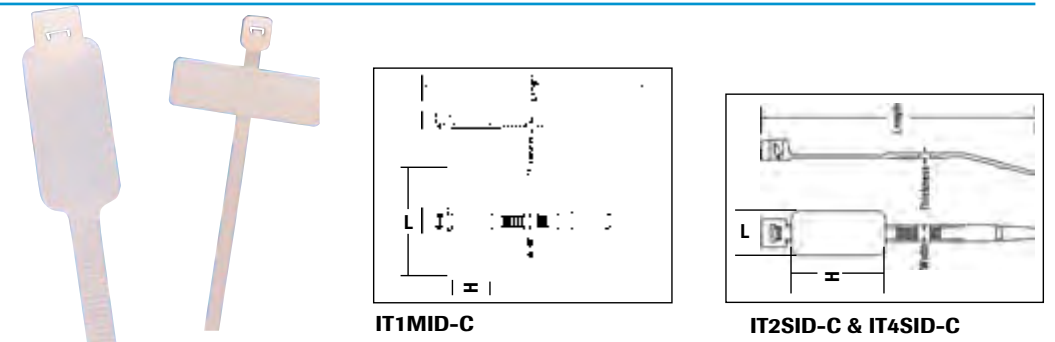

Description	Length	Width	Thickness	Max. Bundle	Tensile Strength	Pad Size (H X L)	Qty./Bag	Cat. No.
Natural Nylon	4.0 in./102mm	.100 in./2.54mm	.044 in./1.12mm	1/16 - 7/8 in.	18 lbs.	5/16 in. x 1 in.	100	IT1MID-C
Natural Nylon	7.8 in./200mm	.181 in./4.59mm	.055 in./1.40mm	1/16 - 1-7/8 in.	50 lbs.	1-1/8 in. x 1/2 in.	100	IT2SID-C

Mounting Pads


- Patented stay-in-place tab keeps cable ties from sliding down during vertical applications
- Lead-N-Feature allows easy insertion for hard to reach applications
- Four-sided entry slots save time during placement orientation
- Smooth radius cradle eliminates possible damage to cable while providing stable support
- Webbed punch through screw hole allows maximum adhesive surface area, along with easy insertion of mechanical fasteners
- Low Profile is essential in confined spaces
- UL recognized, rubber adhesive positioning device

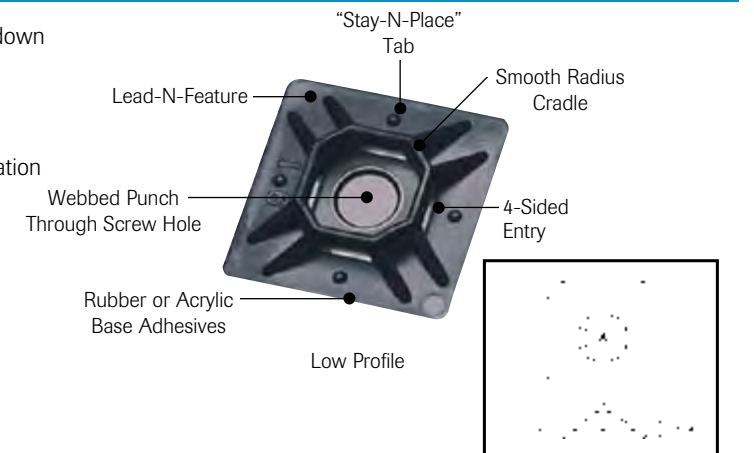

Description	Width	Height	Slot Height	Slot Width	Screw Size	Qty./Bag	Cat. No.
Natural Nylon	.74 in./19mm	.19 in./4.8mm	.05 in./1.2mm	.20 in./5.1mm	No. 4	100	IT750MP-C
UV Black Nylon						100	IT750MP-C0
Natural Nylon	.99 in./25mm	.20 in./5.0mm	.06 in./1.5mm	.20 in./5.1mm	No. 6	100	IT1000MP-C
UV Black Nylon						100	IT1000MP-C0

Screw Mounting Bases - Standard

- Deep cradle design provides minimum support for larger bundles and tubing
- Recessed screw hole allows cable ties to easily pass over screw head

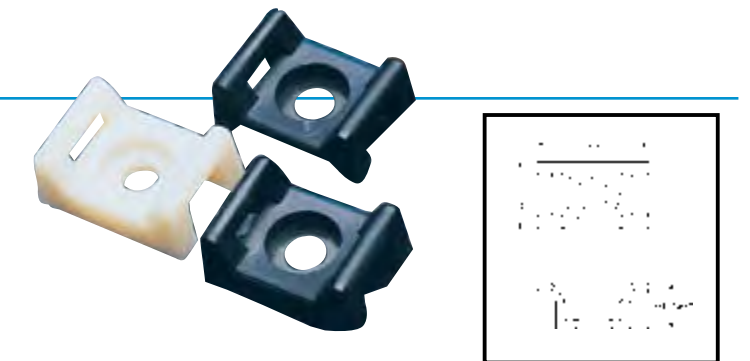

Description	Length	Width	Height	Slot Height	Slot Width	Screw Size	Qty./Bag	Cat. No.
Screw Mount Natural Nylon	.590 in./15mm	.370 in./9.40mm	.270 in./6.86mm	.062 in./1.59mm	.190 in./4.83mm	No. 6	100	IT1SMB-C
Screw Mount UV Black Nylon							100	IT1SMB-C0
Screw Mount Natural Nylon	.870 in./22mm	.640 in./16.26mm	.380 in./9.65mm	.125 in./3.18mm	.300 in./7.62mm	1/4 in.	100	IT2SMB-C
Screw Mount UV Black Nylon							100	IT2SMB-C0

Wire Marker Booklets



- Convenient pocket-size booklets
- Plastic-impregnated cloth construction for long-lasting durability
- Resists abrasion, moisture, dirt and oil
- Perforated 1/4 in. x 1-1/2 in. markers can be separated into half-length sizes
- Non-smear black legend ensures high visibility
- Self-sticking on wire and cable
- For applications above or below ground

Specifications:

Temperature Range: -40°F to 180°F (-40°C to 82°C)
Adhesion: 45 oz./in. width ultimate

Legend Assortments*

Legend	Qty.	Cat. No.
0-9	45 Markers each	44-101
A-Z 0-15 +, -, /	10 Markers each	44-102
L1, L2, L3	150 Markers each	44-108

Ten pages per booklet with each page bearing the legend assortment indicated. All booklets contain 450 wire markers and 450 terminal markers.

Write-On Marker Booklets*

- Use for developing personal identification systems
- Surface accepts pen, pencil or rubber stamp



Marker Size* (In.)	Markers per page	Pages per book	Cat. No.
1 x 2-1/2	6	10	44-151
1 x 5	3	10	44-152

*Write-on area for 2-1/2 in. markers is 3/4 in. x 1 in. Write-on area for 5 in. markers is 1 in. x 1 in.

Adhesion: .25 oz./in. width ultimate

Cable-Tie Installation Tool

- Consistent, positive tension
- Flush cut-off leaves no projections to damage nearby wires or components
- Lightweight economy model for smaller jobs



Description	Cat. No.
Economy – use w/intermediate & standard ties*	BCTT-200

*Colour may vary

POWER TOOL ACCESSORIES




TKC Carbide Tipped Hole Cutters

TKO cutters offer the most efficient and clean cutter replacement for traditional knockouts, by making smooth holes in a fraction of the time at a fraction of the cost.

Specifically designed to cut sheet metal, TKO cutters will even cut stainless steel with fine grained, carbide tips. The innovative design includes the exclusive SmoothStart™ replaceable pilot drill, which guides the cutter to the surface, avoiding cutter damage and providing smoother holes. An integral overdrill flange prevents cutter penetration beyond the sheet metal.

When it comes to quality, performance and durability, IDEAL is the professional's choice for carbide tipped hole cutters.

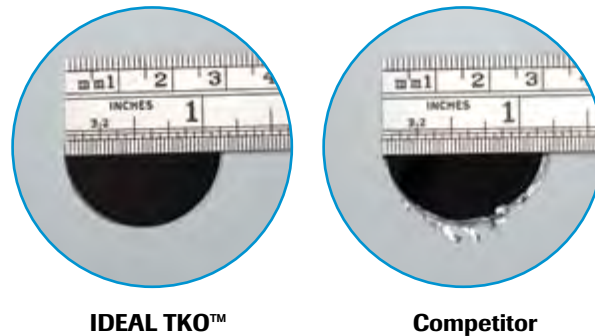

IDEAL provides smoother, more precise holes than competitors (holes cut with 29mm / 1-1/8 in. cutters)

SmoothStart™ Replacement Pilot Drill

- Exclusive! SmoothStart™ pilot guides cutter to surface providing smoother holes and avoiding cutter damage.



Description	Cat. No.
SmoothStart™ Replacement Pilot Drill	36-312

4-Piece Kit

- Includes the three most common sizes along with a spare SmoothStart™ pilot bit and a convenient carrying case




Description	Cat. No.
4-Piece Carbide Hole Cutter Kit — Includes SmoothStart™ Replacement Tip, 22 mm / 7/8 in., 29 mm / 1-1/8 in., 35 mm / 1-3/8 in.	36-311

Integrated overdrill flange prevents penetration beyond the sheet metal.

TKC Carbide Tipped Hole Cutters

With SmoothStart™ Pilot

Carbide tips cut over 200 holes through stainless steel, and outperform HSS cutters and bi-metal hole saws in sheet steel

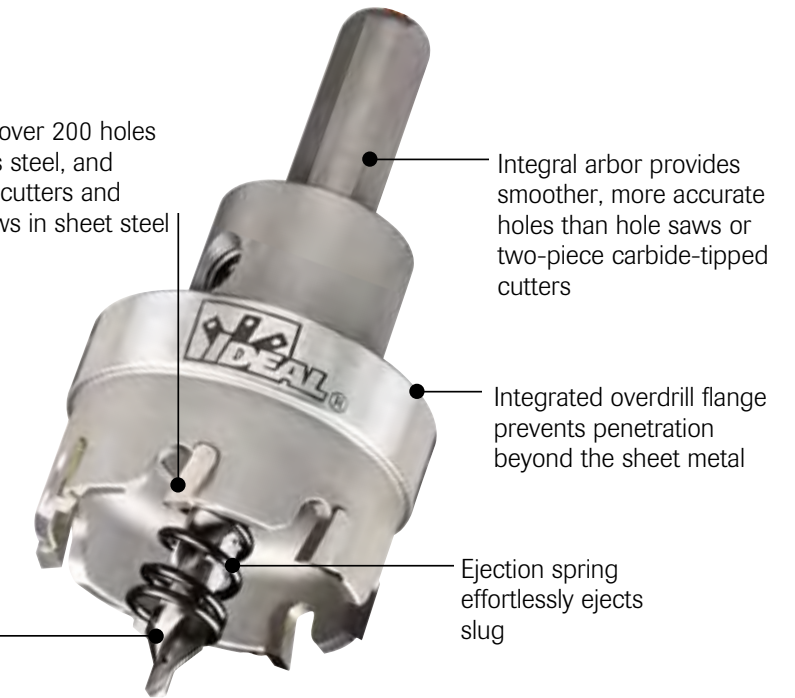

Integral arbor provides smoother, more accurate holes than hole saws or two-piece carbide-tipped cutters


Integrated overdrill flange prevents penetration beyond the sheet metal

Ejection spring effortlessly ejects slug

Exclusive SmoothStart™ pilot drill guides cutter

See how IDEAL TKO can save time...


Total time using the IDEAL TKO™
30 Seconds



Chuck Cutter


00:10

Drill hole & store




00:30

Total time using the competitors' knockout tool
More than 6 Minutes



Chuck Step Drill

00:10




Drill Pilot Hole

00:30



Assemble knockout punch & stud pull

02:00



Ratchet

04:20



Slug removed, disassemble & store

06:20

Hole Cutters

Hole Cutters

Imperial Step Drill Bits



Trust IDEAL step drill bits for precise, repetitive drilling through the toughest materials including brass, carbon steel, cast iron, stainless steel, and more.

These tough and reliable tools are constructed with a rugged titanium nitrite exterior coating. Each step is gradually blended to ease stepping through hole sizes; reducing the need to keep changing drill bits, which speeds up the fabrication process.

Improved Split-Point tip design eliminates the need for a starter hole or punch and delivers three times faster starts, saving valuable time. The double-fluted design provides balanced cuts and cooler operation.



Improved Split-Point design for 3x faster starts

Protective titanium nitrite coating

Double-fluted design

Radius-blended, multi-diameter steps




Drill Diameter Sizes (In.)	No. of Hole Sizes	Step Increments (In.)	Step Thickness (In.)	Shank Dia. (In.)	Cat. No.
1/8 to 1/2	13	1/32	1/8	1/4	35-511
1/4 to 3/4	9	1/16	1/8	3/8	35-512
1/4 to 7/8	11	1/16	1/16	3/8	35-513
1/2 to 1	8	1/16	1/8	3/8	35-514*
1/4 to 1-1/8	16	1/16	1/16	3/8	35-515
3/16 to 1/2	6	1/16	3/8	1/4	35-516
1/4 to 1-3/8	10	1/32	1/16 to 1/4	3/8	35-517

*Requires pilot holes.

Electrician's Step Bit Kit

- Durable blow-moulded case securely holds and protects bits
- Kit includes four step bits (35-511, 35-513, 35-515 and 35-517)
- Kit provides a solution for every electrical hole size between 1/8 in. and 1-3/8 in.



Description	Cat. No.
Electrician's Step Drill Bit Kit	35-520

Quick Change Step Bits



- Split-point tip lasts longer and starts faster than competition
- High speed tool steel
- Double-tempered for superior tip life
- Double fluted and blended radius steps for smooth drilling
- 1/4" Quick change shank

Impact Ready!

35-524

Drill Diameter Sizes (In.)	No. of Hole Sizes	Step Increments (In.)	Step Thickness (In.)	Shank Dia. (In.)	Cat. No.
1/8 to 1/2	13	1/16	1/8	1/4	35-521
1/4 to 7/8	11		1/16		35-522
1/4 to 1-1/8	16		1/16		35-523
Description					Cat. No.
3-Piece Quick Change Step Drill Bit Kit (35-521, 35-522, 35-523)					35-524



Tri-Bore™ Multi-Purpose Hole Saw

- Massive carbide tips designed to cut wood with nails, cement board, composite enclosures, ceiling tile and more!
- Faster than self-feed bits in wood
- Faster than carbide grip in abrasive materials
- Available in all popular sizes



Carbide teeth for wood with nails, cement board, composite enclosures and other abrasive materials.

Rugged construction for extra life

Deep gullets for easy plug removal

Spade Bit & Carbide Pilot



Cat. No.	Description	Application
36-367*	Spade Bit	Wood boring
36-368*	Carbide Pilot	Abrasive material boring

*Sold separately.

Cat. No.	Hole Size mm	Hole Size Inches
36-350	35mm	1-3/8
36-351	54mm	2-1/8
36-352	57mm	2-1/4
36-353	65mm	2-9/16
36-354	76mm	3
36-355	86mm	3-3/8
36-356	92mm	3-5/8
36-357	102mm	4
36-358	108mm	4-1/4
36-359	105mm	4-1/8
36-360	112mm	4-3/8
36-361	118mm	4-5/8
36-362	137mm	5-3/8
36-363	158mm	6-1/4
36-364	162mm	6-3/8
36-365	168mm	6-5/8
36-366	175mm	6-7/8

IRONMAN™ Bi-Metal Hole Saws

IRONMAN™ Bi-metal hole saws from IDEAL INDUSTRIES, with re-engineered bi-metal construction, a thick "flex-free" backing plate, and variable sized teeth, IDEAL IRONMAN™ hole saws will rival the cutting speed and longevity of any in the industry.

The bi-metal construction cuts metal, wood and plastics including: tool and stainless steel, nail embedded wood, plywood, and pipe.

An extensive range of hole saws, effective accessories, and kits are available to meet all your cutting needs.

When it comes to quality, performance and durability, IDEAL is the professional's choice for hole saws.

New improved solid plate design resists flexing of the new hole saw for clean true holes and added durability

Bi-metal construction combines hardened and durable tool steel teeth welded to fatigue resistant body for long and consistent cutting life

Variable sized teeth clear chips away from the work quickly for faster cuts and reduced vibration

41 mm / 1-5/8 in. cutting depth cuts through 2' x 4's on the first cut

Threads fit all standard arbors

Hole Saws

- Thicker, FLEX FREE backing plate for clean true holes and longer tool life
- Improved bi-metal construction for long life and durability
- Variable pitch tooth geometry for fast cutting and reduced vibration
- Cuts all types of machinable metal including stainless steel, wood, nail embedded wood, plastic and fibreboard



Saw Diameter (mm)	Saw Diameter (inches)	Cat. No.
16mm	5/8	35-341
19mm	3/4	35-343
20mm	3/16	35-344
22mm	7/8	35-345
25mm	1	35-347
29mm	1-1/8	35-349
32mm	1-1/4	35-351
35mm	1-3/8	35-353
38mm	1-1/2	35-355
40mm	1-9/16	35-356
43mm	1-11/16	35-358
44mm	1-3/4	35-359
48mm	1-7/8	35-361
50mm	2	35-362
54mm	2-1/8	35-364
57mm	2-1/4	35-365
60mm	2-3/8	35-367
64mm	2-1/2	35-368
65mm	2-9/16	35-369
67mm	2-5/8	35-370
70mm	2-3/4	35-371
73mm	2-7/8	35-372
76mm	3	35-373
79mm	3-1/8	35-374
83mm	3-1/4	35-375
89mm	3-1/2	35-377
92mm	3-5/8	35-378
95mm	3-3/4	35-379
102mm	4	35-381
105mm	4-1/4	35-383
111mm	4-3/8	35-384
114mm	4-1/2	35-385
152mm	6	35-390

*Other sizes and kits are available - details on request.

Hole Saw Kits

Electrician's Hole Saw Kit

- Reliable 8-piece kit in a durable plastic case



Description	Cat. No.
Hole Saw sizes 22 mm (7/8 in.), 29mm (1-1/8 in.), 35mm (1-3/8 in.), 44mm (1-3/4 in.), 50mm (2 in.) & 64 mm (2-1/2 in.) Also includes arbor models 35-393 & 35-394	35-400

Arbor Extension

- For boring jobs that require a longer reach
- Arbor extensions add up to 45 cm / 18 in. length
- Can easily be connected to IDEAL hole saw arbors



Description	Cat. No.
Extension for 7/16 in. Arbors, 300 mm (12 in.) long	35-396

Adjustable Can Light Hole Saws


- Cuts drywall and ceiling tile
- Self-sharpening carbide coated cutting blades
- Includes two dust shields to minimize clean up



Drill not included.

Description	Cat. No.
Adjustable Can Light Hole Saw - 10 sizes from 64 mm (2-1/2 in.) to 178 mm (7 in.)	35-598

Hole Saw Arbors

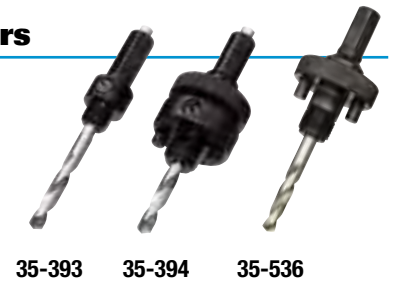


- Durable steel construction means years of long-lasting performance
- Set-screw in body allows easy replacement of the pilot drill
- Save valuable time through this versatile design
- Instantly change hole saws without tools and without having to remove the arbor from the chuck

Shank Size	Thread Size	Chuck Size	Fits Hole Saw Sizes	Cat. No.
11mm / 7/16 in. Hex	1/2 - 20 in.	1/2 in.	Up to 30 mm	35-393
11mm / 7/16 in. Hex	5/8 - 18 in.	1/2 in.	32 mm to 152 mm	35-394
11mm / 7/16 in. Hex	5/8 - 18 in.	1/2 in.	32 mm to 152 mm	35-536

Replacement Pilot Drills for Hole Saw Arbors

- Split point pilot drills start on contact for faster penetration and less walking.

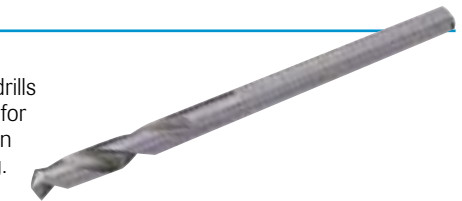

Description	Cat. No.
114 mm (4-1/2 in.) x 6 mm (1/4 in.) - Fits 35-393 & 35-394 arbors	35-397
83 mm (3-1/4 in.) x 6 mm (1/4 in.) - Fits 35-536 arbor	35-398

Reciprocating Blades

- Bi-metal blades - last up to ten times longer than carbon steel blades
- Flexible spring-back provides long blade life
- Super-hard, high speed steel teeth for a sharp, long-lasting cutting edge
- Shatterproof for tough applications
- Fits all reciprocating saws using 1/2 in. (13 mm) universal shank



	L/W/TH Inches / mm	TPI	Material	Blade Back	Qty.	Application	Cat. No.
Metal Cutting							
	6 x 3/4 x .035 152 x 19 x 1.9	18	Bi-metal	Straight	5	Structural steel, pipe, conduit, stainless steel: 1/16" - 3/16" (1.6 - 4.3 mm) thick, Non-ferrous metal: 1/16" - 5/16" (1.6 - 8 mm) thick	36-057
	8 x 3/4 x .035 203 x 19 x 0.9	18	Bi-metal	Straight	5	Structural steel, pipe, conduit, stainless steel: 1/16" - 3/16" (1.6 - 4.3 mm) thick, Non-ferrous metal: 1/16" - 5/16" (1.6 - 8 mm) thick	36-060
Heavy-Duty Metal Cutting							
	6 x 3/4 x .050 152 x 19 x 1.3	18	Bi-metal	Straight	2	Heavy-duty blade for cutting structural steel, pipe, conduit, stainless steel: 1/16" to 3/16" (1.6 - 4.8 mm) thick	36-085
	8 x 3/4 x .050 203 x 19 x 1.3	10/14	Bi-metal	Straight	2	Heavy-duty blade for cutting structural steel, pipe, conduit, stainless steel: 1/8" to 1/2" (3 - 13 mm) thick	36-086
Wood w/Nails							
	6 x 3/4 x .050 152 x 19 x 1.3	6	Bi-metal	Taper	5	Fast cutting, roughing-in work, nail-embedded wood, remodeling	36-065
	9 x 3/4 x .050 229 x 19 x 1.3	6	Bi-metal	Taper	5	Fast cutting, roughing-in work, nail-embedded wood, remodeling	36-066
General Purpose							
	6 x 3/4 x .035 152 x 19 x 0.9	10	Bi-metal	Straight	5	Nail embedded wood, metal and non-ferrous metal composition materials & plastics 1/8" - 1/2" (3-13 mm)	36-075
Specialty Cutting							
	8 x 3/4 x .050 203 x 19 x 1.3	Grit	Tung. Grit	Straight	2	Iron pipe, fibreglass, reinforced plastics, ceramic tile, stone, slate and brick.	36-090
Plaster/Drywall							
	6 x 3/4 x .050 152 x 19 x 1.3	6	Bi-metal	Taper	2	For plaster, drywall, plaster board & lath. Bi-directional cutting	36-088

Long-Life Metal Cutting Reciprocating Blades

- Engineered to be the longest lasting, metal cutting blades available
- Long-life blades perform up to three times as many cuts as similar metal cutting blades
- 8% cobalt cutting edge for extreme durability
- Shatterproof bi-metal design
- Longer life for greater value



Long-Life Blades	L/W/TH Inches / mm	TPI	Material	Blade Back	Qty.	Application	Cat. No.
	6 x 3/4 x .035 152 x 19 x 0.9	18	Bi-metal	Straight	5	Long-Life blade for cutting structural steel, pipe, conduit, stainless steel, sheet metal: 1/6" - 3/16" (4.2 - 4.8 mm) thick	36-043
	8 x 3/4 x .035 203 x 19 x 0.9	18	Bi-metal	Straight	5	Long-Life blade for cutting structural steel, pipe, conduit, stainless steel, sheet metal: 1/6" - 3/16" (4.2 - 4.8 mm) thick	36-044

Progressive Tooth Reciprocating Blades

- Specially designed for all purpose cutting
- Cut multiple materials without changing blades
- Tough bi-metal and HCS construction for long life.

Long-Life Blades	L/W/TH Inches / mm	Material	Blade Back	Qty.	Application	Cat. No.
	6 x 3/4 x .035 152 x 19 x 0.9	Progressive	Bi-metal	5	All metal, non-ferrous metal, sheet metal, pipe and other metal materials	36-056

BULZ-EYE™ Self Feed Wood Boring Bits

Description	Diameter inches	Diameter mm	Cat.
1 in. Self-Feed Wood Boring Bit	1 in.	25	36-250
1-1/4 in. Self-Feed Wood Boring Bit	1-1/4 in.	31	36-252
1-1/2 in. Self-Feed Wood Boring Bit	1-1/2 in.	38	36-254
2 in. Self-Feed Wood Boring Bit	2 in.	51	36-256
3 in. Self-Feed Wood Boring Bit	3 in.	76	36-260

* Other sizes available - details on request

Replacement Lead Screws

- Keeps self-feed bits running fast and true
- Easily replaced with hex wrench providing extended drill life and optimum cost-per-hole value



Description	Cat. No.
3-pack small replacement lead screws, fits bit sizes 1 in. - 2-9/16 in. (25mm - 40 mm)	36-271
3-pack small replacement lead screws, fits bit sizes 3 in. - 4-5/8 in. (76 mm - 118 mm)	36-270

Extension Bars

- Cuts into hard-to-reach areas
- Fits IDEAL Auger Bits



Description	Cat. No.
5-1/2 in. / 140 mm Extension Bar	36-273
18 in. / 457 mm Extension Bar	35-819

Wider precision ground teeth for maximum control

Twin cutting edges for faster, more balanced drilling and cleaner holes

Precision machined shaft eliminates wobble resulting in true, accurate holes

Robust replaceable lead screw with burr-free threads

Black oxide coated, heat treated and hardened for improved durability



Quick change shank design for fast bit changes and use with pneumatic drills

Sharpening File


- Keeps durable bits working like new
- High-grade sharpener hones dulled edges quickly and efficiently



Description	Cat. No.
Sharpening File	36-272


Nailbiter™ Premium Ship Auger Bits

- Dual-Helix construction with twin cutting edges provides faster and smoother drilling action, even through nail-embedded timbers
- Full body, dual induction heat treatment ensures durability, minimises warping and delivers long lasting performance
- Heavy-duty lead screw designed for quick gripping power, superior penetration and extra-long life
- Re-sharpenable for extended tool life

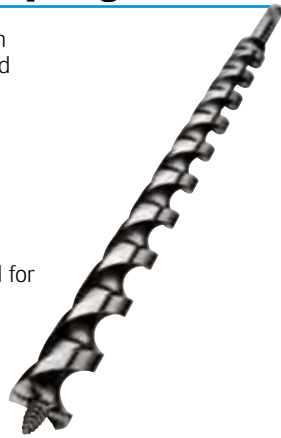

RESI-MASTER™ Heavy-Duty Ship Augers

- 62° cutting angle reinforces the cutting edge and provides greater durability
- Hardened lead screw and cutting edge provide increased wear resistance and extended life
- Secondary relief angle evacuates wood chips quickly and prevents auger from jamming
- Oversized cutting head makes hole larger than body of bit for easy ejection from work piece

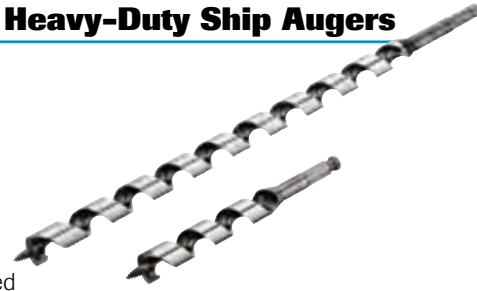

Power Ship Augers

Hole Diameter	Shank	Overall Length Inches (mm)	Twist Length Inches (mm)	Cat. No.
5/8 in. (16 mm)	7/16 in.	7-1/2 (190)	5 (127mm)	35-810
3/4 in. (19 mm)	7/16 in.	7-1/2 (190)	5 (127mm)	35-812
7/8 in. (22 mm)	7/16 in.	7-1/2 (190)	5 (127mm)	35-814
1 in. (25 mm)	7/16 in.	7-1/2 (190)	5 (127mm)	35-815
1-1/4 in. (32 mm)	7/16 in.	7-1/2 (190)	5 (127mm)	35-817

Hole Diameter	Shank	Overall Length Inches (mm)	Twist Length Inches (mm)	Cat. No.
1/2 in. (13 mm)	7/16 in.	18 (457)	15 (381)	35-820
5/8 in. (16 mm)	7/16 in.	18 (457)	15 (381)	35-821
3/4 in. (19 mm)	7/16 in.	18 (457)	15 (381)	35-823
7/8 in. (22 mm)	7/16 in.	18 (457)	15 (381)	35-825
1 in. (25 mm)	7/16 in.	18 (457)	15 (381)	35-827
1-1/4 in. (32 mm)	7/16 in.	18 (457)	15 (381)	35-829


RESI-MASTER™ Auger

Hole Diameter	Shank	Overall Length Inches (mm)	Twist Length Inches (mm)	Cat. No.
5/8 in. (16 mm)	7/16 in.	7-1/2 (190)	5 (127mm)	35-892
3/4 in. (19 mm)	7/16 in.	7-1/2 (190)	5 (127mm)	35-893
7/8 in. (22 mm)	7/16 in.	7-1/2 (190)	5 (127mm)	35-896
1 in. (25 mm)	7/16 in.	7-1/2 (190)	5 (127mm)	35-898
1-1/4 in. (32 mm)	7/16 in.	7-1/2 (190)	5 (127mm)	35-732

Hole Diameter	Shank	Overall Length Inches (mm)	Twist Length Inches (mm)	Cat. No.
1/2 in. (13 mm)	7/16 in.	18 (457)	15 (381)	35-726
5/8 in. (16 mm)	7/16 in.	18 (457)	15 (381)	35-971
3/4 in. (19 mm)	7/16 in.	18 (457)	15 (381)	35-972
7/8 in. (22 mm)	7/16 in.	18 (457)	15 (381)	35-976
1 in. (25 mm)	7/16 in.	18 (457)	15 (381)	35-978
1-1/4 in. (32 mm)	7/16 in.	18 (457)	15 (381)	35-729

Mini™ Utility Bit Augers

- Designed to fit between wall studs when used with common drills
- Eliminates the need for expensive right angle drills



Mini™ Augers

Hole Diameter	Shank	Overall Length Inches (mm)	Twist Length Inches (mm)	Cat. No.
5/8 in. (16 mm)	7/16 in.	4-3/4 (121 mm)	2-1/2 (64)	35-862
3/4 in. (19 mm)	7/16 in.	4-3/4 (121 mm)	2-1/2 (64)	35-864
7/8 in. (22 mm)	7/16 in.	4-3/4 (121 mm)	2-1/2 (64)	35-866

Mini Power Ship Augers

Hole Diameter	Shank	Overall Length Inches (mm)	Twist Length Inches (mm)	Cat. No.
1 in. (25 mm)	7/16 in.	4-3/4 (121 mm)	2-1/2 (64)	35-868


Auger Bit Extensions



*Allen Key Included

Description	Cat. No.
Auger Bit Extension - 7/16 in. / 11 mm	35-819
Auger Bit Extension - 5-1/2 in. / 140 mm	36-273

Flexible Drill Bits

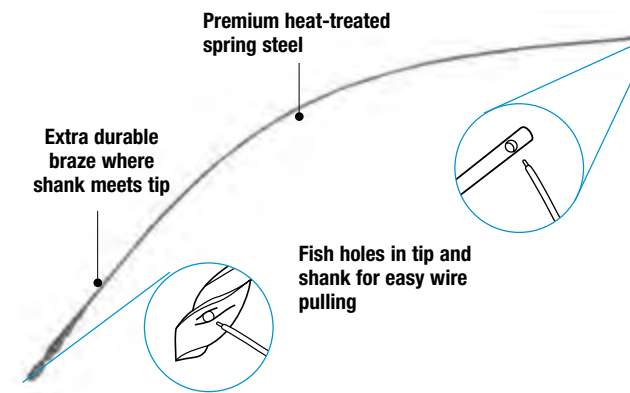

Screw Point Flexible Bits, Type B

- Fast and aggressive, self-starting bit
- Ultra-sharp ground threads provide increased pulling power through obstructions
- Designed for easy to tough wood drilling



Description	Shank mm	Shank in.	Cat. No.
3/8 in. x 54 in. (9.5 mm x 1372 mm) Screw Point Flexible Bit	4.76	3/16	90-082
1/2 in. x 54 in. (13 mm x 1372 mm) Screw Point Flexible Bit	4.76	3/16	90-085
3/4 in. x 54 in. (19 mm x 1372 mm) Screw Point Flexible Bit	6.3	1/4	90-091




Flexible Bit Extensions

- Connect to chuck end of shaft to increase the length of the bit



Description	Shank mm	Shank in.	Cat. No.
3/16 in. x 36 in. (4.8 mm x 914 mm) Flexible Bit Extension	4.76	3/16	90-170
1/4 in. x 36 in. (6.3 mm x 914 mm) Flexible Bit Extension	6.3	1/4	90-173

Flexible Bit Placement Tool

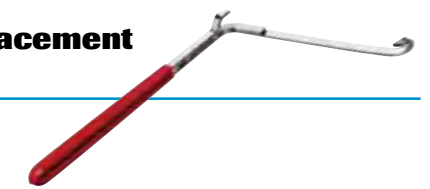

Description	Cat. No.
Flexible Bit Placement Tool	90-176

Power-Spade™ Spade / Flat Bits

- The most innovative and fastest spade bit ever!
- Smooth and effortless drilling



Description	Cat. No.
1/2 in. / 13 mm	36-413
5/8 in. / 16 mm	36-415
3/4 in. / 19 mm	36-417
7/8 in. / 22 mm	36-419
1 in. / 25 mm	36-421
1-1/4 in. / 32 mm	36-423
4-pc. Kit with pouch 5/8 in. (16 mm), 3/4 in. (19 mm), 7/8 in. (22 mm) & 1 in. (25 mm)	36-432

Wood Boring Bits


Flexible Drill Bits

PowerBlade™ Cable Cutter

- Extremely versatile: fits almost any drill (12V minimum)
- Cuts copper up to 5 cm (2 in.) diameter or 380 mm² (750 MCM) or aluminum up to 5 cm (2 in.) diameter or 507 mm² (1000 MCM)
- Heavy-duty gears and specially hardened blades for professional quality
- Rounded blade design minimises cable distortion during cutting
- No need to mess with battery packs or special chargers; this tool works with the drill you already carry!



(Drill not included)



(Folding handle for storage.)

Description	Cat. No.
PowerBlade™ Cable Cutter	35-078
PowerBlade™ Replacement Handle	K-8947R
PowerBlade™ Replacement Blades (pair)	K-8906R
PowerBlade™ Replacement Torque Arm Assembly	K-8909
PowerBlade™ Replacement Carrying Case	K-8926

*Max. Jaw Opening - 5 cm (2 in.)

Big Kahuna Cable Cutter

- Cuts copper up to 8.25 cm (3-1/4 in.) diameter or 380 mm² (750 MCM) or aluminum up to 8.25 cm (3-1/4 in.) or 507 mm² (1000 MCM) power cable
- Heavy-duty gears and specially hardened blades for long life
- Rounded blade design minimises cable distortion during cutting
- Folding handle facilitates cuts in tight electrical boxes
- Comes complete with carrying case



Description	Cat. No.
Big Kahuna Cable Cutter	35-076



ELECTRICAL SAFETY



LOCKOUT STATION



Importance of Safe Isolation

Unintentional energisation of circuits, machinery and equipment is a leading cause of death and injury among electrical contractors in the UK.

To minimise this type of accident regulations such as the "Provision and Use of Work Equipment 1998, Section 19 Energy" and the "Electricity at Work Regulations 1989, Regulation 13" require companies to have effective isolation policies in place.

Most accidents can be avoided by installing simple lockout / tagout devices prior to any electrical work being carried out.

Basic Practice for Safe Isolation

When working on electrical equipment / energized circuits, it is important that certain basic steps are followed:

- The correct point of isolation is identified
- An appropriate means of isolation is used
- Suitable caution notices should be placed where visible at the point of isolation
- All conductors must be proved to be dead at the point where work is intended to be carried out
- The electrical supply can not be reinstated while work is being carried out on any equipment / part of the circuit
- Isolation of equipment / circuits should be under the control of the person responsible for carrying out work on the isolated conductors
- Multi-lock hasps / devices should be used in the event of more than one person working on isolated equipment / circuits



IDEAL offers a range of lockout / tagout products to provide a cost-effective and safe solution in the management of electrical safety and circuit isolation in the workplace. IDEAL lockout/tagout devices help to achieve compliance with current regulations.

For more comprehensive information on electrical safety and safe isolation, refer to the best practice guide available from the Electrical Safety Council entitled 'Guidance on the management of electrical safety and safe isolation procedures for low voltage installations'. The latest version is available on the Electrical Safety Council website (www.esc.org.uk).

UK Contractor Lockout/Tagout Kit

- Aimed at the fully approved contractor working on industrial, commercial and domestic installations
- Contains a broad range of devices allowing you to lock off most breakers on the market
- Comes in a handy pouch that keeps your kit close to hand and easily accessible
- The durable zipped pouch keeps your devices safe and helps to prevent loss.



Description	Cat. No.
UK Contractor Lockout/Tagout Kit	44-985UK

UK Personal Lockout/Tagout Kit

- Contains two of our most popular devices
- Aimed at companies wishing to kit out their entire workforce with our low-cost versatile kit.



Description	Cat. No.
UK Personal Installer Lockout/Tagout Kit	44-925



UK Domestic Installer LOTO Kit

- Aimed at the domestic installer
- Contains devices to use on the typical breakers found in domestic installations
- Comes in a handy pouch that keeps your kit close to hand and easily accessible



Description	Cat. No.
UK Domestic Installer Lockout/Tagout Kit	44-924


Cat. No.	IA-3240	K-8334	KB-0224	KB-0225	KB-0234	KB-0375	K-7566	444.001	IA-2280	KB-0228*
44-985UK	✓	✓	✓		✓	✓	✓	✓	✓	✓ (8)
44-924	✓	✓	✓	✓	✓		✓			✓ (4)
44-925		✓		✓	✓					✓ (1)

*Available to order in packs of 10 (KB-0235)



Padlocks

- Dedicated safety lockout device reduces confusion with other locks
- Complies with OSHA's "1-key, 1-lock"
- Non-conductive, lightweight Xenoy® body
- Key retention ensures keys do not get lost while not in use and that padlocks are not left untouched
- 38 mm / 1-1/2 in. shackle clearance
- 38 mm / 1-1/2 in. wide lock with 6mm / 1/4 in. diameter plated metal shackle for corrosion resistance
- Four colours for easy identification
- Keyed-alike, Master-Keyed, 2nd key, additional colours and engraving available by special order

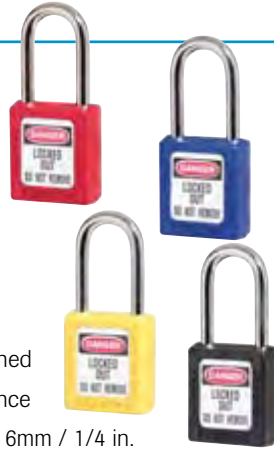

Description	Cat. No.
Xenoy® Safety Padlock 38 mm shackle - red	K-8334
Xenoy® Safety Padlock 38 mm shackle - blue	K-8330
Xenoy® Safety Padlock 38 mm shackle - black	K-8332
Xenoy® Safety Padlock 38 mm shackle - yellow	K-8336

Stainless Steel Padlocks

- Marine grade 316 stainless steel shackle provides superior corrosion resistance
- Various length of shackle
- Durable padlock weighs just 3 ounces, making it easy to carry many
- Special thermoplastic body offers superior performance against chemicals, moisture, heat, cold and UV. Operates from -70 to +350 degrees F (-56 to +176 degrees C).



Description	Cat. No.
Safety Padlock 38 mm stainless steel shackle	K-8334-SS38
Safety Padlock 76 mm stainless steel shackle	K-8334-SS76

Snap-On Lockout Hasp - Labeled

- Combines multiple person lockout and tagout identification
- Features an easy-to-apply "snap-on" advantage with its spring-loaded locking arm
- Anodised aluminium and stainless steel construction for combined corrosion-resistance and strength



Description	Cat. No.
Snap-On Lockout Hasp - Labelled	44-427EU

Stainless Steel Lockout Hasp

- 4mm dia. shackle hasp
- 100% stainless steel hasp
- Can be locked out with 8 padlocks
- 2 supervisor holes
- Body size: (L x W x D) 91 x 46 x 17mm
- Shackle size: 39mm (Vertical clearance) 26mm (Horizontal clearance)



Description	Cat. No.
Stainless Steel Lockout Hasp	44-431-SS

Steel Lockout Hasp

- Steel jaw with vinyl coated handle
- Allows up to six workers to lock out a single energy source
- Attach hasp to energy disconnect switch
- Control cannot be turned on until last worker's padlock is removed from hasp
- Inside jaw diameter of 38 mm



Description	Cat. No.
Steel Lockout Hasp	KB-0224

Nylon Hasp and Shackle


- Allows up to six workers to lock out a single energy source
- Attach hasp to energy disconnect switch
- Control cannot be turned on until last worker's padlock is removed from hasp
- Inside jaw 25 x 63 mm
- Non-conductive, dielectrical protection, anti-sparkling



Description	Cat. No.
Non-Conductive Lockout Hasp	44-428EU

Grip Tight™ Circuit Breaker Lockouts

- Attaches securely to breaker with simple thumb turn and clamping handle
- KB-0226 is designed for breakers with wide or tall toggles
- KB-0227 fits standard height and tie-bar toggles
- The narrow profile permits side-by-side breaker lockout
- Durable construction with powder coated steel and reinforced polymer allows operation in harsh environments

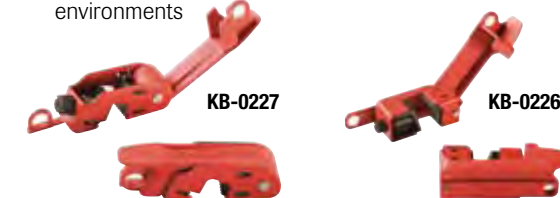

Description	Cat. No.
Circuit Breaker Lockout Kit including one for wide & tall toggles and one for standard single & double toggles	KB-0375
Circuit Breaker Lockout Kit for wide & tall toggles	KB-0226*
Circuit Breaker Lockout Kit for standard single & double toggles	KB-0227*

* Not sold separately

"No-Hole" Lockout Device

- Lockout device that is ideal for breakers without built-in locking facilities often found in older domestic and commercial installations
- Extremely versatile - works on wide range of single pole and internal-trip multi-pole breakers
- Use thumbscrews to clamp lockout securely onto switch tongue, then pull cover over thumbscrew and lock in place to prevent clamp from being loosened



Description	Cat. No.
MCB Lockout Device	IA-2280

Miniature Circuit Breaker Lockout Device

- A safe and effective method for locking out European Circuit Breakers
- The lockout easily installs with the aid of a Push Button
- Recommended to use in combination with a padlock for added safety. The lockout can take padlocks for a shackle diameter up to 6 mm
- Requires no tools to install



Description	Cat. No.
Mini - MCB Lockout Device	441.001

Adjustable Cable Lockout

- Infinitely adjustable safety hasp and cable
- Ideal for multiple circuit breaker panels and side-by-side gate valve lockouts
- Feed the cable end through the points to be locked out, then back through the lockout body. Clinch it tight to remove any slack with the patented locking feature.
- Tough, flexible multi-stranded 1.8 m/6 ft. / 2 cm/1/4 in. dia. steel cable is insulated with a clear vinyl coating
- Tough, lightweight, dielectric Xenoy thermoplastic body withstands chemicals; performs effectively in extreme conditions
- Up to four workers can apply their personal safety locks
- Complete with high-visibility, re-usable, write-on safety labels (English, French & Spanish). Identify the responsible person, then erase for the next job.



Description	Cat. No.
Adjustable Cable Lockout	44-808

Miniature Lockout Device


- An MCB lockout device useful for MCB's without lock holes on the MCB flanges
- Simple and easy to use without the need for any special tools



Description	Cat. No.
MCB Lockout Device for flanges w/o lock holes	KB-0234

Miniature Circuit Breaker Lockout Device


- Locks out both European and Asian equipment
- Fits breaker with toggle openings of 11mm or less
- Simple and easy to use without the need for any special tools



Description	Cat. No.
MCB Lockout Device	KB-0225

Lock Stations

- Integrated, one-piece moulded construction eliminates loose parts
- Resilient polycarbonate material provides twice the heat resistance and quadruple the impact strength of typical stations
- Lockable cover prevents loss of valuable safety products and innovative hinge holds cover open for easy product selection
- Secure with a combination lock for simple access control



44-806



44-778



Description	Cat. No.
Four-Lock Station Kit includes Four-Lock Station Board (44-778-S0), four red Safety Padlocks (K-8334), 12 Heavy-Duty Lockout Tags and two 5 cm / 1 in. Safety Lockout Hasps (44-824EU)	44-778
Four-Lock Station Board Only	44-778-S0*
Ten-Lock Station Kit includes Ten-Lock Station Board (44-806-S0), ten red Safety Padlocks (K-8334), 24 Heavy-Duty Lockout Tags and two 5 cm / 1 in. Safety Lockout Hasps (44-824EU)	44-806
Ten-Lock Station Board Only	44-806-S0*

*Not shown.

Warning Tags

- High visibility lettering
- Machine-laminated card with non-fade legends



Description	Cat. No.
Warning Tag - pack of 10	KB-0235

Marking Pen

- Fast-drying, permanent ink will not smear
- Use on write-on marker cards and write-on cable-tie marker plates



Description	Cat. No.
Marking Pen w/black ink	K-7566

Heavy-Duty Lockout Tags

- High-visibility lettering
- Laminated plastic tags have non-fade legends, resist corrosive and harsh environmental conditions grommet
- Vinyl tags are silk screened with a 7/8 in. metal grommet; fastener included
- Exceeds OSHA's 50-lb. pullout requirement



Legend	Type	Qty.	Cat. No.
Do Not Operate - (red striped background)	Heavy-Duty Laminated	5/card	44-833

IDEAL Pouch

- Durable zipped pouch
- Keeps your devices safe and helps preventing loss



Description	Cat. No.
IDEAL Pouch	IA-3240

TEST & MEASUREMENT



Danloss Graham
Danloss Graham Inc.
10000 10th St. S. Suite 100
Minnetonka, MN 55345
Tel: 952-895-5511
Fax: 952-895-5512
Call: 800-858-7411
Website: www.danloss.com

VLT 6000 HVAC

VLT

Clamp Meter Selection Guide

CLAMP METER	740 Series		760 Series		770 Series	
	61-744	61-746	61-763	61-765	61-773	61-775
MEASUREMENT FUNCTIONS						
AC Voltage	•	•	•	•	•	•
DC Voltage	•	•	•	•	•	•
AC Current	•	•	•	•	•	•
DC Current			•	•	•	•
Resistance	•	•	•	•	•	•
Audible Continuity	•	•	•	•	•	•
Capacitance			•	•	•	•
Frequency			•	•	•	•
FEATURES						
Display Type (Digital)	D	D	D	D	D	D
AC Current Capacity	600	600	660	660	1000	1000
DC Current Capacity				660		1000
True RMS		•	•	•	•	•
Auto/Manual Ranging	•	•	•	•	•	•
Data Hold	•	•	•	•	•	•
Max Hold						
Peak Hold			•	•	•	•
Min/Max			•	•	•	•
DCA Zero			•	•	•	•
Auto Power Off	•	•	•	•	•	•
Non-Contact Voltage Indication	•	•				
Backlight			•	•	•	•
Low Battery Indication	•	•	•	•	•	•
High Voltage Warning			•	•	•	•
Overload Protection on all Ranges	•	•	•	•	•	•
Conductor Size – Inches (mm)	1.5" (38)	1.5" (38)	1.4" (36)	1.4" (36)	2.0" (51)	2.0" (51)
Warranty (years)	2	2	2	2	2	2
CERTIFICATIONS						
UL 61010 Listed	•	•	•	•	•	•
CAT III, 100V/CAT IV 600V	III	III	IV	IV	IV	IV
CE	•	•	•	•	•	•

Multimeter Selection Guide

MULTIMETER	310 Series		340 Series		480 Series		490 Series		600	
	61-310	61-312	61-340	61-342	61-484	61-486	61-497	61-498	61-605	61-605
MEASUREMENT FUNCTIONS										
AC & DC Voltage	•	•	•	•	•	•	•	•	•	•
AC Current	•	•	•	•	•	•	•	•	•	•
DC Current	•	•	•	•	•	•	•	•	•	•
Resistance	•	•	•	•	•	•	•	•	•	•
LV Resistance										
Audible Continuity	•	•	•	•	•	•	•	•	•	•
Diode Test	•	•	•	•	•	•	•	•	•	•
Capacitance			•	•	•	•	•	•	•	•
Frequency			•	•	•	•	•	•	•	•
Temperature	•	•	•	•		•	•	•	•	•
Duty Factor								•	•	•
Battery Test	•									
Decibels								•	•	•
FEATURES										
Display Type (Digital or Analogue)	D	D	D	D	D	D	D	D	D	D
True RMS					•	•	•	•	•	•
Auto/Manual Ranging		•	•	•	•	•	•	•	•	•
Non-Contact Voltage Detection					•	•				
Data Hold / Auto Hold	D	D	D	D	D	D	A	A	D	D
Min/Max			•	•	•	•	•	•	•	•
Min/Max/Avg			•	•	•	•	•	•	•	•
Peak Min/Max					•	•	•	•	•	•
Relative Mode							•	•	•	•
High Speed Analogue Bar Graph					•	•	•	•	•	•
Auto Power Off			•	•	•	•	•	•	•	•
Backlight			•	•	•	•	•	•	•	•
Low Battery Indication			•	•	•	•	•	•	•	•
Dual Display							•	•	•	•
Overload Protection on all Ranges	•	•	•	•	•	•	•	•	•	•
Data Logging							•	•	•	•
Data Acquisition							•	•	•	•
Memory Storage & Recall							•	•	•	•
Optical USB Interface							•	•	•	•
ProVision™ II Software							•	•	•	•
Warranty (years)	2	2	2	2	2	2	2	2	2	2
CERTIFICATIONS										
UL 61010 Listed	•	•	•	•	•	•	•	•	•	•
CAT Rating	II	II	III	III	IV	IV	IV	IV	IV	II
CE	•	•	•	•	•	•	•	•	•	•

TightSight® Clamp Meters 1000 & 660 Amp (770 & 760 Series)

- TightSight® bottom display
- Tapered jaws with hook tip
- Measures AC current
- True RMS
- AC/DC Voltage
- Capacitance
- Audible continuity
- Frequency via clamp head or test leads
- Resistance
- High frequency rejection*
- Peak hold
- Max/min hold
- Data hold
- Selectable audible and visual voltage alerts on AC/DC voltage functions
- Selectable auto power off
- Backlit display
- Low battery indicator
- 2-year warranty

*Reads accurately on noisy electrical circuits.



Description	Cat. No.
1000AAC Clamp Meter w/ differentiating features	61-773
1000A AC/DC Clamp Meter	61-775
660AAC Clamp Meter	61-763
660A AC/DC Clamp Meter	61-765

Includes: Carrying Case and Test Leads w/Crocodile Clips.



1000A Clamp (61-773)



660A Clamp (61-763)



Specifications	Range & Resolution				Accuracy
	61-773	61-775	61-763	61-765	
AC Current	0.0-999.9A		0.0-660.0A		2.0%
DC Current	—	0.0-999.9A	—	0.0-660.0A	2.0%
AC Voltage		0.0-750.0V			1.0%
DC Voltage		0.0-999.9V			1.0%
Resistance		0.0-999.9Ω			1.5%
Capacitance		0.0-999.9μF			5.0%
Continuity		0.0-999.9Ω			Audible @ <30Ω
Frequency		20.0-400.0Hz			0.5%
Jaw Size	2" (51mm)		1.42" (36mm)		—

Clamp-Pro™ Clamp Meters 600 Amp (740 Series)

- Measures up to 600AAC
- Non-contact voltage indicator (70V-600VAC)
- Continuity
- Tapered jaws with hook tip
- Auto/manual ranging
- Data hold
- Auto power off
- Low battery indicator
- 2-year warranty



61-744

Description	Cat. No.
600A Clamp Meter w/ TRMS	61-746
600A Clamp Meter	61-744

Includes: Carrying Case and Test Leads.

Specifications	Range & Resolution	Accuracy
		61-744 & 61-746
AC Current	40.00/400.0/600A	1.7%
AC Voltage	400.0/600 V	1.2%
DC Voltage	400.0/600 V	0.5%
Resistance	400.0/4.000k/ 40.00k 400.0k/4.000M/40.00M Ω	1.0%

Jaw opening is 1.25" (32mm).



Compact jaw for use in tight locations.

Split-Jaw™ Smart Meter

- Measures 0.9-200AAC
- Measures 1.3-750VAC
- Measures 2.1-1000VDC
- Measures 0.0-9999Ω
- Audible continuity
- Data hold
- Integral lead storage
- Replaceable test leads
- Auto power off
- Low battery indication
- 2-year warranty



Description	Cat. No.
Split-Jaw™ Smart Meter	61-096

Includes: Test Leads.

Specifications	61-096	
AC Voltage	1.3 - 750 V	1.5%
DC Voltage	1.8 - 1000 V -0.6 - 1000 V	1.0%
AC Current	0.6 - 200.0A	3.0%
Resistance	0 - 2000 Ω	1.0%

*Note: Jaw opening is 0.6 in. (16mm) - up to 1/0 copper cable.

Industrial-Grade Multimeters (490 Series)

- True RMS
- Data acquisition
- Data logging
- Data storage
- Auto AC/DC voltage and current mode w/frequency indication
- High voltage indicator
- Frequency
- Temperature
- High frequency rejection mode*
- Auto selection for resistance/continuity/diode/capacitance
- Auto hold
- Peak hold
- dBm/dB measurement
- Relative mode
- Min/Max/Avg
- Dual display
- Duty factor
- Auto power off
- Auto sensing backlight
- Low battery indicator
- USB cable and software included
- 2-year warranty

*Reads accurately on noisy electrical circuits.



61-498

Description	Cat. No.
Digital Multimeter, 0.015% DCV Accuracy	61-498
Digital Multimeter, 0.03% DCV Accuracy	61-497

Accessories

Includes	Cat. No.
Test Leads w/Crocodile Clips	TL-497
Magnetic Strap	61-565
USB Cable	61-902
ProVision™ II Software	61-906
K-Type Thermocouple	61-461
Thermocouple Adapter	61-465
Carrying Case	C-230



Specifications	Range & Resolution		Accuracy	
	61-497	61-498	61-497	61-498
AC Voltage	40.000m/400.00m/ 4.0000/40.000/400.00/1000.0 V	100.000m/1000.00m/ 10.0000/100.000/1000.00V	±0.7%	±0.40%
DC Voltage	40.000m/400.00m/ 4.0000/40.000/400.00/1000.0 V	100.000m/1000.00m/ 10.0000/100.000/1000.00V	±0.03%	±0.015%
AC Current	40.000m/400.00m/10.000 A	10.0000m/100.000m/10.0000A	±0.8%	±0.7%
DC Current	40.000m/400.00m/10.000 A	10.0000m/100.000m/10.0000A	±0.2%	±0.1%
Resistance	400.00/4.0000k/40.000k/400.00k/ 4.0000M/40.000M Ω	1000.00/10.0000k/100.000k/1000.00k 10.0000M/40.000M Ω	0.6%	0.6%
Capacitance	4.000n/40.00n/400.0n/4.000µ/ 40.00µ/ 400.0µ/4.000m/40.00mF	4.000n/40.00n/400.0n/4.000µ/40.00µ/ 400.0µ/4.000m/40.00mF	0.9%	0.9%
Diode Test	2.000 V	0.400 V - 0.800 V	±1.5%	±1.5%
Frequency	40.000/400.00/4.000k/40.000k/400 .00k/ 4.0000M Hz	40.000/400.00/4.000k/40.000k/40 0.00k/ 4.0000M Hz	±0.002%	±0.002%
Duty Factor	20% - 80%	20% - 80%	±0.1%	±0.1%
Temperature	-328° F to 2192° F (-200° C TO 1200° C)	-328° F to 2192° F (-200° C TO 1200° C)	±1.0% +2°F/1°C	±1.0% +2°F/1°C

Commercial-Grade Multimeters (480 Series)

- True RMS
- Auto AC/DC voltage detect w/low impedance (Auto - VLoZ)
- Capacitance
- Frequency
- Analogue bar graph
- Min/max
- Non-contact voltage detection
- Low battery indication
- Auto power off
- 2-year warranty



61-486

Description	Cat. No.
Digital Multimeter w/peak hold, temperature, includes thermocouple	61-486
Digital Multimeter	61-484

Include: Test Leads & Carrying Case.



Specifications	Range & Resolution		Accuracy	
	61-484	61-486	61-484	61-486
AC Voltage	6.000/60.00/600.0/1000.0 V	600.0 mV	1.0%	0.80%
AC mV	600.0 mV	60.00/600.0 mV	1.5%	1.2%
DC Voltage	6.000/60.00/600.0/1000.0 V	600.0 mV	0.1%	0.08%
DC mV	600.0 mV	60.00/600.0 mV	1.5%	1.2%
AC Current	60.00m/600.0m/6.000/10.00A	60.00m/600.0m/6.000/10.00A	1.0%	0.80%
DC Current	600.0/6.000k/60.00k/600.0k/6.000M/40.0 0M Ω	600.0/6.000k/60.00k/600.0k/6.000M/40.0 0M Ω	1.0%	0.80%
Resistance	1nF to 10.mF	1nF to 10.mF	0.1%	0.1%
Capacitance	99.9 to 100.0k Hz	99.9 to 100.0k Hz	0.1%	0.1%
Frequency	—	-40°F to 752°F (-40°C to 400°C)	1.0%	1.0%
Temperature				

Resi-Pro™ Multimeters (310 Series)

- Voltage
- Current
- Resistance
- Audible continuity
- Temperature
- Data hold
- Diode test
- Large numbers displayed
- 2-year warranty



Description	Cat. No.
Resi-Pro™ Meter w/Auto Ranging, AC/DC Current, Capacitance, Frequency, Auto Power Off, Low Battery Indication	61-312
Resi-Pro™ Meter w/Manual Ranging, Tests Batteries	61-310

Includes: Test Leads and Thermocouple.



Specifications	Range & Resolution		Accuracy	
	61-310		61-312	
AC Voltage	200.0/600 V	1.2%	4.000/40.00/400.0/600 V	1.2%
DC Voltage	200.0m/2.000/20.00/200.0/600 V	0.5%	400.0m/4.000/40.00/400.0/600 V	0.5%
Current	200.0m/10.00 ADC	1.5%	400.0µ/4000µ/40.00m/400.0m/10.00A AC/DC	1.5%
Resistance	200.0/2.000k/20.00k/200.0k/20.00M Ω	1.0%	400.0/4.000k/40.00k/400.0k/4.000M/40.00M Ω	1.0%
Capacitance	—	—	40.00n/400.0n/4.000µ/40.00µ/400.0µ F	3.0%
Frequency	—	—	10.00/100.0/1.000k/10.00k/100.0k/1.000M/10.00M Hz	0.3%
Temperature	-4-1382°F (-20-750°C)	2.5%	-4-1382°F (-20-750°C)	2.5%

Test-Pro™ Multimeters (340 Series)

- Capacitance
- Frequency
- Temperature
- Voltage
- Current
- Resistance
- Audible continuity
- Relative mode
- Backlight
- Min/max
- Data hold
- Low battery indicator
- Auto power off
- 2-year warranty



Description	Cat. No.
Test-Pro™ Multimeter w/TRMS	61-342
Test-Pro™ Multimeter	61-340

Includes: Test Leads and Thermocouple.



Specifications	Range & Resolution		Accuracy	
	61-340 & 61-342			
AC Voltage	4.000/40.00/400.0/600 V	1.5%		
DC Voltage	400.0m/4.000/40.00/400.0/600 V	0.5%		
Current	400.0µ/4000µ/40.00m/400.0m/4.000/10.00A AC/DC	1.5%		
Resistance	400.0/4.000k/40.00k/400.0k/4.000M/40.00M Ω	1.0%		
Capacitance	40.00n/400.0n/4.000µ/ 40.00µ/400.0µ F	3.0%		
Frequency	10.000/100.00/1.000k/10.00k/100.0k/1.000M/4.000M Hz	0.3%		
Temperature	-4° F to 1382° F (-20° C to 750° C)	3.0%		

Pocket Meter

- Convenient pocket size
- Built-in test stand
- Audible continuity
- Auto power off
- Test lead storage
- 2-year warranty



Description	Cat. No.
Pocket Meter	61-605

Includes: Test Leads.



Specifications	Range & Resolution		Accuracy	
	61-605			
AC Voltage	200.0m/2.000/20.00/200.0/600 V	4.0%		
DC Voltage	200.0m/2.000/20.00/200.0/600 V	2.0%		
Resistance	200.0/2.000k/20.00k/200.0k/2.000M/20.00M Ω	3.0%		

Vol-Con® Elite Digital Voltage Tester

- Tests for AC Voltage from 24-600VAC
- Tests for DC Voltage from 6-220VDC
- Visual and audible warning
- Audible continuity
- Non-contact voltage indication (40-600VAC)
- Low impedance to eliminate ghost voltages
- Low battery indicator
- Replaceable GS38 compliant test leads
- Integral lead storage
- 2-year warranty



Description	Cat. No.
Vol-Con® Elite Digital Voltage Tester	61-090EU

Accessories

Includes	
GS38 Compliant Test Leads	TL-102EU
Optional	
Carrying Case	C-90



XL-Series Solenoid Voltage Tester

- Rugged and reliable tester
- Vibrates when voltage is present
- Indicates AC/DC voltage level
- Replaceable leads with shielded probe tips
- Bright, long-life LED's and neon indicator lamp
- Dual voltage indication for backup safety
- Compact size
- 2-year warranty



Description	Cat. No.
Vol-Con® XL Voltage/Continuity Tester, 6-600V AC/DC	61-086

Accessories


Includes	
Standard Test Leads	TL-80
Optional	
Resistor-fused Leads*	TL-82
Padded Nylon Case	C-90
Leather Case	61-010

*Special, current-limiting resistor in each lead acts as a fuse to open in a short-circuit situation.



VoltAware™ Non-Contact Voltage Tester

- Indicates presence of voltage from 40-1000VAC
- Visual indication of voltage
- Selectable audible indication of voltage
- Sleek, compact design
- Green LED indicates power on
- Low battery indicator
- Battery replacement (AAA size)
- 2-year warranty

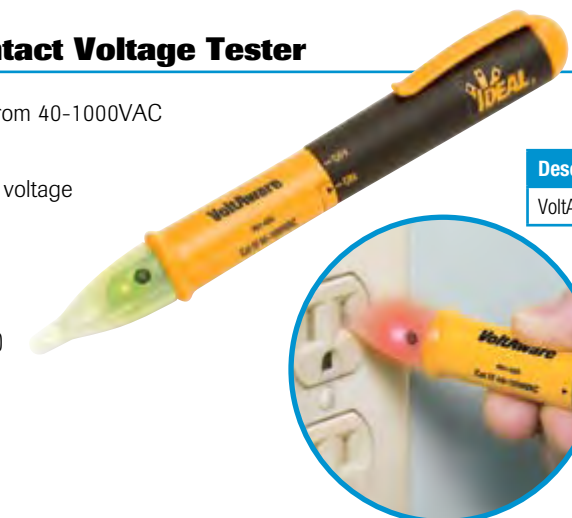

Description	Cat. No.
VoltAware™ Non-Contact Voltage Tester	61-025EU



Convenient button turns audible voltage indication on or off.

Insulation Testers

- Checks new installations for proper insulation
- Checks existing installations and motor windings for breakdowns in insulation
- 2-year warranty



61-795



61-797



Description	Cat. No.
Insulation Meter w/PI, DAR, Remote Probe	61-797
Insulation Tester	61-795

Accessories

Includes (61-795)	
Test Leads	TL-795
Carrying Case	C-795

Includes (61-797)	
Test Leads	TL-797
Remote Probe	TL-797RP
Carrying Case	C-230

Specifications	Range & Resolution	
	61-795	61-797
Test Voltage	250/500/1000 VDC	50/100/250/500/1000 VDC
Voltage AC/DC	0.1-600.0 V	0.1-600.0 V
Continuity	0.01-20.0 Ω	—
Resistance	0-200.0Ω	—
Insulation Resistance	Up to 4000M Ω	Up to 20G Ω
Earth-Bond Resistance	—	0.01 Ω to 40.00k Ω

Ground Resistance Meters

- Auto ranging
- Auto power off
- Hard case included
- 2-year warranty



61-920



61-796



TL-796

Description	Cat. No.
Ground Resistance Clamp Meter	61-920
3-Pole Ground Resistance Tester - includes TL-796 lead set kit	61-796
Earth Resistance Lead Set Kit	TL-796

Specifications	Range & Resolution		Accuracy	
	61-920	61-796	61-920	61-796
Ground Resistance	0/120/1200 Ω	20.00/200.0/2000 Ω	1.5%	2.0%
Ground Leakage Current	100M/1000M/15/30 A	—	2.0%	—

SureTest® Installation Tester

- BS 7671:2008 (17th Edition) Compliant
- Super bright OLED display
- Ultra-lightweight
- Remote probe and calibration certificate included
- 2-year warranty

Description	Cat. No.
SureTest® Installation Tester	61-255
UK Mains Power Plug	TLMP-255UK
Remote Probe	TL-797RP
3 Wire Test Lead Set	TL-255
Spare Fuses (2 pack)	F-255



Installation Tester

Auto-RCD mode saves trips back and forth to the distribution board. Once the Test button is pressed, resetting of the RCD is all that's required.



Installation Tester

The "NULL" feature allows you to reliably zero out test lead resistance assuring accurate R1 + R2 continuity measurements.



Installation Tester

Irrespective of whether the high current or non-tripping loop range is selected, fast and accurate results are guaranteed. At the same time the PEFC/PSCC value is calculated and displayed.



Measurement Functions	
Voltage and Frequency	•
Wiring Polarity	•
Insulation resistance	250, 500, 1000V
Continuity	•
Loop & Line Resistance	•
PEFC/PSCC	•
RCD Tripping Time	•
Ramp Test	•
Auto RCD	•
Phase Sequence Indicator	•
Touch Voltage	25V/50V

Insulation/Ground Testers

Installation Tester

Open/Closed Circuit Tracers

- Identifies breakers and fuses
- Pinpoints opens and shorts
- Traces wires
- "0-99" display of signal strength
- Audible intensifies in tone/pitch
- Works on energised or de-energised circuits (0 - 600V AC/DC)
- Four modes of sensitivity - search high, search low, trace and breaker
- Peak bar graph
- 2-year warranty

61-958
Pictured



Description	Cat. No.
Kit Includes: Rotating Display, Inductive Clamp and Battery Pack	61-958
Kit Includes: Rotating Display	61-956
Kit Includes: Standard Display	61-954

Accessories

Includes	
Fuse - High-energy, Fast-acting, 1A/1000V	F-958
Magnetic Strap	61-565
Tracer Test Lead Set (includes 1-6 below)	TL-956
1. Outlet Plug Adaptor for Transmitter	TLOP-956
2. Blade Prongs for Lead Adaptors (2/set)	TLBP-956
3. Ground Prong for Lead Adaptor	TLGP-956
4. Crocodile Clips for Lead Adaptors (2/set)	TLAC-956
5. 90 cm (3 ft.) Lead Adaptors for Transmitter (2/set)	TLA1-956
6. 7.5 m (25 ft.) Lead Adaptor for Transmitter	TLA2-956
Optional	
Cradle for Receiver*	CR-958

*Threaded for use on standard extension pole.



CR-958

Kit Contents	61-954	61-956	61-958
Transmitter	TR-958	TR-958	TR-958
Receiver	RC-954	RC-958	RC-958
Tracer Test Lead Set	TL-956	TL-956	TL-956
Inductive Clamp			IC-958
Battery Pack			BP-958
Magnetic Hanging Strap			61-565
Hard Carrying Case	C-956	C-956	C-958
Batteries	•	•	•
Instruction Manual	•	•	•



TL-956

TR-958



RC-958



RC-954



Exclusive Rotating Display

Revolutionary technology in the receiver rotates the display in 90° increments so that you always receive an upright reading. Even when the receiver is pointing down, you can keep up.



Transmitter and receiver take four standard AA batteries.

Transmitter will work on a de-energised circuit and won't affect RCD's and sensitive equipment on an energised circuit.

Digital Circuit Breaker Finder & Socket Tester

- Locates breakers and fuses quickly and accurately
- Check polarity and easily identifies common wiring faults
- Verifies presence of power
- Visual and audible indicators
- 2-year warranty

61-534EU



61-184EU

Description	Cat. No.
Digital Circuit Breaker Finder & Socket Tester (includes carrying case)	61-534EU
Crocodile Clip & Probe Set	61-184EU
Carrying Case	C-290

Specifications

	61-534EU
Operating Voltage	200 - 250 VAC
Operating Frequency	47 - 63 Hz



Voltage Performance Monitor

- Real-time TRMS voltage, frequency and harmonics monitoring
- Logs voltage, sags, swells and impulses
- Measures %THD and logs periods over 3% (line to neutral)
- Selectable thresholds based on the most accepted international standards, defaults to ITIC*
- Custom programmable event thresholds
- Invertible display, when it is necessary to plug in upside down
- 2-year warranty

*Captures events that would affect equipment on branch circuit

Applications

Monitor voltage near sensitive equipment

- Installation and Service Technicians - Monitor voltage at point of equipment connection
- Electricians - Eliminate guesswork on service calls
- Building Maintenance Technicians - Identify voltage caused equipment failures
- Equipment Manufacturers - Eliminate unnecessary warranty costs
- Hospital/IT Maintenance Engineers - Monitor voltage quality to critical equipment



Description	Cat. No.
Voltage Performance Monitor	61-830

Accessories

Includes	
Adapters (set of 4)	PA-830
Carrying Case	61-179

Specifications

	61-830
Operating Range	15-265V
Memory	513 Events
Sampling Method	Continuous (128 samples per cycle)
Voltage Accuracy	1%
Impulse Detection	6µs, 4kV
Harmonic Distortion	2%, FFT to 51st



61-179



PA-830



See voltage through the eyes of your equipment

Poor voltage quality increases facility expenses, warranty costs and downtime plus shortens the life of equipment. The IDEAL VPM identifies only those voltage conditions that can damage equipment or cause equipment failure.

+44 (0)1925 44 44 46 for Customer Service

HeatSeeker® Thermal Imagers

- Blended thermal/digital image (0-100% & PIP)
- Hottest/coldest temperature cursors instantly display on live screen
- Sequence image recording activated by alarm settings
- Class II laser
- Built-in LED light
- High and low temperature alarms
- Save images with text and voice annotation
- Adjustable emissivity for maximum accuracy
- Multi-lingual - nine languages included
- Six-hour battery life
- Tripod mountable
- ThermalVision™ PC software included
- Two-year warranty



Description	Cat. No.
HeatSeeker 320 Thermal Imager, Carrying Case, Power Supply, Removable-Rechargeable Battery, ThermalVision™ II PC Software and USB cable	61-848
HeatSeeker® 160 Thermal Imager, Carrying Case, Power Supply, Removable-Rechargeable Battery, ThermalVision™ II PC Software and USB cable	61-846EU
HeatSeeker® Thermal Imager, Removable Handle, Carrying Case, Power Supply, ThermalVision™ PC Software and USB Cable	61-844EU


Accessories	61-848	61-846EU	61-844EU
Includes			
Removable Battery	61-846BAT	61-846BAT	—
USB Cable	61-844USB	61-844USB	61-844USB
Camera Handle	—	—	61-844HAN
Carrying Case	61-844CC	61-844CC	61-844CC
Power Supply	61-848PS	61-846PS	61-844PS
ThermalVision™ Software	61-848SW	61-846SW	61-844SW
Optional			
Light Shade	61-844LS	61-844LS	61-844LS
Car Charger	61-848CAR	61-846CAR	61-844CAR
Desktop Charger	61-846DT	61-846DT	—
Hard Transport Case	61-846HC	61-846HC	61-846HC




61-846EU

HeatSeeker® Thermal Imaging Camera Specifications


Features	HeatSeeker® (61-844EU)	HeatSeeker® 160 (61-846EU)	HeatSeeker® 320 61-848
Temperature Range	14°F to 662°F (-10°C to 350°C)	14°F to 482°F (-10°C to 250°C)	
Temperature Accuracy	±2°C or ±2% of reading		
Emissivity Table	0.2 to 1.0 (adjustable)		0.1 to 1.0 (adjustable)
Cursors	Two-movable	Four-movable (with independent emissivity setting)	
Image Storage (2 GB micro SD card)	2000 Images		1000+
Field of View	20° x 20°	10° x 15°	21.4° x 16°
Thermal Sensitivity	< 0.3°C at 30°C	< 0.08°C at 30°C	
Focal Plane Array	2,209 pixels (47 x 47)	19,200 pixels (160 x 120)	76,800 pixels (320 x 240)
Display	3.5" LCD		
Visible Light Camera Resolution	1.0 Megapixels	3.0 Megapixels	
Spectral Range	8µm to 12µm	8µm to 14µm	8µm to 14µm
Image Control	Eight colour palettes (Ironbow, Rainbow, Isotherm, Hot Metal, High Contrast, Rainbow 16, Black Hot and White Hot)		
Focus	Manual		
Power	Internal rechargeable Li-ion battery	Field replaceable rechargeable Li-ion battery	

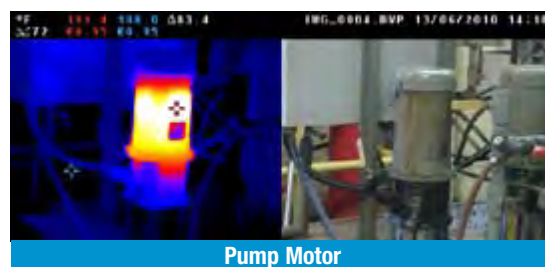

Pump Motor

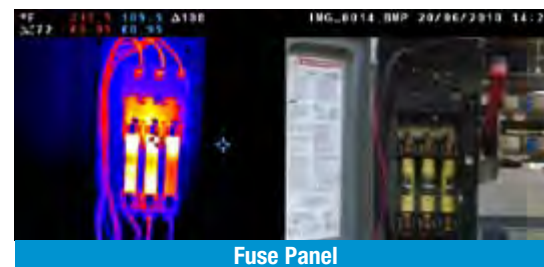

Fuse Panel

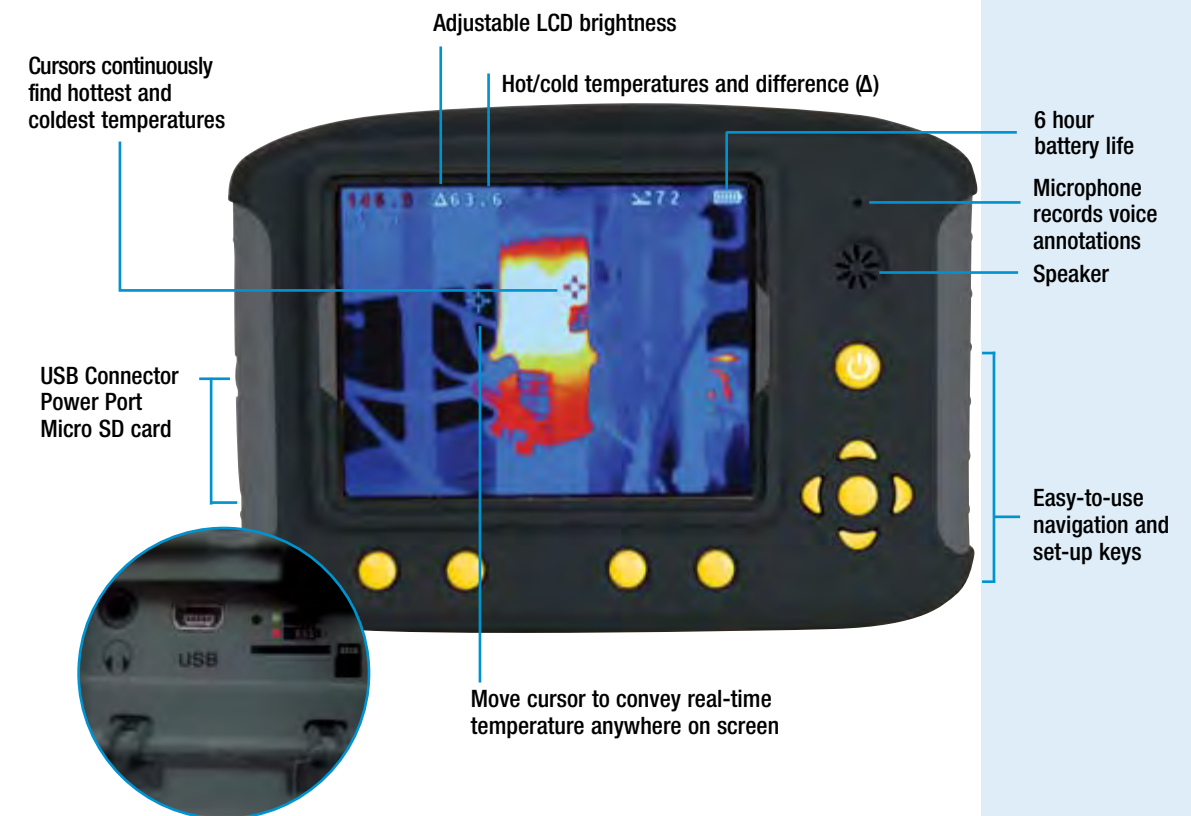


Side door allows quick access to headphone and USB connections, charging port and removable Micro SD card

ThermalVision™ PC Software Included

Easy-to-use software allows image download to PC for analysis.

Features

- View, edit and analyse images
- Automatic report generating capabilities
- Disk also includes user manual



HeatSeeker® provides real-time analysis and is ideal for:

Electrical Safety

- Identifies overloaded circuits, loose/corroded connections and failing breakers in electrical panels
- Identifies blown fuses, overloads, phase imbalance and harmonics problems
- Identifies hot spots from high resistance connections

Energy Efficiency

- Identifies inefficient heating and cooling transfer
- Identifies draft sources from missing insulation in roof spaces, walls and floors
- Identification of problem areas helps reduce heat gain/loss and carbon footprint

Building Maintenance

- Discovers sources of moisture in roofs and areas behind walls
- Checks air distribution for blockages in pipes, damaged duct work and insulation gaps
- Checks fluid distribution for stuck valves and burst pipes

Preventive Maintenance

- Identifies equipment efficiencies/inefficiencies
- Applications include motors, pumps, boilers, radiators, heaters, refrigeration units and transformers



Digital Light Meter

- Auto or manual ranging
- Measures in four ranges up to 20,000 FC or 200,000 Lux
- +/- 3% basic accuracy
- Data hold mode
- Max. reading mode
- Auto zero adjustment
- Low battery indication
- Auto power off
- Remote sensor with 59 in. (1.5m) cable



Description	Cat. No.
Digital Light Meter	61-686

Includes: Carrying Case.

Infrared Thermometer

- Measurement range: -60 to 500° C (-76°F to 932°F)
- Distance spot: 12:1
- Modes: Ave., Difference, Hi/Lo limits w/alarm, Max, Min, Lock
- Emissivity Range: Adjustable from 0.1 to 1
- Precision K-type thermocouple (optional)
- Backlight
- Auto power off
- Low battery indicator
- 2-year warranty



Description	Cat. No.
Infrared Thermometer	61-685

Includes: Carrying Case.

Accessories

Optional	Cat. No.
K-type Thermocouple	61-461

Specifications	Range & Resolution	Accuracy
	61-685	
Object Temperature	-27 to 932°F (33 to 500°C)	+/- 2% or +/- 4°F (+/- 2°C) of reading whichever is greater
Ambient Temperature	73 +/- 5°F (23 +/- 3 °C)	

3-Phase/Motor Rotation Tester

- Identifies three-phase sequence
- Indicates motor rotation
- Checks for open phases
- For use up to 600V
- 2-year warranty
- Includes carrying case



Description	Cat. No.
3-Phase/Motor Rotation Tester	61-521

Accessories

- Various accessories such as adaptors, test leads, carrying cases etc.

Description	Cat. No.
Cradle for Circuit Tracer Receiver	CR-958
Set of 4 Adaptors for 61-830	PA-830
R1 +R2 Test Lead Adaptors	PR-958UK
Standard Test Leads	TL-80
Resistor Fused Test Leads	TL-82
GS38 Compliant Test Leads	TL-102EU
Test Leads w/large crocodile clip	TL-104
Test Leads with crocodile clip (61-497)	TL-497
Test Leads (for 61-795)	TL-795
Earth Ground Test Lead Kit	TL-796
Test Leads (for 61-797)	TL-797
Remote Probe (for Insulation/Installation Tester)	TL-797RP
Tracer Test Lead Set	TL-956
Test Lead Kit for Digital Circuit Breaker Finder	61-184EU
Magnetic Strip	61-565
Car Charger	61-844CAR
Camera Handle	61-844HAN
Light Shade	61-844LS
Power Supply	61-844PS
ThermalVision™ Software	61-844SW
USB Cable	61-844USB
Removable Battery	61-846BAT
Car Charger	61-846CAR
Desktop Charger	61-846DT
Power Supply	61-846PS
ThermalVision™ Software	61-846SW
USB Cable	61-902
ProVision™ II Software	61-906



61-184EU



TL-102EU



CR-958



PR-958UK

Description	Cat. No.
Carrying case (61-086)	61-010
Carrying case for Voltage tester (61-096/61-090EU)	C-90
Carrying case for 490 Series	C-230
Carrying case for 61-534EU	C-290
Carrying case for 61-795	C-795
Carrying case for 61-796	C-796
Carrying case for 61-830	61-179
Carrying case for 61-844EU/61-846EU	61-844CC
Hard Carrying case for Thermal imagers	61-844HC


Installation Tester Accessories

- Various accessories for the 61-255 installation tester (see page E-9)

Description	Cat. No.
Test Lead Kit for SureTest® Installation Tester	TL-255
UK Mains Power Plug for SureTest® Installation Tester	TLMP-255UK
Spare Fuses for Installation Tester	F-255
Remote Probe	TL-797RP



TLMP-255UK



TL-255

Thermocouple

- Measures up to 1500° F (816° C)
- K-type thermocouple plugs into digital multimeter voltage jacks with 61-465 adaptor

Description	Cat. No.
Beaded K-type Thermocouple	61-461
Thermocouple Adaptor	61-465



61-465

61-461


Replacement Parts Selection Guide

METER REPLACEMENT PARTS SELECTION GUIDE			086	090	255	310	340	480	490	600	740	760	770	790	950														
			61-086	61-090EU	61-096	61-255	61-310	61-312	61-340	61-342	61-484	61-486	61-497	61-498	61-605	61-744	61-746	61-763	61-765	61-773	61-775	61-795	61-796	61-797	61-954	61-956	61-958		
FUSES																													
F-105	1A (600V)	10.3 x 35mm																											
F-255	Spare Fuse Set	2-pack																											
F-310	250mA (250V)	5 x 20mm																											
F-312	500mA (250V)	5 x 20mm																											
F-314	10A (250V)	5 x 20mm																											
F-340	0.5A (500V)	6.35 x 32mm																											
F-341	10A (1000V)	10 x 38mm																											
F-497	440mA (1000V)	10 x 35mm																											
F-498	11A (1000V)	10 x 38mm																											
F-797	315mA (1000V)	5 x 32mm																											
F-958	1A (1000V)																												
BATTERIES																													
61-201	1.5V (LR44)																												
—	1.5V (AA)																												
—	1.5V (AAA)																												
—	9V																												
TEST LEADS																													
TL-80	Standard Test Leads																												
TL-82	Resistor Fused Test Leads																												
TL-95	Test leads																												
TL-100	Test leads w/crocodile clips																												
TL-102EU	GS38 compliant test leads																												
TL-104	Test leads w/large crocodile clips																												
TL-255	3-Wire Test Lead Set																												
TL-310	Test leads																												
TL-497	Test leads w/crocodile clips																												
TL-795	Test leads																												
TL-796	Test Leads																												
TL-797	Test leads																												
TL-956	Tracer Test Lead Set																												
61-184EU	Test Lead Kit																												

Carrying Case Selection Guide

		61-086	61-090EU	61-096	310	340	480	490	610	740	760	770	790	830	840										
		61-086	61-090EU	61-096	61-310	61-312	61-340	61-342	61-484	61-486	61-497	61-498	61-610	61-614	61-744	61-746	61-763	61-765	61-773	61-775	61-795	61-796	61-797	61-830	61-844EU
61-010	Leather Tester Case																								
61-179	Nylon Carrying Case																								
C-90	Nylon Carrying Case																								
C-230	Nylon Carrying Case																								
C-290	Nylon Carrying Case																								
C-760	Nylon Carrying Case																								
C-770	Nylon Carrying Case																								
C-795	Carrying Case																								
C-796	Carrying Case																								
61-844CC	Soft Carrying Case																								
61-846HC	Hard Carrying Case																								

Safety in the Field

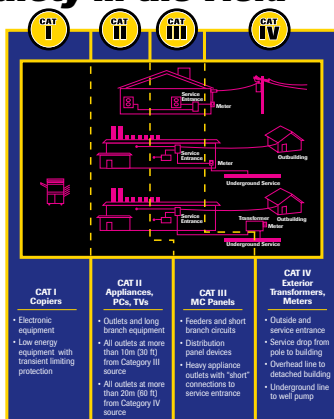

The power demands of today's high-tech world have caused a marked increase in occurrences and levels of transient overvoltages. The International Electrotechnical Commission (IEC) has developed a safety standards model for measurement, control and laboratory use.

Category I - The signal level for telecommunications, electronic and other low-energy equipment with transient-limiting protection. Peak impulse transient range is 600-4,000 volts with a 30 ohm source.

Category II - The local level for fixed and non-fixed powered devices including appliances, lighting and portable equipment. Outlets located more than 30 feet from CAT III sources and 60 feet from CAT IV sources. Peak impulse transient range is from 600-6,000 volts with a 12 ohm source.

Category III - The distribution level for fixed primary feeders or branch circuits. Circuits that are separated from CAT IV sources by at least one level of transformer isolation. Peak impulse transient range is 600-8,000 volts with a 2 ohm source.

Category IV - The primary supply level for the highest levels of transient overvoltage. Includes the utility service both outside and at the service entrance, service drop from the pole to the building, overhead line to remote buildings, and underground line to a well pump. Peak impulse transient range is 600-12,000 volts with less than a 1 ohm source.

NETWORKS TOOLS & TESTERS



LanTEK® II Series Cable Certifier

Superior performance, revolutionary fibre options and outstanding value makes LanTEK® II the ultimate cable certification platform.

Choose from three models that provide the test capabilities you need today with cost-effective upgrades should these change tomorrow.

With frequency ranges of 350MHz, 500MHz and 1GHz there is a model available for ISO Class D/CAT 5e through to ISO Class FA/CAT 7A certification.

LanTEK® II also offers ultimate versatility with options for certification of TERA, GG45 and EC7 category 7/7A systems, plus M12 industrial Ethernet and coaxial test adaptors.

- High speed testing - 11 seconds for Class D/CAT 5e
- Patented test method eliminates the need for expensive permanent link adaptors
- Test and certify with off-the-shelf patch cords
- DualMODE function allows certification to two different standards with one press of the Autotest button
- Internal memory stores 1,700 ISO Class E tests with full colour graphs
- Smart Lithium-Ion batteries offer up to 18 hours field use
- USB 2.0 port for fast data download
- Digital Talkset works over copper and fibre
- 11 cm widescreen display gives superb 160° viewing angle
- Maximum reporting power with IDEAL DataCENTER (IDC) software
- Optional Alien Crosstalk Kit for 10GBASE-T applications
- Accuracy independently verified by ETL



FIBERTEK® FDX

- The only solution that completely eliminates the need to swap fibres or modules, allowing complete one-step certification of horizontal and backbone cabling.
- More than 2x as fast as any other fibre certification tester
- Complies to TIA/ISO/IEC certification standards
- Real-time power meter to aid in troubleshooting active equipment



Cat. No.	Description	Cat. No.	Description
33-993*	LanTEK® II-1000: TIA/EIA Cat7A, ISO Class F/F _A certifier w/Cat6A adaptors	33-990-FA02**	FiberTEK® FDX Multimode (850/1300nm) kit with VCSEL/laser light sources for laser optimised fibre
33-992*	LanTEK® II-500: TIA/EIA Cat6A, ISO Class E _A certifier w/Cat6A adaptors	33-990-FA03**	FiberTEK® FDX Single mode (1310/1550nm) kit with laser light sources for single mode fibre
33-991*	LanTEK® II-350: TIA/EIA Cat6, ISO Class E certifier w/Cat6 adaptors	33-990-FA04**	FiberTEK® FDX Combination MM/SM kit with LED MM sources and laser SM sources (33-990-FA01 & 33-990-FA03)
33-990-FA01**	FiberTEK® FDX Multimode (850/1300nm) kit with LED light sources for standard multi-mode fibre	33-990-FA05**	FiberTEK® FDX Combination MM/SM kit with VCSEL/laser MM sources and laser SM sources (33-990-FA02 & 33-990-FA03)

*Contents: LanTEK® II display and remote handset, two smart lithium ion batteries, two 110-240V power adaptors with US/EU/UK plugs, lockable semi-rigid carrying case, Cat6A F/FTP patch cords, USB cable, DataCENTER data management and reporting software, two headsets, hanging straps and ETL accuracy certificate.

**Contents: Two FiberTEK® FDX modules, lockable semi-rigid carrying case, SC, FC, ST adaptors for modules (2 ea.), SC-SC patch cords (MM kits: 3x 62.5µm, 3x 50µm; SM kits: 3x 9µm SMF) compliant to ISO/IEC 14763-3 standard, quick reference guide, and electronic operation manual.

FiberMASTER™ Fibre Optic Testers

The IDEAL FiberMASTER™ allows the user to measure absolute power and calculate the insertion loss of fibre optic links at several wavelengths. Measure fibre optic power in microwatts (µW), milliwatts (mW) and decibel-milliwatts (dBm) to test and troubleshoot active Local Area Networks. Plus the 1490nm wavelength measurement mode is perfect for troubleshooting emerging Fibre to the Home cabling systems.

- **Fibre Optic Power Meter & Light Source** – Four wavelength power meter for multimode and single mode testing, and 850nm multimode LED light source.
- **Calibration Function** – Stores reference power level for quick dB loss measurements eliminating the need to manually calculate loss.
- **Save Time and Money** – Power meter features 2.5mm universal and FC adaptors, light source includes ST®, SC and FC adaptors to test the most common interfaces.
- **Ready for FTTx** – 1490nm measurement wavelength for use with nearly all single mode Fibre-To-The-Home applications.
- **Designed for the Field** – Unique “docking” light source and easy three-button operation make this the perfect fibre tester for use in the field.

FiberMASTER™ Kit Includes:

- 33-926 Light source, 850nm LED with ST®, SC and FC adaptors
- 33-927 Power meter, 4 wavelength with universal 2.5mm and fixed FC adaptor
- 2x SC-SC 50µm multimode cables
- 1 SC calibration coupler
- Carrying case
- User manual in English, Spanish, German, French, Portuguese, Italian and Chinese

Description	Cat. No.
Power meter with 850NM fibre light source (33-926 & 33-927)	33-928
Power meter with four wavelength MM/SM light source (33-927 & 33-929)	33-931
Fibre Power Meter with Calibration Function	33-927
Quad Light Source 850/1300/1310/1550	33-929



Fibre Inspection Microscope

- 100X magnification for viewing multimode connectors
- Includes 2.5mm connector “Universal Adaptor” for FC, ST® and SC style connectors
- Oblique illumination provides excellent view of ferrule cleanliness and core condition
- Rugged, rubberized metal housing, precision glass optics and a built-in laser safety filter
- White LED illumination delivers 100,000 hours bulb life
- Optional 200X Conversion Eyepiece threads on for viewing finish/polish of singlemode connectors



Description	Cat. No.
Fibre Inspection Microscope w/carrying case	45-332
1.25mm Connector Adaptor	45-334
MTRJ-Style Connector Adaptor	45-335
200X Conversion Eyepiece for Singlemode Connectors	45-336

Note: ST® is a registered trademark of AT&T.



Visual Fault Finder

- Laser light source used to locate breaks, faulty splices and crimps
- 2.5mm Universal Adaptor for all ST®, SC and FC connectors
- Useful over a distance of 5km (3 miles)
- Two AA batteries provide over 30 hours of continuous use
- Slim, pocket-sized tool in rugged solid aluminum body
- Nylon carrying case with belt loop included



Description	Cat. No.
Visual Fault Finder	VFF5

Note: ST® is a registered trademark of AT&T.



SIGNALTEK™ & SIGNALTEK™ FO Multimedia Qualification Testers

SIGNALTEK™ provides a technically innovative method for checking a network's ability to support voice, data, video, and VoIP applications.

It tests the link by transmitting Ethernet packets on the wire and measuring the link performance according to the IEEE 802.3ab Gigabit Ethernet standard. By monitoring transmitted and received data packets, it can report the BERT (Bit Error Rate Test) for the link.

SIGNALTEK™ - FO offers all the capabilities of the standard SIGNALTEK™ and adds the powerful capability of fibre optic qualification.

Traditional power meter/light source kits only measure the attenuation of fibre optic links. As Gigabit Ethernet is becoming the standard for backbone and zone fibre optic cabling, attenuation tests alone may not be enough to guarantee error-free performance.

SIGNALTEK™ - FO performs full Gigabit Qualification on both copper and fibre links for less than the price of an Optical Test Set alone.

- Simulate real world network traffic with full-duplex gigabit performance over twisted pair cabling
- Gigabit performance qualification to IEEE 802.3 standards
- Selectable 10/100/1000 Bit Error Rate Testing to ensure performance for all Ethernet devices
- Data monitoring to detect intermittent network problems
- Network interrogation with link establishment, port LED blink and ping
- Wiremap fault detection
- Internal and USB Data Storage - 20,000+ tests internally or unlimited on USB Device
- Prints Easy-to-Read Pass/Fail Qualification Reports

Additional FO Features:

- Qualify copper and fibre optic cabling to IEEE 802.3 standards
- Qualify short and long range cabling to a distance of up to 10km (Multimode and Single Mode capability)
- Perform Bit Error Rate Testing (BERT) and decibel (dB) loss measurements on optical links
- Small Form factor Pluggable (SFP) modules are compact, light-weight, and field changeable
- Store and print Qualification reports for copper and fibre jobs using internal memory or USB drives



CE



#33-975 - SIGNALTEK™ Kit - Copper Only



#33-986 - SIGNALTEK™-FO w/850 & 13X0 Modules

Description	Cat. No.
SIGNALTEK™-FO w/850 Modules	33-984
SIGNALTEK™-FO w/13X0 Modules	33-985
SIGNALTEK™-FO w/850 & 13X0 Modules	33-986
SIGNALTEK™-FO w/o Modules (Fibre-Ready)	33-988
SIGNALTEK™ Kit - Copper Only	33-975
Universal 120-240V Power Adaptor	4010-00-0136
Pair of 850m, SFP Modules	SFP-850
Pair of 13X0nm SFP Modules	SFP-13X0
Case, Signaltek	3010-12-0104
Replacement Cable Accessory Kit - contains all original cables in SIGNALTEK™ kit	1219-91-0003



SecuriTEST™ PRO

CCTV installers often need to carry a variety of testing tools to complete their work.

SecuriTEST™ PRO combines the most-needed tools in one easy-to-carry package. Since all connections (video/communications/DMM) attach to a single unit, **SecuriTEST™ PRO** eliminates the need to juggle several devices while on a ladder or lift, making working conditions safer and increasing productivity.

SecuriTEST™ PRO includes IRE testing (video and sync levels), audio level testing, a high-capacity lithium ion battery in a package that's small and light.

The **SecuriTEST™ PRO** has all the features and functionality that CCTV technicians need to install, test and maintain analogue security camera systems. **SecuriTEST™ PRO** also includes a custom carrying case.

Features of SecuriTEST™ PRO

- IRE video level and sync tests
- Sound level test through integrated speaker and on screen level indicator
- High capacity lithium ion battery
- Carrying case included
- **Seven Essential CCTV Tools** - Combines a CCTV video tester, PTZ camera controller, Digital Multimeter, UTP cable tester, video test pattern generator, PTZ protocol analyser and camera programmer in a single compact package.
- **Save Time & Money** - Test, aim, focus and program cameras when working alone. Save time by not having to walk back to the control centre to verify functionality of each camera.
- **Compact Design** - Combines all the most needed security tools in a lightweight easy-to-carry unit. Sharp, bright 2.5 in. (6.3 cm) color LCD screen with on-screen displays for PTZ control/diagnostics and DMM readouts.
- **PTZ Protocol Analyzer** - Compatible with 20+ PTZ protocols to test and program cameras in the field. Decodes and identifies output from PTZ console to aid in troubleshooting.

Description	Cat. No.
SecuriTEST™ PRO CCTV/Security Tester only	33-892
SecuriTEST™ Tester Pouch only	62-891

Network Tools & Testers



Testers

Testers

VDV PRO Cable Tester

The VDV PRO Cable Tester is an easy-to-use cable testing and verification device that can quickly test all wiring requirements found throughout today's residential and commercial environments.

- Voice – tests 3-pair USOC and 6-position RJ-11/12 jacks for voice cable testing
- Data – tests wire map of shielded and unshielded cable to T568A/B standard
- Video – tests coax cable for opens, shorts and length with F-Connector interface
- Larger backlit LCD screen for better test results readability
- Network link LED blink for visual cable tracing
- Voice testing capability detects RJ-11 (1, 2, or 3 pair)
- Voice test also shows Normal or Reverse for pins 1 through 6
- Length measurement is shown during initial test results for convenience and time savings
- Eight remotes have RJ-45, RJ-11 and Coax F-jacks for increased testing capabilities
- Tests for shield continuity, shorts, opens, miswires, reversals and split pairs with remote connected
- Full dot-matrix LCD display for user convenience to read display results
- One-ended testing for shorts, opens and split pairs (no remote needed)
- Test results displayed in wire map format with message line for shorts and split pairs



Description	Cat. No.
VDV PRO w/one remote and terminator	33-770
VDV PRO w/eight remotes and terminators	33-771
VDV PRO (33-770) w/one remote and Amplifier Probe (62-164)	33-780
VDV PRO Eight Remote Replacement Kit (ID 1-8)	33-774
Eight Coax Terminator Kit	33-775



IENet[®] PRO Cable Tester for RJ-45 and M-12 Industrial Ethernet Cable Testing

The IENet[®] PRO tester makes it a snap to quickly verify wiring integrity and assure proper terminations for diverse types of industrial cabling and provides automatic pin conversion between M-12 and RJ-45 connections.

- Simple selection between Voice, 2 and 4 pair Data, and Coax testing functions. Voice and Video/Security tests via optional adaptors
- Tests for opens, shorts, miswires, reversals, split pair (user selectable) and length
- Indicates correct wiremap to T568A/B standards for shielded and unshielded cabling
- Easy-to-read LCD display with "PASS" or "Miswire" indicator for each test
- Identifies presence of voltages on cables
- Tone generator supports four different tones making fault isolation easier
- Network LED blink for visual cable tracing
- Numerical indication for UTP "No Shield" and STP - "Shield" to comply with industrial ethernet PROFINET[®] requirements

PROFINET[®] is a registered trademark of PROFIBUS International.

Ordering Information

Description	Cat. No.
IENet [™] PRO w/single remote	33-772
IENet [™] PRO w/eight remotes	33-773
Eight Coax Terminator Kit	33-775
IENet [™] PRO Eight Remote Kit (ID 1-8)	33-776



Test-Tone-Trace Kit

- Kit includes the VDV (33-856) and Amplifier Probe (62-164)
- Tests and traces coax, twisted pair and telephone cables



Description	Cat. No.
Test-Tone-Trace Kit	33-866

540DK Tone Generator & Amplifier Probe

Tests wiring configurations on UTP/STP cables.

Checks for shorts, miswires, reversals and split pairs.

Debug feature, automatic shut-off and low battery LED indication.

- Tracing and continuity checking of telecom and datacom cables
- Ergonomic design aids grip and durability
- Probe's unique rubber tip won't break or crack
- LED lamp provides visual indication of correct wire
- External terminals for butt-set connection
- Volume adjustment knob
- Batteries included



Description	Cat. No.
Tone Generator & Amplifier Probe	540DK

VDV MultiMedia Cable Tester

Easy-to-use tester for installers working with voice, data and video applications.

One tester for all applications!

- **Voice** – supports 3-pair USOC and 6-position RJ-11/12 jacks for telephone cable testing
- **Data** – supports both shielded and unshielded cable testing to T568A/B (RJ-45)
- **Video** – tests coax cable for opens and shorts with F-connector interface
- Tests for opens, shorts, miswires, reversals and split pairs. Also indicates correct wiremap. Has automatic shut off (to prolong battery life) and low battery indicator.
- Easy-to-read LCD display with "PASS or ERROR" indicator after each test
- Tone generator supports four different tones making fault isolation easier
- One remote wiremap and testing unit is stored inside tester – easier to keep all parts together
- Uniquely designed remote accommodates RJ-11, RJ-45 and F-style connectors



Description	Cat. No.
VDV MultiMedia Cable Tester	33-856

LinkMaster[™] Tester

Tests wiring configurations on UTP/STP cables. Checks for shorts, miswires, reversals and split pairs. Debug feature, automatic shut-off and low battery LED indication.

- Designed to test installed twisted pair wiring
- Tests unshielded and shielded modular plugs
- Main unit and remote allow one person testing



Description	Cat. No.
LinkMaster [™] Tester and Remote	62-200

OmniSeal™ Pro Compression Tools

The IDEAL OmniSeal™ Compression Tools now offer additional features and increased connector compatibility in a smaller, more compact tool designed to meet the demands of the professional installer.

OmniSeal™ Pro 30-603



(OmniSeal™ requires no accessory attachment to terminate IDEAL branded compression connectors.)

Most other manufacturers compression connectors can be terminated with an easy plunger depth adjustment.

The simple intuitive design combined with its size and universal connector acceptance makes this the only compression tool needed by professional installers.

- Factory preset to work with IDEAL compression connectors
- Compresses F-type, RCA, BNC and Mini connectors
- Adjustable to fit other manufacturer's connectors – no accessory adaptors required

Description	Cat. No.
OmniSeal™ Pro Compression Tool	30-603



F-Compression Tool

- Easily compresses series 6 and 59 coax compression F-connectors
- Permanent connection – never comes loose
- Works with most brands of compression connectors

Description	Cat. No.
Economy Compression Tool	30-633



Compression Connectors



RTQ™ Reg/Tri/Quad & Plenum F-Connectors

- Fits 60% regular, tri-shield and quad shield cables
- Nickel-plated, brass-construction for superior corrosion resistance
- Designed for use by satellite and cable TV companies
- Weatherproof for indoor and outdoor use
- Use 30-603, 30-793 or 30-633 Compression Tools

OmniCONN™ F-Connectors

- Non corrosive nickel plated brass body and polycarbonate bushing
- Delrin/Nylon adaptor sleeve and o-ring provide double protection for a watertight seal
- Free spinning hex nut for ease of installation onto all 7/16 ports
- 75 ohm nominal impedance
- Two-piece pre-assembled connectors




BNC Connectors

- Nickel-plated, brass-construction for superior corrosion resistance
- Moisture-inhibiting design
- Use 30-793 Compression Tool
- 75 Ohm nominal impedance
- Gold-plated pin contact area
- Available in plenum versions

RCA Connectors

- Constructed of nickel plated brass and gold plated head
- 75 ohm nominal impedance
- Bandwidth up to 3 GHz
- Compatible with 30-603 and 30-793 Compression Tools

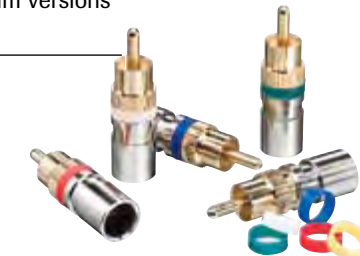

Compression Connector Chart

	Connector Type	Cable Type	Qty.	Cat. No.
	F	RG-6 Reg/Tri/Quad	Card of 10	92-651
			Jar of 50	92-650
	F	RG-59 Reg/Tri/Quad	Jar of 50	92-610
	F	RG-6	Jar of 50	89-044
	F	Quad	Jar of 50	89-045
	BNC	RG-6	Card of 15	89-048
			Jar of 35	89-5048
	BNC	RG-59	Card of 15	89-047
			Jar of 35	89-5047
	RCA*	RG-6	Card of 10	89-582
	RCA*	RG-59	Card of 10	89-572


*RCA Connectors include an assortment of colour ID bands.

Compression Connectors


Compression Connector Instructions

Compression F-Connector

1. Use IDEAL Data T[®]-Cutter (45-074) to cut cable to desired length.
2. Use IDEAL Coax Stripper (45-603 or 45-526) to strip coax to correct dimensions.
 - Correct strip length settings will leave 6.4 mm (1/4") of centre conductor exposed and 6.4 mm (1/4") of braiding (shield) exposed.
 - After stripping, make sure tip of centre conductor is straight and not bent. Straighten conductor if necessary.
3. Fold back outer layer of braiding (shield) against cable jacket. Keep braid strands as straight and as close to jacket as possible.

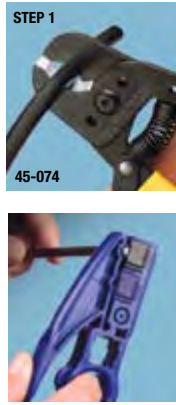

- Note: For Quad Shield cables (with 4 layers: outer braid, outer foil, inner braid, inner foil), first fold back outer braiding. Use 45-074 to score and remove exposed 6.4 mm (1/4") of outer foil. Remove outer foil, and fold back inner braiding.
4. Push F connector on to prepared cable until white centre dielectric is flush with bottom of the nut of the F connector.
 5. Insert connector/cable assembly into the OmniSeal[™] Pro XL compression tool, squeeze handle completely to compress fitting. Remove completed cable assembly.

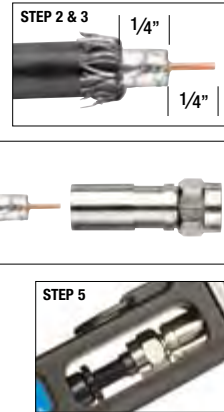


Compression BNC/RCA Connectors

1. Use IDEAL Data T[®]-Cutter (45-074) to cut cable to desired length.
2. Use an IDEAL coax stripper (45-603 or 45-526) to strip coax to proper dimensions.
 - Correct strip length settings will leave 6.4 mm (1/4") (minimum) of centre conductor exposed and 6.4 mm (1/4") of braiding (shield) exposed.
 - After stripping, make sure tip of centre conductor is straight and not bent. Straighten conductor if necessary. Conductor must be straight to make proper contact with pin contact inside of connector.
3. Fold back outer layer of braiding (shield) against cable jacket. Keep braid strands as straight and as close to jacket as possible.
 - Note: For Quad Shield cables (with 4 layers: outer braid, outer foil, inner braid, inner foil), first fold back outer braiding. Use 45-074 to score and remove exposed 6.4 mm (1/4") of outer foil. Remove outer foil, and fold back inner braiding.




4. Measure and mark cable insertion length.
 - For BNC's, align tip of centre conductor with top of the nut fitting.
 - For RCA's, align tip of centre conductor with top of retention collar. Mark or lightly score cable jacket near base of connector.
- Connector should be within 3.2 mm (1/8") of this mark after it is pushed on to cable. If it is more than 3.2 mm (1/8") away from the mark, continue rocking and guiding connector on to cable.
- Approximately 32 mm (1-1/4") of cable length should be inserted into the connector prior to compressing connector for BNC.
Approximately 28.5 mm (1-1/8") of cable length should be inserted into connector prior to compressing connector for the RCA.
5. Insert connector/cable assembly into OmniSeal[™] Pro XL compression tool, squeeze handle completely to compress fitting. Remove completed cable assembly.

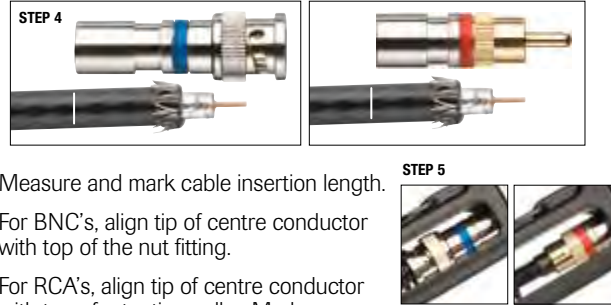

Crimpmaster[™] Crimp Tools & Die Sets

High quality ratchet-type crimp tool for electricians, contractors and installers who require guaranteed repeatability of good mechanical and electrical connections.

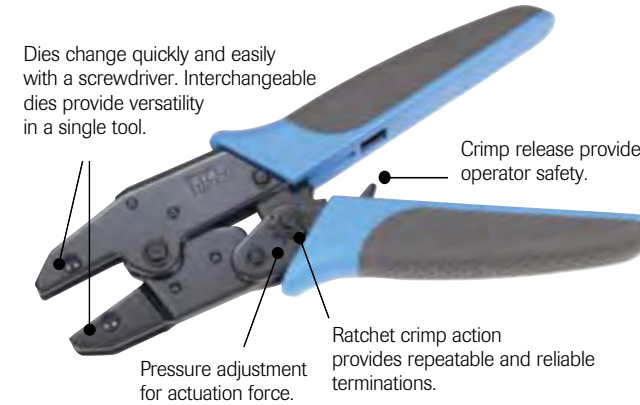

30-556
RJ-11 Crimp Tool for two, four or six-position modular plugs



30-582
F-type CATV RG-59, RG-6 Connectors (Hex, 0.350 (8.89mm), 0.320 (8.13mm), 0.255 (6.48mm))



30-559
RJ-45 Eight-position Crimp Tool for keyed or non-keyed modular plugs



30-579
22-10 AWG (.324mm² - 5.261mm²) insulated terminals/colour coded nests
Tool w/die 30-500



30-581
RG-58, RG-59/62, BNC/TNC Coax Connectors (Hex, 0.255 (6.48mm), 0.213 (5.41mm), 0.068 (1.73mm))




30-580
22-8 AWG (.3mm²-8mm²) non-insulated Terminals



Description	Cat. No.
Crimpmaster [™] Crimp Frame Tool	30-506

Punch Down Tool

- Insertion Tool for Krone Blocks
- For seating telecom and data cables into terminals



Description	Cat. No.
Punch Down Tool	35-482

Telemaster[™] Telephone Tools

- For paired conductors
- Multi-function telephone tool cuts, strips and crimps for easy one-tool application
- Steel frame for long-term durability. (Crimps primary modular plug strain relief only)



Description	Kit Cat. No.	Tool Only Cat. No.
Tool for RJ-11 (1, 2, 3 pair) and RJ-45 (4 pair) Plugs	33-700*	30-496-001
Tool for RJ-22 (handset) and RJ-11 (1, 2, 3 pair)	N/A	30-499
Replacement Cut and Strip Blade Set for Telemaster [™]	N/A	LB-1747

*Kit includes 10 each, RJ-45 8P8C, RJ-11 6P6C and RJ-11 6P4C modular plugs.

Ratchet Telemaster[™]

- For paired conductors
- Ratchet version of popular Telemaster[™] Tool for RJ-45 and RJ-11 modular plugs
- Repeatably crimp action for consistent, high quality connections



Description	Cat. No.
Ratchet Telemaster [™]	30-696
Replacement Cut & Strip Blade Set for 30-696	LA-4102

Compression Connectors

Crimp Tools

Kinetic Super™ Wire Stripper/Crimper


- Cuts and strips 22 to 24 AWG
- Crimps IDC Connectors



Description	Cat. No.
Kinetic Super™ Wire Stripper/Crimper Kit – includes 25 IDC's (UR-1, 3-Wire Butt Splice)	33-719

Insulation Displacement Connectors (IDC)

IDC connectors create fast splice and tap connections on solid copper wires. Designed for low voltage telecommunication cables.



- Moisture-resistant sealant protects wires from corrosion
- Use with solid copper single-conductor wire
- Kinetic Super™ Wire Stripper/Crimper easily cuts and strips 22 to 24 AWG solid wire

Description	Qty.	Cat. No.
UR-1, 3-Wire Butt Splice IDC	25	85-925
UR-1, 2-Wire Butt Splice IDC	100	86-925
UR-1, 3-Wire Butt Splice IDC	1,000	87-925
IDC Combo Pack	25	85-960
UY-1, 2-Wire Butt Splice IDC	25	85-950
UB-1, 2-Wire Tap Splice IDC	25	85-900


Strain Relief Boots for Modular Plugs

- Prevents broken connector tabs and snagging while extending connector life
- Minimises cable bends that can reduce data speed and result in data loss
- Dampens cable movement and vibrations that can result in premature connector failure



Description	Qty.	Cat. No.
Strain Relief Boots for Modular Plugs	25	85-380

Modular Plugs

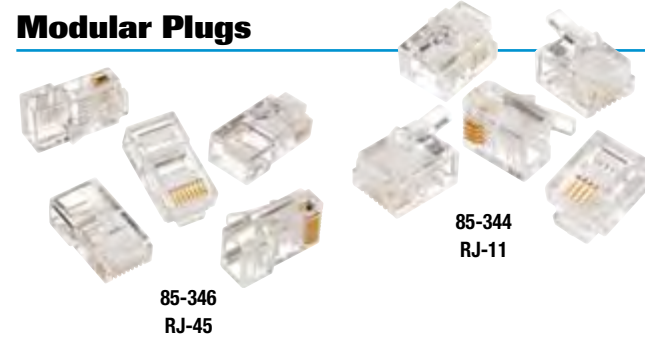

- Plugs are capable of supporting the latest EIA/TIA cable system performance categories when installed in compliance with appropriate EIA/TIA standards and methods
- All plugs work with 24 AWG solid or stranded conductors and round or flat cables.

Description	Qty.	Cat. No.
8-Position 8-Contact, RJ-45	25	85-346
6-Position 6-Contact, RJ-11	25	85-345
6-Position 4-Contact, RJ-11	25	85-344

CAT 6 RJ-45 Modular Plugs

- Unique three-piece design provides easy installation and optimal performance
- Crimps with a standard RJ-45 crimp die
- 50 micron gold contacts, 8-position, 8-contact
- Suitable for solid or stranded conductors – 22 – 23 AWG



Description	Qty.	Cat. No.
CAT 6 RJ-45 Modular Plugs	25	85-366


Push-On F-Connectors, RG-6 & RG-59

- No terminator tool required
- All brass nickel-plated construction
- Knurled nut for superior grip
- Designed for indoor use



Connector Type	Cable Type	Qty.	Cat. No.
F	RG-6	Card of 4	85-065
F	RG-59	Card of 4	85-067

Wiring Configurations for Modular Plugs

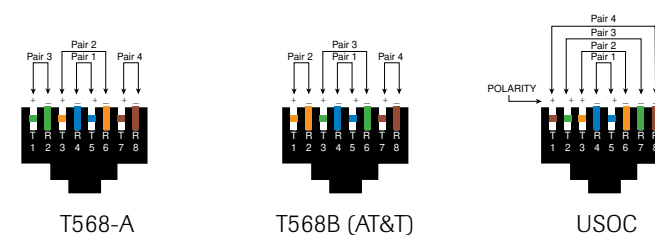

UTP/STP/Coaxial Cable Strippers

- Adjustable blades can be set for any depth to help ensure nick-free stripping and slitting of cables



Description	Typical RG Cables	Cat. No.
Coaxial Cable Stripper, up to 1/8 in. (3.2mm) O.D.	RG-174, RG-187	45-162-341 (Gray)
Coaxial Cable Stripper, 1/8 in. (3.2mm) to 7/32 in. (5.556mm) O.D.	Mini Coax RG-58, CB	45-163-341 (Blue)
Coaxial Cable Stripper, 1/4 in. (6.4mm) to 9/16 in. (14.3mm) O.D.	RG-11, RG-8	45-164-341 (Blue)
Cable Stripper, 3/16 in. (4.8mm) to 5/16 in. (8mm) O.D.	RG-59/6, UTP Cable	45-165-341 (Black)
Replacement Blade Set* for 45-162, 45-163, 45-165	—	L-9225
Replacement Blade Set* for 45-164	—	L-9226

*A set of blades consists of three straight blades and one round blade.

UTP Cable Stripper


- Strips Cat 3, 5, 5e & 6 cables
- One-step stripping



Description	Cat. No.
UTP Cable Stripper	45-167

Data T®-Cutter

- Cuts round communication cable and maintains cable geometry for better cable performance
- Cuts multi-pair cable up to .500 in. (12.7mm) and coaxial cable up to RG-9/U
- Suitable for soft cables (not steel re-inforced)
- Steel reinforced center conductors can be trimmed with bolt cutting holes
- Locking latch keeps tool closed in pouch



Description	Cat. No.
Data T®-Cutter	45-074

Cable/Satellite/CCTV Coax Stripper

- Designed for fast and easy 6.4 mm (1/4") x 6.4 mm (1/4") strip lengths
- Blades auto-adjust to different diameter coax cables
- Spinner ring for fast stripping
- Strips RG-6/6 Quad and RG-59 coax cable



Description	Cat. No.
Video Coax Stripper	45-321

Coax Cable Stripper

- For RG-6, RG-6 Quad and RG-59
- No adjustment required
- Strips centre conductor and cable jacket



Description	Cat. No.
Coax Cable Stripper	45-320

Multi-Strip Coax/UTP Cable Stripper


- Strips UTP, RG-59 and RG-6 coax cable
- Provides a 6.4 mm / 1/4 in. (minimum) x 6.4 mm / 1/4 in. strip on coax
- Spare cartridge compartment provided
- Push-on ring for easy connector termination



Description	Cat. No.
Coax/UTP Cable Stripper	45-603

Correct Coax Strip Procedure

6.4 mm (1/4 in.) x 6.4 mm (1/4 in.) standard strip.

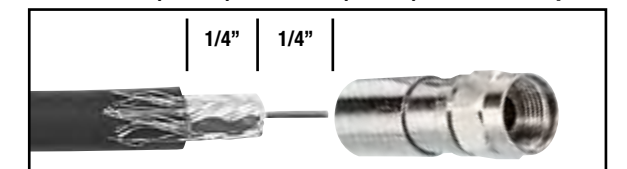

- Correct strip length settings will leave 6.4 mm (1/4") of the centre conductor exposed and 6.4 mm (1/4") of the braiding (shield) exposed.
 - After stripping, make sure the tip of the centre conductor is straight and not bent. Straighten the conductor if necessary.
- Fold back the outer layer of braiding (shield) against the cable jacket.
- Keep the braid strands as straight and as close to the jacket as possible.

- Note: For Quad Shield cables (with four layers; outer braid, outer foil, inner braid, inner foil), first fold back the outer braiding. Use the 45-074 to score and remove the exposed 6.4 mm (1/4") of outer foil. Remove outer foil and fold back inner braiding.

Item	Page
3-Phase/Motor Rotation Tester	E-14
A	
Acc. Kits For Tuff-Rod	B-4
Adjustable Cable Lockout	D-5
Adjustable Hole Cutter	C-7
Adjustable Wrenches	B-10
Aqua-Gel II	B-6
Arbor Extension	C-7
Arbors	C-7
Auger Bits	C-10
Aviation Tin Snips	B-10
B	
Battery Pack (Circuit Tracer)	E-10
Battery, Thermal Imager	E-12
Bigfoot Ratcheting Cable Cutter	B-11
Blued-Steel Replacement Fish Tape	B-3
BNC Type Connectors	F-9
Bullet Disconnects, Insulated	A-7
Bulz-Eye Wood Boring Bit	C-9
Butt Splices, Insulated	A-8
C	
Cable Cutters	B-11
Cable Cutters, Long Arm	B-11
Cable Pulling Lubricant	B-5
Cable Tie Installation Tool	B-22
Cable Tie Mounting Base	B-21
Cable Tie Mounting Pad	B-21
Cable Ties	B-20, B-21
Cable/Satellite/CCTV Coax Stripper	F-12
Camera Handle - Thermal Imager	E-12
Car Charger - Thermal Imager	E-12
Carbide Tipped Hole Cutters	C-2
Cat 5E RJ-45 Modular Plugs	F-12
Cat 6 RJ-45 Modular Plugs	F-12
Circuit Breaker / Fuse Finder	E-11
Circuit Tracer Test Lead Set	E-10, E-15
Circuit Tracers	E-10
Clamp Meters	E-3
Clamp-Pro Clamp Meters	E-4
Clearglide	B-6
Coax Cable Strippers	F-12

Item	Page
Coax Termination Kit	F-6
Compression Tool, Economy	F-8
Conduit Bender, Aluminium	B-8
Conduit Bender, Ductile Iron	B-8
Crimpmaster Crimp Die Sets	F-11
Crimpmaster Crimp Frame Tool	F-11
Crocodile Clip & Probe Leads Set	E-11, E-15
D	
Data T-Cutter	B-11, F-13
Desktop Charger - Thermal Imager	E-12
Digital Voltage Tester, Vol-Con Elite	E-7
Duct Seal	B-7
E	
Earth Ground Test Lead Kit	E-8, E-15
Electrician's Knife	B-15
Extension Bars	C-9, C-10
F	
F Type Connectors	F-9
F-Connectors, Push-On	F-12
Female Disconnects, Fully Insulated	A-7
Female Disconnects, Insulated	A-8
Fibre Power Meters	F-3
Fibermaster Kits	F-3
Fibertek FDZ Kits	F-2
Fibre Inspection Microscope	F-4
Fibre Optic Modules	F-4
Flat Bits	C-12
Flexible Drill Bit Extensions	C-12
Flexible Drill Bits	C-12
Fuse (Circuit Tracer)	E-10
Fuse Pullers, Safe-T-Grip	B-13
Fuses (Spare) For Installation Tester	E-9, D-15
G	
Ground Resistance Clamp Meter	E-8
GS38 Compliant Test Leads	E-7, E-15
H	
Hacksaw Blades, Bi-Metal	B-16
Hacksaw, Ergonomic	B-16
Hacksaw, Heavy-Duty	B-16
Hammer, 18oz	B-15

Item	Page
Heatseeker - Thermal Imaging Cameras	E-12
Hex-Key Set AF 9pce	B-15
Hole Saws	C-5, C-6, C-7
I	
IENet Pro	F-6
Inductive Clamp (Circuit Tracer)	E-10
Infrared Thermometer	E-14
Installation Tester, SureTest	E-9
Insulated High-Leverage Cable Cutters	B-13, B14
Insulated Long Nose Pliers	B-13, B14
Insulated Multi-Crimp / Cutter	B-13, B14
Insulated Offset Diagonal Cutters	B-13, B14
Insulated Premium T-Stripper	B-13, B14
Insulated Side Cutting Linesman Pliers	B-13, B14
Insulation & Continuity Tester	E-8
Insulation Displacement Connectors (IDC's)	F-12
Insulation Meter, Industrial	E-8
In-Sure Push-In Wire Connectors	A-4
Ironman Bi-Metal Hole Saw Kit	C-7
Ironman Bi-Metal Holesaws	C-6
J	
Journeymans Electrician's Tote	B-18
K	
Kinetic Super Wire Stripper / Crimper Kit	F-12
L	
Lantek II Cable Certifier	F-2
Leather Pouch / Carrier, Tuff-Tote	B-17
Leather Tool Belt	B-17
Leather Tool Pouch, Electrician's	B-17
Leather Tool Pouch, Ergo	B-17
Level, Torpedo	B-15
Light Meter, Digital	E-14
Light Shade - Thermal Imager	E-12
Lil' Ripper Stripper	B-9
Linkmaster Tester	F-7
Lock Stations	D-5

Item	Page
Lockout / Tagout Carrying Pouch	D-6
Lockout / Tagout Devices	D-5
Lockout / Tagout Kits	D-3
Lockout / Tagout Safety Hasps	D-3
Lockout / Tagout Safety Padlocks	D-3
M	
Mains Plug (UK) Test Lead	E-9, E-15
Male Disconnects, Fully Insulated	A-7
Male Disconnects, Insulated	A-8
Marker Pen	D-3, D-6
Mini Hacksaw	B-16
Mini Utility Auger Bit	C-10
Miniature Cable Ties	B-19
MTRJ-Style Connector Adaptor	F-3
Multi-Crimp Strip Tool	B-10
Multimeter, Commercial Grade	E-5
Multimeter, Industrial Grade	E-5
Multimeter, Resi-Pro	E-6
Multimeter, Test-Pro	E-6
Multimeters	E-5, E-6
Multi-Stack Disconnects, Insulated	A-8
Multi-Strip Coax/UTP Cable Stripper	F-12
Multi-Wire Pulling Leader	B-3
N	
Nailbiter Premium Auger Bit	C-10
Noalox Anti-Oxidant	B-7
Non-Contact Voltage Tester, VoltAware	E-7
O	
Omniseal Pro Compression Tool	F-8
P	
Pilot Drill, Arbor	C-7
Placement Tool, Flexible Drill Bits	C-12
Plaster Board / Jab Saw	B-16
Plaster Board / Jab Saw Replacement Blade	B-16
Pliers, Insulated	B-13, B14
Pocket Meter	E-6
Power Ship Auger	C-10
Power Supply - Thermal Imagers	E-12

Item	Page
Powerblade Cable Cutter	B-11
Punch Down Tool	F-11
Push-In Wire Connectors	A-4
R	
R1 + R2 Test Lead Adaptor	E-10, E-15
Ratch-A-Nut Screwdriver	B-12
Ratchet Crimp Tool	B-10
Ratchet Telemaster	F-11
Ratcheting Cable Cutter	B-11
RCA Type Connectors	F-9
Receptacle Disconnect, Fully Insulated	A-7
Reciprocating Saw Blades	C-8, C-9
Reflex T-Stripper Wire Stripper	B-9
Remote Probe	E-8, E-9, E-15
Resi-Master Auger Bit	C-10
Ring Terminals, Insulated	A-6
RJ-11 Modular Plugs	F-12
RJ-11, RJ-22 & RJ-45 Crimp Tools	F-11
RJ-45 Modular Plugs	F-12
S	
Scissors, Lever Snips	B-15
Screwdrivers	B-12
Securitest PRO	F-5
Sharpening File	C-9
Signaltek / Signaltek FO	F-4
Smoothstart Replacement Pilot Drill	C-2
Solenoid Voltage Tester, Vol-Con XI	E-7
Spade Terminal, Insulated	A-6
Spin-Twist Wire Connector Socket	A-3
Spliceline In-Line Wire Connectors	A-5
Split-Jaw Smart Meter	E-4
Step Drills, Quick Change	C-4
Step Drills, Titanium Nitride	C-4
Strain Relief Boots	F-12
Stripmaster Wire Stripper	B-10
T	
Telemaster Crimp Tool	F-11
Test Lead Set	E-9, E-15
Test Leads	E-15, E-16
Test-Tone-Trace Kit	F-7
Thermalvision™ Software - Thermal Imager	E-12
Thermocouple Adaptor	E-5, E-15
Thermocouple, K-Type	E-5, E-14, E-15

Item	Page
Three Pole Earth Testing Kit	E-8
Tightsight Clamp Meters	E-3
Tone Generator & Amplifier Probe	F-7
Tool Bag, Large Mouth	B-18
Tool Tote, Master Electrician's	B-18
Tri-Bore Multi-Purpose Hole Saws	C-5
Tri-Bore Spare Bits	C-5
T-Stripper Wire Strippers	B-9
Tuff-Grip Pro Blue Steel Fishtape	B-3
Tuff-Grip Pro Zoom Fish Tape	B-3
Tuff-Rod - Replacement Rods	B-4
Tuff-Rod Extra Flex Glow Rod Kits	B-4
Tuff-Rod Regular Flex Rod Kits	B-4
Twin & Earth Cable Stripper	B-9
Twist-A-Nut Screwdriver	B-12
Twister PRO Wire Connectors	A-2
Twister Wire Connectors	A-2
U	
Utility Knife & Blades	B-15
UTP Cable Strippers	F-12
V	
VDV Multimedia Cable Tester	F-7
VDV Pro	F-6
Velocity Lube	B-6
Visual Fault Finder	F-3
Voltage Performance Monitor	E-11
Volt-Guard Fish Tape	B-3
Volt-Guard Replacement Fish Tape	B-3
W	
Warning Tags	D-3, D-6
Waterpump Pliers	B-10
Weatherproof Wire Connectors	A-3
Wire Marker Booklets	B-22
Wire Pulling Lubricant	B-5
Wire Stripper, 7-in-1	B-9
Wire Strippers	B-9, B-10
Wood Boring Bits	C-9, C-10, C-11
Write-On Marker Booklets	B-22
Y	
Yellow 77	B-6

Item	Page
Z	
Zoom Replacement Fish Tape	B-3



Index by Part Number

Item	Page	Item	Page	Item	Page	Item	Page
441.001	D-5	31-096	B-3	33-990-FA05	F-2	35-375	C-6
10-466	B-17	31-097	B-3	33-991	F-2	35-377	C-6
1219-91-0003	F-4	31-147	B-3	33-992	F-2	35-378	C-6
30-026	B-7	31-276	B-6	33-993	F-2	35-379	C-6
30-031	B-7	31-277	B-6	34-001	B-13	35-381	C-6
30-087	A-4	31-351	B-6	34-002	B-13	35-383	C-6
30-088	A-4	31-355	B-6	34-003	B-13	35-384	C-6
30-090	A-4	31-358	B-6	35-001	B-10	35-385	C-6
3010-12-0104	F-4	31-371	B-6	35-020	B-10	35-390	C-6
30-1032	A-4	31-378	B-6	35-021	B-10	35-393	C-7
30-1033	A-4	31-381	B-6	35-031	B-11	35-394	C-7
30-1034	A-4	31-385	B-6	35-032	B-11	35-396	C-7
30-1042	A-5	31-388	B-6	35-033	B-11	35-397	C-7
30-144	A-2	31-542	B-3	35-053	B-11	35-398	C-7
30-161	A-3	31-544	B-3	35-078	B-11	35-400	C-7
30-162	A-3	31-552	B-3	35-087	B-15	35-410	B-18
30-163	A-3	31-554	B-3	35-146	B-15	35-427	B-18
30-244J	A-2	31-601	B-7	35-205	B-15	35-430	B-10
30-261	A-3	31-605	B-7	35-210	B-15	35-440	B-10
30-262	A-3	31-611	B-4	35-259	B-16	35-441	B-18
30-263	A-3	31-612	B-4	35-260	B-16	35-462	B-18
30-340	A-2	31-631	B-4	35-261	B-16	35-482	F-11
30-341	A-2	31-633	B-4	35-271	B-16	35-5052	B-11
30-342	A-2	31-643	B-4	35-272	B-16	35-511	C-4
30-441J	A-2	31-644	B-4	35-273	B-16	35-512	C-4
30-496-001	F-11	31-647	B-4	35-275	B-16	35-513	C-4
30-499	F-11	31-648	B-4	35-285	B-15	35-514	C-4
30-500	F-11	31-651	B-4	35-300	B-15	35-515	C-4
30-5000EU	A-3	31-652	B-4	35-301	B-15	35-516	C-4
30-5001EU	A-3	33-700	F-11	35-311	B-17	35-517	C-4
30-5020EU	A-4	33-719	F-12	35-312	B-17	35-520	C-4
30-5021EU	A-4	33-770	F-6	35-316	B-17	35-521	C-4
30-506	F-11	33-771	F-6	35-325	B-17	35-522	C-4
30-556	F-11	33-772	F-6	35-341	C-6	35-523	C-4
30-559	F-11	33-773	F-6	35-343	C-6	35-524	C-4
30-579	F-11	33-774	F-6	35-344	C-6	35-536	C-7
30-580	F-11	33-775	F-6	35-345	C-6	35-598	C-7
30-581	F-11	33-775	F-6	35-347	C-6	35-688	B-12
30-582	F-11	33-776	F-6	35-349	C-6	35-726	C-10
30-603	F-8	33-780	F-6	35-351	C-6	35-729	C-10
30-633	F-8	33-780	F-6	35-353	C-6	35-732	C-10
30-640J	A-2	33-856	F-7	35-355	C-6	35-810	C-10
30-644J	A-2	33-866	F-7	35-356	C-6	35-812	C-10
30-696	F-11	33-892	F-5	35-358	C-6	35-814	C-10
30-902	A-3	33-927	F-3	35-359	C-6	35-815	C-10
30-9429	B-13, B14	33-928	F-3	35-361	C-6	35-817	C-10
30-9430	B-13, B14	33-929	F-3	35-362	C-6	35-819	C-9, C-10
31-035	B-3	33-931	F-3	35-364	C-6	35-820	C-10
31-036	B-3	33-975	F-4	35-365	C-6	35-821	C-10
31-038	B-3	33-984	F-4	35-367	C-6	35-823	C-10
31-055	B-3	33-985	F-4	35-368	C-6	35-825	C-10
31-056	B-3	33-986	F-4	35-369	C-6	35-827	C-10
31-057	B-3	33-988	F-4	35-370	C-6	35-829	C-10
31-090	B-3	33-990-FA01	F-2	35-371	C-6	35-862	C-10
31-091	B-3	33-990-FA02	F-2	35-372	C-6	35-864	C-10
31-092	B-3	33-990-FA03	F-2	35-373	C-6	35-866	C-10
31-093	B-3	33-990-FA04	F-2	35-374	C-6	35-868	C-10

Index

Index by Part Number

Item	Page	Item	Page	Item	Page	Item	Page
35-892	C-10	36-357	C-5	45-778	B-10	61-848SW	E-12
35-893	C-10	36-358	C-5	45-9120	B-13, B14	61-902	E-5
35-896	C-10	36-359	C-5	45-9125-341	B-13, B14	61-906	E-5
35-898	C-10	36-360	C-5	540DK	F-7	61-920	E-8
35-9029	B-13, B14	36-361	C-5	61-010	E-7	61-954	E-10
35-9038	B-13, B14	36-362	C-5	61-025EU	E-7	61-956	E-10
35-9052	B-13, B14	36-363	C-5	61-086	E-7	61-958	E-10
35-9430	B-13, B14	36-364	C-5	61-090EU	E-7	62-200	F-7
35-971	C-10	36-365	C-5	61-096	E-4	62-891	F-5
35-972	C-10	36-366	C-5	61-179	E-11	74-002	B-8
35-976	C-10	36-367	C-5	61-184EU	E-11, E-15	74-003	B-8
35-978	C-10	36-368	C-5	61-255	E-9	74-019	B-8
35-988	B-12	36-413	C-11	61-310	E-2, E-6	74-020	B-8
36-043	C-8	36-415	C-11	61-312	E-2, E-6	74-027	B-8
36-044	C-8	36-417	C-11	61-340	E-2, E-6	74-028	B-8
36-056	C-9	36-419	C-11	61-342	E-2, E-6	74-032	B-8
36-057	C-8	36-421	C-11	61-461	E-5, E-14, E-15	74-047	B-8
36-060	C-8	36-423	C-11	61-465	E-5, E-15	83-001	B-10
36-065	C-8	36-432	C-11	61-484	E-2, E-5	83-2121	A-6
36-066	C-8	4010-00-0136	F-4	61-486	E-2, E-5	83-2131	A-6
36-075	C-8	44-101	B-22	61-497	E-2, E-5	83-2141	A-6
36-085	C-8	44-102	B-22	61-498	E-2, E-5	83-2151	A-6
36-086	C-8	44-108	B-22	61-521	E-14	83-2221	A-6
36-088	B-16, C-8	44-151	B-22	61-534EU	E-11	83-2231	A-6
36-090	C-8	44-152	B-22	61-565	E-5, E-10	83-2241	A-6
36-250	C-9	44-427EU	D-4	61-605	E2, E-6	83-2251	A-6
36-252	C-9	44-428EU	D-4	61-685	E-14	83-2331	A-6
36-254	C-9	44-431-SS	D-4	61-686	E-14	83-2341	A-6
36-256	C-9	44-778	D-6	61-744	E-2, E-4	83-2351	A-6
36-260	C-9	44-778-SO	D-6	61-746	E-2, E-4	83-2361	A-6
36-270	C-9	44-806	D-6	61-763	E-2, E-3	83-2371	A-6
36-271	C-9	44-806-SO	D-6	61-765	E-2, E-3	83-7111	A-6
36-272	C-9	44-808	D-5	61-773	E-2, E-3	83-7121	A-6
36-273	C-9, C-10	44-833	D-6	61-775	E-2, E-3	83-7131	A-6
36-301	C-2	44-924	D-3	61-795	E-8	83-7151	A-6
36-302	C-2	44-925	D-3	61-796	E-8	83-7161	A-6
36-303	C-2	44-985UK	D-3	61-797	E-8	83-7171	A-6
36-304	C-2	45-025	E-11	61-830	E-11	83-7201	A-6
36-305	C-2	45-074	B-11, F-13	61-844CAR	E-12	83-7211	A-6
36-306	C-2	45-120-341	B-9	61-844CC	E-12	83-7221	A-6
36-307	C-2	45-125-341	B-9	61-844EU	E-12	83-7231	A-6
36-308	C-2	45-162-341	F-13	61-844HAN	E-12	83-8001	A-7
36-309	C-2	45-163-341	F-13	61-844HC	E-12	83-8011	A-7
36-310	C-2	45-164-341	F-13	61-844LS	E-12	83-8101	A-7
36-311	C-2	45-165-341	F-13	61-844PS	E-12	83-8111	A-7
36-312	C-2	45-167	F-13	61-844SW	E-12	83-9281	A-8
36-315	C-2	45-235	B-9	61-844USB	E-12	83-9291	A-8
36-316	C-2	45-292-341	B-10	61-846BAT	E-12	83-9301	A-8
36-317	C-2	45-320	F-13	61-846CAR	E-12	83-9511	A-8
36-318	C-2	45-321	F-13	61-846DT	E-12	83-9521	A-8
36-350	C-5	45-332	F-3	61-846EU	E-12	83-9541	A-8
36-351	C-5	45-334	F-3	61-846HC	E-12	83-9551	A-8
36-352	C-5	45-335	F-3	61-846PS	E-12	83-9571	A-8
36-353	C-5	45-336	F-3	61-846SW	E-12	83-9581	A-8
36-354	C-5	45-425-341	B-9	61-848	E-12	83-9601	A-8
36-355	C-5	45-603	F-13	61-848CAR	E-12	83-9611	A-8
36-356	C-5	45-777	B-9	61-848PS	E-12	83-9621	A-8

Index


Item	Page	Item	Page	Item	Page
83-9631	A-8	IT1000MP-CO	B-21	L-9226	F-13
83-9771	A-7	IT11H-L	B-20	LA-4102	F-11
83-9781	A-7	IT11H-LO	B-20	PA-830	E-11
83-9791	A-7	IT14H-L	B-20	PR-958UK	E-10, E-15
83-9911	A-7	IT14H-LO	B-20	SFP-13X0	F-4
83-9921	A-7	IT1M-C	B-19	SFP-850	F-4
83-9931	A-7	IT1M-CO	B-19	TL-102EU	E-7, E-15
83-9971	A-8	IT1MID-C	B-21	TL-104	E-15
83-9981	A-8	IT1SMB - C	B-21	TL-255	E-9, E-15
83-9991	A-8	IT1SMB - CO	B-21	TL-497	E-5, E-15
85-065	F-12	IT2I-C	B-20	TL-796	E-8, E-15
85-067	F-12	IT2I-CO	B-20	TL-797RP	E-8, E-9, E-15
85-344	F-12	IT2LH-C	B-20	TL-956	E-10, E-15
85-345	F-12	IT2LH-CO	B-20	TLMP-255UK	E-9, E-15
85-346	F-12	IT2M-C	B-19	VFF5	F-3
85-366	F-12	IT2M-CO	B-19		
85-380	F-12	IT2S-C	B-20		
85-900	F-12	IT2S-CO	B-20		
85-925	F-12	IT2SID-C	B-21		
85-950	F-12	IT2SMB - C	B-21		
85-960	F-12	IT2SMB - CO	B-21		
86-925	F-12	IT3I-C	B-20		
87-925	F-12	IT3I-CO	B-20		
89-044	F-9	IT3S-C	B-20		
89-045	F-9	IT3S-CO	B-20		
89-047	F-9	IT4I-C	B-20		
89-048	F-9	IT4I-CO	B-20		
89-5047	F-9	IT4LH-L	B-20		
89-5048	F-9	IT4LH-LO	B-20		
89-572	F-9	IT4S-C	B-20		
89-582	F-9	IT4S-CO	B-20		
90-082	C-11	IT5LH-L	B-20		
90-085	C-11	IT5LH-LO	B-20		
90-091	C-11	IT5S-C	B-20		
90-170	C-11	IT5S-CO	B-20		
90-173	C-11	IT6EH-CO	B-20		
90-176	C-11	IT750MP-C	B-21		
92-610	F-9	IT750MP-CO	B-21		
92-650	F-9	IT7H-L	B-20		
92-651	F-9	IT7H-LO	B-20		
BCTT-200	B-22	IT7LH-L	B-20		
BP-958	E-10	IT7LH-LO	B-20		
C-230	E-5, E-15	K-7566	D-6		
C-290	E-11, E-15	K-8330	D-4		
C-796	E-15	K-8332	D-4		
C-90	E-7, E-15	K-8334	D-4		
C-958	E-10	K-8334-SS38	D-4		
CR-958	E-10	K-8334-SS76	D-4		
F-255	E-9, D-15	K-8336	D-4		
IA-2280	D-5	KB-0224	D-4		
IA-3240	D-6	KB-0225	D-5		
IC-958	E-10	KB-0226	D-5		
IT1_5I-C	B-20	KB-0227	D-5		
IT1_5I-CO	B-20	KB-0234	D-5		
IT1_5M-C	B-19	KB-0235	D-6		
IT1_5M-CO	B-19	KB-0375	D-5		
IT1000MP-C	B-21	L-9225	F-13		

IDEAL INDUSTRIES ELECTRICAL

Over 6,000 items make up the IDEAL family of products including some whose names have become synonymous with their function.

Twister® & In-Sure™ Wire Connectors, Yellow 77® Wire Pulling Lubricant, SureTest® Electrical Testers and T® - Stripper Wire Strippers are products which have found their way into the tool bags of electrical and networking professionals and solidified the IDEAL reputation as a manufacturer of innovative and trustworthy products.

Every IDEAL product is covered by a comprehensive worldwide warranty.

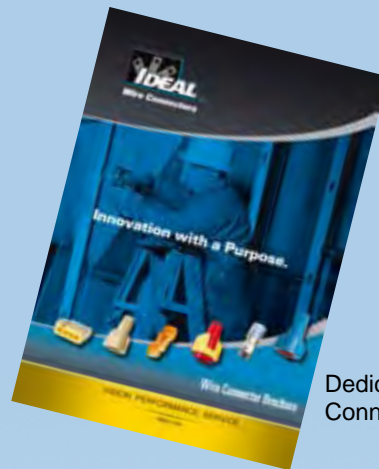

Dedicated Wire Connector Brochure



IDEAL INDUSTRIES NETWORKS

IDEAL INDUSTRIES NETWORKS provides test solutions for LAN cable installers, network technicians, IT managers, Telecoms operators and service providers. The range includes copper cable testers, Cat 5 to Cat7A cable certifiers, OTDRs, 1 GbE testers, xDSL testers, network troubleshooting tools and more.

For more information on our Networks range please visit www.idealnwd.co.uk

For additional information on the entire range of IDEAL Electrical Products visit www.idealindustries.co.uk

Alternatively you can contact us on **+44 (0)1925 44 44 46** or via email: uksales@idealnwd.com

All the products featured in this catalogue are stocked in our state-of-the-art Warrington Distribution Centre.

In 1992, IDEAL INDUSTRIES INC. established it's first subsidiary outside of North America in the UK.



UK Distribution Centre, Warrington



WIRE TERMINATION ■ TOOLS & SUPPLIES
POWER TOOL ACCESSORIES ■ ELECTRICAL SAFETY
TEST & MEASUREMENT ■ NETWORK TOOLS & TESTERS

IDEAL INDUSTRIES LIMITED

Unit 3, Europa Court, Europa Boulevard, Westbrook, Warrington, WA5 7TN, U.K.
Tel.: +44 (0)1925 44 44 46 • Fax: +44 (0)1925 44 55 01 • Email: UKsales@idealnwd.com

For complete sales office contact information, visit us at:

www.idealindustries.co.uk