


Bussed Gutters

400 Amp - 2000 Amp

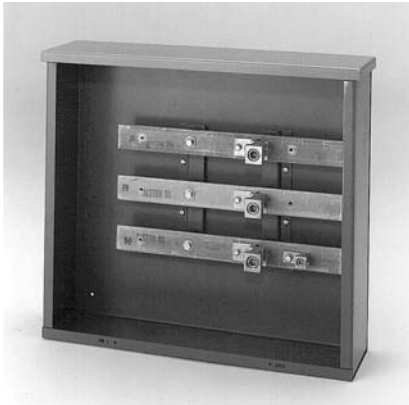

R1024HC

APPLICATION

- Intended for use as a distribution point for multiple load applications

CONSTRUCTION

- Type 3R construction
- **Tin-plated aluminum bussing is standard. Copper available as special order.**
- ⁵/₁₆-18 mounting holes for load lugs - single location per ø per foot width.

STANDARDS

- UL 1773 listed

FINISH

- ANSI 61 gray acrylic electrocoat finish

1Ø 3W

CATALOG NUMBER	AIC RATING	AMPACITY	VOLTAGE	BUS SIZE	CONDUCTOR LUG RANGE			DIMENSIONS (INCHES)		
					PHASE LINE*	CONDUCTOR LOAD	NEUTRAL CONDUCTOR*	HEIGHT (H)	WIDTH (W)	DEPTH (D)
R1024HC	10K	400	600	¼" x 2" AL	(1) 4 AWG - 600 kcmil	NONE	(1) 4 AWG - 600 kcmil	22	24	6
R1036HC	10K	400	600	¼" x 2" AL	(1) 4 AWG - 600 kcmil	NONE	(1) 4 AWG - 600 kcmil	22	36	6
R1048HC	10K	400	600	¼" x 2" AL	(1) 4 AWG - 600 kcmil	NONE	(1) 4 AWG - 600 kcmil	22	48	6
R1060HC	10K	400	600	¼" x 2" AL	(1) 4 AWG - 600 kcmil	NONE	(1) 4 AWG - 600 kcmil	22	60	6
R1072HC	10K	400	600	¼" x 2" AL	(1) 4 AWG - 600 kcmil	NONE	(1) 4 AWG - 600 kcmil	22	72	6
R1036HD	10K	600	600	¼" x 3" AL	(2) 4 AWG - 600 kcmil	NONE	(2) 4 AWG - 600 kcmil	22	36	6
R1048HD	10K	600	600	¼" x 3" AL	(2) 4 AWG - 600 kcmil	NONE	(2) 4 AWG - 600 kcmil	22	48	6
R1060HD	10K	600	600	¼" x 3" AL	(2) 4 AWG - 600 kcmil	NONE	(2) 4 AWG - 600 kcmil	22	60	6
R1072HD	10K	600	600	¼" x 3" AL	(2) 4 AWG - 600 kcmil	NONE	(2) 4 AWG - 600 kcmil	22	72	6
R1048HE	10K	800	600	¼" x 4" AL	(3) 4 AWG - 600 kcmil	NONE	(3) 4 AWG - 600 kcmil	22	48	6
R1060HE	10K	800	600	¼" x 4" AL	(3) 4 AWG - 600 kcmil	NONE	(3) 4 AWG - 600 kcmil	22	60	6
R1072HE	10K	800	600	¼" x 4" AL	(3) 4 AWG - 600 kcmil	NONE	(3) 4 AWG - 600 kcmil	22	72	6

* Every 600 kcmil lug will accept (2) 1/0 - 250 kcmil cables.

Bussed Gutters

400 Amp - 2000 Amp

3Ø 4W

CATALOG NUMBER	AIC RATING	AMPACITY	VOLTAGE	BUS SIZE	CONDUCTOR LUG RANGE		NEUTRAL CONDUCTOR*	DIMENSIONS (INCHES)		
					PHASE LINE*	CONDUCTOR LOAD		HEIGHT (H)	WIDTH (W)	DEPTH (D)
R1024HCC	10K	400	600	¼" x 2" AL	(1) 4 AWG - 600 kcmil	NONE	(1) 4 AWG - 600 kcmil	22	24	6
R1036HCC	10K	400	600	¼" x 2" AL	(1) 4 AWG - 600 kcmil	NONE	(1) 4 AWG - 600 kcmil	22	36	6
R1048HCC	10K	400	600	¼" x 2" AL	(1) 4 AWG - 600 kcmil	NONE	(1) 4 AWG - 600 kcmil	22	48	6
R1060HCC	10K	400	600	¼" x 2" AL	(1) 4 AWG - 600 kcmil	NONE	(1) 4 AWG - 600 kcmil	22	60	6
R1072HCC	10K	400	600	¼" x 2" AL	(1) 4 AWG - 600 kcmil	NONE	(1) 4 AWG - 600 kcmil	22	72	6
R1096HCC	10K	400	600	¼" x 2" AL	(1) 4 AWG - 600 kcmil	NONE	(1) 4 AWG - 600 kcmil	22	96	6
R1036HDD	10K	600	600	¼" x 3" AL	(2) 4 AWG - 600 kcmil	NONE	(2) 4 AWG - 600 kcmil	28 ½	36	6
R1048HDD	10K	600	600	¼" x 3" AL	(2) 4 AWG - 600 kcmil	NONE	(2) 4 AWG - 600 kcmil	28 ½	48	6
R1060HDD	10K	600	600	¼" x 3" AL	(2) 4 AWG - 600 kcmil	NONE	(2) 4 AWG - 600 kcmil	28 ½	60	6
R1072HDD	10K	600	600	¼" x 3" AL	(2) 4 AWG - 600 kcmil	NONE	(2) 4 AWG - 600 kcmil	28 ½	72	6
R1096HDD	10K	600	600	¼" x 3" AL	(2) 4 AWG - 600 kcmil	NONE	(2) 4 AWG - 600 kcmil	28 ½	96	6
R10120HDD	10K	600	600	¼" x 3" AL	(2) 4 AWG - 600 kcmil	NONE	(2) 4 AWG - 600 kcmil	28 ½	120	6
R1048HEE	10K	800	600	¼" x 4" AL	(3) 4 AWG - 600 kcmil	NONE	(3) 4 AWG - 600 kcmil	28 ½	48	6
R1060HEE	10K	800	600	¼" x 4" AL	(3) 4 AWG - 600 kcmil	NONE	(3) 4 AWG - 600 kcmil	28 ½	60	6
R1072HEE	10K	800	600	¼" x 4" AL	(3) 4 AWG - 600 kcmil	NONE	(3) 4 AWG - 600 kcmil	28 ½	72	6
R1096HEE	10K	800	600	¼" x 4" AL	(3) 4 AWG - 600 kcmil	NONE	(3) 4 AWG - 600 kcmil	28 ½	96	6
R10120HEE	10K	800	600	¼" x 4" AL	(3) 4 AWG - 600 kcmil	NONE	(3) 4 AWG - 600 kcmil	28 ½	120	6
R1060HFF	10K	1200	600	¼" x 6" AL	(4) 4 AWG - 600 kcmil	NONE	(3) 4 AWG - 600 kcmil	36	60	6
R1072HFF	10K	1200	600	¼" x 6" AL	(4) 4 AWG - 600 kcmil	NONE	(3) 4 AWG - 600 kcmil	36	72	6
R1096HFF	10K	1200	600	¼" x 6" AL	(4) 4 AWG - 600 kcmil	NONE	(3) 4 AWG - 600 kcmil	36	96	6
R10120HFF	10K	1200	600	¼" x 6" AL	(4) 4 AWG - 600 kcmil	NONE	(3) 4 AWG - 600 kcmil	36	120	6
R1072HGG	10K	1600	600	¼" x 6" AL**	(6) 4 AWG - 600 kcmil	NONE	(3) 4 AWG - 600 kcmil	36	72	6
R1096HGG	10K	1600	600	¼" x 6" AL**	(6) 4 AWG - 600 kcmil	NONE	(3) 4 AWG - 600 kcmil	36	96	6
R10120HGG	10K	1600	600	¼" x 6" AL**	(6) 4 AWG - 600 kcmil	NONE	(3) 4 AWG - 600 kcmil	36	120	6
R1072HHH	10K	2000	600	¼" x 6" AL***	(6) 4 AWG - 600 kcmil	NONE	(3) 4 AWG - 600 kcmil	36	72	6
R1096HHH	10K	2000	600	¼" x 6" AL***	(6) 4 AWG - 600 kcmil	NONE	(3) 4 AWG - 600 kcmil	36	96	6
R10120HHH	10K	2000	600	¼" x 6" AL***	(6) 4 AWG - 600 kcmil	NONE	(3) 4 AWG - 600 kcmil	36	120	6

* Every 600 kcmil lug will accept (2) 1/0 - 250 kcmil cables.

** 2 per Ø

*** 3 per Ø