


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PART#	DESCRIPTION	WEIGHT*
CJSK6X88TG**	8 POSITION, 8 WIRE SHIELDED MODULE WITH INTEGRAL SHIELD. TERMINATION CAP IS COLOR CODED FOR T568A AND T568B WIRING SCHEMES.	3.314 LB/100 PCS (1503g/100 PCS)



*WEIGHT IS APPROXIMATE
** = JACK COLOR/KEY SUFFIX
(SEE SHEET 2)

NOTES:


1. BLUE WIRE CAP DESIGNATES CATEGORY 6A PERFORMANCE.
2. MATERIAL:
MODULE HOUSING-ABS
NOMINAL WALL THICKNESS .078(2.0).
WIRE CAP-PC/ZINC
3. ALL MINI-COM TX6A 10GIG 8 POSITION, 8 WIRE, KEYED JACK MODULES ARE NOT UNIVERSAL IN DESIGN. EACH MODULE ACCEPTS ONLY ONE SPECIFIC KEYED PLUG THAT MATCHES THE JACK KEYED CONFIGURATION.
4. DIMENSIONS IN PARENTHESES ARE IN METRIC.
5. .187 x .010" GROUNDING TAB PROVIDED AS OPTIONAL CONDUCTIVE PATH FOR GROUNDING.

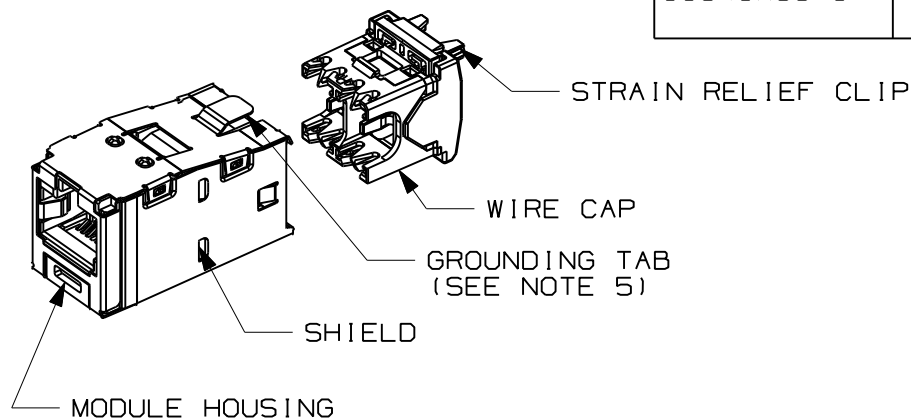

KEYED FEATURE
(SEE SHEET 2)

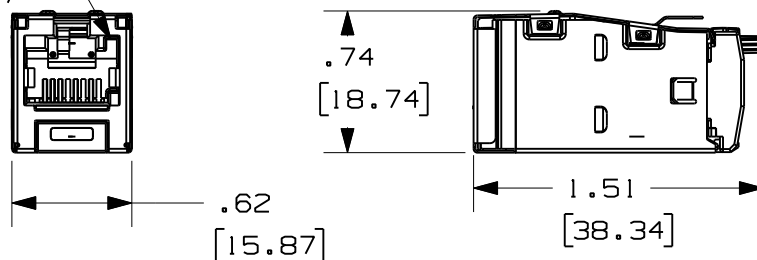

ACTUAL SIZE

MODEL FILENAME		M03011AA/01	SIZE A
DRAWING FILENAME		M03011EK_DC60/00B	
TITLE MINI-COM TX6A 10GIG SHIELDED KEYED JACK MODULE CUSTOMER DRAWING			
 PANDUIT ™ CORP. TINLEY PARK, ILL 60477		I.I. NUMBER	
		PRODUCT SPEC	
 THIRD ANGLE PROJECTION		WORK INSTRUCTION	
		SCALE FULL	
DRAWN BY MDJr		REVIEW DRAWING NUMBERS	
DATE 10-22-08		PART NO. CJSK6X88TG**	
CHK'D BMBA		DRAWING NO. 03011-60 SHEET 1 OF 2	

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH
I	1-27-09	MDJr	PBD	A. UPDATED JACK MODELS ON SHEET 2.	03011-60		VMB		
R	12-03-08	MDJr	BMBA	RELEASED TO PRODUCTION	03011-60		VMB		

