



# Retail Sales T8

## F15T8 SOFT WHITE/18 ALTO 6PK

Energy Savings, extra long life, extra low mercury T8 lamps offer high energy savings, superior lumen output, and long life in an environmentally responsible lamp.

### Product data

General Information	
Cap-Base	G13 [ Medium Bi-Pin Fluorescent]
Life to 10% Failures (Nom)	10000 h
Life to 50% Failures (Nom)	13000 h
Features	ALTO® (ALTO)

Light Technical	
Color Code	830 [ CCT of 3000K]
Initial lumen (Nom)	990 lm
Color Designation	Soft White
Lumen Maintenance 2000 h (Nom)	93 %
Lumen Maintenance 5000 h (Nom)	88 %
Correlated Color Temperature (Nom)	3000 K
Color Rendering Index (Nom)	83

Operating and Electrical	
Power (Rated) (Nom)	15.5 W
Lamp Current (Nom)	0.335 A
Voltage (Nom)	55 V

Controls and Dimming	
Dimmable	Yes

Mechanical and Housing	
Cap-Base Information	Green [ Green Cap]

Approval and Application	
Energy Efficiency Label (EEL)	A
Mercury (Hg) Content (Nom)	2.0 mg


Product Data	
Order product name	F15T8 SOFT WHITE/18 ALTO SL6
EAN/UPC - Product	046677392123
Order code	392126
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	928022883028
Net Weight (Piece)	59.600 g

### Warnings and Safety

- Lamp contains mercury. Manage in Accord with Disposal Laws. See: [www.lamprecycle.org](http://www.lamprecycle.org) or 1-800-555-0050

# Retail Sales T8


## Dimensional drawing

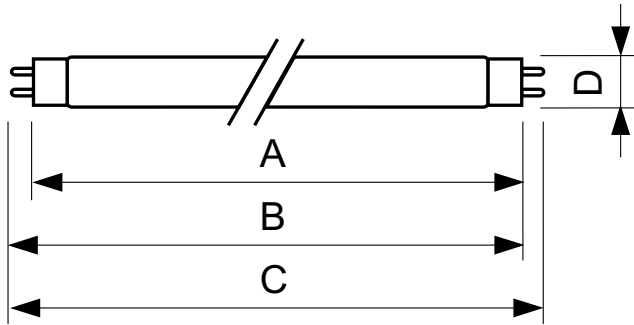


TL-D F15T8 Soft White/GC ALTO

Product	D (max)	A (max)	B (max)	B (min)	C (max)
F15T8 SOFT WHITE/18 ALTO	28 mm	437.4 mm	444.5 mm	442.1 mm	451.6 mm
SL6					


## Lifetime

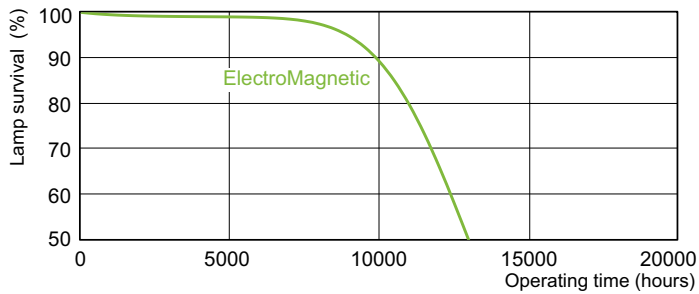

TL-D Standard Colours Life Expectancy 3 h cycle

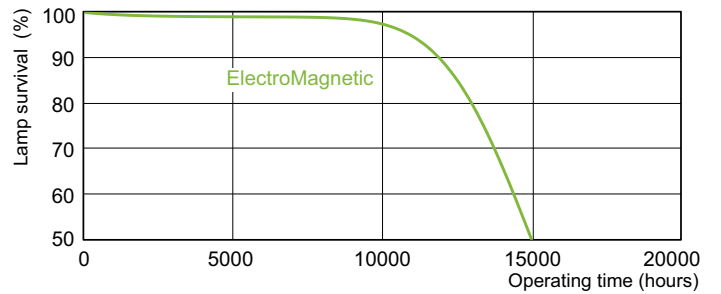

TL-D Standard Colours Life Expectancy 12 h cycle

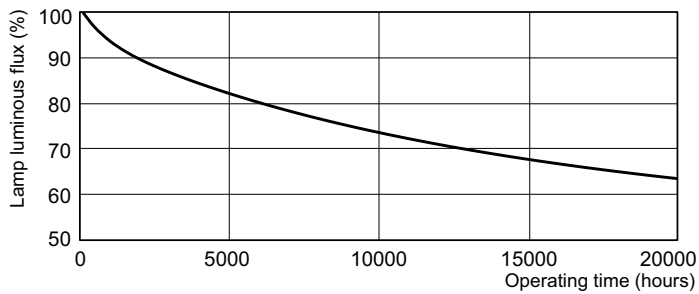

TL-D Standard Colours Lumen Maintenance 3 h + 12 h cycle

