Shuriken Collection Shuriken 52" Ceiling Fan - Satin Black SBK 300209SBK (Satin Black)

Project Name:	
Location:	
Туре:	
Qty:	
Comments:	

Product Information

Product ID	300209SBK
Finish	Satin Black
Blade Finish	Dark Driftwood/Non- Reversible
Collection	Shuriken Collection

Airflow, Power and Efficiency

Speed	RPM	CFM	CFM/ Watt	Amps	Watts
High	121	4634	58	.67	80
Med	80	3156	79	.48	40
Low	44	1656	114	.28	14


Specifications

Number of Blades	4
Blades Included	Yes
Blade Pitch	13 Degrees
Blade Sweep	52"
Blades Reversible	No
Blade Material	ABS
Optional Blades Available	No
Downrod 1	1.00 OD X 4.50
Primary Control System	3 Speed Cooltouch Full Function - In project applications using multiple ceiling fans, alternative remote controls may be required. Please contact Kichler Advanced Product Solutions at 844-542-4537 to confirm your project requirements.
Remote Included	No
Wall Control Included	No
Low Ceiling Adaptable	No
Lead Wire Length	78.00"
Motor Size	172MM X 17MM
Motor Type	AC

Downlight

20mmgni		
Downlight Included	Yes	
Light Source	LED	
Downlight Bulb Included	Integrated	

Dimensions

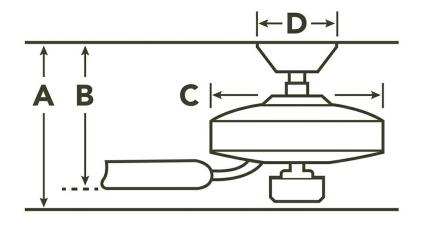

Downrod	Α	В	С	D
1.00 OD X 4.50	15.04	8.66	11.77	6.80

Available Finishes

Finish	Fixture	Glass	Blade 1	Blade 2


Kichler

7711 East Pleasant Valley Road Cleveland, Ohio 44131-8010 Toll free: 866.558.5706 or kichler.com

Notes

Information provided is subject to change without notice.

All values are design or typical values when measured under laboratory conditions.





Shuriken Collection Shuriken 52" Ceiling Fan - Satin Black SBK

300209SBK (Satin Black)

Finish	Fixture	Glass	Blade 1	Blade 2
Oil Brushed Bronze	300209OBB	ETCHED CASED OPAL	WALNUT SHADOWED	NON- REVERSIBLE
Brushed Nickel	300209NI	ETCHED CASED OPAL	DRIFTWOOD	NON- REVERSIBLE
Satin Black	300209SBK	ETCHED CASED OPAL	DARK DRIFTWOOD	NON- REVERSIBLE

Control Options

Product ID	Descr
370038MULTR	Wall Transmitter F-Function
371045MUL	56K Wall Control System Full F

Project Name:
Location:
Type:
Qty:
Comments:

Number of Lights/LEDs	1
Max or Nominal Watt	17W
Glass Description	Etched Cased Opal
Optional Light Kit Available	No
Efficacy (LMIW)	94
Kelvin Temperature	3000K
Color Rendering Index	80
	80

Safety Listings & Certifications

Safety Rated	Dry		
Warranty	www.kichler.com/warranty		
Installation			
Installation requirements	The electrical junction box and support structure must be securely mounted and capable of reliably supporting a minimum of 50 pounds.		

Installation requirements capable of reliably supporting a minimum of 50 pounds. Use only ETL/UL listed electrical junction boxes marked ""For Fan Support""

Electrical Requirements 120V 60Hz AC

Hanging Weight 22.04 LBS

Minimum Distance Between
Bottom Of Fan Blade To 7
Floor

7.5 feet



