


Terna Collection

Terna LED Pendant Fan - Oil Brushed Bronze OBB

300230OBB (Oil Brushed Bronze)



Dimensions

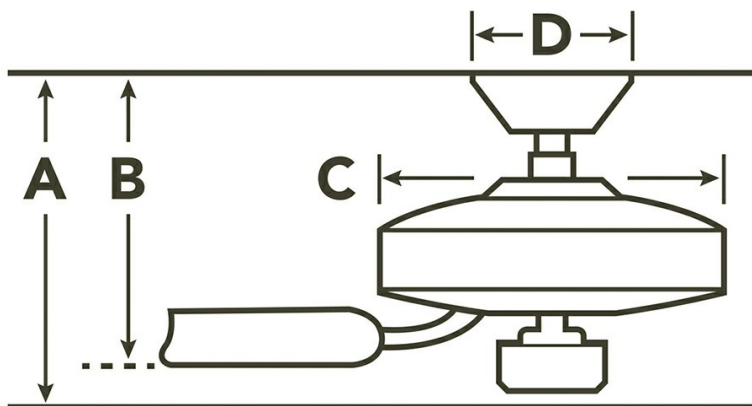

Downrod	A	B	C	D
1.00 OD X 4.50	19.86	19.13	10.55	6.23

Available Finishes

Finish	Fixture	Glass	Blade 1	Blade 2

Project Name: _____
 Location: _____
 Type: _____
 Qty: _____
 Comments: _____

Product Information

Product ID	300230OBB
Finish	Oil Brushed Bronze
Blade Finish	Oil Brsh Bronze/Non-Reversible
Collection	Terna Collection

Airflow, Power and Efficiency

Speed	RPM	CFM	CFM/ Watt	Amps	Watts
High	311	1029	31	.28	34
Med	187	655	38	.28	17
Low	91	277	32	.22	9

Specifications

Number of Blades	5
Blades Included	Yes
Blade Sweep	15"
Blades Reversible	No
Blade Material	POLYCARBONATE
Optional Blades Available	No
Downrod 1	1.00 OD X 4.50

3 Speed Cooltouch Full Function - In project applications using multiple ceiling fans, alternative remote controls may be required. Please contact Kichler Advanced Product Solutions at 844-542-4537 to confirm your project requirements.

Primary Control System

Remote Included	No
Wall Control Included	No
Low Ceiling Adaptable	No
Lead Wire Length	78.00"
Motor Size	153MM X 15MM
Motor Type	AC

Downlight

Downlight Included	Yes
Light Source	LED
Downlight Bulb Included	Integrated
Number of Lights/LEDs	1

Notes:

1) Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions.
 2) Incandescent Equivalent: The incandescent equivalent as presented is an approximate number and is for reference only.

Terna Collection

Terna LED Pendant Fan - Oil Brushed Bronze

OBB

300230OBB (Oil Brushed Bronze)

Finish	Fixture	Glass	Blade 1	Blade 2
Brushed Nickel	300230NI	ETCHED CASED OPAL	CHAMPAGNE	NON-REVERSIBLE
Oil Brushed Bronze	300230OBB	ETCHED CASED OPAL	OIL BRSH BRONZE	NON-REVERSIBLE
White	300230WH	ETCHED CASED OPAL	WHITE	NON-REVERSIBLE

Control Options

Product ID	Descr
370038MULTR	Wall Transmitter F-Function
371045MUL	56K Wall Control System Full F

Project Name: _____
 Location: _____
 Type: _____
 Qty: _____
 Comments: _____

Glass Description	Etched Cased Opal
Optional Light Kit Available	No
Efficacy (LMIW)	94
Kelvin Temperature	3000K
Color Rendering Index	80

Safety Listings & Certifications

Safety Rated	Dry
Warranty	www.kichler.com/warranty

Installation

Installation requirements	The electrical junction box and support structure must be securely mounted and capable of reliably supporting a minimum of 50 pounds. Use only ETL/UL listed electrical junction boxes marked ""For Fan Support""
Electrical Requirements	120V 60Hz AC
Hanging Weight	15.87 LBS
Minimum Distance Between Bottom Of Fan Blade To Floor	7.5 feet

Notes:

- 1) Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions.
- 2) Incandescent Equivalent: The incandescent equivalent as presented is an approximate number and is for reference only.