



PL-S Short 2-Pin Base

PL-S 7W/835/2P/ALTO

Philips Linear Compact Fluorescent Lamps offer designers, specifiers and end-users new levels of efficiencies and versatility in sizes, configurations and application possibilities. With so many elegant fixtures available to complement their small size, high light output and advanced technology, Philips Energy Advantage lamps are fast becoming the preferred choice when maximum efficiency and sleek design solutions are required.

Product data

General Information	
Cap-Base	G23 [G23]
Life to 10% Failures (Nom)	0 h
Life to 50% Failures (Nom)	10000 h
LSF 2000 h Rated	99 %
LSF 4000 h Rated	98 %
LSF 6000 h Rated	95 %
LSF 8000 h Rated	86 %
Light Technical	
Color Code	835 [CCT of 3500K]
Initial lumen (Nom)	400 lm
Luminous Flux (Rated) (Nom)	405 lm
Color Designation	White (WH)
Correlated Color Temperature (Nom)	3500 K
Luminous Efficacy (rated) (Nom)	57 lm/W
Color Rendering Index (Nom)	82
LLMF 2000 h Rated	94 %
LLMF 4000 h Rated	91 %
LLMF 6000 h Rated	89 %
LLMF 8000 h Rated	86 %

Operating and Electrical	
Power (Rated) (Nom)	7.1 W
Lamp Current (Nom)	0.175 A
Temperature	
Design Temperature (Nom)	28 °C
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Cap-Base Information	2P
Approval and Application	
Energy Efficiency Label (EEL)	B
Mercury (Hg) Content (Nom)	1.4 mg
Product Data	
Order product name	PL-S 7W/835/2P/ALTO
EAN/UPC - Product	046677148720
Order code	148726
Numerator - Quantity Per Pack	1

PL-S Short 2-Pin Base


Numerator - Packs per outer box	10
Material Nr. (12NC)	927901283521
Net Weight (Piece)	26.000 g

ILCOS Code	FSD-7/35/1B-I-G23
------------	-------------------

Warnings and Safety

- Lamp contains mercury. Manage in Accord with Disposal Laws. See: www.lamprecycle.org or 1-800-555-0050



Dimensional drawing

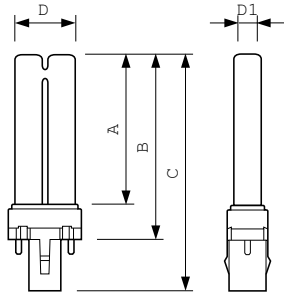

Product	D (max)	D1 (max)	A (max)	B (max)	C (max)
PL-S 7W/835/2P/ALTO	28 mm	13 mm	97 mm	113 mm	135 mm

PL-S ALTO 7W/835/2P



Photometric data

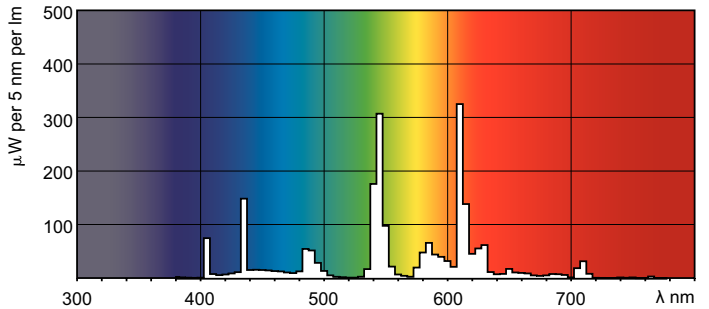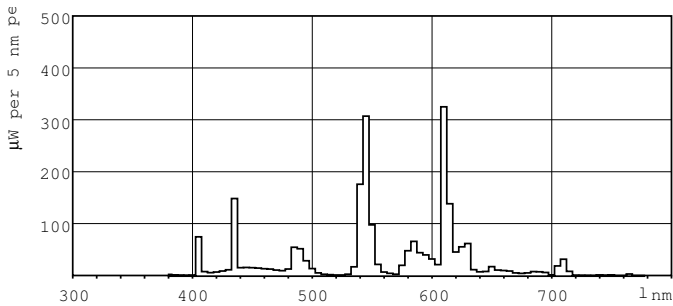

Lightcolor /835

Lightcolor /835

Lifetime

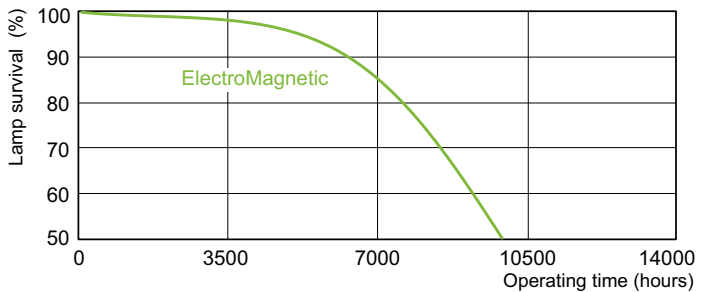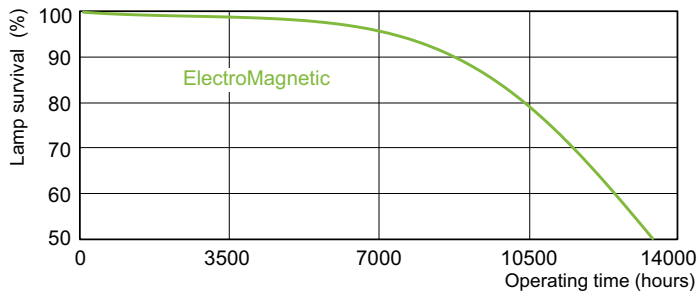


Life Expectancy 12 h cycle

Life Expectancy 3 h cycle

PL-S Short 2-Pin Base

Lifetime

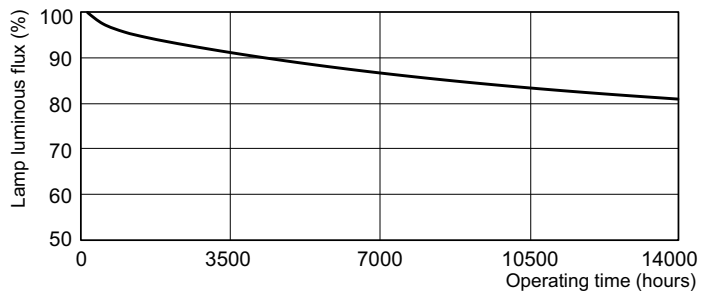

Lumen Maintenance 3 h + 12 h cycle

