

Rittal – The System.

Faster – better – everywhere.

Laminated Copper Bars – SV 3572.005

Date : May 24, 2018

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



Laminated Copper Bars – SV 3572.005

created: 24.05.2018 build on www.rittal.com/us-en

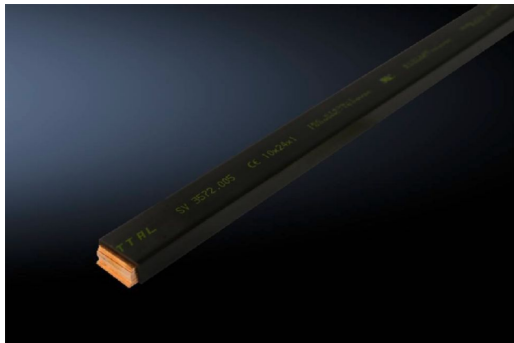

Product description

Material:	Cu lamina: High-purity electrolyte copper Insulation: High-strength vinyl compound, expansion 370%, dielectric strength: 20 kV/mm Fire protection corresponding to UL 94-V0
Note:	May be cut to length as required

Product features

Dimensions:	Length: 2000 mm
Laminated flat copper version:	Number of lamina: 10 Lamina thickness: 1 mm (0.04 ") Lamina width: 24 mm (0.94 ")
Rated current for temperature increase by:	70 K: 920 A 50 K: 770 A 30 K: 585 A
Packaging unit:	1 pc(s).
Weight/packaging unit:	4.8 kg (10.6 lb.)
EAN:	4028177666788
Customs tariff number:	74071000
ETIM 6.0:	EC001522

ETIM 5.0:	EC001522
eCl@ss 8.0/8.1:	27370303
eCl@ss 7.0/7.1:	27370303
eCl@ss 6.0/6.1:	27370303
eCl@ss 5.1/5.1.4:	27370302
Product description (long):	SV Laminated copper bar, WH: 24x10 mm, L: 2000 mm
Approvals	
Approvals:	C-UR UR UR + C-UR
Certificates:	EAC
Declarations:	Declaration of conformity