

PHILIPS

Lighting



MasterColor CDM-T T6 Elite

MASTERColor CDM-T Elite 35W/930 G12 1CT

The Elite family is at the very top of the MasterColor CDM range, and gives a unique combination of unbeatable light quality and consistent performance over lifetime, while keeping running costs low. MasterColor metal halide lamps deliver consistent white light and higher color rendering than any standard metal halide source for architectural lighting.

Product data

General Information	
Cap-Base	G12 [G12]
Operating Position	Universal [Universal]
Life to 5% Failures (Nom)	12000 h
Life to 10% Failures (Nom)	14000 h
Life to 20% Failures (Nom)	16000 h
Life to 50% Failures (Nom)	20000 h
ANSI Code HID	C130/E
Light Technical	
Color Code	930 [CCT of 3000K]
Luminous Flux (Rated) (Nom)	4050 lm
Color Designation	Warm White (WW)
Lumen Maintenance 1000 h (Nom)	95 %
Lumen Maintenance 12000 h (Nom)	80 %
Lumen Maintenance 10000 h (Nom)	83 %
Lumen Maintenance 2000 h (Nom)	93 %
Lumen Maintenance 4000 h (Nom)	90 %
Lumen Maintenance 5000 h (Nom)	88 %
Chromaticity Coordinate X (Nom)	0.435

Chromaticity Coordinate Y (Nom)	0.395
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	98 lm/W
Color Rendering Index (Min)	87
Color Rendering Index (Nom)	90
Operating and Electrical	
Power (Rated) (Nom)	39.0 W
Lamp Current Run-Up (Max)	1 A
Lamp Current (EM) (Nom)	0.500 A
Ignition Supply Voltage (Max)	198 V
Ignition Peak Voltage (Max)	5000 V
Ignition Supply Voltage (Min)	198 V
Re-Ignition Time (Min) (Max)	15 min
Ignition Time (Max)	30 s
Voltage (Max)	90 V
Voltage (Min)	80 V
Voltage (Nom)	85 V

MasterColor CDM-T T6 Elite

Controls and Dimming

Dimmable	No
Run-Up Time 90% (Max)	3 min
Run-Up Time 90% (Nom)	1.5 min

Mechanical and Housing

Bulb Finish	Clear (CL)
-------------	------------

Approval and Application

Energy Efficiency Label (EEL)	A+
Mercury (Hg) Content (Nom)	4.7 mg
Energy Consumption kWh/1000 h	43 kWh

UV

Pet (Niosh) (Min)	8 h/500lx
Damage Factor D/fc (Max)	0.3

Luminaire Design Requirements

Bulb Temperature (Max)	500 °C
Cap-Base Temperature (Max)	250 °C
Pinch Temperature (Max)	350 °C


Product Data

Order product name	MASTERColor CDM-T Elite 35W/930 G12 1CT
EAN/UPC - Product	046677409142
Order code	409144
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	928185205115
Net Weight (Piece)	0.028 kg
ILCOS Code	MT/UB-35/930-H-G12-20/90

Warnings and Safety

- R "WARNING: These lamps can cause serious skin burn and eye inflammation from short wave ultraviolet radiation if outer envelope of the lamp is broken or punctured. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Certain lamps that will automatically extinguish when the outer envelope is broken or punctured are commercially available." This lamp complies with FDA radiation performance standard 21 CFR subchapter J. (USA:21 CFR 1040.30 Canada: SOR/DORS/80-381)
- Lamp contains mercury. Manage in Accord with Disposal Laws. See: www.lamprecycle.org or 1-800-555-0050

Dimensional drawing

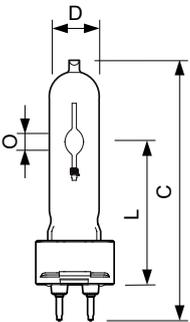


CDM-T Elite 35W/930 G12



Product	D (max)	O	L (min)	L (max)	L	C (max)
MASTERColor CDM-T Elite 35W/930 G12 1CT	20 mm	4.8 mm	55 mm	57 mm	56 mm	103 mm

MasterColor CDM-T T6 Elite

Photometric data

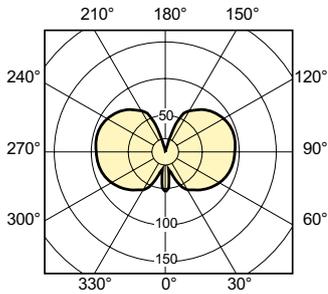


CDM-T Elite 35W /842, /930

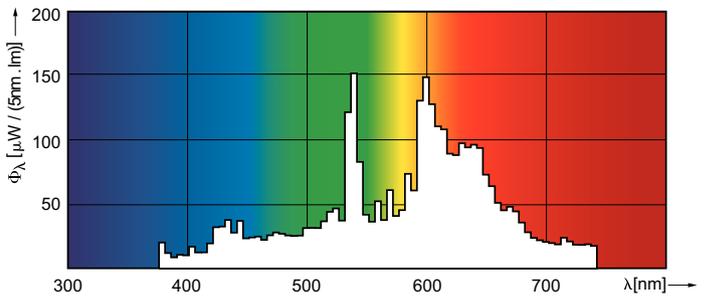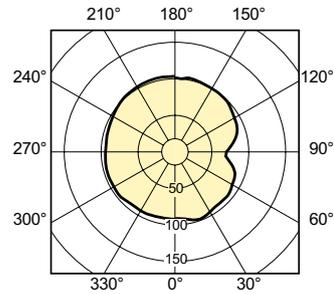


CDM-T Elite 35W /930

Lifetime

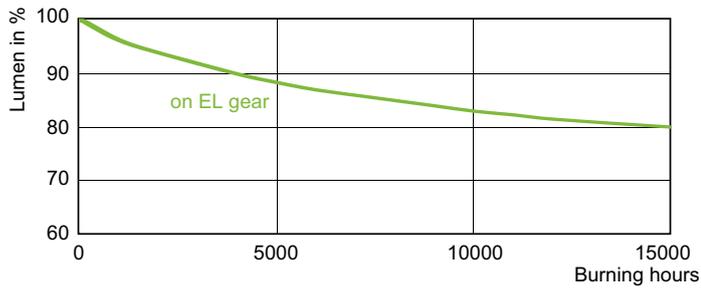

CDM-T Elite 35W & 70W Lumen Maintenance /930

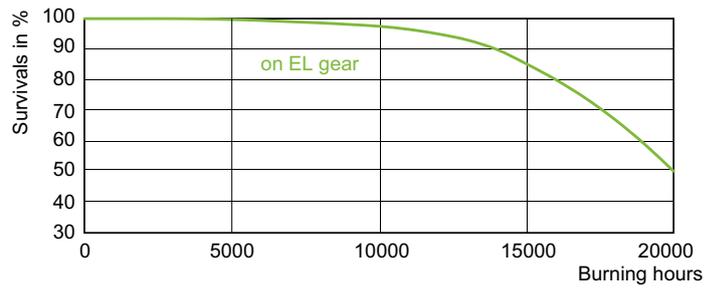

CDM-T Elite 35W, 50W, 70W, 100W Life Expectancy /930

