


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

| FIBER TYPE | PANDUIT PART NUMBER | DESCRIPTION |
|-----------------------|---------------------|--|
| SINGLEMODE OS1/OS2 | F1AS9N-1A12-10S | QUICKNET HIGH DENSITY CASSETTE STANDARD FIBER STRAIGHT THROUGH |
| | F1AS9N-1A12-10F | QUICKNET HIGH DENSITY CASSETTE STANDARD FIBER - FLIPPED PAIR |
| MULTIMODE OM3/OM4 | F1ASXN-1A12-10S | QUICKNET HIGH DENSITY CASSETTE OM3 STANDARD FIBER STRAIGHT THROUGH |
| | F1ASXN-1A12-10F | QUICKNET HIGH DENSITY CASSETTE OM3 STANDARD FIBER - FLIPPED PAIR |
| | F1ASXO-1A12-10S | QUICKNET HIGH DENSITY CASSETTE OM3 OPTIMIZED FIBER STRAIGHT THROUGH |
| | F1ASXO-1A12-10F | QUICKNET HIGH DENSITY CASSETTE OM3 OPTIMIZED FIBER - FLIPPED PAIR |
| | F1ASZN-1A12-10S | QUICKNET HIGH DENSITY CASSETTE OM4 STANDARD FIBER STRAIGHT THROUGH |
| | F1ASZN-1A12-10F | QUICKNET HIGH DENSITY CASSETTE OM4 STANDARD FIBER - FLIPPED PAIR |
| | F1ASZO-1A12-10S | QUICKNET HIGH DENSITY CASSETTE OM4 OPTIMIZED FIBER STRAIGHT THROUGH |
| | F1ASZO-1A12-10F | QUICKNET HIGH DENSITY CASSETTE OM4 OPTIMIZED FIBER - FLIPPED PAIR |

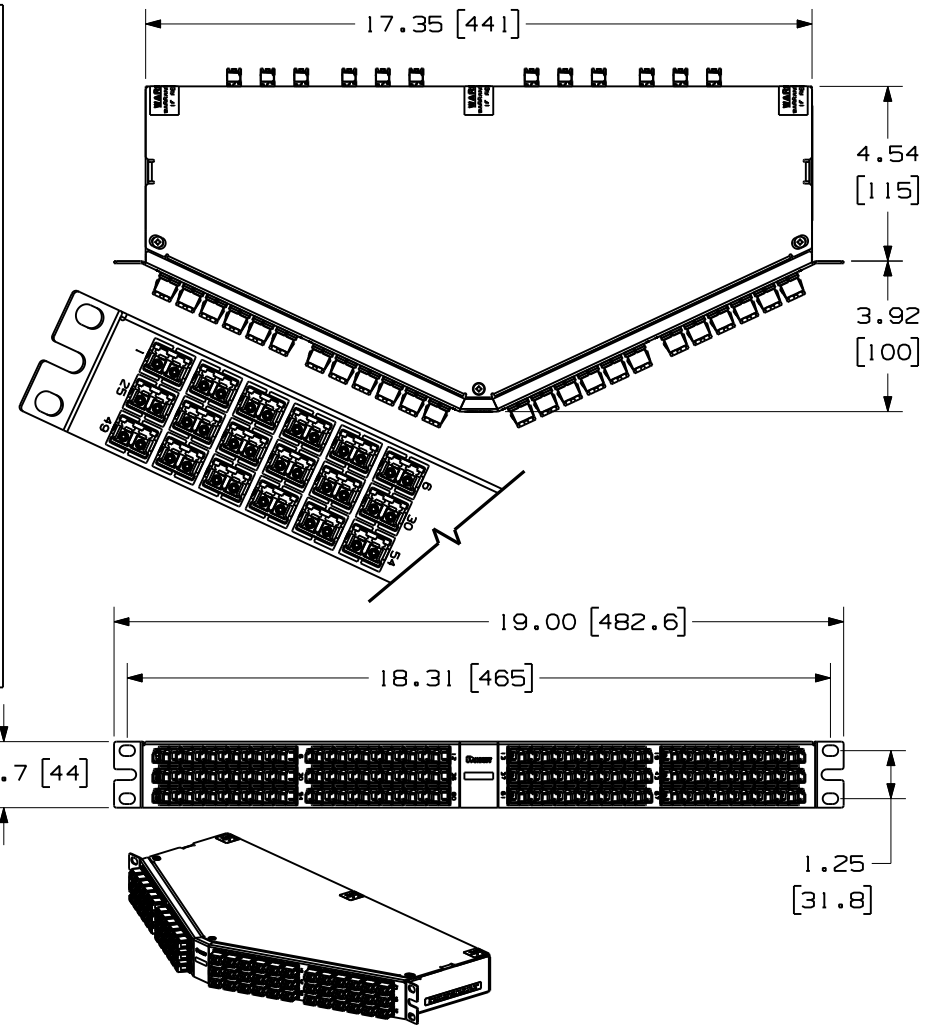


NOTES:

- SEE CURRENT CATALOG FOR PART NUMBER SUFFIXES TO INDICATE COLOR AND/OR PACKAGE QUANTITIES.
- SEE CATALOG FOR A COMPLETE LIST OF PARTS APPLICABLE FOR USE WITH THIS PRODUCT.
- EXCEPT FOR THE PART NUMBERS ENDING IN "F", THE HDQ CASSETTES LISTED ON THIS PRINT FOLLOW TYPE A ARRAY AS CITED IN TIA-568-C.3
- PART NUMBERS ENDING IN "F" INDICATE FLIPPED PAIRS. THE "F" OPTION REPLACES THE NEED FOR AN A-A PATCH CORD, ONLY REQUIRING TWO A-B PATCH CORDS IN THE METHOD A SYSTEM. REFERENCE TIA-568-C.0 FOR DETAILS ON METHOD A CONNECTIVITY.
- MATERIALS:
 - CASSETTE MATERIAL: ALUMINUM
 - ADAPTER: COMPOSITE PLASTIC
- ALL MATERIALS AND COMPONENTS USED MEET THE MATERIAL RESTRICTIONS OF RoHS, (EUROPEAN DIRECTIVE 2002/95/EC ON THE RESTRICTIONS OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITTEE.
- CASSETTE WEIGHT: 49.6oz [1406g]
- DIMENSIONS IN BRACKETS ARE METRIC

1RU HDQ SERIES 144 FIBER ANGLED CASSETTE
12 FIBER MPO TO LC WITH STANDARD LABELING
TYPE A ARRAY FOR METHOD A CONNECTIVITY
CUSTOMER DRAWING



PANDUIT™
CORP.
TINLEY PARK, ILL 60477



ALL DIMENSIONS ARE GIVEN IN INCHES,
UNLESS OTHERWISE SPECIFIED,
DIMENSIONAL TOLERANCES ARE:
(.X) (.XXX) ±.010 (0.3)
(.XX) ±.03 (0.8) ANGLES

DRAWING FILENAME
10F109AJ_DC/00B

SCALE
NONE

DRAWN BY
MC

REVIEW DRAWING NUMBERS

PART NO.
SEE TABLE

DATE
05-27-11

DRAWING NO.
10F109AJ-DC

SIZE
A

CHK'D
MTV

| REV | DATE | BY | CHK | DESCRIPTION | ECN | R | CUST | SUP | OTH |
|-----|----------|-----|-----|------------------------|-------------|-----|------|-----|-----|
| 01 | 02-07-12 | EFK | MTV | RELEASED TO PRODUCTION | 10F109AJ-DC | MTV | CHDE | | |