

Catalog Number: U1783-O-KK

Item Description: 200A 4T RL MTR DB PED

784572134287

Brand Name: Milbank

Type: Ringless Meter Socket

Application: Meter Socket

Standard: UL Listed

Voltage Rating: Up to 240 Volts Alternating Current

UPC Code:

Amperage Rating: 200 Ampere Continuous

Phase: 1 Phase

Frequency Rating: 60 Hertz

Cable Entry: Underground

Terminal: Single Mechanical Line Side and Single

Mechanical Load Side

Mounting: Pedestal

Enclosure: Type 3R, G90 Galvanized Steel with

Powder Coat Finish


Additional Specifications: Number of Jaws:4 Terminal

Hub Opening and Closing Plates:Plain Top

Bypass Provision: Horn Bypass

Number Positions: 2 Positions



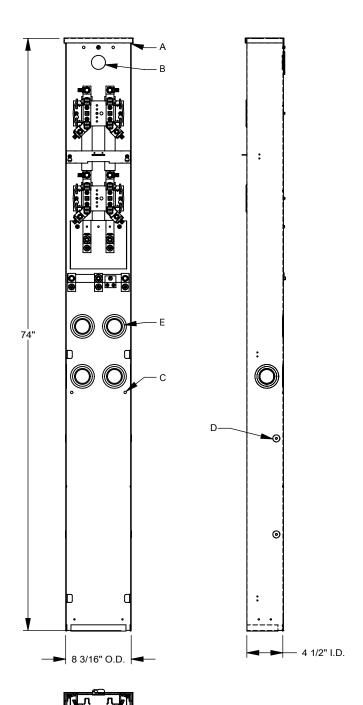



FEATURE TABLE		
ITEM	QTY	DESCRIPTION
Α	4	STD. MNTG. EMBOSS, NO HOLE
В	1	1.75 SOLID K.O.
С	4	5/16 SOLID K.O.
D	4	1/4, 1/2 CONC. K.O.
Е	6	11/4, 11/2, 2, 21/2 CONC, K.O.



Version:

All dimensions are +/- 1/16". Drawing views are not to scale.

1

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements prior to ordering or installing this equipment. This product must be installed by a licensed electrician. Installation of this equipment may require local electrical inspector approval.