






**Sec. 12**


**TERMINALS & CONNECTORS**

**Sealed Crimp & Solder Terminals  
Continued 12 - 10 Gauge Wire Range (Yellow)**

Actual Size	Wire Size	Auveco Part No.	Unit Pkg.
	3/8"	21274	10
	1/4" Female Slip-On	21282	10
	1/4" Male Slip-On	21283	10
	Butt Connector	21005	10
	16-14 Ga. to 12-10 Ga. Step down butt connector	21277	10

**Moisture Resistant Nylon Insulated Butt Connectors**

Protect electrical connections from corrosive environments: road chemicals, salt spray, etc. Insert wire and crimp twice (electrical and mechanical) at each end. No need for heat or chemicals.

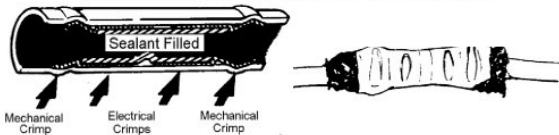

Auveco Part No.	Wire Range	Color	Unit Pkg.
13683	22-18 Ga.	Red	10
13684	16-14 Ga.	Blue	10
13685	12-10 Ga.	Yellow	10

**Heat-Shrinkable, Solder-Type Closed-End Connector**




Heat-shrinkable thermoplastic sleeve containing a spiral wound copper insert that is fitted with a pre-fluxed solder band. Easy installation: Insert stripped wires, then twist slightly. Twisting causes the copper insert to tightly grip, compress and hold the wires together. Apply heat.









**18716**

Insulated & Sealed Closed-End Connector  
Color Code: Green  
Wire Range: 22-14 Gauge  
Minimum Combination: 3 22 Gauge  
Maximum Combination: 1 14 Gauge & 1 22 Gauge  
UNIT PACKAGE: 10






**Solderless Terminals  
Non-Insulated  
22-18 Gauge Wire Range**

Actual Size	Wire Size	Auveco Part No.	Unit Pkg.
	#4-#6	5000	100
	#8-#10	5002	100
	Butt Connector	5044	100

**16-14 Gauge Wire Range**

Actual Size	Wire Size	Auveco Part No.	Unit Pkg.
	#4-#6	5003	100
	#8-#10	5005	100
	#12-1/4"	5006	100
	#4-#6	5014	100
	#8-#10	5015	100
	Butt Connector	5045	100

**16-14 Gauge Wire Range  
High Temperature**

Actual Size	Wire Size	Auveco Part No.	Unit Pkg.
	#8-#10	17491	50
	#12-1/4"	17492	50
	.187" Female	10724	25
	1/4" Female	5066	100
	1/4" Male	17490	50