



UPC Code : 078477381618

Country Of Origin : United States

RoHS Compliant : Yes



**Available Colors :**



Black



Brown



Gray



Ivory



Light Almond

## T5320-W

15 Amp Tamper-Resistant Duplex Outlet

15 Amp, 125 Volt, NEMA: 5-15R, Pole: 2, 3-Wire, Tamper-Resistant, Duplex Receptacle/Outlet, Straight Blade, Grounding, Quickwire Push-In & Side, Standards and Certifications: UL/CSA, Warranty: 2 Year Limited, NEC compliant – White

- SAFE – Tamper-resistant offers protection from electrical shocks
- DURABLE – Impact-resistant thermoplastic nylon construction
- EASY – Quickwire push-in and side wiring for easy installation
- CONVENIENT – TR symbol on strap assures they meet the latest NEC requirements

### Technical Information

Product Features

**Amperage** : 15 A

**Blade Type** : Straight Blade

**Color** : White

**Device Type** : Duplex Receptacle

**Feature** : Tamper-Resistant

**Grounding** : Grounding

**NEMA** : 5-15R

**Pole** : 2

**Standards and Certifications** : UL/CSA

**Termination** : Quickwire Push-In & Side

**Torque Range** : 14 – 18 in.-lbs

**Type** : Duplex Receptacle

**Voltage** : 125 VAC

**Warranty** : 2-Year Limited

**Wire** : 3

Standards and Certifications


**CSA C22.2 No. 42** : File 152105; Class 6233-01

**NOM** : NOM Certified


**UL 498** : File E13399

### Features and Benefits

- Terminal screws accept up to #12 AWG copper or copper-clad wire
- Quickwire push-in terminals accept #14 AWG solid copper wire only
- Shallow depth for maximum wiring room
- Heavy-gauge zinc-plated steel mounting strap
- Additional material added to strap to help reinforce and prevent excessive bending of the break-off tabs
- Shutter mechanism inside the receptacle blocks access to the contacts unless a two-prong plug is inserted, helping ensure hairpins, keys, etc., will be locked out
- TR symbol on strap assures they meet the latest NEC requirements
- Ultrasonic welding, heavy-duty construction offers long, trouble-free service life
- Limited 2-year warranty

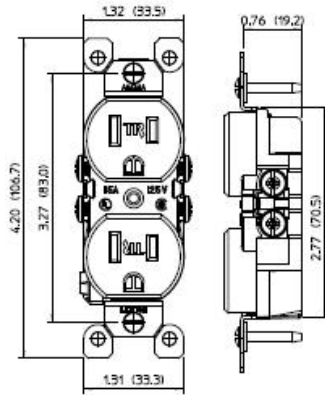

**Wiring Diagram**



5-15R

**SPECIFICATION SUBMITTAL**

JOB NAME:		CATALOG NUMBERS:	
<input type="text"/>		<input type="text"/>	
JOB NUMBER:			
<input type="text"/>		<input type="text"/>	

**Leviton Manufacturing Co., Inc.**

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday):

+1-800-824-3005

**Leviton Manufacturing of Canada, Ltd.**

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·

FAX: +1-800-824-3005 · [www.leviton.com/canada](http://www.leviton.com/canada)

**Leviton S. de R.L. de C.V.**

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-

1797 · [www.leviton.com.mx](http://www.leviton.com.mx)

Visit our Website at: [www.leviton.com](http://www.leviton.com)

© 2021 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

**Leviton has a global presence.**

If you would like to know where your local Leviton office is located please go to:

[www.leviton.com/international/contacts/](http://www.leviton.com/international/contacts/)

