

Location: _____




FS1720-FL

**12" X 12" X 6" FLOOR AREA AND INDIRECT
SANITARY WASTE DRAIN WITH FLANGE**

Specification: MIFAB Series FS1720-FL, 12" x 12" x 6" deep cast iron floor area and indirect sanitary waste drain complete with white acid resistant porcelain enamel coated interior and loose set grate and anchor flange with weepholes. Anti-splash aluminum dome strainer included.

Function: Used in kitchens, restaurants, grocery stores, hospitals, schools, and other areas that require a large volume sanitary drain. The anchor flange is engineered to receive water proofing membrane. Membrane clamps are recommended for use with the anchor flange (Suffix -C). The light duty grate is not suitable for foot traffic.

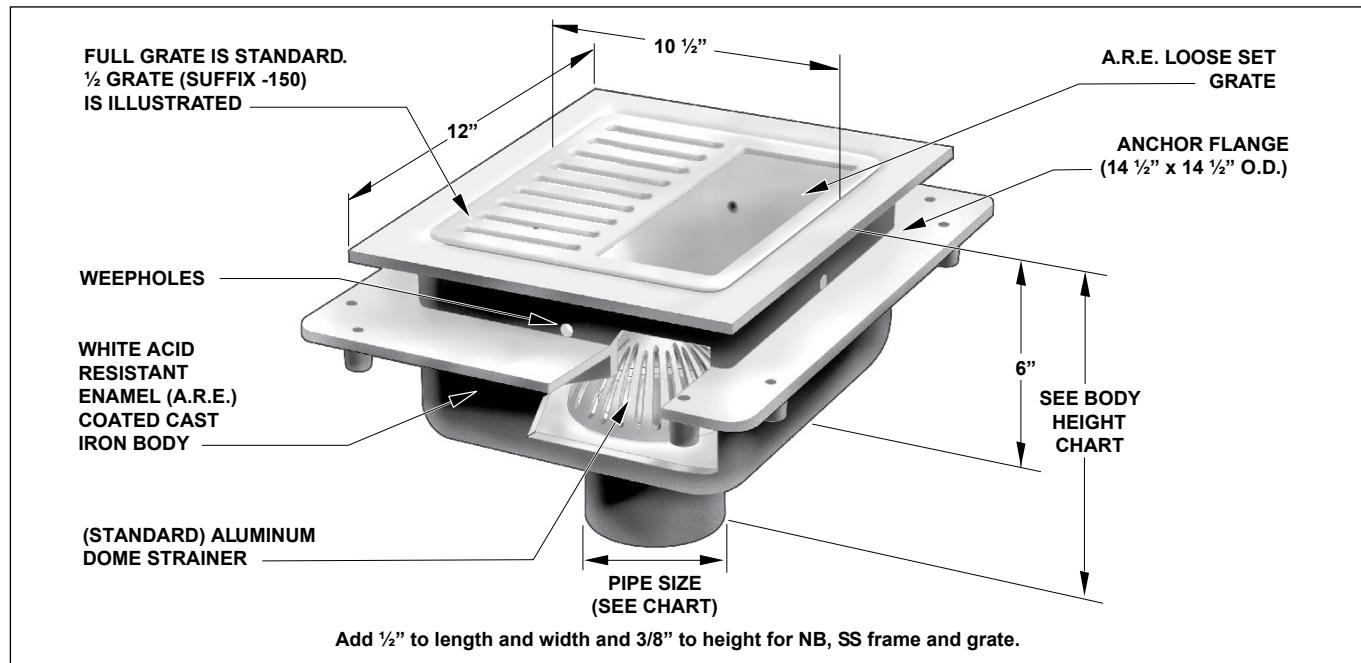

| PIPE SIZE | BODY HEIGHT | | | | |
|-----------|-------------------|--------------|---------------|------------------|-----------------------|
| | NO HUB (STANDARD) | PUSH ON (P) | THREADED (T) | INSIDE CAULK (X) | PVC (-30) / ABS (-31) |
| 2" (51) | 7 3/4" (197) | 7 3/4" (197) | *8 1/2" (216) | 8 5/8" (219) | *9 1/4" (235) |
| 3" (76) | 7 3/4" (197) | 7 3/4" (197) | *8 7/8" (225) | 8 5/8" (219) | *9 1/4" (235) |
| 4" (102) | 7 3/4" (197) | 7 3/4" (197) | *8 7/8" (225) | 8 5/8" (219) | *9 1/4" (235) |

*Indicates outlet size and connection available with transition outlet body only. Outlet sizes indicated by the * are available with the transition outlet body only

| SUFFIX | OPTIONAL VARIATIONS | SUFFIX | OPTIONAL VARIATIONS |
|---------------|--|------------|--|
| -1 | Nickel bronze frame and grate | -90 | Threaded side outlet |
| -3 | Stainless steel frame and grate | -90NH | No hub side outlet |
| -5 | Sediment bucket | -95 | Client logo (-1, -3 only) |
| -6 | Security screws (1, -3 only, T-20 Torx and pin) | -150 | 1/2" PVC grate |
| -7 | 1/2" trap seal primer connection | -175 | 3/4" PVC grate |
| -8 | Backwater valve (2", 3" or 4" only) | -BA | Buy American Act compliant product |
| -9 | Hinged grate (-3 only) | (Standard) | No hub outlet |
| -21 | Secondary flat stainless steel strainer | -C | Membrane clamp with hardware |
| -22 | Less grate | -F4 | 4" round funnel |
| see FS1920-FL | Stainless steel body (Type 304) | -F6 | 6" round funnel |
| see FS1920-FL | Stainless steel body (Type 316) | -FL | Anchor flange |
| -30 | PVC outlet | -G | 4" x 9" oval funnel |
| -31 | ABS outlet | -J | 3" x 1" oval funnel |
| -32 | Deep seal trap with flushing connection | -P | Push on outlet |
| -50 | A.R.E. coated cast iron funnel | -PA | Pennsylvania Steel Act compliant product |
| -51 | 2 1/2" round center hole in grate (-1, -3 only) | -T | Threaded outlet |
| -69 | Stainless steel sediment bucket | X | Inside caulk outlet |
| -83 | Stainless steel mesh screen over sediment bucket | -Z | Extended wide elastomeric flange (with -FL only) |

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____
Section No: _____
Schedule No: _____

Page No: _____
Contractor: _____
Purchase Order No: _____