




71974 - 4' ECONOMY WRAP

40W 120-277V 5000K

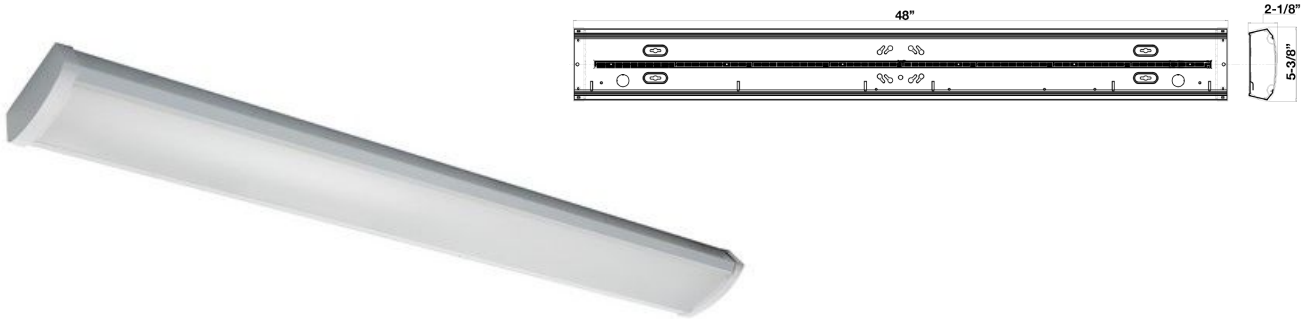


FEATURES:

- Color Temperature: 5000K
- Compatible with most 0-10V LED dimmers
- Heavy Gauge Steel Housing
- Simple Snap-On/Snap-Off Lens - No screws or tools
- PMMA Frosted Lens
- Baked Enamel Painted Steel Housing
- 2 KOs on Back
- 0-10V Dimmable
- Operating Temperature: -22°F - 104°F
- 50,000+ Hour LED Life Expectancy
- Surface Mounting Hardware Included
- Certification: UL; DLC
- IP20 Rated
- 5 Year Limited Warranty

Part#	Input/Wattage	Volts	Lumens	CCT	CRI	Lumens/Watt	Dimming	Light Pattern	DLC PRODUCT ID#:
71974	40W	120-277	4,800	5000K	83.4	126	0-10V	106° X 126°	PRHHWRM1

PHOTOMETRY

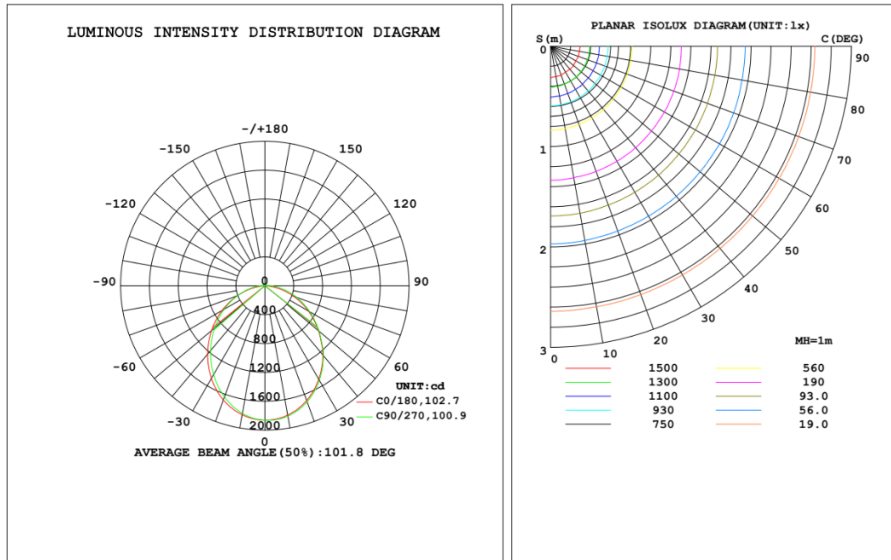



71974 - 4' ECONOMY WRAP

40W 120-277V 5000K

Technical Specifications:

Electrical:

Input Voltage: 120-277V

Current: 0.33A

Frequency: 50/60Hz

Power Factor: 0.99

THD: 6.8%

Product Parameters:

Input Watts: 40W

Lumens @ 40W: 4800

Efficacy: 126 Lumens per watt

50,000+ Hour L70 Life Span

CCT: 5000K

Chromacity Measurements:

Beam Angle: H106.8 V125.5

CRI: 83.4

R9: 11

Component Specifications:

LED: SMD3528

BUG: B1 U3 G1

120V 50-60HZ

Driver Output Volts: 42V DC

Driver Output Amps: 700 mA LED

Input Volts: 5.6V DC

LED Input Amps: 62.5 mA

2.5KV Surge Protection

Dimming: 0-10V

Operating Temperature:

Minimum Starting -22°F-104°F

Construction:

Baked Enamel Painted Steel

Housing Frosted PC Lens

IP20 Rated

Lens Material: PC Frosted Optics

Mounting: Surface

Mounts: N/A

Listings:

cULus

DLC 5.1 Standard

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).