

Makita®

3-1/2" FRAMING NAILERS

INTEGRATED 3-MODE SELECTOR SWITCH ALLOWS USER CONTROL OVER FIRING OPTIONS

Large Capacity Air Chamber for Increased Power to Drive Nails Varying in Length from 2" to 3-1/2"

Quick Two-Step Loading Process Reduces Downtime

Built-in Air Filter Minimizes Dust and Debris from Entering Tool

Retractable Hook Allows Tool to Remain Close-by but Never in the Way

Ideal for Framing, Sheathing, Decking, Fencing and Many Other Applications

PERFORMANCE




Integrated 3-mode selector switch (bounce, sequential, lock) allows user control over firing options

EFFICIENCY



Simply drop nails into the magazine and engage pusher lever for a quick 2-step loading process

DURABILITY

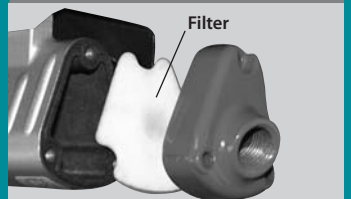

Built-in air filter minimizes dust and debris, prolonging life and minimizing maintenance

ACCURACY



"Tool-less" depth adjustment with 9 settings allows user to drive nails to the precise level on the wood's surface

Models
AN923
AN943

PNEUMATICS

3-1/2" FRAMING NAILERS

Models AN923 / AN943

FEATURES & BENEFITS

- Integrated 3-mode selector switch (bounce, sequential, lock) allows user control over firing options
- Built-in air filter minimizes dust and debris from entering tool
- "Tool-less" depth adjustment with 9 settings allows user to drive nails to the precise level on the wood's surface
- To prevent dry firing, tool stops when three nails remain in the magazine
- Large capacity air chamber increases power yet is compact enough to fit between 16" framing studs
- Retractable hook so tool can remain close-by but never in the way
- Sharp, pronounced spurs grip wood for controlled firing at an angle
- Durable rear loading aluminum magazine has large nail holding capacity
- Rubber bumpers protect the tool and surface from damage
- Exhaust port directs exhaust air away from user
- Rubber grips for better control and comfortable handling

STANDARD EQUIPMENT

- Oil Supply (181434-7)
- Safety Goggles (192517-8)
- Tool Hook (122742-7)

SPECIFICATIONS

	AN923	AN943
Operating Air Pressure	65 - 120 PSI	65 - 120 PSI
Nail Size	2" to 3-1/2" .113 - .162 Shank diameter (plastic or wire collated)	2" to 3-1/2" .113 - .131 Shank diameter (paper collated)
Magazine Capacity	64 - 74	60 - 84
Dimensions (L x W x H)	22" x 4-1/4" x 13-11/16"	17-7/8" x 4-1/4" x 14-3/8"
Net Weight	8.7 lbs.	8.7 lbs.
Shipping Weight	12.1 lbs.	11.9 lbs.
UPC Code	088381-07012-6	088381-07013-3

OPTIONAL ACCESSORIES

- Tool Repair Kit (193006-6)
- Premium Vinyl Air Hose
- 21° Round Head Strip Framing Nails
- Air Fittings



Size	3/Pkg. Part#	5/Pkg. Part#	10/Pkg. Part#
1/4" x 25'			1121-1
1/4" x 50'		1122-1	
1/4" x 100'	1123-1		
3/8" x 25'			VAH25
3/8" x 50'		VAH50	
3/8" x 100'	VAH100		


■ Industrial Rubber Air Hose



Size	3/Pkg. Part#	5/Pkg. Part#	10/Pkg. Part#
3/8" x 25'			RAH25
3/8" x 50'		RAH50	
3/8" x 100'	RAH100		




Type	Body	Size	Thread Style	2/Pkg. Part#
Automotive	1/4"	1/4"	Male	311008-A
		1/4"	Female	311004-A
		3/8"	Male	311009-A
		3/8"	Female	311005-A
Automotive	3/8"	1/4"	Male	311016-A
		1/4"	Female	311012-A
		3/8"	Male	311017-A
		3/8"	Female	311013-A
Industrial	1/4"	1/4"	Male	311006-A
		1/4"	Female	311002-A
		3/8"	Male	311007-A
		3/8"	Female	311003-A
Industrial	3/8"	1/4"	Male	311014-A
		1/4"	Female	311010-A
		3/8"	Male	311015-A
		3/8"	Female	311011-A



Model AN923



0 88381 07012 6



Model AN943



0 88381 07013 3

Makita offers a wide variety of accessories for Pneumatic tools. For a complete listing, please refer to the Makita General Catalog, or visit our website at makitatools.com, or call 1-800-4MAKITA.

All specifications subject to change without prior notice. All models and accessories subject to stock on hand.
 PNTF-0307 4M MA-0213-07 For more information, call 1-800-4MAKITA or visit makitatools.com



Makita U.S.A., 14930 Northam St., La Mirada, CA 90638