

McGuire Manufacturing Co., Inc.

60 Grandview Court Cheshire, Connecticut 06410 (203) 699-1801 Fax (203) 699-1813

customerservice@mcguiremfg.com mcguiremfg.com

PRODUCT SPECIFICATION


Part No.

LF2165CCLKECO

Compression x Compression Lavatory Supply

Job Name:

Submittal Number:

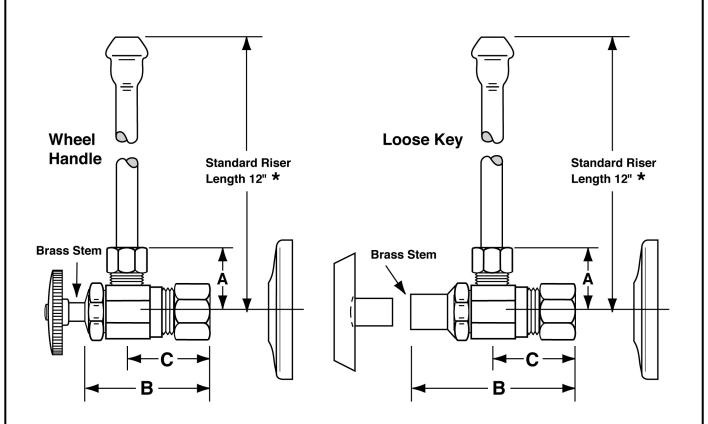

NO.	DESCRIPTION	ROUGHING MEASUREMENTS		
		A	В	C
LF2165CCLKECO	1/2" Nominal x 3/8" O.D.	1"	2-3/8"	1"

• Rated Operating Pressure: 20-125 PSI

• Rated Operating Temperature: 40-140°F

• Note: 180°F max. during temporary high-temperature system flush

LK designates Loose Key

* See options and accessories section for details on product variations.



ASME A112.18.1

Specifications:

Supply kit shall include lead free chrome plated supply brass stop valves with full turn brass stem, no plastic, (12, 15, 20) inch chrome plated risers and (shallow, deep, bell) (steel, brass) or (forged brass with set screw) flange. Inlet shall be (3/8, 1/2) inch IPS. Outlet shall be (3/8, 1/2) inch (IPS, compression). Supply kit shall be McGuire _______. Supply kit shall be certified by recognized authority and bear manufacturer and testing mark.



This product can expose you to chemicals including lead, which is known to the State of California to cause cancer, and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.