

# Media Air Cleaners



## PRODUCT DESCRIPTION

Rheem® Media Air Cleaners provide a clean, controlled indoor environment and are much more efficient than ordinary furnace filters. Rheem media filters consistently outperform the competition, due to their highly-efficient synthetic material, featuring extended-surface pleats that have been proven to have a higher dirt-holding capacity than competitive filters.

## FEATURES

- Wide variety of sizes: available in 16"x 25"x 7", 20"x 20"x 7", and 20"x 25"x 7" — offer dealers a variety of flexible applications.
- Outstanding Performance: Rheem Media boasts high MERV ratings, which means the filters effectively remove mold, spores, pollen, and other airborne contaminants.
- High Efficiency: An extended surface pleated filter with maximum dust-holding capacity and 100% electrostatically-charged synthetic fibers provide a very low resistance, enabling the heating and cooling system to run cleaner and more efficiently, while saving on energy bills.

## HOW MEDIA AIR CLEANERS WORK

The non-woven, pleated Rheem media filter traps particles as small as one micron, so clean air is circulated back into the home. Most common media filters (Figure 1) restrict airflow throughout the heating and cooling system, causing higher energy costs. This accumulation of airborne particles restricts airflow and makes the entire heating/cooling system work harder. Rheem media filters (Figure 2) capture and retain pollutants inside the filter, allowing air to flow freely through the system.




FIGURE 1  
Most Media Filters



FIGURE 2  
Rheem Media Filters

# RHEEM




## SPECIFICATIONS

Part Number	84-25050-01	84-25050-05	84-25050-06
Vendor Cross Reference	Air Bear, Space Guard P26F AC-1, Electro-Air	Air Bear 20x20	Air Bear 16x25
Rated Air Flow	2000 CFM (3398 M <sup>3</sup> /hr)	1400 CFM (2379 M <sup>3</sup> /hr)	1400 CFM (2379 M <sup>3</sup> /hr)
MERV Rating	8	8	8
Shipping Weight	20 lbs (9.07 kg)	16 lbs (7.2 kg)	16 lbs (7.2 kg)
Media Filter Size	5D x 20H x 24 $\frac{1}{4}$ W (127 x 508 x 616 mm)	5D x 20 $\frac{3}{4}$ H x 20W (127 x 508 x 527 mm)	5D x 16H x 24 $\frac{1}{4}$ W (127 x 406 x 616 mm)
Replacement Media Filter	54-25051-01 (3/pack)	54-25051-03 (4/pack)	54-25051-04 (3/pack)
Replacement Media Filter MERV 11 Rating	54-25051-14 (3/pack) 5D x 20H x 25W	—	—

## STATIC RESISTANCE

Part Number	84-25050-01	84-25050-05	84-25050-06
600 CFM (1019 M <sup>3</sup> /hr)	.03 in. WG 7.5 pascals	.04 in. WG 9.9 pascals	.04 in. WG 9.9 pascals
800 CFM (1359 M <sup>3</sup> /hr)	.05 in. WG 12.4 pascals	.08 in. WG 19.9 pascals	.08 in. WG 19.9 pascals
1000 CFM (1699 M <sup>3</sup> /hr)	.07 in. WG 17.4 pascals	.12 in. WG 29.8 pascals	.12 in. WG 29.8 pascals
1200 CFM (2039 M <sup>3</sup> /hr)	.10 in. WG 24.9 pascals	.18 in. WG 44.8 pascals	.18 in. WG 44.8 pascals
1400 CFM (2379 M <sup>3</sup> /hr)	.14 in. WG 34.8 pascals	.24 in. WG 59.7 pascals	.24 in. WG 59.7 pascals
1600 CFM (2718 M <sup>3</sup> /hr)	.18 in. WG 44.8 pascals	—	—
1800 CFM (3058 M <sup>3</sup> /hr)	.22 in. WG 54.7 pascals	—	—
2000 CFM (3398 M <sup>3</sup> /hr)	.27 in. WG 67.1 pascals	—	—

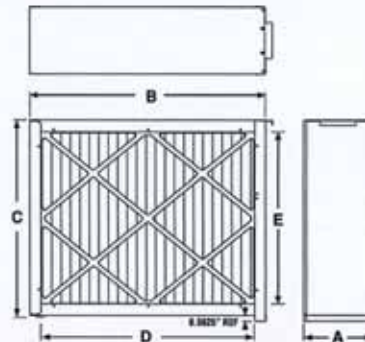

## UNIT DIMENSIONS

Part Number	84-25050-01	84-25050-05	84-25050-06
A	7 $\frac{1}{8}$ in 181 mm	7 $\frac{1}{8}$ in 181 mm	7 $\frac{1}{8}$ in 181 mm
B	24 $\frac{1}{4}$ in 632 mm	21 $\frac{1}{4}$ in 543 mm	24 $\frac{1}{4}$ in 632 mm
C	20 $\frac{1}{4}$ in 514 mm	19 in 483 mm	16 $\frac{1}{4}$ in 413 mm
D	22 $\frac{1}{2}$ in 572 mm	22 $\frac{1}{2}$ in 572 mm	22 $\frac{1}{2}$ in 572 mm
E	17 $\frac{1}{8}$ in 454 mm	17 $\frac{1}{8}$ in 454 mm	13 $\frac{1}{8}$ in 352 mm



Rheem® Air Cleaners have been tested using AnSi/ASHRAE 52.2-1999 standard testing procedures. Specifications are subject to change without notice.  
08-08/RT/HPG PRO-8151

4744 Island Ford Road  
Randleman, NC 27317  
336.495.6800 336.495.6867 fax