




**PROFESSIONAL-GRADE
ILLUMINATION TOOLS**



2015

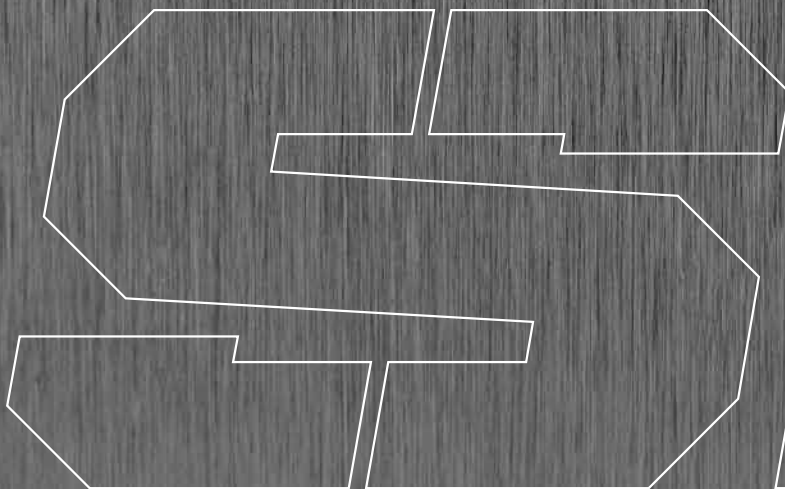

HEROES TRUST STREAMLIGHT®

THE LOYALTY AND TRUST THAT PUBLIC SAFETY AND THE MILITARY HAVE GIVEN STREAMLIGHT IS BASED ON YEARS OF TESTING IN THE FIELD, AND THE PROVEN PERFORMANCE EARNED BY CARRYING OUR LIGHTS IN DANGEROUS SITUATIONS. UNCOMPROMISING PRODUCT QUALITY. OUR STRIVING FOR EXCELLENCE AND ACCOUNTABILITY HAVE DRIVEN CONTINUOUS PRODUCT IMPROVEMENT AND NEW PRODUCT INNOVATION. THAT TRUST HAS LED TO GROWTH ACROSS MARKETS AND IS WHY A STREAMLIGHT IS ONE OF THE MOST RECOGNIZED PROFESSIONAL FLASHLIGHTS AND LANTERNS.



TOOLS NOT TOYS®

STREAMLIGHT MAKES TOOLS NOT TOYS, BUT YOU DON'T NEED TO BE RUSHING INTO A BURNING BUILDING, CHASING A SUSPECT OR LEADING A MOUNTAIN SEARCH PARTY TO BENEFIT FROM OUR TECHNOLOGIES. WE MAKE TOOLS FOR EVERYONE WHO NEEDS TO LIGHT THE DARKNESS, FROM OUTDOOR ENTHUSIASTS TO AUTO MECHANICS, TO INDUSTRIAL CONTRACTORS TO MILITARY PERSONNEL AND HOMEOWNERS. WE'RE ALWAYS COMING UP WITH WAYS TO MAKE LIGHTS BRIGHTER, LIGHTER, MORE COMPACT AND LONGER LASTING.

STREAMLIGHT

PROFESSIONAL-GRADE ILLUMINATION TOOLS

STREAMLIGHT COMPANY INFO

SL Line Overview	Pgs. 4-5
SL Shapes Illumination	Pgs. 6-7
SL USB Technology	Pgs. 8-9
SL Safety-Rated Products	Pgs. 46-57

RECHARGEABLE PRODUCTS

Stinger LED HL® Series	Pg. 12
Stinger® HPL™ Series	Pg. 13
Stinger® LED Series	Pg. 14
Ultrastinger®	Pg. 15
PolyStinger® Series	Pgs. 16-17
Stinger® Specialty Series	Pgs. 18-19
Strion® Series	Pgs. 20-21
SL Series	Pgs. 22-23
Portable Scene Light	Pgs. 26-27
E-Flood HL® LiteBox® HL™	Pgs. 28-29
E-Flood® LiteBox® // E-Flood® FireBox®	Pg. 30
E-Spot® LiteBox® // E-Spot® FireBox®	Pg. 31
Fire Vulcan® LED	Pg. 32
HID LiteBox®	Pg. 33
Waypoint® Series	Pgs. 34-35
The Siege® Series	Pgs. 36-37
Survivor® Series	Pgs. 40-41
Knucklehead® Series	Pgs. 44-45
ProTac HL® USB	Pg. 76
Stylus Pro® USB	Pg. 88
Clipmate® USB	Pg. 104

NON-RECHARGEABLE PRODUCTS

PolyTac 90® Series	Pg. 42
Vantage®	Pg. 43
Knucklehead® Haz-Lo® Series	Pgs. 48-49
Safety-Rated Headlamps	Pgs. 50-51
Safety-Rated ProPolymer® Series	Pgs. 52-57
Tactical Gun-Mount / TLR Series	Pgs. 60-71
Super Tac® X // TL-2® X	Pg. 70
Scorpion® HL // Scorpion® X // NightFighter® X	Pg. 71
PolyTac® Series	Pgs. 74-75
ProTac® Series	Pgs. 76-79
Sidewinder® Series	Pgs. 80-83
Buckmasters® Series // Camo Series	Pgs. 84-87
Stylus® Series	Pgs. 88-90
Stylus Reach® Series	Pg. 91
Headlamp Series	Pgs. 94-97
Twin-Task® Series	Pgs. 98-102
Specialty Series	Pg. 103
Pocket Lights	Pgs. 104-105
Lights For A Cause	Pgs. 106-107



STREAMLIGHT
Heroes Trust Streamlight®

// STAY CONNECTED WITH US:



LEADING THE INDUSTRY

WITH THE GREATEST VARIETY OF PROFESSIONAL GRADE LIGHTS:



STREAMLIGHT

PERFORMANCE. PERIOD.



POLYSTINGER DS® LED pg. 17



POLYSTINGER® LED pg. 17



STINGER® LITE PIPE pg. 18



STINGER® CLASSIC LED pg. 19



STRION LED HL® pg. 20



STRION® HPL™ pg. 21



STRION® LED pg. 21



SL-20L® pg. 22



SL-20LP® pg. 23



WAYPOINT® pg. 34



WAYPOINT® RECHARGEABLE pg. 35



THE SIEGE® pg. 37



SIEGE® AA pg. 37



SURVIVOR® pg. 41



POLYTAC 90® pg. 42



VANTAGE® pg. 43



KNUCKLEHEAD® FLOOD & SPOT MODELS pg. 45



KNUCKLEHEAD® HAZ-LO® MODELS pg. 49



3C PROPOLYMER® HAZ-LO® pg. 55



3AA PROPOLYMER® HAZ-LO® pg. 56



3N PROPOLYMER® LED pg. 57



TLR-1 HL®/TLR-2 HL® pg. 60



TLR-1®/TLR-1s pg. 61



TLR-2®/TLR-2s pg. 61



TLR-1® HPL™ pg. 62



TLR-1® GAME SPOTTER® pg. 63



SCORPION® HL pg. 73



SCORPION® X pg. 73



NIGHTFIGHTER® X pg. 73



POLYTAC 90® pg. 74



POLYTAC® pg. 75



POLYTAC® HP pg. 75



PROTAC HL® pg. 76



PROTAC HL® USB pg. 76



PROTAC HL® 3 pg. 77



PROTAC HL® HEADLAMP pg. 77



BUCKMASTERS® PACKMATE® pg. 84



BUCKMASTERS® TWIN-TASK® 2L pg. 84



BUCKMASTERS® CAMO TRIDENT® pg. 85



BUCKMASTERS® STYLUS PRO® CAMO pg. 85



CAMO ENDURO® pg. 87



STYLUS PRO® USB pg. 88



STYLUS PRO® REACH® pg. 88



TRIDENT® pg. 97



GREEN TRIDENT® pg. 97



BUCKMASTERS® TRIDENT® pg. 97



ENDURO® pg. 97



TWIN-TASK® 3C LED pg. 98



TWIN-TASK® 3C-UV LED pg. 98



TWIN-TASK® 3AA LED pg. 99



TWIN-TASK® 3AAA LASER LED pg. 99



CLIPMATE® USB pg. 104



EPU-5200™ (Light Not Included) pg. 104



CLIPMATE® pg. 105



THE LOGO™ pg. 105



KEY-MATE® pg. 105



NANO LIGHT® pg. 107



STREAMLIGHT

Heroes Trust Streamlight®

WE DON'T JUST MAKE FLASHLIGHTS, WE SHAPE ILLUMINATION.



GENERAL USE CIRCULAR

THE SIEGE® pg. 37 PERFORMANCE CHARACTERISTICS

- Optimal balance of candela and lumens
- Longest regulated run times
- The best value



HIGH-LUMEN + LONG-RANGE

STINGER® HPL™ pg. 13 PERFORMANCE CHARACTERISTICS

- High-candela beam
- Delivers long-range lighting
- Casts a bright peripheral beam


Whether we are engineering the highest performing rechargeable lights on the market, developing durable new lights for standard and hazardous tasks, or shaping our innovative beam patterns into hand-held, hands free, and even scene lighting, you can be sure you are always getting industry-leading illumination at a great value.



LARGE AREA SCENELIGHT

PORTABLE SCENE LIGHT pg. 27 PERFORMANCE CHARACTERISTICS

- High-lumen beam
- Delivers maximum illumination
- Provides a good level of candela

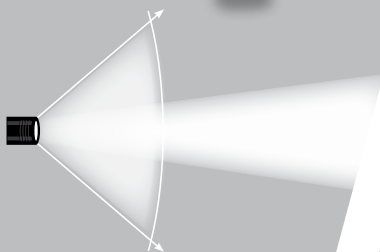

THE USB INNOVATION CONTINUES... MORE LIGHTS AND A NEW PORTABLE POWER UNIT FOR EVEN MORE CONVENIENCE.

We're expanding our family of USB-rechargeable lights to offer you more convenience and added versatility. There are now five USB-rechargeable Streamlight products, including a penlight, a small clip-on light, headlamp, high-lumen light and a portable power unit.

Rechargeability saves money over the lifetime of a flashlight. You won't have to keep buying batteries or worry about having batteries on-hand. These lights offer a quick, easy, convenient way to recharge - simply by connecting to a USB port, an AC wall adaptor or using a USB charger that plugs into your vehicle's on-board USB port.

PROTAC HL® USB Pg. 76

The ProTac HL USB is incredibly bright and features new multiple power source capability. It runs on either our lithium ion rechargeable battery or aftermarket lithium ion 18650 rechargeable battery or CR123 batteries. It recharges by connecting to a USB port, so it's easy to charge on the go. Anti-rattle battery compartment keeps batteries securely and quietly in place and doesn't need a battery carrier.

Since most of us have a cell phone, laptop, tablet, or some mobile device that charges this way, and many newer vehicles include a USB port, it's easy to keep these lights charged. Just plug them in the same way you charge the other devices you rely on every day. And because our Streamlight USB-rechargeable lights can also be plugged into any AC/USB wall adaptor, you can easily charge them at home or on the go.

When a power outage strikes - a time when you really need a good flashlight - you can recharge your light in your vehicle or grab a charge from a laptop or tablet - or the new EPU-5200™. It's quick, easy, and convenient.



EPU-5200™ ELECTRONIC POWER UNIT Pg. 104

We've made it easier than ever to keep your USB flashlights and mobile devices powered up and ready. You can clip the electronic power unit to a vest and take it anywhere. It's lightweight, yet rugged and durable to stand up to almost anything. And it's also a flashlight! IPX4 water-resistant.



OUR USB-RECHARGEABLE LIGHTS CURRENTLY INCLUDE:

CLIPMATE® USB Pg. 104

This small, compact, multi-function dual LED light clips to your pocket or cap for hands-free use. It features both a bright white light and a night vision red light. A flexible, extension cable lets you target the beam where you need it. It recharges by plugging into a USB port with its built-in charge tab or optional AC wall adaptor.



STYLUS PRO® USB Pg. 88

The powerful Stylus Pro® penlight has become a staple for all kinds of professionals who need a dependable light that's easily accessible at all times. The new rechargeable USB model saves money on batteries and, with routine recharging, it's always ready when needed. Its ingenious sliding metal sleeve protects the USB port and it's fully regulated for 70 lumens over 3.5 hours.

DOUBLE CLUTCH™ USB Pg. 94

This dual-power, dual function, dual output headlamp gives you the flexibility of using either a USB-rechargeable battery or 3 AAA alkaline batteries. It also lets you choose either a spot or a flood beam, both with high and low mode.



RECHARGEABLE COMPACT

STINGER/STRION SERIES
// STREAMLIGHT 2015

"MY STINGER DS LED
WAS RUN OVER
AGAIN AND AGAIN ON A MAJOR HIGHWAY,
BUT IT'S STILL SHINING!"

Officer Robert Willmon
Lufkin, TX

// TELL US YOUR STORY ... 

USE THIS EASY COMPARISON CHART TO CHOOSE THE BEST LIGHT FOR YOU BASED ON THE FEATURES THAT YOU NEED!

BEAM PATTERN


SPECS

HIGH MODE PERFORMANCE SHOWN. FOR SPECS IN OTHER MODES, SEE MODEL PAGES.

STINGER DS[®] LED
STINGER[®] LED



TRADITION SERIES




OUTPUT: 350 lumens
INTENSITY: 24,000 candela
BATTERY: NiMH or NiCd
BEAM DISTANCE: 310 meters
RUN TIME: 2 hours
DS SIZE: 8.85" x 1.62" x 1.17"
(22.48 x 4.11 x 2.97 cm)
DS WEIGHT: 12.8 oz (364 g)
COLOR: Black

STINGER DS[®] HPL™
STINGER[®] HPL™



HPL SERIES




OUTPUT: 740 lumens
INTENSITY: 48,000 candela
BATTERY: NiMH
BEAM DISTANCE: 438 meters
RUN TIME: 1.25 hours
DS SIZE: 9.65" x 2.2" x 1.17"
(24.51 x 5.59 x 2.97 cm)
DS WEIGHT: 14 oz (396 g)
COLOR: Black

STINGER DS[®] LED HL[®]
STINGER[®] LED HL[®]



HL SERIES




OUTPUT: 640 lumens
INTENSITY: 22,000 candela
BATTERY: NiMH
BEAM DISTANCE: 297 meters
RUN TIME: 1.25 hours
DS SIZE: 8.85" x 1.62" x 1.17"
(21.96 x 4.11 x 2.97 cm)
DS WEIGHT: 12.8 oz (364 g)
COLOR: Black

STRION[®] LED



TRADITION SERIES




OUTPUT: 260 lumens
INTENSITY: 10,000 candela
BATTERY: Li-ion
BEAM DISTANCE: 200 meters
RUN TIME: 2 hours
SIZE: 5.9" x 1.25" x .95"
(14.99 x 3.18 x 2.41 cm)
WEIGHT: 5.2 oz (148 g)
COLOR: Black or Pink

STRION[®] HPL™



HPL SERIES




OUTPUT: 615 lumens
INTENSITY: 40,000 candela
BATTERY: Li-ion
BEAM DISTANCE: 400 meters
RUN TIME: 2 hours
SIZE: 7" x 2.2" x .95"
(17.78 x 5.59 x 2.41 cm)
WEIGHT: 7.1 oz (202 g)
COLOR: Black

STRION[®] LED HL[®]



HL SERIES




OUTPUT: 500 lumens
INTENSITY: 10,000 candela
BATTERY: Li-ion
BEAM DISTANCE: 200 meters
RUN TIME: 1 hour
SIZE: 5.90" x 1.25" x .95"
(14.99 x 3.18 x 2.41 cm)
WEIGHT: 5.2 oz (148 g)
COLOR: Black

STINGER/STRION
SERIES
// STREAMLIGHT 2015

RECHARGEABLE COMPACT

STINGER SERIES // STREAMLIGHT 2015

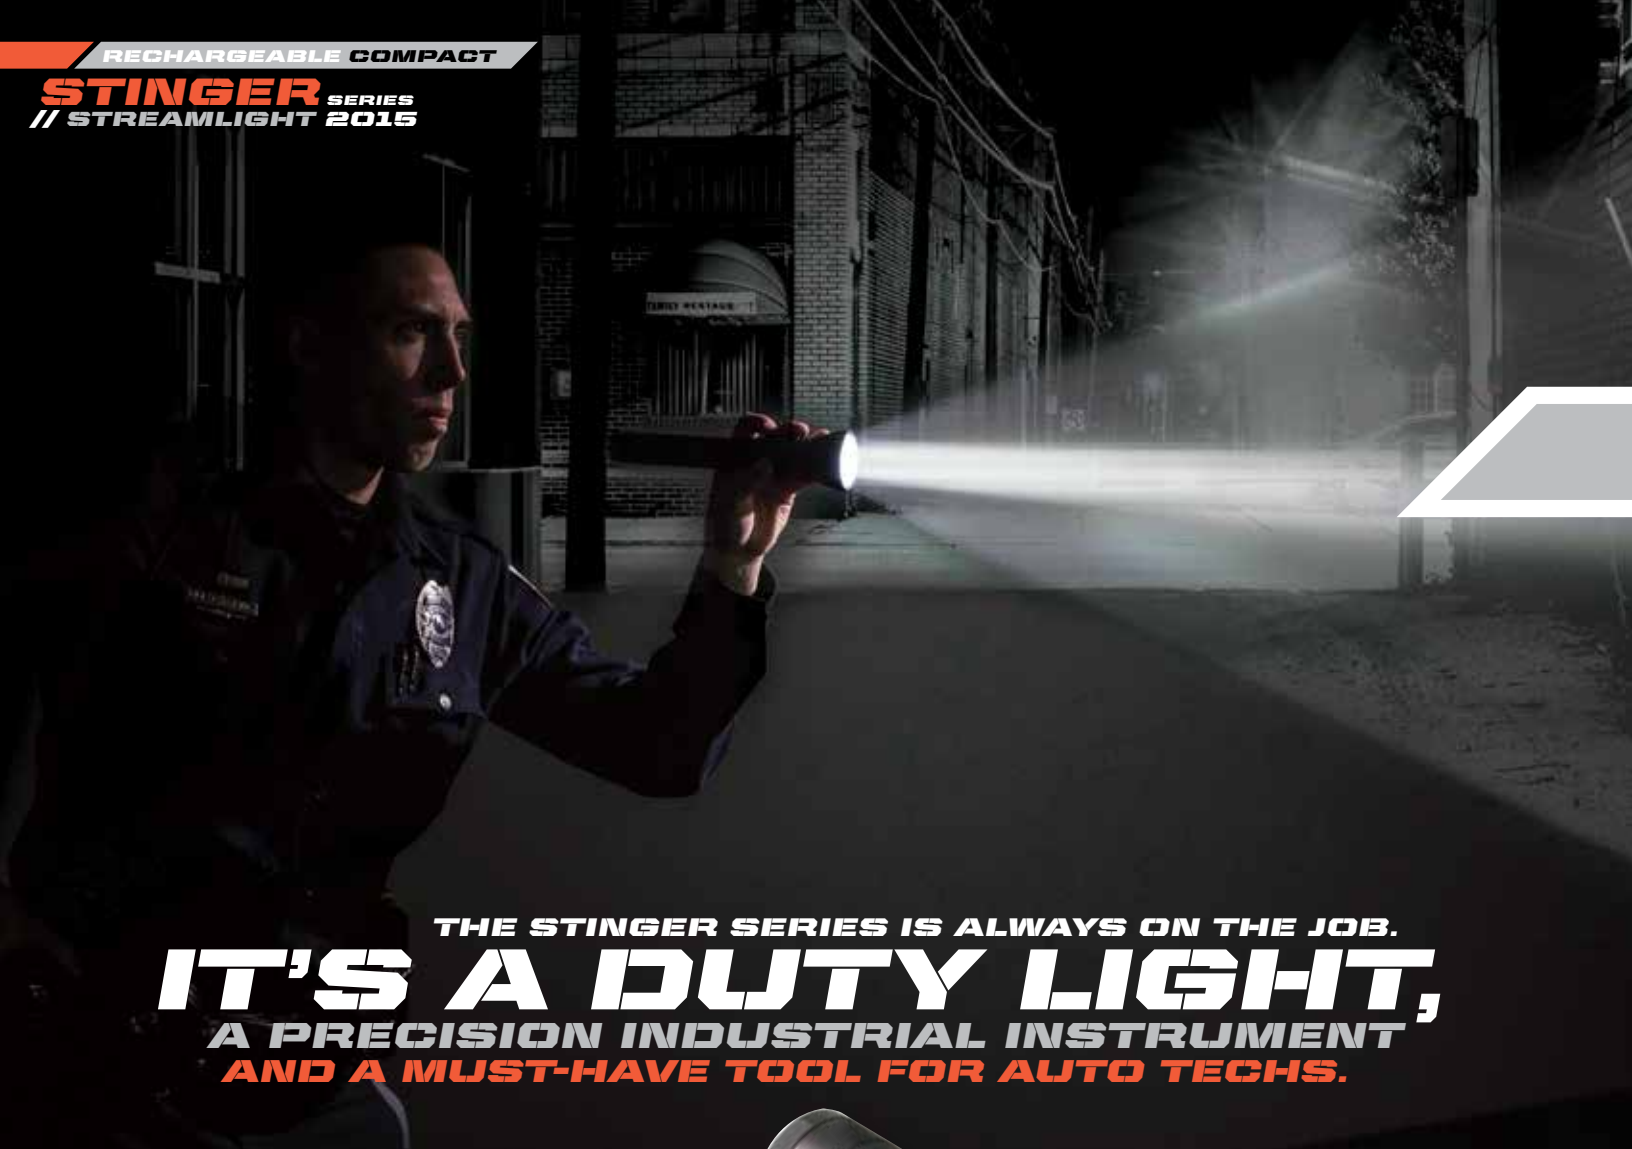


THE STINGER SERIES IS ALWAYS ON THE JOB.
IT'S A DUTY LIGHT,
A PRECISION INDUSTRIAL INSTRUMENT
AND A MUST-HAVE TOOL FOR AUTO TECHS.

STINGER DS LED HL® STINGER LED HL®

Everything you love about the Stinger with high lumens for a brighter, wider beam. Now you can explore corners, tunnels, alleyways, cars, and more. The DS model has two full-feature, independent switches (tail switch and head switch), so you can use either or both.

STINGER DS LED HL	STINGER LED HL
BATTERY: 3-cell, 3.6V NiMH sub-C	BATTERY: 3-cell, 3.6V NiMH sub-C
DS SIZE: 8.85" x 1.62" x 1.17" (22.48 x 4.11 x 2.97 cm)	SIZE: 8.41" x 1.62" x 1.17" (21.36 x 4.11 x 2.97 cm)
DS WEIGHT: 12.8 oz (364 g)	WEIGHT: 12.4 oz (352 g)
COLOR: Black	COLOR: Black

DS LED HL	LED HL
75454	75430 with 120V AC/12V DC - 2 holders
75455	75431 with 120V AC
75456	75432 with 12V DC
75458	75434 with 120V AC/12V DC - 1 PiggyBack
75457	75433 with 120V AC/12V DC - Fast Charge 2 holders
75453	75429 without Charger

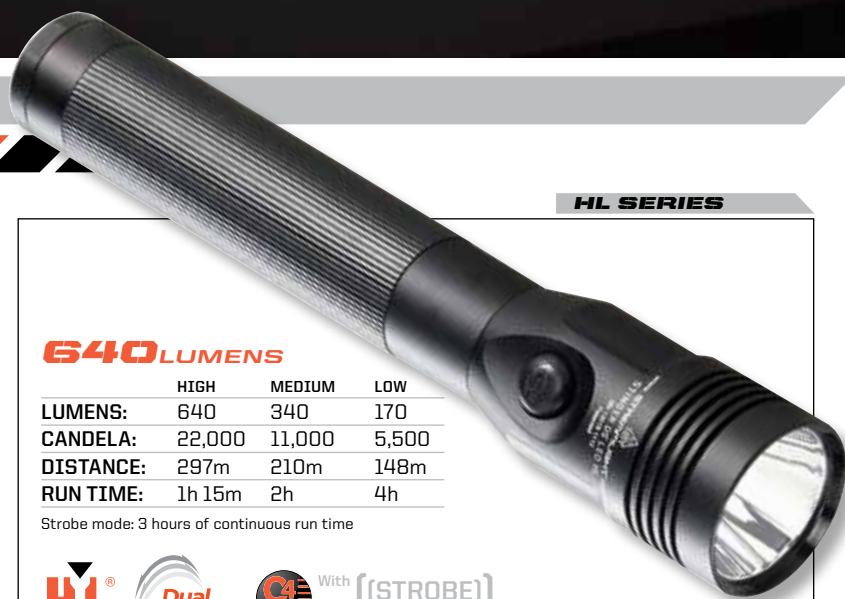

HL SERIES

640 LUMENS

	HIGH	MEDIUM	LOW
LUMENS:	640	340	170
CANDELA:	22,000	11,000	5,500
DISTANCE:	297m	210m	148m
RUN TIME:	1h 15m	2h	4h

Strobe mode: 3 hours of continuous run time



With [(STROBE)]
Double tap switch to activate.

AVAILABLE IN BOTH DUAL SWITCH AND STANDARD STYLES

Special Features:

- Scratch-resistant, unbreakable, O-ring sealed lens.
- IPX4-rated for water-resistance.
- 1 meter impact-resistance tested.

**NEW STINGER
DUTY+TACTICAL
HOLSTER**

ALL-NEW DUTY HOLSTER

- Super-tough nylon construction
- Quick, Easy Access

STINGER DS[®] HPL[™]
STINGER[®] HPL[™]

	HIGH	MEDIUM	LOW
LUMENS:	740	380	190
CANDELA:	48,000	24,000	12,000
DISTANCE:	438m	310m	219m
RUN TIME:	1h 15m	2h 30m	4h 30m

Strobe mode: 3 hours of continuous run time

NEW FOR 2015
740 LUMENS



With **[(STROBE)]**
Double tap switch to activate.

AVAILABLE IN BOTH DUAL SWITCH AND STANDARD STYLES

Special Features:

- Scratch-resistant, unbreakable, O-ring sealed lens.
- IPX4-rated for water-resistance.
- 1 meter impact-resistance tested.

HPL SERIES

The Stinger[®] HPL[™] has combined two intensely bright illumination patterns into one multi-tasking beam giving you clarity up-close and deep into the horizon. Its long distance beam reaches 438 meters and the 740 lumen beam provides side to side visibility to fill in up-close areas and corners.

STINGER DS HPL

BATTERY: 3-cell, 3.6V NiMH sub-C

DS SIZE: 9.65" x 1.62" x 1.17"
(24.51 x 4.11 x 2.97 cm)

DS WEIGHT: 14.0 oz (396 g)

COLOR: Black

STINGER HPL

BATTERY: 3-cell, 3.6V NiMH sub-C

SIZE: 9.23" x 1.62" x 1.17"
(23.44 x 4.11 x 2.97 cm)

WEIGHT: 13.6 oz (385 g)

COLOR: Black

DS HPL	HPL	
75863	75763	with 120V AC/12V DC - 2 holders
75861	75761	with 120V AC
75899	75799	with 12V DC
75882	75782	with 120V AC/12V DC - 1 PiggyBack
75885	-	with 120V AC/12V DC - Fast Charge
75980	75900	without Charger

SEE STINGER ACCESSORIES P. 14 & 15

**STINGER DS[®] LED**
STINGER[®] LED

The Stinger LED and Stinger DS LED deliver the optimal balance of performance and value with the longest run time in the Stinger family. The DS model provides both a tailcap and head switch.

STINGER DS LED**BATTERY:** NiMH or NiCd**DS SIZE:** 8.85" x 1.62" x 1.17"
(22.48 x 4.11 x 2.97 cm)**DS WEIGHT:** 12.8 oz (364 g)**COLOR:** Black**STINGER LED****BATTERY:** NiMH or NiCd**SIZE:** 8.41" x 1.62" x 1.17"
(21.36 x 4.11 x 2.97 cm)**WEIGHT:** 12.4 oz (352 g)**COLOR:** Black

DS LED	LED	(NiCd Battery unless otherwise noted)
75813	75713	with 120V AC/12V DC Steady Charge-Black
75811	75711	with 120V AC Steady Charge-Black
75832	75732	with 120V AC/12V DC Steady PiggyBack [®] -Black
75835	75735	with 120V AC/12V DC Fast Charge-Black
75812	75712	with 12V DC Steady Charge-Black
75853	75753	with 12V DC Steady Charge (NiMH)-Black
75810	75710	without Charge-Black
75970	75960	without Charger (NiMH)-Black

350 LUMENS

	HIGH	MEDIUM	LOW
LUMENS:	350	175	85
CANDELA:	24,000	12,000	6,000
DISTANCE:	310m	219m	155m
RUN TIME:	2h	3h 45m	7h 15m

Strobe mode: 5.5 hours of continuous run time

With **[(STROBE)]**
Double tap switch to activate.

AVAILABLE IN BOTH DUAL SWITCH AND STANDARD STYLES

Special Features:

- Scratch-resistant, unbreakable, O-ring sealed lens.
- IPX4-rated for water-resistance.
- 1 meter impact-resistance tested.

**TRADITION SERIES****STINGER ACCESSORIES**

	5 Unit Bank Charger	2.5 hr Fast Charger	Fast PiggyBack [®] Charger	Steady PiggyBack [®] Charger	Li-Ion Battery Stick	NiCd Battery Stick	NiMH Battery Stick	12V Cig Charge Cord	12V DC2 Charge Cord	120 AC Charge Cord
Stinger DS LED HL	75400	75103	75276	75275	75176	-	75375	22051	22050	22311
Stinger LED HL	75400	75103	75276	75275	75176	-	75375	22051	22050	22311
Stinger DS HPL	75400	75103	75276	75275	75176	75175	75375	22051	22050	22311
Stinger HPL	75400	75103	75276	75275	75176	75175	75375	22051	22050	22311
Stinger DS LED	75400	75103	75276	75275	75176	75175	75375	22051	22050	22311
Stinger LED	75400	75103	75276	75275	75176	75175	75375	22051	22050	22311
UltraStinger LED	75400	75103	75276	75275	-	-	77375	22051	22050	22311

FAR REACHING BEAM + 1,100 LUMENS... THERE'S A REASON IT'S CALLED THE ULTRASTINGER LED.

ULTRASTINGER® LED

We pumped up the brightness to give the new UltraStinger LED a piercing 1,100 lumens. But that's not all. It now has a farther-reaching beam, TEN-TAP® programming for its multiple intensities and strobe; plus we added a rubber sleeve for a better grip. It's IPX4 rated for water resistance and it works with existing Stinger® chargers and accessories.

ULTRASTINGER LED

BATTERY: 5-cell, 6V Ni-MH sub-C

SIZE: 11.82" x 2.37" x 1.19"
(30 x 6.01 x 3 cm)

WEIGHT: 19.9 oz (564 g)

COLOR: Black

ULTRASTINGER LED

77553 with AC/DC Steady Charge-Black

77554 with AC/DC Fast Charge-Black

77551 with AC Steady Charge-Black

77552 with AC Fast Charge-Black

77555 with DC Steady Charge-Black

77556 with DC Fast Charge-Black

77550 without Charger-Black

	HIGH	MEDIUM	LOW
LUMENS:	1,100	350	90
CANDELA:	65,000	21,000	5,000
DISTANCE:	510m	290m	141m
RUN TIME:	1h 30m	4h 30m	16h

Strobe mode: 3h 15m of continuous run time

NEW FOR 2015
1,100 LUMENS



TEN-TAP® programmable switch allows user selection of one of three different programs:

- High/medium/low with strobe (factory default)
- High only without strobe
- High/medium/low without strobe



	Leather Plain Holster	Leather Weave Holster	Std. Nylon Holster	Loop Nylon Holster	Duty Holster	Ring Holder	Red Flip Lens	Green Flip Lens	Blue Flip Lens	Red Wand	White Wand	Blue Wand	Yellow Wand	Glow in the Dark Wand
Stinger DS LED HL	75133	75134	75927	75928	88053	75906	75115	75117	75116	75903	75908	75902	75904	75913
Stinger LED HL	75133	75134	75927	75928	88053	75906	75115	75117	75116	75903	75908	75902	75904	75913
Stinger DS HPL	-	-	75910	75928	88053	75906	-	-	-	75946	75949	75947	75948	75950
Stinger HPL	-	-	75910	75928	88053	75906	-	-	-	75946	75949	75947	75948	75950
Stinger DS LED	75133	75134	75927	75928	88053	75906	75115	75117	75116	75903	75908	75902	75904	75913
Stinger LED	75133	75134	75927	75928	88053	75906	75115	75117	75116	75903	75908	75902	75904	75913
UltraStinger LED	-	-	75910	75928	88053	75906	-	-	-	78903	78908	-	78904	78913

BUILT FOR DURABILITY AND PERFORMANCE.

POLYSTINGER® LED HAZ-LO®

If you're working in a potentially hazardous location, this is the light you need. It provides lots of bright, white light, yet it's intrinsically safe, with a Class I, Div. 1 rating. It has an O-ring sealed, unbreakable, scratch-resistant lens. It's IPX4-rated for water-resistance, and 3 meter impact-resistance tested.

POLYSTINGER LED HAZ-LO**BATTERY:** 4-cell, 4.8V NiCd sub-C**SIZE:** 10.2" x 1.76" x 1.34"
(25.9 x 4.47 x 3.4 cm)**WEIGHT:** 13.5 oz (382 g)**COLOR:** Black or Yellow**POLYSTINGER LED HAZ-LO**

76442	120V AC/12V DC-Black
76412	120V AC/12V DC-Yellow
76411	12V DC-Yellow
76441	12V DC-Black
76410	Without Charger-Yellow
76440	Without Charger-Black

TRADITION SERIESLanyard Ring
with lanyard for tail cap.

	HIGH	LOW
LUMENS:	130	50
CANDELA:	15,000	5,700
DISTANCE:	245m	151m
RUN TIME:	4h	12h

Moonlight mode: 20 days of continuous run time

Intrinsic Safety for Haz. Loc.

Cl. I, II; Div.1 Gr.CD6

Cl. III; 138C (T3C)

Non-Incendive: CL.I Div.2 Gr.ABCD

Product is tested per
ANSI/NEMA FL-1 2009 standard

LISTED ANSIUL 913

Special Features:

- Non-conductive, corrosion-resistant body.
- IPX4-rated for water-resistance.
- 3 meter impact-resistance tested.

POLYSTINGER ACCESSORIES



	5 Unit Bank Charger	5 Unit Bank Fast Charger	10 hr Charger	2.5 hr Fast Charger	Fast PiggyBack® Charger	Steady PiggyBack® Charger	12V Cig Charge Cord	12V DC2 Charge Cord	120 AC Charge Cord
PolyStinger LED HAZ-LO	75400	75401	75100	75103	—	—	22051	22050	22311
PolyStinger DS LED	75400	75401	75100	75103	75276	75275	22051	22050	22311
PolyStinger LED	75400	75401	75100	75103	75276	75275	22051	22050	22311



POLYSTINGER DS[®] LED POLYSTINGER[®] LED

Intense brightness, long-range and long run time in a durable nylon polymer housing. It's the ideal combination of power, performance and durability. The DS model has the convenience of two full-function, independent switches; one on the head and a tail switch.

POLYSTINGER DS LED

BATTERY: 3-cell, 3.6V NiCd sub-C. Available NiMH sub-C.

DS SIZE: 8.64" x 1.76" x 1.21"
(21.95 x 4.47 x 3.07 cm)

DS WEIGHT: 11.9 oz (338 g)

DS COLOR: Black

POLYSTINGER LED

BATTERY: 3-cell, 3.6V NiCd sub-C. Available NiMH sub-C.

SIZE: 8.07" x 1.76" x 1.21"
(20.50 x 4.47 x 3.07 cm)

WEIGHT: 11.5 oz (326 g)

COLOR: Black or Yellow

DS LED	LED	(NiCd Battery unless otherwise noted)
-	76163	120V AC/DC 2 Holders-Yellow
76813	76113	120V AC/DC 2 Holders-Black
-	76161	120V AC-Yellow
76811	76111	120V AC-Black
-	76162	12V DC-Yellow
-	76199	12V DC-Yellow (NiMH) Battery
76812	76112	12V DC-Black
76849	76149	12V DC-Black-(NiMH) Battery
-	76182	120V AC/DC 1 PiggyBack Holder-Yellow
76832	76132	120V AC/DC 1 PiggyBack Holder-Black
-	76185	120V AC/DC Fast Charge-2 holders-Yellow
76835	76135	120V AC/DC Fast Charge-2 holders-Black
-	76166	120V AC/DC Fast Charge-1 PiggyBack-Yellow
-	76116	120V AC/DC Fast Charge-1 PiggyBack-Black
-	76160	Without Charger-Yellow
-	76203	Without Charger-Yellow-(NiMH) Battery
76810	76110	Without Charger-Black
76850	76150	Without Charger-Black-(NiMH) Battery

TRADITION SERIES



	HIGH	MEDIUM	LOW
LUMENS:	385	195	95
CANDELA:	26,000	13,000	6,500
DISTANCE:	322m	228m	161m
RUN TIME:	2h	3h 45m	7h 15m

Strobe mode: 5.5 hours of continuous run time



AVAILABLE IN BOTH DUAL SWITCH AND STANDARD STYLES

Special Features:

- Scratch-resistant, unbreakable, O-ring sealed lens.
- IPX4-rated for water-resistance.
- 3 meter impact-resistance tested.



	NiCd Battery Stick	NiMH Battery Stick	Leather Plain Holster	Leather Weave Holster	Std. Nylon Holster	Loop Nylon Holster	Ring Holder	Red Wand	White Wand	Blue Wand	Yellow Wand	Glow in the Dark Wand
PolyStinger LED HAZ-LO	76375	-	-	-	-	75928	75906	-	-	-	-	-
PolyStinger DS LED	75175	75375	75133	75134	75927	75928	75906	75933	75938	75932	75934	75943
PolyStinger LED	75175	75375	75133	75134	75910	75928	75906	75933	75938	75932	75934	75943

THE STANDARD AND THE EVOLUTION.

STINGER® LITE PIPE

Ultra-thin rechargeable work light features 8 LEDs. Its head-mounted, push-button switch and removable, rotating hook can hang almost anywhere. Thin enough to fit into the tightest spots. Available as a complete unit or, if you have a xenon Stinger, you can buy the Lite Pipe kit to convert it to a Stinger Lite Pipe.

STINGER LITE PIPE

BATTERY: 3-cell, 3.6V NiCd sub-C. Available NiMH sub-C.

SIZE: 19.62" x 1.5" x 1.07"
(49.84 x 3.81 x 2.71 cm)

WEIGHT: 12.3 oz (339 g)

COLOR: Black

NiCd	NiMH	
75684	75685	with 120V AC/DC Steady Charge
75652	-	with 120V AC
75654	-	with 120V AC/DC PiggyBack Steady Charge
75650	75651	without Charger
75951	Stinger Lite Pipe Kit (For use with existing Xenon Stinger)	

LUMENS:	220
RUN TIME:	3h 25m



Special Features:

- Scratch-resistant, cone.
- IPX4-rated for water-resistance.
- 1 meter impact-resistance tested.



Stinger Lite Pipe Kit
(Works with Xenon Stingers manufactured after 2002)

STINGER ACCESSORIES



	5 Unit Bank Charger	5 Unit Bank Fast Charger	10 hr Charger	2.5 hr Fast Charger	Fast PiggyBack® Charger	Steady PiggyBack® Charger	12V Cig Charge Cord	12V DC2 Charge Cord	120V AC Charge Cord
Stinger Lite Pipe	75400	75401	75100	75103	75276	75275	22051	22050	22311
Stinger Classic LED	75400	75401	75100	75103	75276	75275	22051	22050	22311

"YOUR LIGHTS HAVE BEEN ON MY BELT FOR 15 YEARS. NOT ONCE HAVE THEY FAILED!"

I recently made the big mistake of ordering and using a competitor's product. It was a huge mistake. I have since returned completely and totally to Streamlight. Your lights are the toughest and most reliable on the market and I am proud to carry them with me on duty and off. For 15 years, your lights have been on my belt and not once have they ever failed. Thank you for all the great products.

Sincerely,
Sergeant Philip Freeman
Apache Junction Police Department

// TELL US YOUR STORY ...



STINGER[®] CLASSIC LED

So many people loved the size, shape and feel of the original Stinger xenon model that we updated it to a powerful, durable, rechargeable LED flashlight. It produces 390 lumens on high, a smooth beam and lots of peripheral light.

STINGER CLASSIC LED

BATTERY: 3-cell, 3.6V NiCd sub-C. Available NiMH sub-C.

SIZE: 7.65" x 1.60" x 1.08"
(19.43 x 4.06 x 2.74 cm)

WEIGHT: 11.1 oz (315 g)

COLOR: Black

NiCd	NiMH	
75662	—	with 120V AC/DC - 2 Holders
75663	—	with 120V AC
75664	75675	with 12V DC
75666	—	with 120V AC/DC - 1 PiggyBack Holder
75665	—	with 120V AC/DC Fast Charger - 2 Holders
75660	75661	without Charger



	HIGH	MEDIUM	LOW
LUMENS:	390	210	100
CANDELA:	13,200	6,500	3,100
DISTANCE:	230m	161m	111m
RUN TIME:	1h 45m	3h 45m	6h 45m

Strobe mode: 5 hours of continuous run time



Special Features:

- IPX4-rated for water-resistance.
- 1 meter impact-resistance tested.



	NiCd Battery Stick	NiMH Battery Stick	Leather Plain Holster	Leather Weave Holster	Std. Nylon Holster	Loop Nylon Holster	Ring Holder	Red Wand	White Wand	Blue Wand	Yellow Wand	Glow in the Dark Wand
Stinger Lite Pipe	75175	75375	—	—	—	75928	75906	—	—	—	—	—
Stinger Classic LED	75175	75375	75133	75134	75910	75928	75906	75933	75938	75932	75934	75943

LITTLE

IN STATURE, BIG IN LIGHT.

STRION LED HL®

The power like a Stinger HL in a more compact Lithium Ion rechargeable flashlight. It even fits long-gun mounts. Casts a bright white beam that spreads out to illuminate an entire area. You'll see what's in front of you and what may be hiding in the corners.

STRION LED HL

BATTERY: Lithium-ion with on-board safety control circuit. 3.75V, 2000mAh minimum.

SIZE: 5.90" x 1.25" x .95"
(14.99 x 3.18 x 2.41 cm)

WEIGHT: 5.2 oz (148 g)

COLOR: Black

STRION LED HL

74752	with 120V AC/12V DC - 2 holders
74751	with 120V AC/12V DC - 1 holder
74755	with 120V AC/12V DC - 1 holder
74753	with 120V AC
74754	with 12V DC
74750	without Charger
74509	Strion LED HL with grip - with 120V AC

500 LUMENS

	HIGH	MEDIUM	LOW
LUMENS:	500	250	125
CANDELA:	10,000	5,000	2,500
DISTANCE:	200m	141m	100m
RUN TIME:	1h	2h	3h 30m

Strobe mode: 2.5 hours of continuous run time

**Special Features:**

- IPX4-rated for water-resistance.
- 2 meter impact-resistance tested.

STRION ACCESSORIES

	6 Unit Bank Charger 120V	6 Unit Bank Charger DC	Charger Holder	Li-ion Battery Stick	12V Cig Charge Cord	12V DC2 Charge Cord	120V AC Charge Cord	Rail Mount	Vertical Grip
Strion LED HL	74400	74401	74102	74175	22051	22050	22311	74200	69114
Strion HPL	74400	74401	74102	74175	22051	22050	22311	74200	69114
Strion LED	74400	74401	74102	74175	22051	22050	22311	74200	69114

	HIGH	MEDIUM	LOW
LUMENS:	615	320	160
CANDELA:	40,000	20,000	10,000
DISTANCE:	400m	283m	200m
RUN TIME:	1h	2h	3h 45m

Strobe mode: 2.5 hours of continuous run time



NEW FOR 2015
615 LUMENS
With **(ISTROBE)**
C4 LED Double tap switch to activate.

Special Features:

- Scratch-resistant, unbreakable, O-ring sealed lens.
- IPX4-rated for water-resistance.
- 2 meter impact-resistance tested.

HPL SERIES

Lightweight and ultra-compact, yet extremely powerful. It throws its long beam far out in the distance while casting plenty of peripheral light along the way. Features three intensities plus strobe. Rechargeable battery and powerful illumination result in one of the lowest operating costs of any flashlight. Easy, one-handed operation with multi-function push-button tailswitch.

STRION HPL

BATTERY: Lithium-ion with on-board safety control circuit. 3.75V, 2000m Ah minimum.

SIZE: 7" x 2.2" x .95"
(17.78 x 5.59 x 2.41 cm)

WEIGHT: 7.1 oz (202 g)

COLOR: Black

STRION HPL

74501	with 120V AC/12V DC-1 Holder-Black
74502	with 120V AC/12V DC-2 Holders-Black
74503	with 120V AC-Black
74504	with 12V DC-Black
74500	without Charger-Black

	HIGH	MEDIUM	LOW
LUMENS:	260	130	65
CANDELA:	10,000	5,000	2,500
DISTANCE:	200m	141m	100m
RUN TIME:	2h	4h	7h 30m

Strobe mode: 5.5 hours of continuous run time



260 LUMENS
With **(ISTROBE)**
C4 LED Double tap switch to activate.

Special Features:

- 2 meter impact-resistance tested.
- Anti-roll ring included.

TRADITION SERIES

A powerful value that's perfect for the broadest range of lighting needs. IPX4-rated for water-resistance. 2 meter impact-resistance tested. Anti-roll ring included. Optional model with adjustable ring provides a sure-grip for easy one-handed operation.

STRION LED

BATTERY: Lithium-ion with on-board safety control circuit. 3.75V, 2000m Ah minimum.

SIZE: 5.9" x 1.25" x .95"
(14.99 x 3.18 x 2.41 cm)

WEIGHT: 5.2 oz (148 g)

COLOR: Black

STRION LED

74301	with 120V AC/12V DC-1 Holder-Black
74302	with 120V AC/12V DC-2 Holders-Black
74303	with 120V AC-Black
74304	with 12V DC-Black
74308	with 120V AC/12V DC-Black
74300	without Charger-Black
74309	with Grip Ring 120V AC-Black
74350	with 120V AC/12V DC-1 Holder-Pink



	Leather Plain Holster	Leather Weave Holster	Std. Nylon Holster	Nylon Option Holster	Tactical Holster	Red Flip Lens	Green Flip Lens	Blue Flip Lens	Red Wand	White Wand	Blue Wand	Yellow Wand	Glow in the Dark Wand
Strion LED HL	74059	74060	-	85905	88051	85115	85117	85116	74903	-	74902	-	74913
Strion HPL	-	-	75910	-	88051	-	-	-	75946	75949	75947	75948	75950
Strion LED	74059	74060	-	85905	88051	85115	85117	85116	74903	-	74902	-	74913

**SL-20L®**

Full-size, professional grade light that delivers the intense brightness and run times you need for a wide variety of jobs.

SL-20L

BATTERY: 5-cell, 6V NiCd sub-C. Available with NiMH sub-C.

SIZE: 13.1" x 2.5" x 1.5"
(33.3 x 6.35 x 3.81 cm)

WEIGHT: 1 lb 11.2 oz (770 g)

COLOR: Black

NiCd	NiMH	
20603	20703	with 120V AC/DC-2 Sleeves-Black
20601	20701	with 120V AC-Black
20602	20702	with 12V DC-Black
20600	20700	without Charger-Black

C4 LED With **[(STROBE)]**
Double tap switch to activate.



	HIGH	MEDIUM	LOW
LUMENS:	350	160	10
CANDELA:	60,000	27,000	1,000
DISTANCE:	490m	329m	63m
RUN TIME:	2h	4h	50h

Strobe mode: 4 hours of continuous run time

Special Features:

- Unbreakable, scratch-resistant, O-ring sealed lens.
- IPX4-rated for water-resistance.
- 1 meter impact-resistance tested.

SL ACCESSORIES

Our legacy products remain available (i.e. SL-20X, SL-20XP)
Please see www.streamlight.com for our full product offering.

	5 Unit Bank Charger 120v	5 Unit Bank Charger DC	Charger Sleeve	12V Cig Charge Cord	12V DC Charge Cord	120V AC Charge Cord
SL-20L	21400	21401	22052	22051	22050	22311
SL-20LP	21400	21401	22052	22051	22050	22311

STREAMLIGHT STORIES...

"IN OVER 15 YEARS, I'VE DROPPED MY SL-20X PLENTY OF TIMES, BUT IT'S NEVER LET ME DOWN!"

"My Streamlight SL-20X has been working with me in a steel mill nearly every day for over 15 years. It's hard to imagine harsher conditions anywhere else. This light has been dropped off of 40' crane runways, into sluiceways and pits (to name a few things), seen extremes of hot and cold, and banged around every way imaginable. Although it looks a bit weathered, it still works like new."

Richard C. Burns Jr.
Highspire, PA

SL-20LP®

All the power and performance of our SL-20L® in a durable, nylon, polymer lightweight housing.

SL-20LP


BATTERY: 5-cell, 6V NiCd sub-C. Available with NiMH sub-C.

SIZE: 13.2" x 2.5" x 1.5"
(33.5 x 6.35 x 3.81 cm)

WEIGHT: 1 lb 4.8 oz (590 g)

COLOR: Black, Yellow or Orange

NiCd	NiMH	
25223	25323	with 120V AC/12V DC 2 Sleeves - Yellow
25203	25303	with 120V AC/12V DC 2 Sleeves - Black
25213	25313	with 120V AC/12V DC 2 Sleeves - Orange
25221	25321	with 120V AC - Yellow
25201	25301	with 120V AC - Black
25211	25311	with 120V AC - Orange
25222	25322	with 12V DC - Yellow
25202	25302	with 12V DC - Black
25212	25312	with 12V DC - Orange
25220	25320	without Charger - Yellow
25200	25300	without Charger - Black
25210	25310	without Charger - Orange

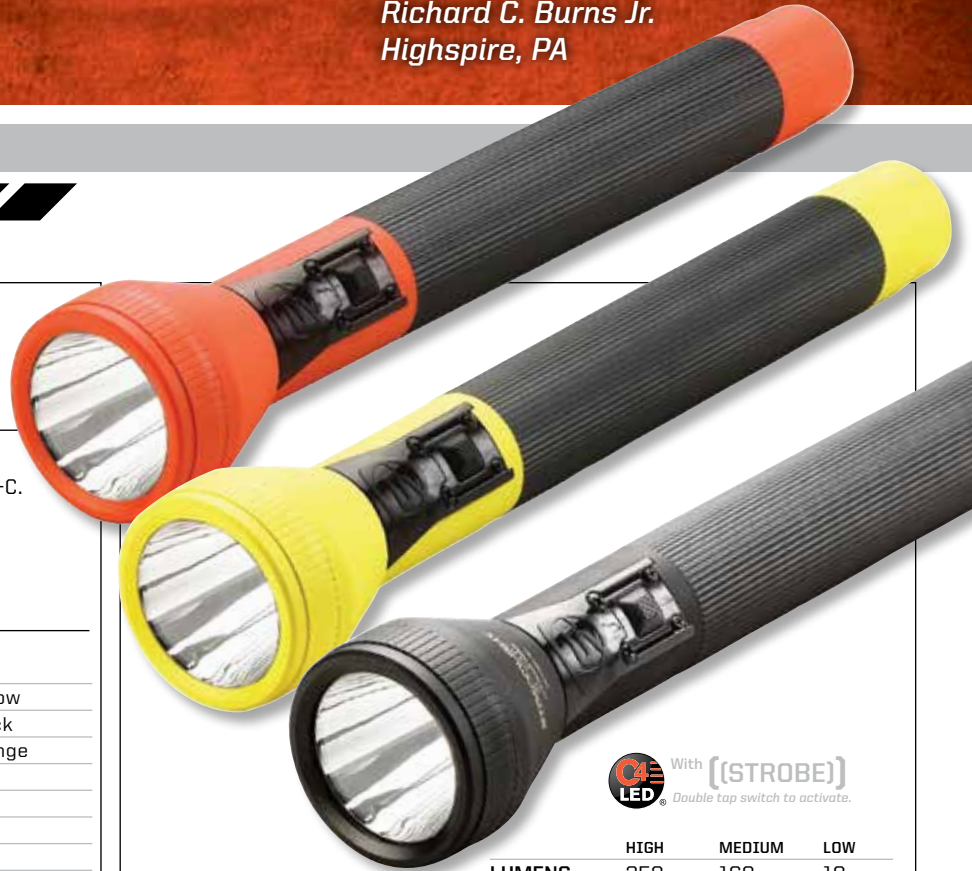

	HIGH	MEDIUM	LOW
LUMENS:	350	160	10
CANDELA:	60,000	27,000	1,000
DISTANCE:	490m	329m	63m
RUN TIME:	2h	4h	50h

Strobe mode: 4 hours of continuous run time

Special Features:

- Unbreakable, scratch-resistant, O-ring sealed lens.
- IPX4-rated for water-resistance.
- 1 meter impact-resistance tested.



	NiCd Battery Stick	NiMH Battery Stick	Ring Holder	Std. Nylon Holster	Red Wand	White Wand	Blue Wand	Yellow Wand	Glow in the Dark Wand
SL-20L	77175	77375	22911	25090	22511	22517	22512	22519	22513
SL-20LP	77175	77375	22911	25090	22511	22517	22512	22519	22513

RECHARGEABLE LANTERNS

LANTERN SERIES
// STREAMLIGHT 2015



STREAMLIGHT TASK-SPECIFIC TECHNOLOGY:
CHOOSE THE LIGHT INTENSITY ALLOWING YOU TO
CHOOSE THE RIGHT LIGHT FOR THE JOB.


USE THIS EASY COMPARISON
CHART TO CHOOSE THE BEST
LIGHT FOR YOU BASED ON THE
FEATURES THAT YOU NEED!

BEAM STYLE

SPECS

HIGH MODE PERFORMANCE SHOWN.
FOR PERFORMANCE IN OTHER
MODES, SEE MODEL PAGES.

PORTABLE SCENE LIGHT




OUTPUT: 3,600 lumens
INTENSITY: 31,000 candela
BEAM DISTANCE: 352 meters
RUN TIME: 5 hours
SIZE: 22" x 6.5" x 11"
(55.88 x 16.5 x 27.9 cm)
WEIGHT: 25 lb (11.3 kg)
COLOR: Yellow

E-FLOOD® LITEBOX® HL™



HL SERIES




OUTPUT: 3,600 lumens
INTENSITY: 31,000 candela
BEAM DISTANCE: 352 meters
RUN TIME: 2 hours
SIZE: 12.3" x 5.1" x 7.7"
(31 x 13 x 19 cm)
WEIGHT: 10.4 lb (4.7 kg)
COLOR: Orange

**E-FLOOD® LITEBOX®
E-FLOOD® FIREBOX®**




OUTPUT: 615 lumens
INTENSITY: 4,000 candela
BEAM DISTANCE: 126 meters
RUN TIME: 8 hours
SIZE: 11.5" x 5.1" x 7"
(29.2 x 13 x 17.8 cm)
WEIGHT: 7 lbs 14.4 oz (3.58 kg)
COLOR: Orange, Yellow, or Beige

**E-SPOT® LITEBOX®
E-SPOT® FIREBOX®**




OUTPUT: 540 lumens
INTENSITY: 55,000 candela
BEAM DISTANCE: 469 meters
RUN TIME: 7 hours
SIZE: 11.5" x 5.1" x 7"
(29.2 x 13 x 17.8 cm)
WEIGHT: 7 lbs 14.4 oz (3.58 kg)
COLOR: Orange, Yellow, or Beige

FIRE VULCAN® LED



OUTPUT: 145 lumens
INTENSITY: 80,000 candela
BEAM DISTANCE: 566 meters
RUN TIME: 3 hours
SIZE: 7.5" x 5" x 6.5"
(19.05 x 12.7 x 16.51 cm)
WEIGHT: 1 lb 13.6 oz (839 g)
COLOR: Orange

HID LITEBOX®



OUTPUT: 3,350 lumens
INTENSITY: 1,000,000 candela
BEAM DISTANCE: 2,000 meters
RUN TIME: 1.75 hours
SIZE: 14.9" x 5.1" x 8.8"
(38 x 13 x 23 cm)
WEIGHT: 10 lbs 1.6 oz (4.6 kg)
COLOR: Orange or Black

LANTERNS
SERIES
// STREAMLIGHT 2015



LIGHT UP THE WORLD ANYWHERE YOU WANT.

PORTABLE SCENE LIGHT

Our newest portable scene light provides rapid deployment on site, and it goes anywhere. With its 90° swivel neck, it's easy to shine light into the most out-of-the-way place. Equipped with a high-performance light head, identical to the E-Flood® HL, that extends to 72" within seconds. It provides 3 levels of lighting and substantial run time to last through several shifts, even days. The unique diffuser lets you select a flood or spot beam in all three levels. It's designed to adapt to tight spaces, but rugged enough to be stable in wide open terrain or steps. The regulated light provides consistent output throughout the life of the battery. It's an indispensable tool for first responders, construction crews, and utility workers.

PORTABLE SCENE LIGHT

BATTERY: Zero-maintenance 12V, 14.4 Ah sealed lead acid. Can also be powered by 12V DC or AC power cord.


SIZE: 22" x 6.5" x 11"
(55.88 x 16.5 x 27.9 cm)

WEIGHT: 25 lb (11.3 kg)

COLOR: Yellow

PORTABLE SCENE LIGHT

45670 120V AC/12V DC Portable Scene Light - Yellow

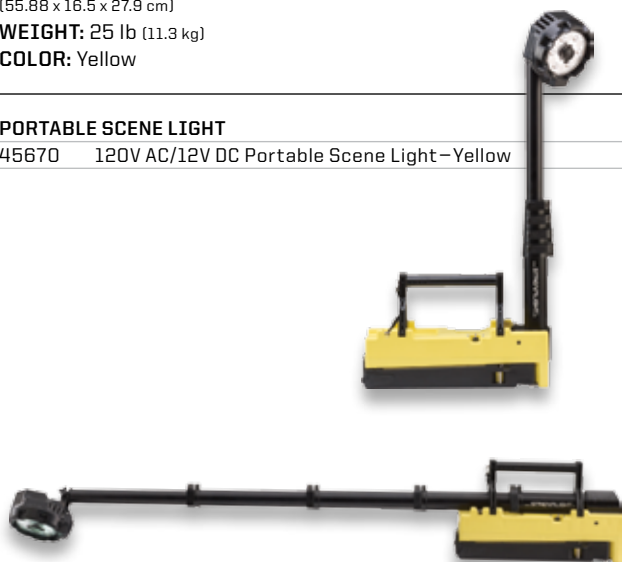

	HIGH	MEDIUM	LOW
LUMENS:	3,600	2,400	1,100
CANDELA:	31,000	20,000	11,000
DISTANCE:	352m	283m	210m
RUN TIME:	5h	9h	18h



HL SERIES

Full extension to 72" with the stabilization legs fully deployed and locked in less than 30 seconds

Cord is built into the pole avoiding snags during deployment

Balanced design; lead acid batteries provide ballast and stability

Special Features:

- IP67 rated; dust-tight and waterproof to 1 meter for 30 minutes.
- Pole extends to 72"; cord built into pole to avoid snags.
- Runs on AC or DC power source.



RECHARGEABLE LANTERNS

E-FLOOD SERIES
// STREAMLIGHT 2015



THE E-FLOOD HL
DELIVERS **FULL**
ILLUMINATION
FLOOD OR SPOT.

HL SERIES

The intense brightness of its 3600 lumens stretches from side to side and floods an entire area with light. Unique diffuser lets you select from a flood and spot lens in all three lighting modes. 90° swivel neck lets you aim light where it's needed. Ideal for illuminating a rescue scene, an entire plant floor or any site that requires a large flood beam. The portability and full illumination is perfect for underground construction.

E-FLOOD LITEBOX HL

BATTERY: Zero-maintenance 12V, 4.4 Ah sealed lead acid. Can also be powered by 12V DC power cord.

SIZE: 12.3" x 5.1" x 7.7"
(31 x 13 x 19 cm)

WEIGHT: 10.4 lb (4.7 kg)

COLOR: Orange

E-Flood HL LiteBox

45661 120V AC/12V DC, shoulder strap & mounting rack - Orange

45665 Vehicle Mount System, 12V DC direct wire rack, shoulder strap - Orange

45660 without Charger - includes shoulder strap - Orange

	HIGH	MEDIUM	LOW
LUMENS:	3,600	2,400	1,200
CANDELA:	31,000	20,000	11,000
DISTANCE:	352m	283m	210m
RUN TIME:	2h	4h	8h



NFPA

Rack meets requirements of NFPA 1901-14.1.11.2 (2003) mounted in any position



Special Features:

- Six super-bright C4® LEDs
- Unbreakable, scratch-resistant, O-ring sealed lens.
- Provides regulated light output throughout battery life.

LANTERN ACCESSORIES

Our legacy products remain available. Please see www.streamlight.com for our full product offering.

Mounting Racks	Fits All	Charge Cords	Fits All	Upgrade Kits for LiteBox/FireBox	PN	Shoulder Straps	Fits All	Battery for	PN
Standard Mounting Rack—Orange	45070	12V CIG	22051	E-Spot Upgrade	45845	Quick Release Strap	44050	E-Flood LiteBox HL	45630
Standard Mounting Rack—Yellow	45072	12V DC	22050	E-Flood Upgrade	45842	Shoulder Strap	45232	E-Flood LiteBox	45937
Standard Mounting Rack—Beige	45073	120V AC	22312					E-Flood FireBox	45937
Vehicle Mounting Rack—Orange	45071							E-Spot LiteBox	45937
Vehicle Mounting Rack—Yellow	45074							E-Spot FireBox	45937

**E-FLOOD® LITEBOX®**
E-FLOOD® FIREBOX®

Six C4® LEDs spread light over an entire area. It has an extended run time - 18 hrs. on low - so you can keep large areas illuminated no matter how long your shift lasts. With its swivel head, you can point light right where it's needed. The FireBox has 2 rear blue LEDs so you can be seen from behind: a life-saving feature for firefighters!

E-FLOOD LITEBOX / E-FLOOD FIREBOX

BATTERY: Zero-maintenance 6V, 12 Ah sealed lead acid

SIZE: 11.5" x 5.1" x 7"
(29.2 x 13 x 17.8 cm)

WEIGHT: 7 lbs 14.4 oz (3.58 kg)

COLOR: Orange, Yellow or Beige (Power Failure model only)

E-Flood LiteBox

- 45801 120V AC/12V DC, shoulder strap and mounting rack-Orange
- 45821 120V AC/12V DC, shoulder strap and mounting rack-Yellow
- 45805 Vehicle Mount System with 12V DC, shoulder strap-Orange
- 45825 Vehicle Mount System with 12V DC, shoulder strap-Yellow
- 45807 Power Failure w/120V AC/12V DC Chargers, mounting rack-Orange
- 45817 Power Failure w/120V AC/12V DC Chargers, mounting rack-Beige
- 45806 without Charger - includes shoulder strap-Orange
- 45816 without Charger-Beige
- 45826 without Charger - includes shoulder strap-Yellow

E-Flood FireBox

- 45811 120V AC/12V DC, dual rear LEDs, strap, mounting rack-Orange
- 45815 Vehicle Mount System w/DC, dual rear LEDs, shoulder strap-Orange
- 45832 without Charger incl. shoulder strap-dual rear LEDs-Orange



	HIGH	LOW
LUMENS:	615	330
CANDELA:	4,000	2,150
DISTANCE:	126m	93m
RUN TIME:	8h	18h

NFPA

Rack meets requirements of
NFPA 1901-14.1.11.2 (2003)
mounted in any position



E-Flood
FireBox
includes
dual rear
LEDs.

The Power Failure System
features "Smart" power failure
circuitry which automatically
illuminates the light when the
power goes off



THE E-FLOOD & E-SPOT SERIES ARE ABOUT DELIVERING THE RIGHT LIGHT EXACTLY WHERE YOU NEED IT.

E-SPOT® LITEBOX®
E-SPOT® FIREBOX®

Three C4® LEDs spotlight an area with focused bright light so you can search or inspect from a distance. Its beam has more of a hotspot than the E-Flood, providing more concentrated, brighter light. Its swivel head makes it easy to inspect high bays, ceilings, and out-of-the-way places. IPX4-rated for water-resistance. Optimized electronics provide regulated intensity. Unbreakable, scratch-resistant lens.

E-SPOT LITEBOX / E-SPOT FIREBOX

BATTERY: Zero-maintenance 6V, 12 Ah sealed lead acid

SIZE: 11.5" x 5.1" x 7"
(29.2 x 13 x 17.8 cm)

WEIGHT: 7 lbs 14.4 oz (3.58 kg)

COLOR: Orange, Yellow or Beige (Power Failure model only)

E-Spot LiteBox

45851	120V AC/12V DC, shoulder strap and mounting rack—Orange
45871	120V AC/12V DC, shoulder strap and mounting rack—Yellow
45855	Vehicle Mount System with 12V DC, shoulder strap—Orange
45875	Vehicle Mount System with 12V DC, shoulder strap—Yellow
45857	Power Failure System, shoulder strap and mounting rack—Orange
45867	Power Failure System, shoulder strap and mounting rack—Beige
45856	without Charger - includes shoulder strap—Orange
45866	without Charger - includes shoulder strap—Beige
45876	without Charger - includes shoulder strap—Yellow

E-Spot FireBox

45861	120V AC/12V DC, dual rear LEDs, strap, mounting rack—Orange
45865	Vehicle Mount System w/DC, dual rear LEDs, shoulder strap—Orange
45882	without Charger incl. shoulder strap—dual rear LEDs—Orange

	HIGH	LOW
LUMENS:	540	330
CANDELA:	55,000	32,000
DISTANCE:	469m	358m
RUN TIME:	7h	15h

NFPA

Rack meets requirements of
NFPA 1901-14.1.11.2 (2003)
mounted in any position



Power Failure System



E-Spot FireBox includes
dual rear LEDs.

LANTERN ACCESSORIES

Our legacy products remain available.
Please see www.streamlight.com
for our full product offering.

Mounting Racks	Fits All	Charge Cords	Fits All	Upgrade Kits for LiteBox/FireBox	PN	Shoulder Straps	Fits All	Battery for	PN
Standard Mounting Rack—Orange	45070	12V CIG	22051	E-Spot Upgrade	45845	Quick Release Strap	44050	E-Flood LiteBox HL	45630
Standard Mounting Rack—Yellow	45072	12V DC	22050	E-Flood Upgrade	45842	Shoulder Strap	45232	E-Flood LiteBox	45937
Standard Mounting Rack—Beige	45073	120V AC	22312					E-Flood FireBox	45937
Vehicle Mounting Rack—Orange	45071							E-Spot LiteBox	45937
Vehicle Mounting Rack—Yellow	45074							E-Spot FireBox	45937

**FIRE VULCAN® LED**

This lightweight lantern with taillight LEDs helps you be seen even in thick smoke. It's IPX7-rated for water resistance to 1 meter for 30 minutes. It even floats! Delivers regulated, consistent light throughout battery life. The light modes are programmable, so you can control the order in which the modes come on. Features an unbreakable, scratch-resistant, O-ring sealed lens.

FIRE VULCAN LED

BATTERY: 2 lightweight Lithium-ion nanotechnology cells

SIZE: 7.5" x 5" x 6.5"
(19.05 x 12.7 x 16.51 cm)

WEIGHT: 1 lb 13.6 oz (839 g)

COLOR: Orange

44450	Standard System with 120V AC/12V DC—Orange
44451	Vehicle Mount with 12V DC—Orange
44454	without Charger—Orange



Class I, Div. 2, Groups A, B, C, D;
Class II, Div. 2, Groups F, G;
Class III T-Code: T4

NFPA

Rack meets requirements
of NFPA 1901-14.1.11.2
(2003) mounted in
any position

	HIGH	LOW
LUMENS:	145	70
CANDELA:	80,000	40,000
RUN TIME:	3h	7h



Ultra-bright blue tail light LEDs make certain you can be seen, even in thick smoke.

**TWO FIRE VULCAN® LED MODELS:**

Standard System: Includes charging rack and both AC and DC chargers.

Vehicle Mount System: Includes 12V DC vehicle-mountable, direct-wire charging rack.

FIRE VULCAN LED ACCESSORIES

Our legacy products remain available. Please see www.streamlight.com for our full product offering.

**Charge Racks****Fits All****Charge Cords****Fits All****Shoulder Straps****Fits All****Battery for****PN**

Standard Charge Rack, Orange

44101

12V CIG

22051

Quick Release Strap

44050

Fire Vulcan LED

44610

Direct Wire 12V DC Charge Rack, Orange

44131

12V DC

22050

120V AC

22311

THE HID LITEBOX:
**THE POWER
TO LIGHT AN
ENTIRE SCENE.**

HID LITEBOX®

This portable, one million candela searchlight illuminates objects up to a mile away. Its 35-watt, high intensity xenon lamp has a 3,000-hour minimum lifetime and a 90° swivel head. The intense brightness and amazing 1-mile reach make this the ideal hand-held light when you absolutely must be able to inspect an entire area quickly and efficiently. It plugs into your vehicle's power source for an unlimited run time.

HID LITEBOX

BATTERY: Zero-maintenance 12V, 7.2 Ah sealed lead acid

SIZE: 14.9" x 5.1" x 8.8"
(38 x 13 x 23 cm)

WEIGHT: 10 lbs 1.6 oz (4.6 kg)

COLOR: Orange or Black

ORANGE BLACK

45601	45621	w/ 120V AC/12V DC includes shoulder strap and flood lens
45600	45620	without Charger includes shoulder strap and flood lens
45605	45625	Vehicle Mount System with 12V DC includes shoulder strap and flood lens



	HIGH
LUMENS:	3,350
CANDELA:	1,000,000
RUN TIME:	1h 45m



10 ft (3 meters) 12V DC power cord plugs into port at rear of light to provide duration lighting


HID LiteBox battery will continue to charge while operating directly from an external 12V DC power source when using the remote cord



Swivel neck shown in 90° position.



Swivel neck shown in 45° position.

**HID LITEBOX ACCESSORIES**

Mounting Racks	Fits All	Charge Cords	Fits All	HID LiteBox Lens/Filters	PN	Shoulder Straps	Fits All	Battery for	PN
Standard Mounting Rack, Black	45075	12V CIG	22051	HID Bulb Kit	45637	Quick Release Strap	44050	HID LiteBox	45630
Standard Mounting Rack, Orange	45070	12V DC	22050	Lens Reflector Assy.	45638	Shoulder Strap	45232		
Vehicle Mounting Rack, Orange	45071	12V DC (10ft, 3m)	22056	Flood Lens	45657				
Vehicle Mounting Rack, Yellow	45074	120V AC for HID	22665	IR Filter	45654				



WAYPOINT®

This long-distance, pistol-grip lantern is the light you need to inspect a power line from the ground, find a dock from the interior of a lake or to see whatever is way up ahead. Its beam reaches about the length of 6 football fields! It also has plenty of peripheral light, so you can see what's all around you. Set it down to illuminate an entire area or aim it to check on trees or power lines far away. This next generation alkaline model features 3 modes including a strobe for signaling.

WAYPOINT

BATTERY: 4 "C" batteries (not included).
Can also be powered by 12V DC power cord (included)

SIZE: 6.75" x 7.14" x 3.5"
(17.15 x 18.14 x 8.89 cm)

WEIGHT: 1 lb 12.8 oz (816 g)

COLOR: Yellow or Black

YELLOW BLACK

44900	44902	12V DC power cord* - w/polymer storage mount
44904	44905	12V DC power cord*

ACCESSORIES

44908	44908	Polymer Storage Mount
44903	44903	12V DC power cord
44924	44924	Red Filter
44925	44925	Green Filter

*12V DC power cord does not recharge batteries



Trigger style switch with momentary operation.

UPDATED FOR 2015 550 LUMENS
NOW EVEN BRIGHTER!
MORE THAN DOUBLE THE LUMENS

	HIGH	LOW
LUMENS:	550	40
CANDELA:	100,000	7,900
DISTANCE:	625m	178m
RUN TIME:	10h	82h



Unlimited run time when using 12V DC power cord.
Emergency signal run time 82 hours.



Green Filter
reduces
shadows.

Red Filter
preserves
night vision.

Special Features:

- Unbreakable, O-ring sealed lens.
- IPX4-rated for water-resistance.
- 1 meter impact-resistance tested.
- Integrated stand for hands-free scene lighting.



WAYPOINT RECHARGEABLE... 5 FEET OF CHARGING CORD 1,800 FEET OF LIGHT.



WAYPOINT® RECHARGEABLE

The rechargeable model has a broader, wider beam than the original Waypoint. It spreads bright light across a whole room, campsite or backyard illuminating everything, yet its beam still reaches an impressive 678 meters. IPX8 rated design water-proof to 2 meters. Light floats if dropped in water. Includes 3 modes: low, medium and high. With its integrated stand you can set it up for easy area illumination. Fully recharges in 4 hours.

WAYPOINT RECHARGEABLE

BATTERY: Lithium Ion with on-board safety control circuit

SIZE: 6.75" x 7.14" x 3.62"
(17.15 x 18.14 x 9.29 cm)

WEIGHT: 1 lb 8.32 oz (691 g)

COLOR: Yellow or Black

YELLOW BLACK

44910 44911 with 120V AC charge cord

ACCESSORIES

44918 44918 Polymer Storage Mount

44915 44915 Red Filter

44916 44916 Green Filter

44923 44923 12V DC charge cord

44909 44909 120V AC charge cord



1,000 LUMENS

UPDATED FOR 2015

**NOW EVEN BRIGHTER!
MORE THAN DOUBLE THE LUMENS**

	HIGH	MEDIUM	LOW
LUMENS:	1,000	550	35
CANDELA:	115,000	60,000	10,000
DISTANCE:	678m	490m	200m
RUN TIME:	3h	6h	80h

Emergency signal run time 35 hours.

Special Features:

- Unbreakable, O-ring sealed lens.
- IPX8-rated for water-resistance.
- 1 meter impact-resistance tested.
- Integrated stand for hands-free scene lighting.

Red Filter preserves night vision.

Green Filter reduces shadows.

12V Charge Cord.



Includes 120V Charge Cord.

The Waypoint rechargeable holder allows for secure storage (included with product and also offered as an accessory).





**STREAMLIGHT TECHNOLOGY:
DECADES OF ILLUMINATION
INNOVATION.**



RUGGED PERFORMANCE //

THE SIEGE:

- 340 LUMENS ON HIGH
- 12+ DAY RUN TIME ON LOW
- DROP TESTED TO 2 METERS

SIEGE 2AA:

- 200 LUMENS ON HIGH
- DROP TESTED TO 2 METERS



VERSATILE //

- 3 WHITE LIGHT SETTINGS
- WILL HANG ANYWHERE
- D-RINGS CLIP ANYWHERE
- REMOVE THE TOP FOR DIRECT ILLUMINATION



SURVIVAL //

- WATERPROOF
- ENGINEERED TO FLOAT
- RESISTANT TO BATTERY CORROSION



RESCUE //

- SHINES IN SOLID RED
- MORSE CODE S.O.S. SIGNAL LASTS 18 DAYS (SIEGE) OR 12 DAYS (SIEGE AA)



THE SIEGE: IT'S GOT SURVIVAL INSTINCTS.

THE SIEGE® LANTERN

The Siege is brighter, more durable, and much more versatile than other emergency/camping lanterns. It's bright enough to light up a whole campsite. It runs for over 30 hours on high, and over 12 days on low! Its handle and D-rings allow you to hang it or clip it almost anywhere, upright or inverted. It has 3 white light settings, a red light for softer, less intense light, and an SOS mode. Remove the top for brighter light. Battery indicator flashes to alert you to low battery. It floats for easy retrieval; and it's waterproof to 1 meter. 2 meter impact-resistance tested. Unbreakable lens. Rugged, non-slip base.

THE SIEGE

BATTERY: (3) "D" size alkaline

SIZE: 3.8" x 7.25"
(9.65 x 18.41 cm)

WEIGHT: 1 lb 15 oz (878 g)

COLOR: Coyote

THE SIEGE

44931 The Siege Lantern—Coyote

(4) WHITE C4 LEDs	HIGH	MEDIUM	LOW
LUMENS:	340	175	33
RUN TIME:	30h	70h	295h

Light output with outer globe removed.

(1) RED LED	HIGH	FLASH/SOS MODE
LUMENS:	10	10
RUN TIME:	235h	430h

Versatile design features rugged carry handle and D-rings clip to hang virtually anywhere.



Shown with outer globe removed.



Special Features:

- Floats for easy retrieval.
- Waterproof to 1 meter.
- 2 meter impact-resistance tested.
- Unbreakable lens. Rugged, non-slip base.



With **[(RED SOS)]**
Hold on/off button to activate.

SIEGE® AA LANTERN

The Siege® AA lantern features one C4® power LED, and two red LEDs. There are five output modes and a battery level indicator built into the on/off button. With the outer lantern globe in place, the light will float. Use the lantern with or without the outer globe cover. Remove the outer globe and hang the body upside down by the D ring for large area lighting needs. Battery replacement is a breeze with the center post orienting the battery cover correctly every time.

SIEGE AA

BATTERY: (3) "AA" size alkaline

SIZE: 2.37" x 5.44"
(6.00 x 13.82 cm)

WEIGHT: 8.8 oz (249.47 g)

COLOR: Coyote

SIEGE AA

44941 Siege AA Lantern—Coyote

WHITE C4 LED	HIGH	MEDIUM	LOW
LUMENS:	200	100	50
RUN TIME:	7h	15h 30m	37h

Light output with outer globe removed.

(2) RED LEDs	HIGH	FLASH/SOS MODE
LUMENS:	.7	.7
RUN TIME:	192h	288h

Versatile design features rugged carry handle and D-ring clips to hang virtually anywhere.



Shown with outer globe removed.

NEW FOR 2015



Special Features:

- Floats for easy retrieval.
- Waterproof to 1 meter.
- 2 meter impact-resistance tested.
- Unbreakable lens. Rugged, non-slip base.



With **[(RED SOS)]**
Hold on/off button to activate.




USE THIS EASY COMPARISON CHART TO CHOOSE THE BEST LIGHT FOR YOU BASED ON THE FEATURES THAT YOU NEED!

BEAM STYLE

SPECS


HIGH MODE PERFORMANCE SHOWN.
FOR PERFORMANCE IN OTHER MODES, SEE MODEL PAGES.

SURVIVOR® RECHARGEABLE




OUTPUT: 175 lumens
INTENSITY: 41,000 candela
BEAM DISTANCE: 405 meters
RUN TIME: 3 hours 30 min
SIZE: 7.06" x 2.85" x 2.87"
(17.92 x 7.24 x 7.29 cm)
WEIGHT: 18 oz (510 g)
COLOR: International Safety Orange, High-Visibility Yellow, or Black

SURVIVOR® ALKALINE




OUTPUT: 175 lumens
INTENSITY: 41,000 candela
BEAM DISTANCE: 405 meters
RUN TIME: 4 hours
SIZE: 7.06" x 2.85" x 2.87"
(17.92 x 7.24 x 7.29 cm)
WEIGHT: 13.7 oz (388 g)
COLOR: International Safety Orange, High-Visibility Yellow, or Black

VANTAGE®



OUTPUT: 115 lumens
INTENSITY: 7,000 candela
BEAM DISTANCE: 167 meters
RUN TIME: 6 hours
SIZE: 3.26" x 1.47" x 2.56"
(8.28 x 3.73 x 6.5 cm)
WEIGHT: 5.14 oz (145.7 g)
COLOR: Black, Green or Red

POLYTAC 90°




OUTPUT: 170 lumens
INTENSITY: 7,000 candela
BEAM DISTANCE: 167 meters
RUN TIME: 3 hours 45 min
SIZE: 5.22" x 1.25" x 1"
(13.3 x 3.18 x 2.54 cm)
WEIGHT: 4.1 oz (116 g)
COLOR: Black, Yellow, or Orange

KNUCKLEHEAD® FLOOD



OUTPUT: 200 lumens
INTENSITY: 1,150 candela
BEAM DISTANCE: 68 meters
RUN TIME: 3 hours 30 min
SIZE: 9.2" x 2.85" x 2.75"
(23.4 x 7.2 x 7 cm)
NiCd WEIGHT: 1 lb 7.1 oz (655 g)
ALKALINE WEIGHT: 1 lb 2.3 oz (519 g)
COLOR: International Safety Orange

KNUCKLEHEAD® SPOT



OUTPUT: 180 lumens
INTENSITY: 11,000 candela
BEAM DISTANCE: 210 meters
RUN TIME: 3 hours 30 min
SIZE: 9.2" x 2.85" x 2.75"
(23.4 x 7.2 x 7 cm)
NiCd WEIGHT: 1 lb 7.1 oz (655 g)
ALKALINE WEIGHT: 1 lb 2.3 oz (519 g)
COLOR: International Safety Orange

RIGHT ANGLE
SERIES
// STREAMLIGHT 2015

RECHARGEABLE RIGHT ANGLE

SURVIVOR SERIES // STREAMLIGHT 2015



The new, low profile Survivor shown at actual size.

SURVIVOR ACCESSORIES

Battery Chargers	Fits All	Battery Packs	Fits All	Charge Cords	PN
Steady Charger Plug-In Charger Holder	90010	Alkaline Battery Cartridge	90542	120V AC	22311
Steady Charger PiggyBack® Charger	90110	Battery Pack Assembly—LED Div. 1	90130	12V DC Cigarette Lighter	22051
AC Fast Charger (Includes Holder)	90011	Battery Pack Assembly—LED Div. 2	90338	12V DC Direct Wire	22050
AC PiggyBack® Fast Charger	90111				
DC#1 Cigarette Lighter Cord/Fast Charger (Includes Holder)	90012				
DC#1 Cigarette Lighter PiggyBack® Fast Charger	90112				
DC#2 Direct Wire Cord/Fast Charger (Includes Holder)	90113				
120V AC Bank Charger	90400				
12V DC Bank Charger	90401				

THE MOST TRUSTED RIGHT ANGLE LIGHT, JUST GOT THINNER, BRIGHTER & MORE VERSATILE. THE NEW SURVIVOR.

SURVIVOR®

The leading Class I, Div. 1 right angle, clip-on flashlight has been redesigned with a slimmer profile and a new clip/hook for more accurate light orientation. 4 light modes include high, low, flash, and a moonlight mode for low-level lighting that runs for 20 days. Spring-loaded clip easily attaches to belts and harnesses. Comes with two special interchangeable Smoke Cutter® plugs that help create your preferred beam pattern: Black plug significantly reduces peripheral light for a tighter beam while the Amber plug reduces peripheral light and eye fatigue caused by glare. Available in alkaline and rechargeable models.

All openings are O-ring sealed for weather-resistance. IPX4 water-resistant. 2 meter impact resistance tested. Unbreakable, scratch-resistant lens. Designed for easy operation even with heavy gloves.

SURVIVOR

BATTERY: Rechargeable NiCd 4.8V, 1.8 Ah, 4-cell sub-C or (4) "AA" Alkaline depending on model selected

SIZE: 7.6" x 2.85" x 2.87"
(17.92 x 7.24 x 7.29 cm)

NiCd WEIGHT: 18 oz (510 g)

ALKALINE WEIGHT: 13.7 oz (388 g)

COLOR: Orange, Yellow, or Black

YELLOW	ORANGE	BLACK	
90513	90503	90523	w/Charger/Holders 120V AC/DC cords
90512	90502	90522	with 120V AC Fast Charger
90519	90509	90528	with 12V DC Fast Charger
90510	90500	90520	without Charger
90541	90540	90545	Alkaline



Alkaline battery cartridge holds four "AA" alkaline batteries.



NICD MODEL	HIGH	LOW
LUMENS:	175	60
CANDELA:	41,000	14,000
DISTANCE:	405m	237m
RUN TIME:	3h 30m	13h

Moonlight mode: 20 days of continuous run time
Flash runs 8 hours

ALKALINE MODEL	HIGH	LOW
LUMENS:	175	60
CANDELA:	41,000	14,000
DISTANCE:	405m	237m
RUN TIME:	4h	15h

Moonlight mode: 20 days of continuous run time
Flash runs 8 hours

NFPA Rack meets requirements of 1901-14.1.11.2 (2003) mounted in any position



Class I & II, Division 1, Groups C,D,E,F,G;
Class III, T4
Class I, Division 2, Groups A,B,C,D; T4

Interchangeable Smoke Cutter® plugs:



Black reduces peripheral light for a tighter beam

Amber reduces peripheral light and eye fatigue caused by glare



New clip/hook design for accurate light orientation



POLYTAC 90°

Versatile, right angle compact flashlight can clip on to turn-out gear or be used as a headlamp. It's super bright, extremely durable in a nylon polymer housing, and can be operated easily with gloves. 3 modes include a strobe. 90° swiveling head. 1 meter impact resistance tested. IPX7 rated design; waterproof to 1 meter for 30 minutes. Integrated carabiner style D-ring for a variety of attachment methods. Versatile clip allows a variety of mounting positions. Maximum light output throughout battery life.

POLYTAC 90

BATTERY: (2) 3V CR123A Lithium batteries

SIZE: 5.22" x 1.25" x 1"
(13.3 x 3.18 x 2.54 cm)

WEIGHT: 4.1 oz (116 g)

COLOR: Black, Yellow or Orange

YELLOW ORANGE BLACK

88831	88834	88830	with lithium batteries
-	88832	-	with lithium batteries & Gear Keeper

ACCESSORIES

88833	88833	88833	Gear Keeper®
14059	14059	14059	Elastic Headstrap - Coyote

Gear Keeper® makes your job easier while preventing loss of light.

	HIGH	LOW
LUMENS:	170	17
CANDELA:	7,000	700
DISTANCE:	167m	53m
RUN TIME:	3h 45m	30h

Strobe runs 6 hours



Gear Keeper® Tether features spectra nylon line with 36" extension and 6 oz. retraction force.



Headstrap



WHEN IT COMES TO RIGHT ANGLE LIGHTING THERE'S ALWAYS MORE THAN ONE RIGHT ANSWER.

VANTAGE®

The solution to firefighters' hands-free lighting needs. Attaches easily to helmets and hard hats, and rotates 360°. Fits snugly against helmet to prevent snags. Includes a bright tail light so you can be seen from behind even in heavy smoke (blue on black & red models, green on green model). Easy to operate with gloves. Fits both traditional and modern helmets.

VANTAGE

BATTERY: (2) 3V CR123A lithium

SIZE: 3.26" x 1.47" x 2.56"
(8.28 x 3.73 x 6.5 cm)

WEIGHT: 5.14 oz (145.7 g)

COLOR: Black, Green or Red

69140 Vantage LED Tactical Helmet Light—Black

69189 Vantage LED Tactical Helmet Light—Green

69157 Vantage LED Tactical Helmet Light—Red

85175 Lithium Batteries—2 Pack

NFPA Meets requirements of
NFPA 1971-8.6 (2007);
500° heat resistance test

CE Meets applicable European
Community Directives

LUMENS: 115
CANDELA: 7,000
DISTANCE: 167m
RUN TIME: 6h

Dual direction,
easy access
on/off switch.



**STREAMLIGHT TECHNOLOGY: PRODUCT-SPECIFIC DESIGN ALLOWS YOU TO
TARGET THE BEAM.**

MOUNTING VERSATILITY:

Clamp the Vantage® light with C4® technology onto any traditional or modern firefighter's helmet or hard hat. It rotates and can be clamped above or below the brim.



RECHARGEABLE RIGHT ANGLE

KNUCKLEHEAD SERIES
// STREAMLIGHT 2015

WHETHER YOU'RE WORKING ON THE FLOOR
**OR OVERHEAD, THE
KNUCKLEHEAD
IS YOUR PARTNER.**

STREAMLIGHT TASK-SPECIFIC TECHNOLOGY:
CHOOSE THE LIGHT INTENSITY ALLOWING YOU TO
CHOOSE THE RIGHT LIGHT FOR THE JOB.



AIM IT ANYWHERE //
WITH AN ARTICULATING HEAD.

ATTACH IT TO STEEL //
WITH ITS MAGNET.



CLIP IT ANYWHERE //
WITH A SPRING-LOADED
CLIP. (ORANGE MODEL.)



HANG IT ANYWHERE //
WITH AN INTEGRATED
STOWABLE HOOK. (YELLOW & BLACK MODELS.)



KNUCKLEHEAD® FLOOD

	HIGH	LOW
LUMENS:	200	63
CANDELA:	1,150	350
DISTANCE:	68m	37m
RUN TIME:	3h 30m	16h

Moonlight mode: 20 days of continuous run time
Flash: 8 hours continuous time



Class I, Div. 2, Grps A, B, C, D,
Class II, Div. 2, Grps F, G
Class III T4

NFPA

Rack meets requirements
of 1901-14.1.11.2 (2009)
mounted in any position



A lightweight, rechargeable, hand-held work light that hangs/ attaches a variety of ways to flood your entire work area with light. Even light pattern is easy on your eyes. Articulating head rotates 360°, making it easy to aim light where it's needed. Removable magnet. Stowable hook. Unbreakable, anti-scratch, O-ring sealed lens. IPX4-rated for water-resistance. All opening are O-ring sealed. 2 meter impact-resistance tested. Orange model comes with clip; integrated hook on yellow and black models.

KNUCKLEHEAD FLOOD

BATTERY: Rechargeable NiCd 4.8V, 1.8 Ah, 4-cell sub-C; optional 4 "AA" alkaline non-rechargeable battery cartridge.

SIZE: 9.2" x 2.85" x 2.75"
(23.4 x 7.2 x 7 cm)

NiCd WEIGHT: 1 lb 7.1 oz (655 g)

ALKALINE WEIGHT: 1 lb 2.3 oz (519 g)

COLOR: Orange, Yellow, or Black

YELLOW ORANGE BLACK

90627	90657	90607	Charger/Holder and 120V AC & 12V DC cords
90622	-	90602	120V AC Charger/Holder
90626	-	90606	12V DC
90633	-	90613	120V AC/DC PiggyBack® Charger
90631	90661	90611	120V AC Fast Charger
90640	90670	90620	12V DC Fast Charger
90621	90651	90601	without Charger
90642	90644	90641	Alkaline Model

Orange model comes with Clip, Black & Yellow models come with Hook

KNUCKLEHEAD® SPOT

	HIGH	LOW
LUMENS:	180	55
CANDELA:	11,000	3,300
DISTANCE:	210m	115m
RUN TIME:	3h 30m	16h

Moonlight mode: 20 days of continuous run time
Flash: 8 hours continuous time

Spring-loaded clip attaches
to turn-out gear for convenient
hands-free lighting.



Class I, Div. 2, Grps A, B, C, D,
Class II, Div. 2, Grps F, G
Class III T3C

NFPA

Rack meets requirements
of 1901-14.1.11.2 (2009)
mounted in any position



Powerful magnet
adheres to steel surfaces.

Its far-reaching beam helps locate hazards or victims from a distance. Articulating head makes it easy to aim light where it's needed. Powerful, removable magnet. Smoke-cutting beam. Spring-loaded clip for easy attachment to turnout gear and uneven surfaces. 4 modes include high, low, flash and low-light mode for 20-day runtime. Features are designed to give firefighters added flexibility. Unbreakable, anti-scratch, O-ring sealed lens. IPX4-rated for water-resistance. 2 meter impact-resistance tested. All openings are O-ring sealed.

KNUCKLEHEAD SPOT

BATTERY: Rechargeable NiCd 4.8V, 1.8 Ah, 4-cell sub-C; optional 4 "AA" alkaline non-rechargeable battery cartridge.

SIZE: 9.2" x 2.85" x 2.75"
(23.4 x 7.2 x 7 cm)

NiCd WEIGHT: 1 lb 7.1 oz (655 g)

ALKALINE WEIGHT: 1 lb 2.3 oz (519 g)

COLOR: Orange

90757	120V AC/12V DC - Orange
90761	120V AC Fast Charge - Orange
90770	12V DC Fast Charge - Orange
90751	Light Only (without charger) Orange
90744	Alkaline Model - Orange



STREAMLIGHT SAFETY-RATED SERIES.

// STREAMLIGHT GIVES YOU MORE SAFETY-RATED LIGHTS FOR MORE OPTIONS IN HAZARDOUS LOCATIONS.

Streamlight flashlights are tested and approved by the world's leading independent laboratories – including Underwriters Laboratories, ATEX, Demko, and the Mine Safety and Health Administration (MSHA). This testing is your assurance that the Streamlight flashlight you choose will be safe in the environment(s) in which you'll be using it.



3N ProPolymer® LED

4AA ProPolymer® LED

4AA ProPolymer® LUX

3C ProPolymer® LED

NFPA®



ETL CLASSIFIED



// DIFFERENT LIGHTS FOR DIFFERENT HAZARDOUS LOCATIONS.

The National Electric Code (NEC) defines hazardous locations by “class” and “division.” There are three classes:



CLASS I locations are made hazardous by the presence of flammable gases, liquids or vapors.



CLASS II locations are hazardous because combustible dusts are present.



CLASS III locations contain easily ignitable fibers or flyings.

The “Division” designation refers to the likelihood that ignitable concentrations of flammable materials are present. There are two divisions:



DIVISION 1 designates an environment where ignitable concentrations of flammable gases, liquids, vapors or dusts can exist some of the time or all of the time under normal operating conditions, or where easily ignitable fibers and flyings are manufactured, handled or used.



DIVISION 2 locations are where ignitable concentrations are not likely to exist under normal operating conditions or where Class 3 materials are stored or handled.

Hazardous classes are further defined by “groups” based on the physical properties of their combustible materials. These groups include (but are not limited to):



GROUP A Acetylene

GROUP B Hydrogen

GROUP C Ethylene, carbon monoxide

GROUP D Propane, gasoline, naphtha, benzene, butane, ethyl alcohol, acetone, methane



GROUP E Metals including aluminum, magnesium (Div. 1 only)

GROUP F Carbonaceous dusts including coal, carbon black, coke

GROUP G Dusts not included in E and F including wood, plastics, flour, starch or grain dusts



POLYSTINGER®LED
HAZ-LO®



2AA ProPolymer®
HAZ-LO®



3AA ProPolymer®
HAZ-LO®



3C ProPolymer®
HAZ-LO®



SURVIVOR®



KNUCKLEHEAD®
HAZ-LO® //
SPOT & FLOOD

3AA HAZ-LO®



SEPTOR® HAZ-LO®



TRIDENT® HAZ-LO®



ARGO® HAZ-LO®



STYLUS®

STYLUS REACH®

// STREAMLIGHT'S HAZ-LO LIGHTS - 2 STANDARDS PROVIDE DIFFERENT PATHS TO THE SAME RESULT: A DIVISION 1 RATING!

When working in a Division 1 area, we expect explosive atmospheres to be present. Streamlight's HAZ-LO product line is suitable for use in Division 1 areas. Streamlight uses different protection standards and testing at Nationally Recognized Test Labs (NRTL) to achieve the Division 1 rating that is common to all Streamlight HAZ-LO Lighting. This is the best possible performance while ensuring that your flashlight will not become an ignition source. ANSI/UL 783 is the specific standard for flashlights used in hazardous locations. ANSI/UL 913 is the intrinsically safe standard for general electronic equipment. While either standard can direct certification to Division 1 level, it is important to note Class, Group and Temperature code requirements to select the correct flashlight for specific applications.

// WHY ARE SAFETY RATINGS IMPORTANT?

There are several types of locations in which it can be extremely dangerous to use any light that has not been specifically designed – and approved – for that kind of location. These are areas where fire or explosion hazards may exist due to the presence of flammable gases, liquids, vapors, dusts, or ignitable fibers or flyings. If you will be using a flashlight in any potentially hazardous location, it is critical that your light be safety-rated for that specific kind of environment.

// ATEX RATINGS

Streamlight also offers safety-rated lights which comply with the European Union (EU) Directive 94/9/EC (ATEX) for products intended for use in potentially explosive atmospheres within the EU member countries. Please visit our web site (www.streamlight.com) for more information on ATEX-rated products. We also have a catalog of ATEX-rated products available upon request.

RECHARGEABLE RIGHT ANGLE

KNUCKLEHEAD SERIES
// STREAMLIGHT 2015

THE HARD WORKING KNUCKLEHEAD... NOW CLASS 1. DIV.1 RATED.



Streamlight offers a variety of lights that are safety-rated for hazardous environments. We even have several lights that are "intrinsically safe"—these are lights that have been tested to ANSI/U.L.- Std-913 and found to be safe for use in a Division 1 classified environment.

While an intrinsically safe light would have a Class I, Div. 1 rating, it's important to know that not every product with a Class I, Div. 1 rating is intrinsically safe.

KNUCKLEHEAD® FLOOD HAZ-LO®

	HIGH	LOW
LUMENS:	163	50
CANDELA:	730	230
DISTANCE:	54m	30m
RUN TIME:	3h 45m	12h

Moonlight mode: 20 days of continuous run time
Flash: 8 hours continuous time



Class I & II Division 1, Groups C,D,F,G;
Class III; T-Code: T4; Exia;
NON-INCENDIVE: Class I Division 2;
Groups A,B,C,D, T-CODE T4

NFPA

Rack meets requirements
of 1901-14.1.11.2 (2009)
mounted in any position



Class I & II, Div. 1 safety-approved work light with articulating head that hangs/attaches a variety of ways. Its soft flood pattern illuminates your work area, yet the beam is easy on your eyes. Articulating head rotates 360°. Includes high, low, moonlight and flash modes. Removable magnet. Yellow model features an integrated hook for hands-free use. Orange model has a clip that clamps to objects or turn-out gear. IPX4-rated for water-resistance. 2 meter impact-resistance tested.

KNUCKLEHEAD FLOOD HAZ-LO

BATTERY: Dual power source: accepts rechargeable NiCd battery pack or (4) "AA" alkaline batteries

SIZE: 9.2" x 2.85" x 2.75"
(23.4 x 7.2 x 7 cm)

NiCd WEIGHT: 1 lb 7.1 oz (655 g)

ALKALINE WEIGHT: 1 lb 2.3 oz (519 g)

COLOR: Orange or Yellow

YELLOW	ORANGE	
91627	91657	Charger/Holder and 120V AC & 12V DC cords
91622	91652	120V AC
91621	91651	without Charger
91642	91644	Alkaline Model

KNUCKLEHEAD® SPOT HAZ-LO®

	HIGH	LOW
LUMENS:	150	55
CANDELA:	12,900	4,300
DISTANCE:	227m	131m
RUN TIME:	3h 30m	12h

Moonlight mode: 20 days of continuous run time
Flash: 8 hours continuous time



Class I & II Division 1, Groups C,D,F,G;
Class III; T-Code: T4; Exia;
NON-INCENDIVE: Class I Division 2;
Groups A,B,C,D, T-CODE T4

NFPA

Rack meets requirements
of 1901-14.1.11.2 (2009)
mounted in any position



Class I & II, Div. 1 safety-approved for hazardous locations. Far-reaching beam helps locate hazards or victims from a distance. Articulating head make it easy to aim light where it's needed. 4 light modes include a flash for signaling and a low-level mode for 20-day runtime. Hangs/attaches various ways. Powerful, removable magnet. Yellow model features an integrated hook for hands-free use. Orange model has a clip that clamps to objects or turn-out gear for hands-free use. IPX4-rated for water-resistance. 2 meter impact-resistance tested.

KNUCKLEHEAD SPOT HAZ-LO

BATTERY: Dual power source: accepts rechargeable NiCd battery pack or (4) "AA" alkaline batteries

SIZE: 9.2" x 2.85" x 2.75"
(23.4 x 7.2 x 7 cm)

NiCd WEIGHT: 1 lb 7.1 oz (655 g)

ALKALINE WEIGHT: 1 lb 2.3 oz (519 g)

COLOR: Orange or Yellow

YELLOW	ORANGE	
91727	91757	Charger/Holder and 120V AC & 12V DC cords
91722	91752	120V AC
91721	91751	without Charger
91742	91744	Alkaline Model

3AA HAZ-LO® HEADLAMP**SEPTOR® HAZ-LO®**

LUMENS: 120
CANDELA: 6,800
DISTANCE: 165m
RUN TIME: 11h



This compact, long-running, high-performance headlamp meets the stringent requirements of Div. 1 hazardous locations. Exceptional light output. Long run time. Unbreakable, O-ring sealed lens. Easy operation even when wearing heavy gloves. Impact-resistant housing - 1 meter drop-test verified. Intrinsically safe.

3AA HAZ-LO**BATTERY:** (3) "AA" alkaline**SIZE:** 1.88" x 2.5" x 3.08"
(4.76 x 6.35 x 7.82 cm)**WEIGHT:** 7.1 oz (202 g)**COLOR:** Yellow

61200 with alkaline batteries—rubber and elastic straps—Yellow

Class I, II Div. 1, Groups ABCDEFG
Class III, T4A "Classified"Class I, Div. 1, Groups A, B, C, D, T4;
Class II, Div. 1, Groups E, F, G,
Class III, T4 "Exia"Permissible Portable Headlamp Assembly
App. No. 20-A070001-01
Tested for use in methane-air mixtures only

SEPTOR HAZ-LO	HIGH	LOW
LUMENS:	85	20
CANDELA:	620	150
DISTANCE:	50m	24m
RUN TIME:	8h	50h



Includes a rubber head strap that ensures a non-slip grip for hardhats.

The perfect headlamp for close-up tasks or tasks at arm's length is now safe to use in hazardous locations and is intrinsically safe. 90° tilting head. High and low lighting modes. Unbreakable lens. IPX4-rated for water-resistance. 2 meter impact-resistance tested.

SEPTOR HAZ-LO HEADLAMP**BATTERY:** (3) "AAA" alkaline**SIZE:** 1.75" x 2.70" x 2.40"
(4.45 x 6.85 x 6.09 cm)**WEIGHT:** 5.5 oz (156 g)**COLOR:** Yellow

61024 Septor HAZ-LO w/alkaline batteries—rubber and elastic straps—Yellow

Class I, Division 1, Groups A,B,C,D;
Class II, Division 1, Groups E,F,G;
Class III, T-Class: T4 Exia.
(Using: Rayovac No. 824, Panasonic
AM-4PA, Energizer EA92,
or Energizer Lithium L92 batteries.)

INTRODUCING A FULL-LINE OF HAZ-LO HEADLAMPS ALL

CLASS 1, DIV. 1 SAFETY-RATED.

ARGO® HAZ-LO®

With its intense, long-distance beam that reaches as far as 113 meters, and its Class 1, Division 1 safety rating, the Argo® HAZ-LO® headlamp is ideal any where you need hands-free lighting, even in hazardous environments. Intrinsically safe and offers 3 lighting modes and a 90° tilting head. Unbreakable lens. Low battery indicator on Div. 2 model. IPX4-rated for water-resistance. 2 meter impact-resistance tested.

ARGO HAZ-LO HEADLAMP

BATTERY: (3) "AAA" alkaline

SIZE: 1.75" x 2.70" x 2.40"
(4.45 x 6.85 x 6.09 cm)

WEIGHT: 5.4 oz (153 g)

COLOR: Yellow

61026 Argo HAZ-LO w/alkaline batteries—rubber and elastic straps
—Yellow



Class 1, Division 1, Groups A,B,C,D;
Class II, Division 1, Groups E,F,G;
Class III, T-Class: T4 Exia.
(Using: Rayovac No. 824, Panasonic
AM-4PA, Energizer EA92,
or Energizer Lithium L92 batteries.)



ARGO HAZ-LO	HIGH	LOW
LUMENS:	90	20
CANDELA:	3,200	700
DISTANCE:	113m	53m
RUN TIME:	8h	50h



Includes a rubber head strap that ensures a non-slip grip for hardhats.

TRIDENT® HAZ-LO®

Now you can safely use this multi-purpose headlamp in hazardous environments. The Class 1, Division 1 safety-rated Trident® HAZ-LO® headlamp is intrinsically safe and gives you the versatility to switch between a bright C4® power LED to illuminate objects at a distance (102 meters!) or a soft flood light for close-up tasks. 90° tilting head. Unbreakable lens. IPX4-rated for water-resistance. 2 meter impact-resistance tested.

TRIDENT HAZ-LO HEADLAMP

BATTERY: (3) "AAA" alkaline

SIZE: 1.75" x 2.70" x 2.40"
(4.45 x 6.85 x 6.09 cm)

WEIGHT: 5.50 oz (156 g)

COLOR: Yellow

61025 Trident HAZ-LO w/alkaline batteries—rubber and elastic straps
—Yellow



Class 1, Division 1, Groups A,B,C,D;
Class II, Division 1, Groups E,F,G;
Class III, T-Class: T4 Exia.
(Using: Rayovac No. 824, Panasonic
AM-4PA, Energizer EA92,
or Energizer Lithium L92 batteries.)



Includes a rubber head strap that ensures a non-slip grip for hardhats.

HAZ-LO Model	HIGH	LOW
LUMENS:	85	30
CANDELA:	2,600	300
DISTANCE:	102m	35m
RUN TIME:	8h	24h



90° tilting head with a new, more durable ratcheting system.

NON-RECHARGEABLE

PROPOLYMER SERIES // STREAMLIGHT 2015

STREAMLIGHT STORIES...

"MY 4AA PROPOLYMER MELTED & MUTATED. BUT IT STILL WORKS!"

Your flashlights are amazing! I was using a 4AA ProPolymer along with a torch for preheating. The light got too close to the torch; and, as you can see by the pictures, the torch melted the flashlight ... but it still works! Thanks and please continue making great durable products.

*Jason Palmer
Alberta, Canada*

2AA PROPOLYMER® HAZ-LO®

This virtually indestructible safety-rated flashlight is big on brightness and long on run time, but small enough to fit in a pocket or even strap on a helmet. Provides a focused beam with optimum peripheral illumination. O-ring sealed construction. IPX7-rated. Dust and water protected. 1 meter impact-resistance tested. Drop-tested.

2AA PROPOLYMER HAZ-LO

BATTERY: 2 "AA" size alkaline

SIZE: 6.4" x 1.32" x .89"
(16.26 x 3.35 x 2.26 cm)

WEIGHT: 3.6 oz (100 g)

COLOR: Yellow or Black

67101	2AA HAZ-LO with alkaline batteries—Yellow
67100	2AA HAZ-LO with alkaline batteries—Black

ACCESSORIES

Rubber Helmet Strap	99075
Red Safety Wand	74903
Yellow Safety Wand	74904
Glow-In-The-Dark Safety Wand	74913
Nylon Holster	85905
Polymount Kit	68089

LUMENS:	65
CANDELA:	2,300
DISTANCE:	96m
RUN TIME:	24h



Class I, II, Division 1, Groups A, B, C, D, E, F, G;
Class III; T-Class: T4
(approved for use with Energizer E91,
Duracell MN1500 and Rayovac NO.815)



Permissible Flashlight. Approval No. 20-A140002-D.
Tested for Intrinsic Safety in Methane-Air mixtures only.
(approved for use with Energizer E91,
Duracell MN1500 and Rayovac NO.815)



Rubber
Helmet
Strap

THE PROPOLYMER SERIES IS ALWAYS READY FOR HAZARDOUS DUTY.

4AA PROPOLYMER[®] LED

Its soft, diffused light is perfect for up close work; and with 155 hrs. of run time, this safety-rated light is always ready. Contains 4 ultra-bright LEDs. IP65-rated, waterproof, dust-resistant. Unbreakable, scratch-resistant lens.

4AA PROPOLYMER LED

BATTERY: 4 "AA" size alkaline

SIZE: 6.5" x 1.63" x 1.34"
(16.51 x 4.14 x 3.4 cm)

WEIGHT: 6.3 oz (178.6 g)

COLOR: Yellow or Black

YELLOW BLACK

68202	68302	White LEDs/alkaline batteries—Clam packaged
68201	68301	White LEDs/alkaline batteries—in box
68200	68300	White LEDs w/o alkaline batteries—in box

LUMENS: 67
RUN TIME: 155h



Class I, Div. 1, Groups C, D;
Class I, Div. 2, Groups A, B, C, D;
Class II, Div. 2, Groups F&G;
Class III, T3C



Class I, Div. 2, Groups A, B, C, D;
Class II, Div. 2, Groups F&G;
Class III, T3C



Permissible Flashlight
App. No. 10C-658-0
Tested for use in methane-air
mixtures only

4AA PROPOLYMER[®] LUX

This safety-rated light has a long-reaching, bright beam and an ergonomic design for comfortable handling. Unbreakable, scratch-resistant lens. IP67- rated; waterproof to 1 meter for 30 minutes. 1 meter impact-resistance tested. Corrosion-proof.

4AA PROPOLYMER LUX

BATTERY: 4 "AA" size alkaline

SIZE: 7" x 1.35" x 1.69"
(17.8 x 3.43 x 4.29 cm)

WEIGHT: 7.6 oz (216 g)

COLOR: Yellow or Black

YELLOW BLACK

68244	68344	4AA Lux Div. 2 w/alkaline batteries
68602	68702	4AA Lux Div. 1 w/alkaline batteries

ACCESSORIES	4AA LED ProPolymer	4AA Lux ProPolymer
Yellow Safety Wand	75904	75904
Red Safety Wand	75903	75903
Blue Safety Wand	75902	75902
White Safety Wand	75908	75908
Glow-In-The-Dark Safety Wand	75913	75913
Helmet Mount	68085	68085
Gallet Helmet Mount	68269	68269
Polymount Kit	68089	68089



Safety Wands

Gallet Helmet Mount

Helmet Mount

LUMENS: 100
CANDELA: 4,200
DISTANCE: 130m
RUN TIME: 6h



Gallet Helmet Mount



Helmet Mount



Rubber Helmet Strap

4AA Lux Div. 1



Class I & II, Div. 1, Groups C, D, F & G;
Class I, Div. 2, Groups A, B, C, D;
Class III, T4



Class I & II, Div. 1, Groups C, D, F & G;
Class III, T4 Exia
Non-incendive:
Class I, Div. 2, Groups A, B, C, D



Permissible Flashlight
App. No. 20-A060002-0
Tested for use in methane-air
mixtures only

4AA Lux Div. 2



Class I, Div. 2, Groups A, B, C, D;
Class II, Div. 2, Groups F&G;
Class III, T3C (142 C)



Class I, Div. 2, Groups A, B, C, D;
Class II, Div. 2, Groups F&G;
Class III, T3C (142 C)

NFPA

Meets requirements of
NFPA 1971-8.6 (2007);
500° heat resistance test

4AA PROPOLYMAX

The brightest light in our ProPolymer® series stands up to the toughest environments. Produces a tight beam with optimum peripheral illumination. Accepts belt clip and attaches to hard hat. Sealed switch design protects it from corrosion caused by battery leakage. Unbreakable, scratch-resistant lens. Features TEN-TAP® programming, allowing user to select the order in which light modes come on.

IP67-rated for dust-tight and waterproof to 1 meter for 30 minutes. IPX4 for water spray. Non conductive; corrosion-proof.

4AA PROPOLYMAX

BATTERY: 4 "AA" size alkaline

SIZE: 7" x 1.05" x 1.5"
(17.78 x 2.67 x 3.81 cm)

WEIGHT: 8.2 oz (233 g)

COLOR: Yellow, Black or Orange

68820 with alkaline batteries - Yellow

68821 with alkaline batteries - Black

68822 with alkaline batteries - Orange

ACCESSORIES

68088 Belt Clip - fits 4AA ProPolymax

68089 Poly Mount Kit - universal mounting via MSA V-Gard slot or self-adhesive mount



Class I, Div. 2, Groups A, B, C, D;
Class II, Div. 2, Groups F&G;
Class III, T4



Class I, Div. 2, Groups A, B, C, D;
Class II, Div. 2, Groups F&G;
Class III, T4

	HIGH	LOW
LUMENS:	300	50
CANDELA:	17,000	2,500
DISTANCE:	261m	100m
RUN TIME:	2h 45m	24h

Strobe runs 6 hours



TEN-TAP® programmable switch allows user selection of one of three different programs:

- high/low/strobe (factory default)
- high only
- low/high



Belt Clip



Poly Mount Kit

**3C PROPOLYMER LED**

10 ultra-bright LEDs provide lots of bright white light and an extended run time - up to 336 hrs! Safety-rated for use in hazardous locations. Unbreakable, scratch-resistant lens. Waterproof.

3C PROPOLYMER LED

BATTERY: 3 "C" size alkaline

SIZE: 8.55" x 1.95" x 1.48"
(21.72 x 4.95 x 3.76 cm)

WEIGHT: 13.5 oz (382.73 g)

COLOR: Yellow or Black

33202 White LEDs w/o alkaline batteries - Yellow

33302 White LEDs w/o alkaline batteries - Black

LUMENS:	85
RUN TIME:	336h



Permissible Flashlight
App. No. 10C-658-D
Tested for use in methane-air mixtures only



Class I, Div. 1, Group D;
Class I, Div. 2, Groups A, B, C, D;
Class II, Div. 2, Groups F&G;
Class III, T3C



Class I, Div. 2, Groups A, B, C, D;
Class II, Div. 2, Groups F&G;
Class III, T3C





3C PROPOLYMER® HAZ-LO®

An intrinsically safe, high-performance flashlight for hazardous locations. Produces a smooth, uniform beam with optimum peripheral illumination. Virtually indestructible body. Resistant to chemicals and solvents. Sealed switch design protects it from corrosion caused by battery leakage. Unbreakable, scratch-resistant lens. 3 meter impact-resistance tested. IP67-rated for dust-tight and waterproof to 1 meter for 30 minutes. IPX4 for water spray. Anti-static and non-conductive.

3C PROPOLYMER HAZ-LO
BATTERY: 3 "C" size alkaline
SIZE: 9.3" x 1.46" x 2.08"
 (23.62 x 3.71 x 5.28 cm)
WEIGHT: 13.9 oz (394 g)
COLOR: Yellow or Orange

33820 3C ProPolymer HAZ-LO - Yellow
 33822 3C ProPolymer HAZ-LO - Orange
ACCESSORIES
 25090 Holster

LUMENS:	150
CANDELA:	7,000
DISTANCE:	167m
RUN TIME:	18h



Class I, Div 1, Groups A, B, C, D T4;
 Class II, Div. 1, Groups E, F, G;
 Class III, T4 Classified



Class I, Div 1, Groups A, B, C, D T4;
 Class II, Div. 1, Groups E, F, G;
 Class III, T4 Exia

NON-RECHARGEABLE

PROPOLYMER[®] SERIES

// STREAMLIGHT 2015

THE PROPOLYMER SERIES IS ALWAYS
READY FOR
HAZARDOUS DUTY.

3AA PROPOLYMER[®] HAZ-LO[®]

The premiere light in our ProPolymer series with the strongest blend of performance and safety ratings. Intrinsically safe for use in hazardous locations. Produces a tight beam with optimum peripheral illumination. Resistant to chemicals and solvents. Combination of visual and mechanical polarity protection ensures correct installation of batteries. Consistent performance throughout battery life. Unbreakable, scratch-resistant lens. IP67-rated for dust-resistance. Waterproof to 1 meter for 30 minutes. IPX4-rated for water spray.

3AA PROPOLYMER HAZ-LO

BATTERY: 3 "AA" size alkaline

SIZE: 7.0" x 1.05" x 1.50"
(17.78 x 2.67 x 3.81 cm)

WEIGHT: 7.5 oz (213 g)

COLOR: Yellow, Black or Orange

YELLOW	BLACK	ORANGE	
68720	68721	68722	HAZ-LO with alkaline batteries - Clam
68723	68724	-	HAZ-LO with alkaline batteries - Box
68270	-	-	Helmet Lighting Kit- HAZ-LO with white LED, alkaline batteries, helmet mount, helmet band, clam packaged

ACCESSORIES

68085	Helmet Mount
68086	Gallet Helmet Mount
68089	Polymount Kit
68088	Beltclip

LUMENS:	120
CANDELA:	14,000
DISTANCE:	237m
RUN TIME:	6h 30m



Helmet Mount

Helmet Lighting Kit



Class I, Div 1, Groups A, B, C, D;
Class II, Div. 1, Groups E, F, G;
Class III, T4 Exia

3N PROPOLYMER[®] LED

Lightweight, alkaline battery-powered personal light with 3 ultra-bright LEDs. Long run time. Impact-resistant body and face cap. Unbreakable, scratch-resistant lens.

3N PROPOLYMER LED

BATTERY: 3 "N" size alkaline

SIZE: 5.25" x .96" x .69"
(13.33 x 2.44 x 1.75 cm)

WEIGHT: 2.1 oz (59.54 g)

COLOR: Yellow or Black

62202 White LEDs and alkaline batteries—Yellow

62302 White LEDs and alkaline batteries—Black

LUMENS: 30
RUN TIME: 120h



Intrinsic Safety for Haz. Loc.
Class I, II, Div. 1, Groups A,B,C,D,E,F,G;
Class III, T4A Classified



Intrinsic Safety for Haz. Loc.
Exia Class I, II, Div. 1, Groups A,B,C,D,E,F,G;
Class III, T4A Exia



POLYSTINGER[®] LED HAZ-LO[®]

If you're working in a potentially hazardous location, this is the light you need. It provides lots of bright, white light, yet it's intrinsically safe, with a Class I, Div. 1 rating. It has an O-ring sealed, unbreakable, scratch-resistant lens. It's IPX4-rated for water-resistance, and 3 meter impact-resistance tested.

POLYSTINGER LED HAZ-LO

BATTERY: 4-cell, 4.8V NiCd sub-C

SIZE: 10.2" x 1.76" x 1.34"
(25.9 x 4.47 x 3.4 cm)

WEIGHT: 13.5 oz (382 g)

COLOR: Black or Yellow

POLYSTINGER LED HAZ-LO

76442 120V AC/12V DC—Black

76412 120V AC/12V DC—Yellow

76411 12V DC—Yellow

76441 12V DC—Black

76410 Without Charger—Yellow

76440 Without Charger—Black

TRADITION SERIES



Lanyard Ring
with lanyard for tail cap.

	HIGH	LOW
LUMENS:	130	50
CANDELA:	15,000	5,700
DISTANCE:	245m	151m
RUN TIME:	4h	12h

Moonlight mode: 20 days of continuous run time



LISTED ANSI/UL 913


Intrinsic Safety for Haz. Loc.
Cl. I, II, Div. 1 Gr. CDFG
Cl. III, 138C (T3C)
Non-Incendive: Cl. I Div. 2 Gr. ABCD
Product is tested per
ANSI/NEMA FL-1 2009 standard

Special Features:

- Non-conductive, corrosion-resistant body.
- IPX4-rated for water-resistance.
- 3 meter impact-resistance tested.

TLR-1® HL


White Light Illuminator

**HL SERIES**

OUTPUT: 630 lumens
INTENSITY: 12,000 candela
BEAM DISTANCE: 219 meters
RUN TIME: 1 hour 15 min
SIZE: 3.39" x 1.47" x 1.44"
 (8.61 x 3.73 x 3.65 cm)
WEIGHT: 4.18 oz (118.6 g)
COLOR: Black

TLR-2® HL


White Light Illuminator / Red Laser

**HL SERIES**

OUTPUT: 630 lumens
INTENSITY: 12,000 candela
BEAM DISTANCE: 219 meters
RUN TIME: 1 hour 15 min
SIZE: 3.39" x 1.47" x 1.83"
 (8.61 x 3.73 x 4.64 cm)
WEIGHT: 4.78 oz (135.5 g)
COLOR: Black

TLR-1® HPL™


White Light Illuminator

**HPL SERIES**

OUTPUT: 775 lumens
INTENSITY: 48,000 candela
BEAM DISTANCE: 438 meters
RUN TIME: 1 hour 45 min
SIZE: 4.83" x 1.44" x 2.2"
 (12.27 x 3.66 x 5.59 cm)
WEIGHT: 5.3 oz (150.3 g)
COLOR: Black

TLR-1® // TLR-1's


White Light Illuminator

**TRADITION SERIES**

OUTPUT: 300 lumens
INTENSITY: 12,000 candela
BEAM DISTANCE: 219 meters
RUN TIME: 2 hours 30 min
SIZE: 3.26" x 1.47" x 1.44"
 (8.28 x 3.73 x 3.65 cm)
WEIGHT: 4.18 oz (118.6 g)
COLOR: Black

TLR-2® // TLR-2's


White Light Illuminator / Red Laser

**TRADITION SERIES**

OUTPUT: 300 lumens
INTENSITY: 12,000 candela
BEAM DISTANCE: 219 meters
RUN TIME: 2 hours 30 min
SIZE: 3.39" x 1.47" x 1.83"
 (8.61 x 3.73 x 4.64 cm)
WEIGHT: 4.72 oz (133.8 g)
COLOR: Black

TLR-VIR® PISTOL

White Light Illuminator / IR Illuminator

**TRADITION SERIES**

OUTPUT: 300 lumens
IR OUTPUT: 1,000mW/sr
INTENSITY: 11,000 candela
VISIBLE RUN TIME: 2 hours 30 min
IR RUN TIME: 20 hours
SIZE: 3.39" x 1.47" x 2.44"
 (9.7 x 3.73 x 6.19 cm)
WEIGHT: 4.2 oz (119 g) With Batteries
COLOR: Black

USE THIS EASY COMPARISON
CHART TO CHOOSE THE BEST
LIGHT FOR YOU BASED ON THE
FEATURES THAT YOU NEED!

BEAM PATTERN

SPECS


HIGH MODE PERFORMANCE SHOWN.
FOR PERFORMANCE IN OTHER
MODES, SEE MODEL PAGES.

TLR-3[®]

White Light Illuminator



TRADITION SERIES




OUTPUT: 125 lumens
INTENSITY: 5,300 candela
RUN TIME: 1 hour 30 min
SIZE: 2.71" x 1.18" x 1.51"
(6.88 x 3 x 3.84 cm)
WEIGHT: 2.32 oz (65.8 g)
COLOR: Black

TLR-4[®]

White Light Illuminator / Red Laser



TRADITION SERIES




OUTPUT: 125 lumens
INTENSITY: 5,300 candela
RUN TIME: 1 hour 30 min
SIZE: 2.73" x 1.2" x 1.99"
(6.93 x 3.05 x 5.05 cm)
WEIGHT: 2.81 oz (79.7 g)
COLOR: Black

TLR-1[®] GAME SPOTTER[®]

Green Illuminator



TRADITION SERIES




OUTPUT: 160 lumens
INTENSITY: 31,000 candela
BEAM DISTANCE: 352 meters
RUN TIME: 1 hour 45 min
SIZE: 4.83" x 1.44" x 2.2"
(12.27 x 3.66 x 5.59 cm)
WEIGHT: 5.6 oz (158.8 g)
COLOR: Black

TLR-2[®] G

White Light Illuminator / Green Laser



TRADITION SERIES




OUTPUT: 300 lumens
INTENSITY: 12,000 candela
BEAM DISTANCE: 159 meters
RUN TIME: 2 hours 30 min
SIZE: 3.39" x 1.47" x 1.83"
(8.61 x 3.73 x 4.64 cm)
WEIGHT: 4.58 oz (130 g)
COLOR: Black

TLR-2[®] HL G

White Light Illuminator / Green Laser



HL SERIES




OUTPUT: 720 lumens
INTENSITY: 14,000 candela
BEAM DISTANCE: 237 meters
RUN TIME: 1 hour 30 min
SIZE: 3.39" x 1.47" x 1.83"
(8.61 x 3.73 x 4.64 cm)
WEIGHT: 4.78 oz (135.5 g)
COLOR: Black

TLR-4[®] G

White Light Illuminator / Green Laser



TRADITION SERIES



OUTPUT: 115 lumens
INTENSITY: 5,200 candela
RUN TIME: 1 hour 45 min
SIZE: 2.73" x 1.2" x 1.99"
(6.93 x 3.05 x 5.05 cm)
WEIGHT: 2.81 oz (79.7 g)
COLOR: Black

TACTICAL SERIES
// STREAMLIGHT 2015

NON-RECHARGEABLE

TACTICAL WEAPONS-MOUNTED SERIES // STREAMLIGHT 2015



TLR-1[®] HL TLR-2[®] HL

This versatile tactical light fits handguns and long-guns, and you can switch from one to the other in seconds. Its wide peripheral beam lets you see what's all around you, including what's lurking in corners. Includes a strobe for signaling/disorienting. Unbreakable, scratch-resistant, gasket-sealed lens. Operates in temperatures from -40°F to +120°F. IPX4-rated for water resistance. Impact resistant. Easy, fast battery installation/replacement. TLR-2 HL features a red laser.

TLR-1 HL

BATTERY: (2) 3V "CR123A" lithium

SIZE: 3.39" x 1.47" x 1.44"
(8.61 x 3.73 x 3.65 cm)

WEIGHT: 4.18 oz (118.6 g)

COLOR: Black

TLR-2 HL

BATTERY: (2) 3V "CR123A" lithium

SIZE: 3.39" x 1.47" x 1.83"
(8.61 x 3.73 x 4.64 cm)

WEIGHT: 4.78 oz (135.5 g)

COLOR: Black

TLR-1 HL TLR-2 HL

69260 69261 Includes Rail Locating Keys for Glock style, 1913 Picatinny, S&W 99/TSW, and Beretta 90two. Lithium batteries. Black.

69262 - Long Gun Kit includes: TLR-1 HL with thumb screw and "safe off" door switch, remote pressure switch and mounting clips, lithium batteries. For pistol mounting the kit also includes standard door switch, rail locating keys. Lithium batteries. Black.

WHITE LIGHT ILLUMINATOR // HL SERIES

LUMENS: 630

CANDELA: 12,000

DISTANCE: 219m

RUN TIME: 1h 15m

Long Gun Kit includes:

TLR-1 HL with thumb screw and "safe off" door switch, remote pressure switch and mounting clips, lithium batteries. For pistol mounting the kit also includes standard door switch, rail locating keys.

630 LUMENS
HL **LED** With **[(STROBE)]**
Double tap tailswitch to activate.

WHITE LIGHT ILLUMINATOR // RED LASER

TLR ACCESSORIES



	Remington 870 Mount	TLR 12 ga. Mag Mount	AR-15 M16 Mount	Ambidexterous Vert. Grip w/Rail	Rail Locating Kit	TLR Earless Screw	Nylon Holster	Contour Remote
TLR-1 HL/TLR-2 HL	69906	69901	69902	69114	69175	69264	69201/69202	69300
TLR-1/TLR-1s	69906	69901	69902	69114	69175	69125	69201	69300
TLR-2/TLR-2s	69906	69901	69902	69114	69175	69125	69202	69300
TLR-1 Gamespotter	69906	69901	69902	69114	69175	69125	-	-
TLR-2G	69906	69901	69902	69114	69175	69125	69202	-

DURABILITY, POWER, LONG-RUNNING.

ADVANTAGE: TLR TACTICAL LIGHTS

TLR-1® // TLR-1's

WHITE LIGHT ILLUMINATOR //



LUMENS:	300
CANDELA:	12,000
DISTANCE:	219m
RUN TIME:	2h 30m



AVAILABLE WITH STROBE

TLR-2® // TLR-2's

WHITE LIGHT ILLUMINATOR // RED LASER



LUMENS:	300
CANDELA:	12,000
DISTANCE:	219m
RUN TIME:	2h 30m



AVAILABLE WITH STROBE

TRADITION SERIES

Intensely bright, durable tactical light available in standard, strobe and IR. Securely fits a broad range of weapons. Produces a concentrated beam with optimum peripheral illumination. Mounts directly to handguns with Glock-style rails and to all MIL-STD-1913 (Picatinny) rails. Operates in temperatures from -40°F to +120°F. IPX7-rated waterproof to 1 meter for 30 minutes. Impact resistant. The TLR-1s includes a strobe.

TLR-1 / TLR-1S

BATTERY: (2) 3V "CR123A" lithium

SIZE: 3.39" x 1.47" x 1.44"
(8.61 x 3.73 x 3.65 cm)

WEIGHT: 4.18 oz (118.6 g)

COLOR: Black

69110	Includes Rail Locating Keys for Glock style, 1913 Picatinny, S&W 99/TSW, and Beretta 90two. Lithium batteries. Black.
69210	Strobe model includes Rail Locating Keys for Glock style, 1913 Picatinny, S&W 99/TSW, and Beretta 90two. Lithium batteries. Black.
69211	Strobe model with Earless Screw Kit, includes Rail Locating Keys for Glock style, 1913 Picatinny, S&W 99/TSW, and Beretta 90two. Lithium batteries. Black.

TRADITION SERIES

The same great features as the TLR-1 lights with a 650-600nm red laser for accurate aiming. Strobe ("S") model available. IPX4-rated for water resistance.

TLR-2 / TLR-2S

BATTERY: (2) 3V "CR123A" lithium

SIZE: 3.26" x 1.47" x 1.83"
(8.28 x 3.73 x 4.64 cm)

WEIGHT: 4.72 oz (133.8 g)

COLOR: Black

69120	with Red Laser. Includes Rail Locating Keys for Glock style, 1913 Picatinny, S&W 99/TSW, and Beretta 90two. Lithium batteries. Black.
69230	Strobe model w/ Red Laser. Includes Rail Locating Keys for Glock style, 1913 Picatinny, S&W 99/TSW, and Beretta 90two. Lithium batteries. Black.



	Door Switch	Door Switch w/ Safe Off	Retaining Clip	Tape Switch	Coil Pressure Switch	Straight Press. Switch	Red Flip Lens	Blue Flip Lens	Green Flip Lens	IR Flip Lens	Opaque Flip Lens	CR123 Batteries
TLR-1 HL/TLR-2 HL	69130	69161	88178	69132	69134	69135	69115	69116	69117	69118	69124	2 Pk. 85175
TLR-1/TLR-1s	69130	69161	88178	69132	69134	69135	69115	69116	69117	69118	69124	6 Pk. 85180
TLR-2/TLR-2s	69130	69161	88178	69132	69134	69135	69115	69116	69117	69118	69124	12 Pk. 85177
TLR-1 Gamespotter	69130	69161	88178	69132	69134	69135	-	-	-	-	-	400 Pk. 85179
TLR-2G	69130	69161	88178	69132	69134	69135	69115	69116	69117	69118	69124	

NON-RECHARGEABLE

TACTICAL WEAPONS-MOUNTED SERIES
// STREAMLIGHT 2015

TLR-1[®] HPL[™]

**HIGH-LUMEN + LONG-DISTANCE.
SEE EVERYWHERE.**

TLR-1[®] HPL[™]

This high lumen, long-range, rail-mounted tactical light has an intensely bright, far-reaching beam with a large hotspot. It throws a wide beam to illuminate your target downrange, while illuminating everything in your path. Fits long-guns. Attaches/detaches with one hand in seconds. Includes a strobe for signaling/disorienting. Operates in extreme temperatures (-40°F to +120°F). IPX4-rated for water-resistance. Impact-resistant. Easy, fast battery replacement.

TLR-1 HPL W/REMOTE

BATTERY: (2) 3V "CR123A" lithium

SIZE: 5.25" x 1.44" x 2.2"
(13.34x 3.66 x 5.59 cm)

WEIGHT: 5.6 oz (158.8 g)

COLOR: Black

TLR-1 HPL

BATTERY: (2) 3V "CR123A" lithium

SIZE: 4.83" x 1.44" x 2.2"
(12.27x 3.66 x 5.59 cm)

WEIGHT: 5.3 oz (150.3 g)

COLOR: Black

- | | |
|-------|--|
| 69215 | Standard model. Includes Rail Locating Keys for Glock style, 1913 Picatinny, S&W 99/TSW, and Beretta 90two. Lithium batteries. Black. |
| 69216 | Remote model. Includes Rail Locating Keys for Glock style, 1913 Picatinny, S&W 99/TSW, and Beretta 90two. Remote switch and Lithium batteries. Black. |
| 69219 | Long Gun Kit with thumbscrew, "Safe Off" door switch and remote pressure switch. Includes Rail Locating Keys for Glock style, 1913 Picatinny, S&W 99/TSW, and Beretta 90two. Lithium batteries. Black. |

WHITE LIGHT ILLUMINATOR // HPL SERIES

LUMENS: 775
CANDELA: 48,000
DISTANCE: 438m
RUN TIME: 1h 45m



shown with
standard switch
backplate.



shown with
remote switch
backplate.

NEW FOR 2015
775 LUMENS

LED With **[(STROBE)]**
Double tap tailswitch to activate.



TLR-1® GAME SPOTTER®

A long-gun/long-range light with a green LED that preserves night vision and won't spook game. Mounts directly to long-guns with MIL-STD-1913 (Picatinny) rails. Unbreakable, scratch-resistant, O-ring sealed lens. Operates in temperatures from -40°F to +120°F. IPX4-rated waterproof to 1 meter for 30 minutes. Impact resistant.

TLR-1 GAME SPOTTER

BATTERY: (2) 3V "CR123A" lithium

SIZE: 4.83" x 1.44" x 2.2"
(12.27 x 3.66 x 5.59 cm)

WEIGHT: 5.6 oz (158.8 g)

COLOR: Black

- | | |
|-------|---|
| 69227 | Standard model. Includes Rail Locating Keys for Glock style, 1913 Picatinny, S&W 99/TSW, and Beretta 90two. Lithium batteries. Black. |
| 69228 | Remote model. Includes Rail Locating Keys for Glock style, 1913 Picatinny, S&W 99/TSW, and Beretta 90two. Remote switch and Lithium batteries. Black. |

GREEN LIGHT ILLUMINATOR // HP SERIES

LUMENS:	150
CANDELA:	31,000
DISTANCE:	352m
RUN TIME:	1h 45m



*shown with
remote switch
backplate.*

150 LUMENS

C4 LED With **[(STROBE)]**
Double tap tailswitch to activate.

TLR ACCESSORIES



	Remington 870 Mount	TLR 12 ga. Mag Mount	AR-15 M16 Mount	TLR-1 Series Key Kit	Ambidexterous Vert. Grip w/Rail	Door Switch	Door Switch w/Safe Off	Tape Switch	Coil Pressure Switch	Straight Press. Switch
TLR-1 HPL	69906	69901	69902	69175	69114	69130	69161	69132	69134	69135
TLR-1 Gamespotter	69906	69901	69902	69175	69114	69130	69161	69132	69134	69135

NON-RECHARGEABLE

TACTICAL WEAPONS-MOUNTED SERIES
// STREAMLIGHT 2015

STREAMLIGHT

OFFERS A COMPLETE RANGE OF
IR ILLUMINATORS AND LASERS FOR
USE WITH NIGHT VISION GOGGLES.

TLR-2® IR EYE SAFE

Lightweight, compact, lithium battery powered Gun-Mounted Infrared Active Illuminator with Class 1 eye safe integrated IR aiming laser. The illuminator features the latest in shock-proof high power infrared LED technology providing at least 7.5 hrs of continuous run time when in dual mode with the infrared laser. Rail clamp designed to rapidly attach/detach from side of weapon.

TLR-2 IR EYE SAFE

BATTERY: (2) 3V "CR123A" lithium

SIZE: 3.39" x 1.47" x 1.83"
(8.61 x 3.73 x 4.64 cm)

WEIGHT: 4.72 oz (133.8 g)

COLOR: Black

69166 IR w/ Eye Safe Laser. Includes Rail Locating Keys for Glock style, 1913 Picatinny, S&W 99/TSW, and Beretta 90two. Lithium batteries. Black.

IR ILLUMINATOR // EYE SAFE IR LASER

IR LED OUTPUT: 125mW/sr

IR LASER OUTPUT: Less than .8mW

RUN TIME: 7h 30m

IR Laser mode: 45+ hours of run time



	Remington 870 Mount	TLR 12 ga. Mag Mount	AR-15 M16 Mount	Ambidextrous Vert. Grip w/Rail	TLR Key Kit	TLR Earless Screw	Nylon Holster	Contour Remote-Glock	Contour Remote-M6P
TLR-2 IR EYE SAFE	69906	69901	69902	69114	69175	69125	69202	69300	69310
TLR-2 IRW	69906	69901	69902	69114	69175	69125	69202	69300	69310
TLR-1 IR LED	69906	69901	69902	69114	69175	69125	69201	69300	69310



TLR-2® IRW

Features a Class 1 "Eye Safe" Infrared laser along with a blinding bright white light for long-range targeting. User programmable strobe enable/disable. Mounts directly to handguns with Glock-style rails and to all MIL-STD-1913 (Picatinny) rails. Operates in temperatures from -40°F to +140°F. IPX4-rated for water-resistance.

TLR-2 IRW EYE SAFE

BATTERY: (2) 3V "CR123A" lithium

SIZE: 3.39" x 1.47" x 1.83"
(8.61 x 3.73 x 4.64 cm)

WEIGHT: 4.72 oz (133.8 g)

COLOR: Black

69165 TLR-2 IRW. Includes Rail Locating Keys for Glock style, 1913 Picatinny, S&W 99/TSW, and Beretta 90two. Lithium batteries. Black.

WHITE LIGHT ILLUMINATOR // EYE SAFE IR LASER

LUMENS: 300

CANDELA: 12,000

IR LASER OUTPUT: Less than .8mW

DISTANCE: 219m

RUN TIME: 2h 30m

Laser mode: 45+ hours of run time



300 LUMENS

TLR-1® IR LED

Lightweight, compact, lithium battery powered Gun-Mounted Active Illuminator featuring the latest in high power infrared LED technology. The illuminator is built with a shock-proof LED and provides at least 7.5 hours of continuous run time. Rail clamp designed to rapidly attach/detach from side of weapon.

TLR-1 IR LED

BATTERY: (2) 3V "CR123A" lithium

SIZE: 3.26" x 1.47" x 1.44"
(8.28 x 3.73 x 3.65cm)

WEIGHT: 4.18 oz (118.6 g) with batteries


COLOR: Black

69150 IR. Includes Rail Locating Keys for Glock style, 1913 Picatinny, S&W 99/TSW, and Beretta 90two. Lithium batteries. Black.

IR ILLUMINATOR

IR LED OUTPUT: 125mW/sr

IR RUN TIME: 7h 30m

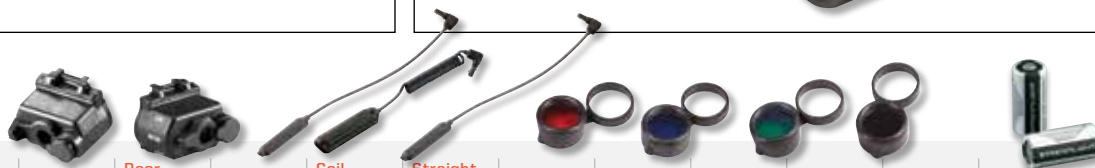

	Door Switch	Door Switch w/ Safe Off	Tape Switch	Coil Pressure Switch	Straight Press. Switch	Red Flip Lens	Blue Flip Lens	Green Flip Lens	IR Flip Lens	Opaque Flip Lens	CR123 Batteries
TLR-2 IR EYE SAFE	69130	69161	69132	69134	69135	69115	69116	69117	69118	69124	6 Pk. 85175
TLR-2 IRW	69130	69161	69132	69134	69135	69115	69116	69117	69118	69124	12 Pk. 85177
TLR-1 IR LED	69130	69161	69132	69134	69135	69115	69116	69117	69118	69124	400 Pk. 85179

NON-RECHARGEABLE

TACTICAL WEAPONS-MOUNTED SERIES
// STREAMLIGHT 2015



TLR-VIR[®]
**BLINDING LIGHT OR
INVISIBLE IR ILLUMINATOR...**
YOU CHOOSE.



	Remington 870 Mount	TLR 12 ga. Mag Mount	AR-15 M16 Mount	Ambidexterous Vert. Grip w/Rail	TLR Key Kit	Nylon Holster
TLR-VIR Pistol	69906	69901	69902	69114	69175	69201
TLR-VIR	69906	69901	69902	69114	69175	69202

TLR-VIR® PISTOL

This combination bright white C4® LED and infrared illuminator is designed for use with a pistol. It has a lower profile than the original TLR-VIR, and it's waterproof to 66 ft. in its standard configuration. The IR illuminator is within the same lens as the white light. You can easily transition from white light to IR with a switch at the bottom of the light. There's no need to remove your eyes from the target or alter your firing grip. It has the standard momentary and constant-on ambidextrous switch as well.

TLR-VIR PISTOL

BATTERY: (2) 3V "CR123A" lithium

SIZE: 3.39" x 1.47" x 1.44"
(8.61 x 3.73 x 3.65cm)

WEIGHT: 4.2 oz (119 g) with batteries

COLOR: Black

69190 Includes rail locating keys for Glock style, 1913 Picatinny, S&W 99/TSW, and Beretta 90two, and 2 CR123A lithium batteries.

TLR-VIR PISTOL

LUMENS: 300

CANDELA: 11,000

IR OUTPUT: 1000mW/sr

VISIBLE RUN TIME: 2h 30m

IR RUN TIME: 32h

300 LUMENS



Ambidextrous momentary steady-on-off switch



3 Position mode selector switch (IR, safe off, visible)



TLR-VIR®

Designed to be used with a long gun, includes both a white LED and an Infrared (IR) illuminator for use with night vision goggles. Also features programmable strobe. Momentary/steady On-Off switch with plug port for momentary remote switch. Switch between white and IR as needed. User programmable strobe enable/disable. Includes a standard mount and remote switch. Operates in temperatures from -40°F to +150°F. IPX7-rated waterproof to 1 meter for 30 minutes. Designed to fits all long guns with MIL-STD-1913 rails.

TLR-VIR

BATTERY: (2) 3V "CR123A" lithium

SIZE: 3.82" x 1.47" x 2.03"
(9.70 x 3.73 x 5.16cm)

WEIGHT: 6.0 oz (170 g) with batteries, retained lens cap and remote switch

COLOR: Black

69180 Includes opaque lens cover, remote switch, 1913 key. (2) CR123A Lithium batteries.

WHITE LIGHT ILLUMINATOR // IR ILLUMINATOR

TLR-VIR

LUMENS: 300

CANDELA: 12,000

IR OUTPUT: 1000mW/sr

VISIBLE RUN TIME: 2h 30m

IR RUN TIME: 20h

300 LUMENS



With **[(STROBE)]**
Double tap tailswitch to activate.



opaque lens cover



	Contour Remote-Glock	Contour Remote-MSP	Door Switch	Door Switch w/ Safe Off	Tape Switch	Coil Pressure Switch	Straight Press. Switch	Red Flip Lens	Blue Flip Lens	Green Flip Lens	IR Flip Lens	Opaque Flip Lens	CR123 Batteries
TLR-VIR Pistol	69300	69310	69130	69161	69132	69134	69135	69115	69116	69117	69118	69124	2 Pk. 85175
TLR-VIR	69300	69310	69130	69161	69132	69134	69135	69115	69116	69117	69118	69124	6 Pk. 85180

NON-RECHARGEABLE

TACTICAL SUB-COMPACT WEAPONS-MOUNTED SERIES
// STREAMLIGHT 2015



DURABILITY, POWER, LONG-RUNNING.

ADVANTAGE: TLR TACTICAL LIGHTS

TLR-4® G

Extremely compact weapon-mounted light specifically designed for compact/sub-compact weapons, yet still fits a broad range of handguns. Produces a concentrated beam with optimum peripheral illumination. It includes a long-range green laser to help guide your aim. Thanks to new technology, the laser operates through an extended temperature range - from -20°F to +120°F. IPX4-rated for water-resistance.

TLR-4 G

BATTERY: (1) 3V "CR2" lithium

SIZE: 2.73" x 1.2" x 1.99"
(6.93 x 3.05 x 5.05 cm)

WEIGHT: 2.81 oz (79.7 g)

COLOR: Black

- | | |
|-------|--|
| 69245 | Standard model includes rail locating keys for a variety of weapons with Picatinny or Glock style rails. Lithium battery. Black. |
| 69246 | H&K USP Compact Model. Black. |
| 69247 | H&K USP Full-Size Model. Black. |

WHITE LIGHT ILLUMINATOR // GREEN LASER

LUMENS:	115
CANDELA:	5,200
RUN TIME:	1h 45m

115 LUMENS



INTRODUCING THE TLR-2 HL G... HOME DEFENSE HAS GONE HIGH-LUMEN.

TLR-2 HL® G

We added a direct drive green laser to this powerful high-lumen weapons light. The green is clearly visible to guide your aim even in bright sunlight. You can count on the light and laser even in extreme temperatures from -20°F to +120°F. IPX4 rated for water resistance.

TLR-2 HL G

BATTERY: (2) 3V "CR123A" lithium

SIZE: 3.39" x 1.47" x 1.83"
(8.61 x 3.73 x 4.64 cm)

WEIGHT: 4.78 oz (135.5 g)

COLOR: Black

69265 Includes Rail Locating Keys for Glock style, 1913 Picatinny, S&W 99/TSW, and Beretta 90two. Lithium batteries. Black.

WHITE LIGHT ILLUMINATOR // GREEN LASER

LUMENS: 720
CANDELA: 14,000
DISTANCE: 237m
RUN TIME: 1h 30m

Laser mode: 17 hours of run time

NEW FOR 2015
720 LUMENS



HL® **C4 LED** With **[(STROBE)]**
Double tap tailswitch to activate.

TLR-2® G

The G is for green. Highly visible (even in daylight) green laser assists in target acquisition. Mounts directly to handguns with Glock-style rails and to all MIL-STD-1913 (Picatinny) rails. Operates in temperatures from 32°F to 104°F. IPX4-rated for water-resistance. Features a strobe that can be disabled.

TLR-2 G

BATTERY: (2) 3V "CR123A" lithium

SIZE: 3.39" x 1.47" x 1.83"
(8.61 x 3.73 x 4.64 cm)

WEIGHT: 4.58 oz (130 g)

COLOR: Black

69250 Includes Rail Locating Keys for Glock style, 1913 Picatinny, S&W 99/TSW, and Beretta 90two. Lithium batteries. Black.

WHITE LIGHT ILLUMINATOR // GREEN LASER

LUMENS: 300
CANDELA: 12,000
DISTANCE: 159m
RUN TIME: 2h 30m

Laser mode: 17 hours of run time

UPDATED FOR 2015
300 LUMENS



C4 LED With **[(STROBE)]**
Double tap tailswitch to activate.

NON-RECHARGEABLE

TACTICAL SUB-COMPACT WEAPONS-MOUNTED SERIES
// STREAMLIGHT 2015

TLR-6

PERFECT PERSONAL DEFENSE ULTRA-COMPACT LIGHT

TLR-6™

An INDUSTRY FIRST - A WHOLE NEW LIGHTING CATEGORY: The first subcompact pistol light with both an LED and a laser. Custom fit for GLOCK® 42 and GLOCK® 43. Durable, impact-resistant polymer construction; IPX4 water-resistant. 1 meter impact resistance tested

TLR-6

BATTERY: (2) 3V CR-1/3 N lithium

SIZE: 2.30" x .085" x 1.42"
(5.84 x 2.16 x 3.61 cm)

WEIGHT: 1.27 oz (36 g)

COLOR: Black

69270 TLR-6 with lithium batteries

All Rights Reserved. The pistol is shown for illustration purposes only and the term Glock® is a registered trademark of Glock, Inc.

WHITE LIGHT ILLUMINATOR // RED LASER

LUMENS:	100
CANDELA:	2,000
DISTANCE:	89m
RUN TIME:	1h

Laser mode: 11 hours of run time

NEW FOR 2015
100 LUMENS



TLR-4[®]

Designed for sub-compact and compact weapons with all the same great features as the TLR-3 plus a red laser to guide your aim. Operates in temperatures from -40°F to +120°F. IPX4-rated water-resistant.

TLR-4

BATTERY: (1) 3V "CR2" lithium

SIZE: 2.73" x 1.2" x 1.99"
(6.93 x 3.05 x 5.05 cm)

WEIGHT: 2.81 oz (79.7 g)

COLOR: Black

69240 Standard model includes rail locating keys for a variety of weapons with Picatinny or Glock style rails. Lithium battery. Black.

69241 H&K USP Compact Model. Black.

69242 H&K USP Full-Size Model. Black.

TLR-3/TLR-4/TLR-4G ACCESSORIES:

Accessory Name	TLR-3	TLR-4/TLR-4G
CR2 lithium batteries—2 Pack	69223	69223
H&K USP Conversion Kit—Compact	69224	69224
H&K USP Conversion Kit—Full Size	69225	69225
Holster	69201	69202
Key Kit	69176	69176

WHITE LIGHT ILLUMINATOR // RED LASER

LUMENS:	125
CANDELA:	5,300
RUN TIME:	1h 30m

Laser mode: 11 hours of run time



125 LUMENS



TLR-3[®]

Lightweight and powerful, this super-bright light is designed for sub-compact and compact weapons, yet it fits the broadest array of handguns - up to full size. Operates in temperatures from -40°F to +120°F. IPX4-rated waterproof to 1 meter for 30 minutes.

TLR-3

BATTERY: (1) 3V "CR2" lithium

SIZE: 2.71" x 1.18" x 1.51"
(6.88 x 3 x 3.84 cm)

WEIGHT: 2.32 oz (65.8 g)

COLOR: Black

69220 Standard model includes rail locating keys for a variety of weapons with Picatinny or Glock style rails. Lithium battery. Black.

69221 H&K USP Compact Model. Black.

69222 H&K USP Full-Size Model. Black.

WHITE LIGHT ILLUMINATOR //

LUMENS:	125
CANDELA:	5,300
RUN TIME:	1h 30m



125 LUMENS



NON-RECHARGEABLE

TACTICAL HAND-HELD SERIES // STREAMLIGHT 2015

WHEN IT COMES TO HAND-HELD TACTICALS...

THE BRIGHTEST LIGHT CONTROLS THE FIGHT.

SUPER TAC® X

Super bright with high, low and strobe modes. Far-reaching beam is ideal for long-range target acquisition. Unbreakable, scratch-resistant lens. IPX4-rated for water resistance. 2 meter impact-resistance tested. Openings O-ring sealed. Regulated intensity throughout battery life.

SUPER TAC X

BATTERY: (2) 3V "CR123A" lithium

SIZE: 6.62" x 2.2" x .9"
(16.81 x 5.59 x 2.29 cm)

WEIGHT: 7.1 oz (200 g)

COLOR: Black

88708 with holster and lithium batteries. Boxed. Black.

88709 with lithium batteries. Clam packaged. Black.

88710 Super Tac Kit: Vert. grip with mount. Boxed. Black.

	HIGH	LOW
LUMENS:	200	10
CANDELA:	40,000	2,000
DISTANCE:	400m	89m
RUN TIME:	2h 30m	50h

Strobe runs 6 hours



With **[(STROBE)]**
Double tap switch to activate.



Suitable for
weapon-mount.

Super Tac Kit. Includes vertical grip
with rail and low profile mount.

TL-2® X

Pierces the darkness and shines for hours. Produces smooth beam with optimum peripheral illumination to aid in navigation. High, low modes plus strobe. Includes belt/pocket clip. IPX4-rated for water-resistance. 3 meter impact-resistance tested. Maximum light output throughout battery life.

TL-2 X

BATTERY: (2) 3V "CR123A" lithium

SIZE: 5.65" x 1.25" x 0.9"
(13.33 x 3.18 x 2.29 cm)

WEIGHT: 4.7 oz (129 g)

COLOR: Black

88119 with lithium batteries. Black.

	HIGH	LOW
LUMENS:	200	10
CANDELA:	11,000	550
DISTANCE:	210m	47m
RUN TIME:	2h 30m	50h

Strobe runs 6 hours



With **[(STROBE)]**
Double tap switch to activate.



Suitable for
weapon-mount.



	Remote Switch Retaining Clips	12 Ga. Mag Tube	Rail Mount	Amb. Vert Grip w/Rail	AR15/M16 Adapter	Low Profile Mount	Remote Switch w/Coil Cord*	Remote Switch w/8" Cord*
Super Tac X	88178	69903	69100	69114	69902	88118	88186	88185
TL-2 X	88178	69903	69100	69114	69902	88118	88186	88185
NightFighter X	-	-	-	-	-	-	*Fits TangoDown Rail Covers (includes two screws, tie wrap, double stick tape and retaining clips)	
Scorpion X	-	-	-	-	-	-		

The only tactical light with a rubberized grip and tail switch is now a water-resistant, high lumen flashlight! It has 600 lumens of blinding light, TEN-TAP® programming and a new sleeve design for better grip.

SCORPION HL

BATTERY: (2) 3V "CR123A" lithium

SIZE: 5.46" x 1.375" x .96"
(13.87 x 3.49 x 2.44 cm)

WEIGHT: 4.8 oz (136 g)

COLOR: Black

85400 with lithium batteries. Black.

	HIGH	LOW
LUMENS:	600	33
CANDELA:	16,000	800
RUN TIME:	1.25h	18h

Strobe runs 2.5 hours

TEN-TAP® programmable switch allows user selection of one of three different programs:

- high/strobe/low (factory default)
- high only
- low/high


SCORPION® X

Full-featured tactical light with high, low and strobe modes and a rubberized housing for secure grip. IPX4-rated for water-resistance. Unbreakable, scratch-resistant lens. 3 meter impact-resistance tested. Maximum light output throughout battery life.

SCORPION X

BATTERY: (2) 3V "CR123A" lithium

SIZE: 5.6" x 1.25" x .94"
(14.22 x 3.18 x 2.39 cm)

WEIGHT: 5.0 oz (142 g)

COLOR: Black

85011 with lithium batteries. Black.

	HIGH	LOW
LUMENS:	200	10
CANDELA:	11,000	550
DISTANCE:	210m	47m
RUN TIME:	2h 30m	50h

Strobe runs 6 hours


NIGHTFIGHTER® X

The brightest light in the ultra-light Nightfighter series. Unique adjustable ring for one-handed operation. Features high, low and strobe modes. IPX4-rated for water-resistance. 3 meter impact-resistance tested. Maximum light output throughout battery life.

NIGHTFIGHTER X

BATTERY: (2) 3V "CR123A" lithium

SIZE: 5.4" x 1.25" x .88"
(13.72 x 3.18 x 2.24 cm)

WEIGHT: 5.2 oz (147 g)

COLOR: Black

88008 with lithium batteries. Black.

	HIGH	LOW
LUMENS:	200	10
CANDELA:	11,000	550
DISTANCE:	210m	47m
RUN TIME:	2h 30m	50h

Strobe runs 6 hours



The fully adjustable ring – unique to the NightFighter X – adjusts to any hand size, providing a sure grip for one-handed operation.


TACTICAL ACCESSORIES

	Nylon Holster	Tactical Holster	Red Flip Lens	Green Flip Lens	Blue Flip Lens	IR Flip Lens	CR123 Batteries
Super Tac X	75910	88051	–	–	–	–	2 Pk. 85175
TL-2 X	85905	88051	85115	85117	85116	74039	6 Pk. 85180
NightFighter X	85905	88051	85115	85117	85116	74039	12 Pk. 85177
Scorpion X	85905	88051	85115	85117	85116	74039	400 Pk. 85179



Our legacy products remain available. Please see www.streamlight.com for details.

NON-RECHARGEABLE

POLYTAC SERIES // STREAMLIGHT 2015



POLYTAC 90°

This versatile right-angle compact light is a great for a wide variety of uses. It has a super-bright, far-reaching beam, and a slip-resistant grip. It clips onto turn-out gear or can be used as a headlamp. 90° swiveling head. Integrated carabiner style D-ring for a variety of attachment methods. IPX7-rated waterproof to 1 meter/30 minutes. 1 meter impact-resistant tested. Removable clip allows for variety of mounting positions

POLYTAC 90

BATTERY: (2) 3V "CR123A" lithium

SIZE: 5.22" x 1.25" x 1"
(13.3 x 3.18 x 2.54 cm)

WEIGHT: 4.1 oz (116 g)

COLOR: Black, Yellow or Orange

88830	with lithium batteries—Black
88831	with lithium batteries—Yellow
88834	with lithium batteries—Orange
88832	with lithium batteries & Gear Keeper®—Orange

NFPA

Meets requirements of
NFPA 1971-8.6 (2007)

	HIGH	LOW
LUMENS:	170	17
CANDELA:	7,000	700
DISTANCE:	167m	53m
RUN TIME:	3h 45m	30h

Strobe runs 6 hours




Includes integrated clip and foldable hook.

Top-mounted switch for easy on/off.



POLYTAC ACCESSORIES

Gear Keeper® Tether features spectra nylon line with 36" extension and 6 oz. retraction force.

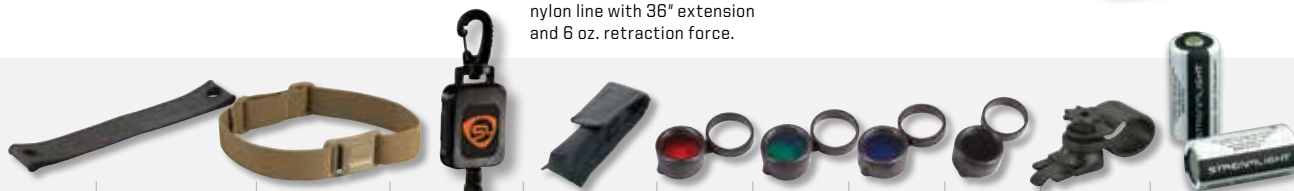

	Rubber Helmet Strap	Elastic Headstrap	Gear Keeper®	Deluxe Holster	Red Flip Lens	Green Flip Lens	Blue Flip Lens	Infrared Lens	Polymount Kit	CR123 Batteries
PolyTac	99075	—	85909	—	69115	69117	69116	69118	68089	2 Pk. 85175
PolyTac HP	99075	—	—	—	—	—	—	—	—	6 Pk. 85180
PolyTac 90	—	14059	—	88833	69115	69117	69116	69118	—	12 Pk. 85177

THE POLYTAC SERIES ARE SUPER-BRIGHT AND WITHSTAND CONSTANT PUNISHMENT.

POLYTAC®

Rugged housing, extreme brightness and extended run times make this ideal for the broadest range of lighting applications at the best value. Superior grip texture for a comfortable/slip-resistant feel. TEN-TAP® programming lets you choose the order of operating modes (high, low, strobe). IPX7-rated waterproof to 1 meter/30 minutes. Maximum light output throughout battery life.

POLYTAC

BATTERY: (2) 3V "CR123A" lithium

SIZE: 5.34" x 1.36" x 1"
(13.56 x 3.54 x 2.54 cm)

WEIGHT: 4.1 oz (116 g)

COLOR: Black, Coyote or Yellow

NFPA

Meets requirements of
NFPA 1971-8.6 (2007)

88850	with lithium batteries—Black
88851	with lithium batteries—Coyote
88853	with lithium batteries—Yellow
88854	Helmet Lighting Kit—includes rubber strap & helmet mount

TRADITION SERIES

	HIGH	LOW
LUMENS:	275	14
CANDELA:	9,500	500
DISTANCE:	195m	45m
RUN TIME:	3h	65h

Strobe runs 5.5 hours

C4 LED With **[(STROBE)]**
Double tap switch to activate.



Helmet Lighting Kit



POLYTAC® HP

Super-bright with a long-range beam - ideal for lighting the way to the end of a dark alley, down a wooded path, inspecting utility lines from the ground, or search and rescue missions. Virtually indestructible housing. Features a superior grip texture for a comfortable/slip-resistant feel. TEN-TAP® programming lets you choose the order of operating modes (high, low, strobe). IPX7-rated waterproof to 1 meter/30 minutes. Maximum light output throughout battery life.

POLYTAC HP

BATTERY: (2) 3V "CR123A" lithium

SIZE: 5.90" x 1.68" x 1"
(14.35 x 4.26 x 2.54 cm)

WEIGHT: 5.2 oz (148 g)

COLOR: Black, Coyote or Yellow

88860	with lithium batteries—Black
88861	with lithium batteries—Coyote
88863	with lithium batteries—Yellow

HP SERIES

	HIGH	LOW
LUMENS:	275	14
CANDELA:	19,000	1,000
DISTANCE:	275m	63m
RUN TIME:	3h	56h

Strobe runs 5.5 hours

C4 LED With **[(STROBE)]**
Double tap switch to activate.



NON-RECHARGEABLE

PROTAC[®] SERIES // STREAMLIGHT 2015

PROTAC HL[®]

One of the brightest tactical personal carry lights of its size. Far-reaching beam. TEN-TAP[®] programming lets you choose the order of operating modes (high, low, strobe). IPX7-rated water-proof to 1 meter/30 minutes. 1 meter impact-resistance tested.

PROTAC HL

BATTERY: (2) 3V "CR123A" lithium

SIZE: 5.4" x 1.375" x 1.0"
(13.72 x 3.49 x 2.54 cm)

WEIGHT: 5.6 oz (158 g)

COLOR: Black

88040	with lithium batteries and holster-Black
88043	Holster

	HIGH	LOW
LUMENS:	750	35
CANDELA:	18,300	900
DISTANCE:	270m	60m
RUN TIME:	1h 15m	18h

Strobe runs 2.5 hours

Nylon
Holster

UPDATED FOR 2015
750 LUMENS



With **[(STROBE)]**
Double tap switch to activate.

HL SERIES

TEN-TAP[®] programmable switch allows user selection of one of three different programs:

- high/strobe/low (factory default)
- high only
- low/high

PROTAC HL[®] USB

The ProTac HL USB is incredibly bright and features new multiple power source capability. It runs on either our lithium ion rechargeable battery or aftermarket Li-On 18650 rechargeable battery or CR123 batteries. It recharges by connecting to a USB port, so it's easy to charge on the go. Anti-rattle battery compartment keeps batteries securely and quietly in place and doesn't need a battery carrier. TEN-TAP[®] programming lets you choose the selection operating modes (high/strobe/low, high only or low/medium/high). IPX4 rated for water resistance.

PROTAC HL USB

BATTERY: Lithium-ion or (2) 3V "CR123A" lithium

SIZE: 6.5" x 1.23" x 1.07"
(16.5 x 3.1 x 2.7 cm)

WEIGHT: 7.2 oz (204 g) with Li Ion battery

COLOR: Black

88052	with USB Cord and holster-Black
88054	with USB 120V/DC and holster-Black
22057	USB Cord
22058	120V AC Wall Adapter

	HIGH	MEDIUM	LOW
LUMENS:	850	350	85
CANDELA:	10,000	4,000	1,000
DISTANCE:	200m	126m	63m
RUN TIME:	1h 30m	4h	12h

Strobe runs 1.5 hours

TEN-TAP[®] programmable switch allows user selection of one of three different programs:

- high/strobe/low (factory default)
- high only
- low/medium/high

NEW FOR 2015
850 LUMENS



With **[(STROBE)]**
Double tap switch to activate.

HL SERIES

Recharge by plugging into USB port or optional AC wall adapter

NEED HIGH LUMEN PERFORMANCE? CHOOSE THE PROTAC HL3 WITH 1,100 LUMENS.

PROTAC HL® 3

New technology allows us to put 1,100 lumens in the palm of your hands with a wide beam pattern that illuminates an entire area. TEN-TAP® programming lets you choose the order of operating modes (high, low, strobe). IPX7-rated waterproof to 1 meter/30 minutes. 1 meter impact-resistance tested.

PROTAC HL 3

BATTERY: (3) 3V "CR123A" lithium

SIZE: 7.1" x 1.73" x 1.0"
(18.03 x 4.39 x 2.54 cm)

WEIGHT: 9.3 oz (263 g)

COLOR: Black

88047 with lithium batteries and holster—Black

88048 Holster

HL SERIES

	HIGH	LOW
LUMENS:	1,100	35
CANDELA:	36,000	1,200
DISTANCE:	379m	69m
RUN TIME:	2h	43h

Strobe runs 1.5 hours



1,100 LUMENS



TEN-TAP® programmable switch allows user selection of one of three different programs:

- high/strobe/low (factory default)
- high only
- low/high

PROTAC HL® HEADLAMP

The perfect light for when your task requires both hands and a bright light with a wide, long-range beam. 90° tilting head reduces neck fatigue. TEN-TAP® programming lets you choose the order of operating modes (high, medium, low). IPX4-rated for water resistance. 1 meter impact-resistance tested. Maximum light output throughout battery life.

PROTAC HL HEADLAMP

BATTERY: (2) 3V "CR123A" lithium

SIZE: 3.66" x 1.2" x 2.6"
(9.30 x 3.05 x 6.60 cm)

WEIGHT: 6.6 oz (187 g)

COLOR: Black

61304 with lithium batteries—Black

HL SERIES

	HIGH	MEDIUM	LOW
LUMENS:	635	105	20
CANDELA:	8,500	1,450	280
DISTANCE:	184m	76m	33m
RUN TIME:	1h 45m	8h	36h

TEN-TAP® programmable switch allows user selection of one of three different programs:

- high/medium/low (factory default)
- high only
- low/medium/high



UPDATED FOR 2015

635 LUMENS



NON-RECHARGEABLE

PROTAC SERIES
// STREAMLIGHT 2015

THE PROTAC SERIES... SMALLEST, LIGHTEST HAND-HELD TACTICALS.

PROTAC® 1L
PROTAC® 2L

They're both compact and lightweight, yet powerful, bright, with long run times and lots of important features. TEN-TAP® programming for user selection of mode programs (high, low, strobe). IPX7 waterproof to 1 meter for 30 minutes. 2 meter impact resistance tested. Maximum light output throughout battery life.

PROTAC 1L

BATTERY: (1) 3V "CR123A" lithium

SIZE: 3.43" x .9" x .77"
(8.71 x 2.29 x 1.96 cm)

WEIGHT: 2.0 oz (57 g)

COLOR: Black

PROTAC 2L

BATTERY: (2) 3V "CR123A" lithium

SIZE: 4.77" x .9" x .77"
(12.12 x 2.29 x 1.96 cm)

WEIGHT: 2.8 oz (79 g)

COLOR: Black

PROTAC® 1L

88030 with (1) lithium battery and holster - Black

88035 Holster

PROTAC® 2L

88031 with (2) lithium batteries and holster - Black

88036 Holster

	HIGH	LOW
LUMENS:	180	12
CANDELA:	3,800	250
DISTANCE:	123m	32m
RUN TIME:	2h	24h

Strobe runs 4 hours



Nylon Holster

TEN-TAP® programmable switch allows user selection of one of three different programs:

- high/strobe/low (factory default)
- high only
- low/high



Nylon Holster



	HIGH	LOW
LUMENS:	260	13
CANDELA:	5,600	300
DISTANCE:	150m	35m
RUN TIME:	3h	50h

Strobe runs 6 hours

PROTAC® EMS

Provides optimal non-glare light for pupil and wound examination. Long run time. Tempered glass lens for maximum beam clarity. IPX7-rated waterproof to 1 meter for 30 minutes. Maximum light output throughout battery life. Removable pocket clip.

PROTAC EMS

BATTERY: (1) "AA" alkaline or lithium

SIZE: 3.97" x .9" x .65"
(10.08 x 2.29 x 1.65 cm)

WEIGHT: 2.3 oz (65 g)

COLOR: EMS Blue

88034 with (1) alkaline battery and holster - EMS Blue

88037 Holster

	LOW	MED	HIGH
LUMENS:	3.6	10	50
CANDELA:	120	340	1,450
DISTANCE:	20m	36m	76m
RUN TIME:	36h	14h	1h 30m

Nylon Holster



PROTAC® 1AA PROTAC® 2AA

Both models are small enough to carry in a pocket, lightweight, yet extremely bright. TEN-TAP® programming for user selection of mode programs (high, low, strobe). IPX7 waterproof to 1 meter for 30 minutes. 2 meter impact resistance tested. Maximum light output throughout battery life.

PROTAC 1AA

BATTERY: (1) "AA" alkaline or lithium

SIZE: 4.16" x .9" x .65"
(10.57 x 2.29 x 1.65 cm)

WEIGHT: 2.3 oz (65 g)

COLOR: Black

PROTAC 2AA

BATTERY: (2) "AA" alkaline or lithium

SIZE: 6.14" x .9" x .65"
(15.60 x 2.29 x 1.65 cm)

WEIGHT: 3.4 oz (96 g)

COLOR: Black

PROTAC® 1AA

88032 with (1) alkaline battery and holster—Black

88037 Holster

PROTAC® 2AA

88033 with (2) alkaline batteries and holster—Black

88038 Holster

	HIGH	LOW
LUMENS:	70	5
CANDELA:	1,450	125
DISTANCE:	76m	22m
RUN TIME:	2h	32h

Strobe runs 4 hours



	HIGH	LOW
LUMENS:	155	11
CANDELA:	3,300	200
DISTANCE:	115m	28m
RUN TIME:	2h	36h

Strobe runs 4 hours

Nylon
Holster

Nylon
Holster

PROTAC® 2AAA

Lightweight personal flashlight with three modes (high, low, and strobe), a removable pocket clip and a 30-hr. run time on low. IPX7 waterproof to 1 meter for 30 minutes. Maximum light output throughout battery life.

PROTAC 2AAA

BATTERY: (2) "AAA" alkaline

SIZE: 5.62" x .72" x .5"
(14.27 x 1.83 x 1.27 cm)

WEIGHT: 2.0 oz (57 g)

COLOR: Black

PROTAC® 2AAA

88039 w/alkaline batteries—Black

88045 Holster

	HIGH	LOW
LUMENS:	80	10
CANDELA:	1,550	200
DISTANCE:	80m	28m
RUN TIME:	1h 30m	30h

Strobe runs 5 hours



PROTAC® 1AAA

Our smallest, brightest ProTac in the ProTac family. It's ultra-compact and ultra-powerful for its size with all the features of the ProTac family including TEN-TAP® programming. The perfect pocket light to carry with you wherever you go. IPX7 waterproof to 1 meter for 30 minutes. ProTac 1AAA also accepts lithium battery for longer run time.

PROTAC 1AAA

BATTERY: (1) "AAA" alkaline or lithium

SIZE: 3.94" x .71" x .57"
(10.0 x 1.80 x 1.44 cm)

WEIGHT: 1.3 oz (37 g)

COLOR: Black

PROTAC® 1AAA

88049 with (1) alkaline battery and holster—Black

LITHIUM	HIGH	LOW
LUMENS:	70	5
CANDELA:	550	40
DISTANCE:	47m	13m
RUN TIME:	2h 15m	22h

Strobe runs 5 hours

ALKALINE	HIGH	LOW
LUMENS:	70	5
CANDELA:	550	40
DISTANCE:	47m	13m
RUN TIME:	30m	11h

Strobe runs 12 hours

NEW FOR 2015



TEN-TAP® programmable switch allows user selection of one of three different programs:

- high/strobe/low (factory default)
- high only
- low/high

SIDEWINDER®

Meets a wide variety of hands-free illumination requirements with various color LEDs at different outputs. 185° tilting head and belt/web clip for multiple positioning/aiming of light. Designed for easy selection of light modes when in the field and when wearing gloves. IPX7-rated waterproof to 1 meter for 30 minutes. 3 meter impact-resistance tested. O-ring and gasket-sealed for waterproof operation. Meets MIL-STD-810F, METHOD 512.4.

SIDEWINDER

BATTERY: (2) "AA" alkaline or (2) "AA" lithium for extended operation in extreme temperatures (-40° F to +150° F)

SIZE: 2.34" x 1.08" x 4.65"
(5.94 x 2.74 x 11.81 cm)

LITHIUM WEIGHT: 4.38 oz (124 g)

ALKALINE WEIGHT: 5.02 oz (142 g)

COLOR: Coyote

Military Model

14000 w/alkaline—White, Red, Blue, IR LEDs. Clam packaged.

NSN-6230-01-556-0487

14027 w/alkaline—White, Red, Blue, IR LEDs w/Helmet Mount. Clam packaged.

NSN-6230-01-571-8752

14031 w/alkaline—White, Red, Blue, IR LEDs w/E-mount. Clam packaged.

14032 w/alkaline—White, Red, Blue, IR LEDs w/Helmet Mount. Boxed.

NSN-6230-01-571-1331

Aviation Model

14008 w/alkaline—White, Green, Blue, IR LEDs. Clam packaged.

14024 w/alkaline—White, Green, Blue, IR LEDs with MOLLE retainer. Boxed.

NSN-6230-01-572-6216

LUMENS: 55

CANDELA: 1,175

DISTANCE: 69m

RUN TIME: 5h 30m



Military Model

Red LED

IR/IFF LED

Blue LED



Tactile battery polarity indicator on body, aids in battery replacement in dark environments

SIDEWINDER® RESCUE

A lightweight hands-free lighting tool with four different color LEDs, each with varying intensities for a wide variety of tasks along with two flash patterns for signaling. The sliding diffuser projects omnidirectional light to be seen by all directions. Accepts either two "AA" alkaline batteries or two "AA" lithium batteries for maximum versatility in the field. IPX7 waterproof to 1 meter for 30 minutes.

SIDEWINDER RESCUE

BATTERY: (2) "AA" alkaline or (2) "AA" lithium for extended operation in extreme temperatures (-40° F to +150° F)

SIZE: 2.34" x 1.08" x 4.65"
(5.94 x 2.74 x 11.81 cm)

LITHIUM WEIGHT: 4.38 oz (124 g)

ALKALINE WEIGHT: 5.02 oz (142 g)

COLOR: Coyote

Rescue Model

14065 Kit (Aviation Model) White C4 LED, Green, Blue, IR LEDs Includes MOLLE retainer, paracord and 2 "AA" alkaline batteries. Boxed
NSN-6230-01-581-2486

14069 Kit (Aviation Model) White C4 LED, Green, Blue, IR LED Includes MOLLE retainer, paracord and 2 "AA" alkaline batteries. Clam

14066 w/alkaline—White, Blue, Green, IR LEDs. Light only. Box

14067 w/alkaline—White, Blue, Green, IR LEDs. Light only. Clam

14068 w/alkaline—White, Blue, Green, IR LEDs. Includes E-Mount. Boxed



Rescue Model

Blue LED

IR LED

Green LED



NEW FOR 2015

"Slide-in-Place" diffuser can be used with any LED color for omni-directional light

Aluminum plate provides flat surface to adhere Velcro® for attaching to helmet

Cord attachment for para-cord lanyard, which provides extra security from loss of light and allows it to be worn around the neck

Securely attaches to MOLLE or other straps using MOLLE retainer

**SIDEWINDER... THE MOST
VERSATILE
MILITARY LIGHT
IN THE WORLD.**



NON-RECHARGEABLE

MILITARY HANDS-FREE / SIGNALING SERIES
// STREAMLIGHT 2015



SIDEWINDER COMPACT II® BATTERY RUN TIME

CR123 LITHIUM/"AA" LITHIUM BATTERY

LED	Low 10% Output	Medium 1 25% Output	Medium 2 45% Output	High 100% Output	Strobe 100% Output
C4®	70 Hrs	28 Hrs	16 Hrs	6 Hrs	10 Hrs
5mm IR or Red	100 Hrs*	72 Hrs	36 Hrs	16 Hrs	24 Hrs
5mm Blue or Green	100 Hrs*	60 Hrs	24 Hrs	12 Hrs	18 Hrs

"AA" ALKALINE BATTERY

C4®	40 Hrs	16 Hrs	8 Hrs	2 Hrs	4 Hrs
5mm IR or Red	100 Hrs*	48 Hrs	18 Hrs	9 Hrs	14 Hrs
5mm Blue or Green	100 Hrs*	36 Hrs	12 Hrs	6 Hrs	10 Hrs

All run time claims to 10% of initial output level. Illumination output electronically regulated.

Extremely versatile lighting tool with white and a variety of color LEDs for multiple tasks. Fits in the palm of your hand, clips to MOLLE vest, belt, hat brim or pocket. Helmet mount also available. Entire body rotates 185° for easy aiming of light. Unbreakable, scratch-resistant lens. Special design for easy operation even when wearing heavy gloves. IPX7-rated waterproof to 1 meter for 30 minutes. 3 meter impact-resistance tested. O-ring and gasket-sealed for waterproof operation. Meets MIL-STD-810F, METHOD 512.4.

SIDEWINDER COMPACT II

MULTIPLE POWER SOURCES:

(1) "CR123A" lithium, or (1) "AA" Alkaline, or (1) "AA" lithium

SIZE: 3" x 1.07" x 2.04"
(7.62 x 2.72 x 5.21 cm)

WEIGHT: 2.4 oz (68 g)

COLOR: Coyote

Military Model

14510	White, Red, Blue, IR LEDs with Helmet Mount. Mailer NSN-6230-01-603-7205
14512	White, Red, Blue, IR LEDs with Helmet Mount. Clam
14513	White, Red, Blue, IR LEDs with E-Mount. Clam
14514	White, Red, Blue, IR LEDs with E-Mount and headstrap. Mailer NSN-6230-01-613-4312
14518	White, Red, Blue, IR LEDs with Helmet Mount and Rail Mount. Clam

Aviation Model

14531	White, Green, Blue, IR LEDs
14532	White, Green, Blue, IR LEDs w/Helmet Mount. Boxed
14533	White, Green, Blue, IR LEDs w/NVG Mount (for HGU-84 rotary wing aircrew helmet) and a AA alkaline battery. Boxed NSN-6230-01-626-6789

Sidewinder Compact II Accessory Kits

14112	Helmet Mount Accessory Kit-Coyote Helmet Mount, Headstrap, and MOLLE plate
14113	Rail Mount Accessory Kit-Coyote Rail Mount, Headstrap and MOLLE plate

	C4 HIGH W/CR123 LITHIUM	C4 HIGH W/"AA" LITHIUM	C4 HIGH W/"AA" ALKALINE
LUMENS:	55	47	47
CANDELA:	1,175	1,000	1,000
DISTANCE:	69m	63m	63m
RUN TIME:	6h	6h	2h



The Sidewinder Compact II is designed for versatility. It can operate on a "AA" Lithium, "AA" alkaline or CR123 Lithium battery.

Military Model

Super-bright white C4® LED
Blue LED
IR/IFF LED
Red LED

Operates on a AA Alkaline, AA Lithium or CR123A Lithium battery

Aviation Model

Super-bright white C4® LED
Blue LED
IR/IFF LED
Green LED

SIDEWINDER ACCESSORIES

Sidewinder Accessories	Sidewinder	Sidewinder Compact II
Helmet Mount - Coyote	14055	14055
Rail Mount for Helmet - Coyote	14057	14057
	NSN-8470-01-633-3996	
Night Vision Goggle Mount	14135	14135
	NSN-5340-01-641-3916	
Safety Wand - Glow in the dark	14902	14902
Elastic Headstrap	-	14059
E-Mount (ACH, ECH, MICH, LWH compatible)	14136	14136
	NSN-5340-01-641-3930	
E-Mount Access. Kit (Includes E-Mount, MOLLE Retainer and paracord)	14137	14137
Paracord	14138	14138
Sidewinder Rescue Access. Kit (Includes MOLLE Retainer and paracord)	14139	14139
Helmet Mount Kit-Coyote Helmet Mount, Headstrap, and MOLLE plate	14112	14112
Rail Mount Kit-Coyote Rail Mount, Headstrap and MOLLE plate	14113	14113
CR123 Batteries	2 Pk. 85175	6 Pk. 85180

NON-RECHARGEABLE

CAMO BUCKMASTER SERIES
// STREAMLIGHT 2015



BUCKMASTERS® PACKMATE®

Designed specifically for the outdoorsman's lighting needs, it features an extended run time mode and green LEDs that preserve night vision and will not spook game. Unbreakable lens. O-ring sealed for weather-resistance. Drop-tested.

BUCKMASTERS PACKMATE

BATTERY: (2) 3V "CR123A" lithium

SIZE: 5.43" x 1.33" x .98"
(13.79 x 3.38 x 2.49 cm)

WEIGHT: 5.44 oz (152 g)

COLOR: RealTree® Hardwoods® Green High Definition (HD)

51057 with lithium batteries—Camo

ACCESSORIES

85175 CR123A lithium batteries—2 Pack

	C4 HIGH	C4 LOW	GREEN HIGH	GREEN LOW
LUMENS:	125	20	7.5	4
CANDELA:	6,000	1,000	80	40
RUN TIME:	2.75h	15h	38h	52h



BUCKMASTERS® TWIN-TASK® 2L

Lightweight, versatile light switches from powerful xenon bulb to 3 ultra-bright safety green LEDs that preserve night vision and won't spook game. Unbreakable lens. Water/corrosion-resistant, durable casing. O-ring sealed for weather-resistance. Drop-tested.

BUCKMASTERS TWIN-TASK 2L

BATTERY: (2) 3V "CR123A" lithium

SIZE: 5.43" x 1.33" x .98"
(13.79 x 3.38 x 2.49 cm)

WEIGHT: 5.44 oz (152 g)

COLOR: RealTree® Hardwoods® Green High Definition (HD)

51025 with lithium batteries—Camo

ACCESSORIES

85905 Nylon Holster

85175 CR123A lithium batteries—2 Pack

	XENON	(3) GREEN LEDS
LUMENS:	72	10
RUN TIME:	2h 30m	28h



WHEN YOU'RE HEADED INTO THE FIELD
RELY ON THE
EXPERTS...
STREAMLIGHT & BUCKMASTERS.

BUCKMASTERS® TRIDENT®

Hands-free lighting with 90° tilting head. Features super-bright, white C4 LED and 3 safety-green LEDs in the same reflector. Green LEDs preserve night vision and won't spook game. Unbreakable lens. Low battery indicator. IPX4-rated for water-resistance. 2 meter impact-resistance tested.

BUCKMASTERS CAMO TRIDENT

BATTERY: (3) "AAA" alkaline or lithium

SIZE: 1.75" x 2.70" x 2.40"
 (4.45 x 6.85 x 6.09 cm)

WEIGHT: 5.50 oz (156 g)

COLOR: RealTree® Hardwoods® Green High Definition (HD)

61070 with alkaline batteries – Camo



Camo

Model	C4 LED	3 LEDS	1 LED
LUMENS:	80	20	6
CANDELA:	4,000	175	55
DISTANCE:	126m	26m	15m
RUN TIME:	5h	20h	63h



BUCKMASTERS® STYLUS PRO®

Powerful multi-task penlight in RealTree® Hardwoods® camouflage for the great outdoors. Unbreakable, scratch-resistant lens. O-ring sealed, shock-proof and drop-tested. IPX4-rated for water-resistance. Removable pocket clip.

BUCKMASTERS STYLUS PRO

BATTERY: (2) "AAA" alkaline

SIZE: 5.3" x .6"
 (13.4 x 1.5 cm)

WEIGHT: 1.64 oz (46.9 g)

COLOR: RealTree® Hardwoods® Green High Definition (HD)

66124 with Green LED – RealTree® Hardwoods® Green HD

66028 Holster

LUMENS:	5
CANDELA:	73
DISTANCE:	17m
RUN TIME:	11h



NON-RECHARGEABLE

CAMO SERIES
// STREAMLIGHT 2015



IF CAMO IS YOUR COLOR, WE'VE GOT YOU COVERED.

ENDURO®

One of the lightest, brightest and most comfortable headlamps. Features an integrated rubber/elastic combination head strap and a clip that attaches to the brim of your hat, coat lapel or car visor. Unbreakable lens. O-ring sealed, waterproof to 1 meter for 1 hour. Impact-resistant housing – drop-test verified. Maximum light output throughout battery life.

ENDURO


BATTERY: (2) "AAA" alkaline

SIZE: 1.3" x 2.25" x 1.6"
(3.25 x 5.7 x 4 cm)

WEIGHT: 2.75 oz (78.5 g)

COLOR: Black or RealTree® Hardwoods® Green High Definition (HD)

61400	with alkaline batteries—Elastic Strap and Visor Clip—Black
61405	with alkaline batteries—Elastic Strap and Visor Clip—Camo

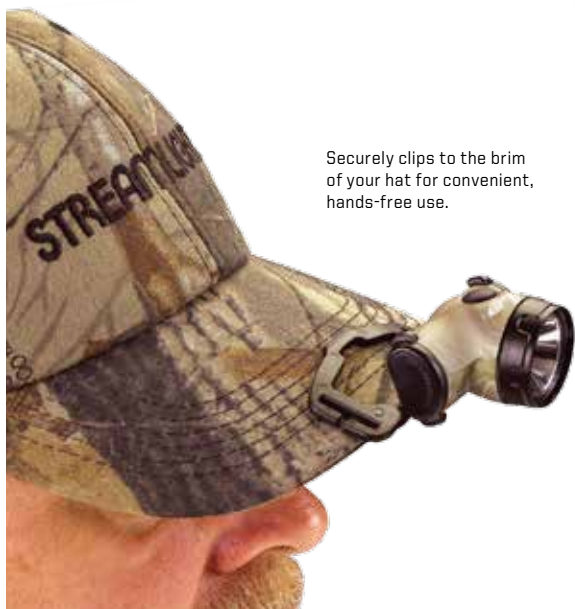

Securely clips to the brim of your hat for convenient, hands-free use.

CAMO & BLACK MODEL		
WHITE LED	HIGH	LOW
LUMENS:	14.5	6
CANDELA:	850	—
RUN TIME:	6h	12h



NON-RECHARGEABLE

STYLUS SERIES // STREAMLIGHT 2015



STYLUS PRO® USB

LUMENS: 70
CANDELA: 630
DISTANCE: 50m
RUN TIME: 3.5h



Sliding metal sleeve
protects micro USB port



Recharge by plugging into
USB port or optional AC
wall adapter

You won't want to be without this sleek, compact penlight that recharges at any USB port or with optional AC wall adaptor. Consistent light output throughout battery life. IPX4 water-resistant. 1 meter impact-resistance tested. Removable pocket clip.

STYLUS PRO USB

BATTERY: Lithium ion cell pack

SIZE: 6.15" x .74"
(15.6 x 1.9 cm)

WEIGHT: 1.9 oz (53.8 g)

COLOR: Black

66133	with 120V AC adapter, USB cord, nylon holster—Black
66134	with USB cord, nylon holster—Black
66143	Stylus Pro USB
22057	USB Cord
22058	120V AC Wall Adapter
66029	Holster

STYLUS PRO REACH®

LUMENS: 38
CANDELA: 825
DISTANCE: 57m
RUN TIME: 8h



A textured grip for non-slip handling
makes it easier to maneuver the
light in slippery or wet conditions.



Magnet
Clip Holder

We added an 8" PVC cable for extended reach and flexibility to our powerful Stylus Pro® penlight. It now provides 14" of reach to get intense light right where you need it. Unbreakable, scratch-resistant lens. O-ring sealed, shock-proof and drop-tested. IPX4-rated water-resistant. Unbreakable pocket clip.

STYLUS PRO REACH

BATTERY: (2) "AAA" alkaline

SIZE: 14.6" x .6"
(37.1 x 1.5 cm)

WEIGHT: 2.7 oz (76.5 g)

COLOR: Matte Black

66418	White LED—Matte Black
-------	-----------------------

LIGHTING THE WAY THROUGH NORTHERN IRAQ... AND ON TO AFGHANISTAN

I just got back from yet another trip on the road, this time to northern Iraq. For the last 340+ days, your Stylus Pro pen light LED has been tucked into my ankle pocket providing instant access. I can't tell you how many times I've used it, but I can tell you that it's been so often that I successfully lost the clip it came with and have worn through the rubber coating over the button that turns it on and off. Thanks for such an awesome and reliable light. Power generation is still a huge challenge here, so having light at my fingertips was invaluable. I'll keep it in my pack for my next trip to Afghanistan, probably around next summer. Keep throwing the right kind of products out there, they're worth it.

Andrew J. "AJ" Brilla, Capt, USAF
Iraq Training and Advisory Mission-Air Force (ITAM-AF)
Chief, Logistics

STYLUS PRO®

MICROSTREAM®



	C4 WHITE LED	GREEN LED
LUMENS:	65	5
CANDELA:	690	73
DISTANCE:	52m	17m
RUN TIME:	6h 30m	11h

Holster



LUMENS:	35
CANDELA:	360
DISTANCE:	38m
RUN TIME:	2h 15m

Compact size, durable construction and optimum beam output make this an ideal light for multiple tasks. Unbreakable lens. O-ring sealed. IPX4-rated for water-resistance. 1 meter impact-resistance tested. Removable pocket clip.

STYLUS PRO

BATTERY: (2) "AAA" alkaline

SIZE: 5.3" x .6"
(13.4 x 1.5 cm)

WEIGHT: 1.64 oz (46.9 g)

COLOR: Matte Black, Silver, Blue or Red

66118	White LED - Matte Black
66121	White LED - Silver
66120	White LED - Red
66122	White LED - Blue
66124	with Green LED - RealTree® Hardwoods® Green HD
66028	Holster

So small, you can keep it in your pocket or clip it to a cap for hands-free lighting. Ideal if you carry a lot of gear and don't want to be weighed down. Unbreakable lens. O-ring sealed. IPX4-rated for water-resistance. 1 meter impact-resistance tested. Removable pocket/hat clip.

MICROSTREAM

BATTERY: (1) "AAA" alkaline

SIZE: 3.5" x .6"
(90 x 15 mm)

WEIGHT: 1.04 oz (29.7 g)

COLOR: Matte Black

66318	White LED - Black
-------	-------------------

NON-RECHARGEABLE

STYLUS[®] SERIES // STREAMLIGHT 2015



STYLUS[®]

This bright, long-running LED penlight has a long battery life, and it goes anywhere you need it. IPX4-rated for water-resistance. Removable pocket clip.

STYLUS

BATTERY: (3) "AAAA" alkaline

SIZE: 6.21" x .375"
(15.17 x .95 cm)

WEIGHT: 1.1 oz (31.19 g)

COLOR: Black, Gold, Silver, US flag, Red, Blue, Camo or Olive Drab

65006	Red LED-Black
65012	White LED-Silver
65016	Blue LED-Silver
65018	White LED-Black
65020	Green LED-Black
65022	Blue LED-Black
65024	White LED-Gold
65035	White LED-Red
65050	White LED-Blue
65058	White LED-Black, UL Listed
65080	White LED-US Flag
65186	IR LED-Olive Drab
65075	Green LED-Camo
65030	AAAA Batteries-6 Pack
65905	Holster

SAFETY RATED
MODEL OFFERED



Intrinsic Safety for Haz. Loc.
Class I, Div. 1,
Groups A, B, C, D, T3C
"Classified"



Intrinsic Safety for Haz. Loc.
Class I, Div. 1,
Groups A, B, C, D, T3C
"Exia"

LED COLOR:	WHITE	GREEN	BLUE	RED
LUMENS:	11	7	2	2
CANDELA:	140	59	110	53
DISTANCE:	24m	15m	21m	15m
RUN TIME:	24h	24h	24h	24h



SAFETY RATED MODEL OFFERED



STYLUS[®] UV

An ultraviolet penlight for fluorescent detection of fraudulent documents and for use in forensic investigations. IPX4-rated for water-resistance. Removable pocket clip.

STYLUS UV

BATTERY: (3) "AAAA" alkaline

SIZE: 6.21" x .375"
(15.17 x .95 cm)

WEIGHT: 1.1 oz (31.19 g)

COLOR: Black

65069	365nm UV LED-Black
65905	Holster

OUTPUT:	3.8 mW
RUN TIME:	24h



THE STYLUS SERIES ELIMINATES HARD-TO-SEE NOOKS AND CRANNIES AND LIGHTS THE WAY.

STYLUS REACH®

LUMENS: 11
CANDELA: 140
DISTANCE: 24m
RUN TIME: 24h

Twist and turn the flexible cable into any position to light the most out-of-the-way places.



Features a high-intensity white LED and a 7" cable (providing 14" of reach) that allows you to see into the tightest spots. IPX4-rated for water-resistance. Pocket clip.

STYLUS REACH

BATTERY: (3) "AAAA" alkaline

SIZE: 14" x .375"
(35.6 x .95 cm)

WEIGHT: 1.7 oz (48.2 g)

COLOR: Black or Silver

**SAFETY RATED
MODEL OFFERED**

65618 White LED-Black
65658 White LED-UL Listed Black
65612 White LED-Silver



**SAFETY RATED
MODEL OFFERED**



Intrinsic Safety for Haz. Loc.
Class I, Div. 1,
Groups A, B, C, D, T3C
"Classified"



Intrinsic Safety for Haz. Loc.
Class I, Div. 1,
Groups A, B, C, D, T3C
"Exia"

STYLUS REACH® 18

LUMENS: 11
CANDELA: 140
DISTANCE: 24m
RUN TIME: 24h



A textured grip for non-slip handling makes it easier to maneuver the light in slippery or wet conditions.

All the great features of the Stylus Reach® with a longer cable. With a total of 25.5" of reach, nothing is out of sight. IPX4-rated for water-resistance. Pocket clip.

STYLUS REACH 18

BATTERY: (3) "AAAA" alkaline

SIZE: 25.5" x .375"
(64.77 x .95 cm)

WEIGHT: 3.5 oz (99.2 g)

COLOR: Black


65418 White LED-18" Cable-Black
65030 AAAA Batteries-6 Pack

Batteries



NON-RECHARGEABLE

HEADLAMP SERIES
// STREAMLIGHT 2015

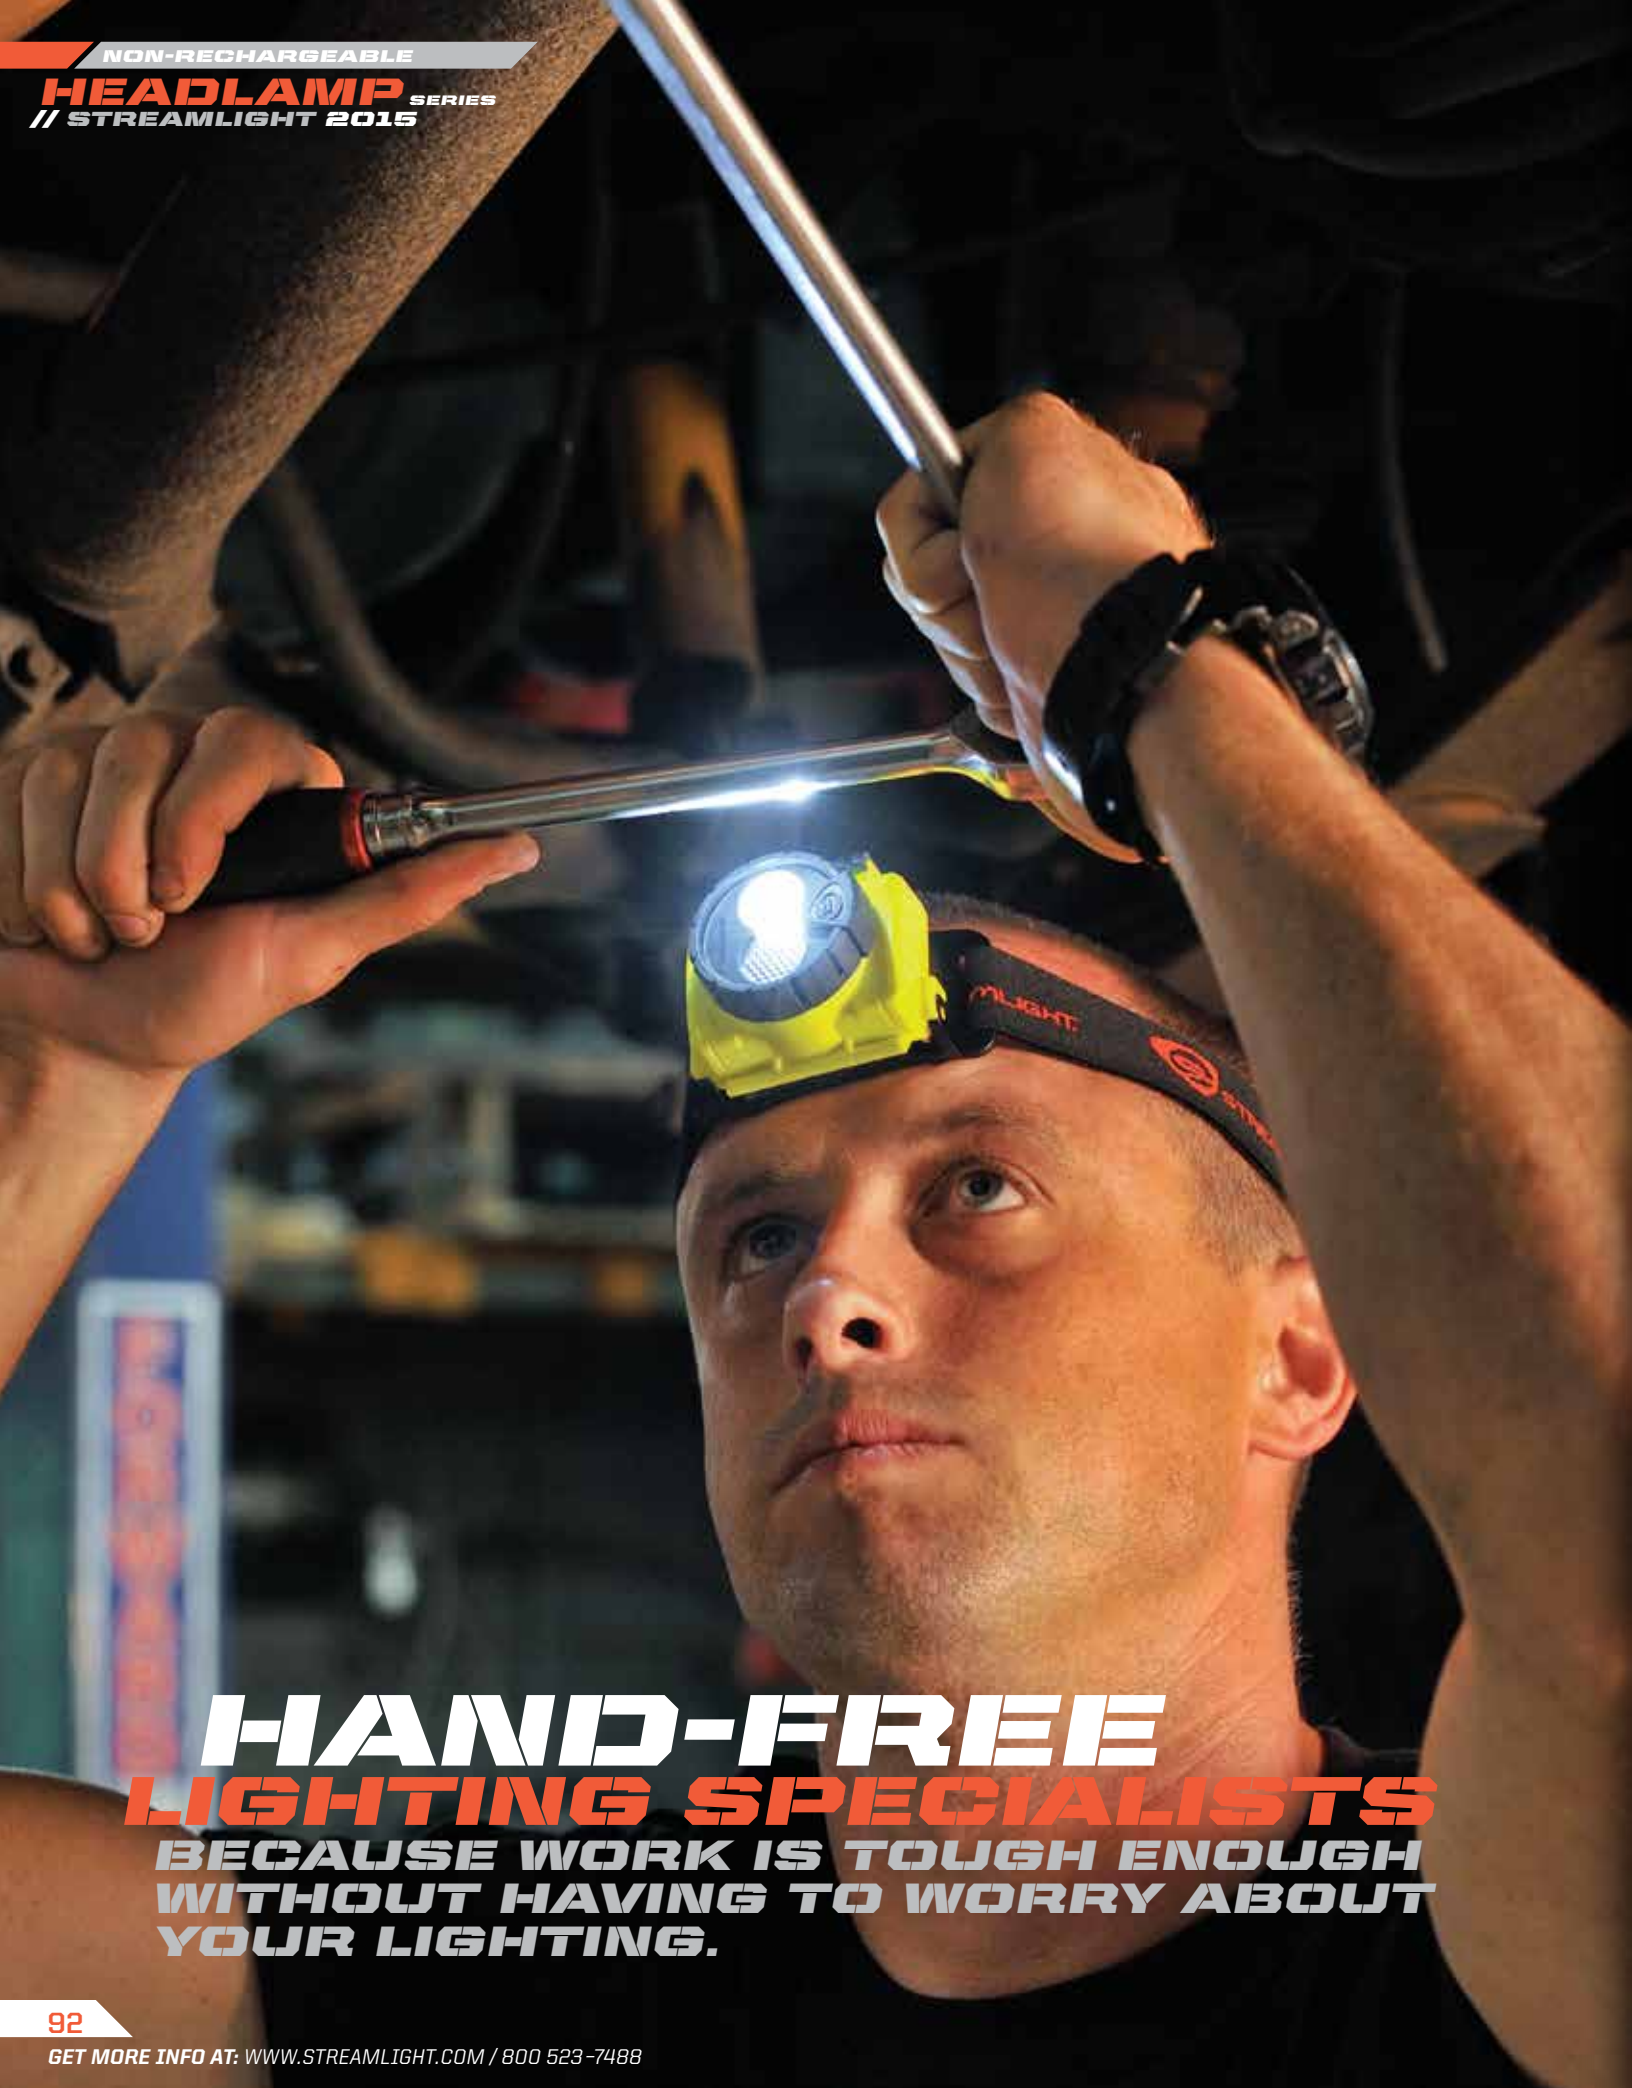

**HAND-FREE
LIGHTING SPECIALISTS**
BECAUSE WORK IS TOUGH ENOUGH
WITHOUT HAVING TO WORRY ABOUT
YOUR LIGHTING.

**STREAMLIGHT TASK-SPECIFIC TECHNOLOGY:
CHOOSE THE LIGHT INTENSITY ALLOWING YOU TO
CHOOSE THE RIGHT LIGHT FOR THE JOB.**


USE THIS EASY COMPARISON
CHART TO CHOOSE THE BEST
LIGHT FOR YOU BASED ON THE
FEATURES THAT YOU NEED!

BEAM STYLE

SPECS


HIGH MODE PERFORMANCE SHOWN.
FOR PERFORMANCE IN OTHER
MODES, SEE MODEL PAGES.

**DOUBLE CLUTCH™
USB**




OUTPUT: 125 lumens
INTENSITY: 1,700 candela
BEAM DISTANCE: 82 meters
RUN TIME: 3 hours 30 min
SIZE: 1.75" x 2.50" x 1.66"
(4.44 x 6.35 x 4.22 cm)
WEIGHT: 4.0 oz (113 g)
COLOR: Yellow or Black

**PROTAC HL™
HEADLAMP**




OUTPUT: 540 lumens
INTENSITY: 7,400 candela
BEAM DISTANCE: 172 meters
RUN TIME: 1 hours 45 min
SIZE: 3.66" x 1.2" x 2.6"
(9.29 x 3.05 x 6.60 cm)
WEIGHT: 6.6 oz (187 g)
COLOR: Black

SEPTOR™




OUTPUT: 120 lumens
INTENSITY: 900 candela
BEAM DISTANCE: 60 meters
RUN TIME: 3 hours 30 min
SIZE: 1.75" x 2.70" x 2.40"
(4.45 x 6.85 x 6.09 cm)
WEIGHT: 5.5 oz (156 g)
COLOR: Yellow

ARGO™



OUTPUT: 150 lumens
INTENSITY: 9,250 candela
BEAM DISTANCE: 190 meters
RUN TIME: 3 hours
SIZE: 1.75" x 2.70" x 2.40"
(4.45 x 6.85 x 6.09 cm)
WEIGHT: 5.4 oz (153 g)
COLOR: Yellow

TRIDENT™ YELLOW



OUTPUT: 80 lumens
INTENSITY: 4,000 candela
BEAM DISTANCE: 126 meters
RUN TIME: 5 hours
SIZE: 1.75" x 2.70" x 2.40"
(4.45 x 6.85 x 6.09 cm)
WEIGHT: 5.50 oz (156 g)
COLOR: Yellow

THE DOUBLE CLUTCH.
SPOT TO FLOOD
 IN ONE EASY
SHIFT.

DOUBLE CLUTCH™ USB HEADLAMP

STREAMLIGHT TECHNOLOGY:
 DECADES OF ILLUMINATION
 INNOVATION.

SHIFT BEAMS //

- SHIFTS EASILY TO SPOT OR FLOOD
- MODES WITH THE TURN OF THE WRIST
- GLOVE-FRIENDLY FACECAP ROTATION

SHIFT BATTERIES //

- USB RECHARGEABLE LITHIUM POLYMER OR "AAA" BATTERIES

SHIFT BRIGHTNESS //

- DOUBLE SHIFT FOR HIGH TO LOW IN SPOT OR FLOOD MODES.
- 125 LUMENS ON HIGH. 30 LUMENS ON LOW.



LITHIUM POLYMER	HIGH	LOW	ALKALINE "AAA"	HIGH	LOW
LUMENS:	125	30	LUMENS:	125	30
SPOT DIST:	82m	40m	SPOT DIST:	82m	40m
SPOT CANDELA:	1,700	400	SPOT CANDELA:	1,700	400
FLOOD DIST:	31m	4m	FLOOD DIST:	31m	4m
FLOOD CANDELA:	250	70	FLOOD CANDELA:	250	70
RUN TIME:	3h 30m	10h	RUN TIME:	6h	18h

This dual-power, dual-function, dual-output headlamp gives you the flexibility of using either a USB-rechargeable battery or 3 AAA alkaline batteries. It also lets you choose either a spot or a flood beam, both with high and low mode. It's lightweight and long-running with a 60° tilting head. Unbreakable lens. IPX4-rated. Water-resistant. 2 meter impact resistance tested.

DOUBLE CLUTCH USB

BATTERY: Rechargeable Lithium Polymer pack or (3) "AAA" alkaline or lithium batteries

SIZE: 1.75" x 2.50" x 1.66"
 (4.44 x 6.35 x 4.22 cm)

WEIGHT: 4.0 oz (113 g)

COLOR: Yellow or Black

YELLOW	BLACK	
61602	61603	120V AC with elastic and rubber straps
61600	61601	with USB Cord (only)
61607	61608	Alkaline Model
22058	22058	120V AC Wall Adapter
22057	22057	USB Cord
61604	61604	Lithium Polymer Battery



PROTAC HL® HEADLAMP

	HIGH	MEDIUM	LOW
LUMENS:	635	105	20
CANDELA:	8,500	1,450	280
DISTANCE:	184m	76m	33m
RUN TIME:	1h 45m	8h	36h



UPDATED FOR 2015
635 LUMENS



HL SERIES

The perfect light for when your task requires both hands and a bright light with a wide, long-range beam. 90° tilting head reduces neck fatigue. TEN-TAP® programming lets you choose the order of operating modes (high, medium, low). IPX4-rated for water resistance. 1 meter impact-resistance tested. Maximum light output throughout battery life.

PROTAC HL HEADLAMP

BATTERY: (2) 3V "CR123A" lithium

SIZE: 3.66" x 1.2" x 2.6"
(9.30 x 3.05 x 6.60 cm)

WEIGHT: 6.6 oz (187 g)

COLOR: Black

61304 with lithium batteries and elastic and rubber straps—Black

STREAMLIGHT HEADLAMPS GIVE YOU THE

VERSATILITY AND THE BRIGHTNESS YOU NEED TO ACCOMPLISH ANY TASK.

SEPTOR®**ARGO®**

	HIGH	MED	LOW
LUMENS:	120	45	13
CANDELA:	900	375	100
DISTANCE:	60m	35m	20m
RUN TIME:	3h 30m	10h	55h



Includes a rubber head strap that ensures a non-slip grip for hardhats.

The Septor task-light headlamp now shines brighter! When you need a hands-free flood light for close-up tasks or tasks at arm's length, the Septor gives you 120 lumens of a soft, wide beam to illuminate your work area.

SEPTOR HEADLAMP

BATTERY: (3) "AAA" alkaline

SIZE: 1.75" x 2.70" x 2.40"
(4.45 x 6.85 x 6.09 cm)

WEIGHT: 5.5 oz (156 g)

COLOR: Yellow

SEPTOR HEADLAMP

61052 with alkaline batteries—rubber and elastic straps—Yellow



Class I, Div. 2, Groups A, B, C, D;
Class II, Div. 2, Groups F, G,
Class III, T5

	HIGH	MED	LOW
LUMENS:	150	100	45
CANDELA:	9,250	6,375	2,750
DISTANCE:	190m	160m	103m
RUN TIME:	3h	4h 30m	30h



Includes a rubber head strap that ensures a non-slip grip for hardhats.



Featuring an intense, long-distance beam for down range illumination with 3 levels of output.

ARGO HEADLAMP

BATTERY: (3) "AAA" alkaline

SIZE: 1.75" x 2.70" x 2.40"
(4.45 x 6.85 x 6.09 cm)

WEIGHT: 5.4 oz (153 g)

COLOR: Yellow

ARGO HEADLAMP

61301 with alkaline batteries—rubber and elastic straps—Yellow



Class I, Div. 2, Groups A, B, C, D;
Class II, Div. 2, Groups F, G,
Class III, T5

TRIDENT®

The Trident multi-purpose headlamp now shines brighter! When you need the versatility of switching between either a bright light to illuminate objects at a distance (126 meters) or a soft flood light for tasks at arm's length.

TRIDENT HEADLAMP

BATTERY: (3) "AAA" alkaline

SIZE: 1.75" x 2.70" x 2.40"
(4.45 x 6.85 x 6.09 cm)

WEIGHT: 5.50 oz (156 g)

COLOR: Yellow or Green or RealTree® Hardwoods® Green High Definition (HD)

THREE TRIDENT MODELS:

Yellow Model: Contains C4® LED and three ultra-bright white LEDs

Green Model: Contains C4® LED, one safety green LED, two white 5mm LEDs

Buckmasters Camo Model: RealTree® Hardwoods® Green High Definition camo; contains super-bright C4 LED and three safety-green 5mm LEDs

TRIDENT HEADLAMP

61051 2 White and 1 Green LED with alkaline batteries—Green

61050 with White LEDs with alkaline batteries—Yellow

61070 3 Green LEDs with alkaline batteries—Camo



Class I, Div. 2, Groups A, B, C, D;
Class II, Div. 2, Groups F, G,
Class III, T5



Yellow

Model	C4 LED	3 LEDS	1 LED
LUMENS:	80	35	11
CANDELA:	4,000	385	120
DISTANCE:	126m	39m	22m
RUN TIME:	5h	10h	53h

Green

Model	C4 LED	3 LEDS	1 LED
LUMENS:	80	25	6
CANDELA:	4,000	275	55
DISTANCE:	126m	33m	15m
RUN TIME:	5h	19h 30m	63h

Camo

Model	C4 LED	3 LEDS	1 LED
LUMENS:	80	20	6
CANDELA:	4,000	175	55
DISTANCE:	126m	26m	15m
RUN TIME:	5h	20h	63h



90° tilting head with a new, more durable ratcheting system.



Includes a rubber head strap that ensures a non-slip grip for hardhats.

ENDURO®

One of the lightest, brightest and most comfortable headlamps. Features an integrated rubber/elastic combination head strap and a clip that attaches to the brim of your hat, coat lapel or car visor. Unbreakable lens. O-ring sealed, waterproof to 1 meter for 1 hour. Impact-resistant housing - drop-test verified. Maximum light output throughout battery life.

ENDURO HEADLAMP

BATTERY: (2) "AAA" alkaline

SIZE: 1.3" x 2.25" x 1.6"
(3.25 x 5.7 x 4 cm)

WEIGHT: 2.75 oz (78.5 g)

COLOR: Black or RealTree® Hardwoods® Green High Definition (HD)

61400	with alkaline batteries—elastic strap and visor clip—Black
61405	with alkaline batteries—elastic strap and visor clip—Camo



BLACK & CAMO MODEL	WHITE LED	HIGH	LOW
LUMENS:	14.5	6	
CANDELA:	850	—	
RUN TIME:	6h	12h	

Includes integrated rubber/elastic combination head strap and a clip that attaches to the brim of your hat, coat lapel or car visor.



NON-RECHARGEABLE

TWIN-TASK[®] SERIES // STREAMLIGHT 2015

THE TWIN-TASK SERIES HAS
VERSATILITY
BUILT RIGHT IN.

TWIN-TASK[®] 3C LED



CHOOSE FROM C4[®], 6 LEDS OR 3 LEDS.

	C4 LED	6 LED	3 LED
LUMENS:	180	80	50
CANDELA:	3,550	980	612
DISTANCE:	120m	62m	50m
RUN TIME:	26h	48h	72h

Three lighting modes let you choose exactly the brightness, distance and run time you need. Provides an even beam, along with piercing hotspot for distance. Unbreakable lens. IPX4-rated for water-resistance. O-ring sealed. 1 meter impact-resistance tested.

TWIN-TASK 3C LED

BATTERY: (3) "C" alkaline

SIZE: 9.02" x 1.68" x 1.26"
(22.9 x 4.26 x 3.2 cm)

WEIGHT: 1 lb (449 g)

COLOR: Matte Black

51039 Matte Black

TWIN-TASK[®] 3C-UV LED



CHOOSE FROM C4[®], 6 UV LEDS OR 3 UV LEDS.

	C4 LED	6 UV LED	3 UV LED
LUMENS:	185	44mw	30mw
CANDELA:	3,730	n/a	n/a
DISTANCE:	116m	n/a	n/a
RUN TIME:	27h	63h	81h

Three lighting modes include ultraviolet light for detection of fraudulent documents or engine and HVAC leaks. The white LED mode provides an even beam with a piercing hotspot for distance. Unbreakable lens. IPX4-rated for water-resistance. O-ring sealed. 1 meter impact-resistance tested.

TWIN-TASK 3C UV LED

BATTERY: (3) "C" alkaline

SIZE: 9.02" x 1.68" x 1.26"
(22.9 x 4.26 x 3.2 cm)

WEIGHT: 1 lb (449 g)

COLOR: Matte Black

51045 Matte Black

"TWIN-TASK 3AA: THE LIGHT THAT NEVER FAILS!"

Dear Streamlight, After three years of using your Twin-Task 3AA I had to write and tell you how pleased I am. I work in industrial maintenance, which requires me to repair heavy, dirty equipment in low light and dangerous conditions. I have tried all the other name brands and much more expensive lights that failed in one way or the other, but your light has not failed me one time.

It has been dropped from 30+ feet out of a lift, submerged in coolant and 90 degree oil. After an airline break it was slung across the floor into a concrete wall. And most recently, it was dropped into a grinding tank where it stayed for four days. When it was retrieved, the light was still burning strong. Other than a few dings and scratches it is still my most valuable tool. Should it ever stop working I will buy another.

Thank You, Kyle Rhodes

TWIN-TASK® 3AA LED



CHOOSE FROM C4®, OR 3 LED.

	C4 LED	3 LED
LUMENS:	100	33
CANDELA:	2,283	467
DISTANCE:	96m	43m
RUN TIME:	5h 45m	34h

Versatile, long-running light that cuts through the dark with extreme brightness. Choose either the piercing bright beam with a hotspot for distance or the ultra-bright beam for area lighting and a longer run time. Unbreakable lens. IPX4-rated for water-resistance. O-ring sealed. 1 meter impact-resistance tested.

TWIN-TASK 3AA LED

BATTERY: (3) "AA" alkaline

SIZE: 8.54" x 1.33" x .79"
(21.7 x 3.38 x 2.0 cm)

WEIGHT: 6.91 oz (196 g)

COLOR: Matte Black

51038 with alkaline batteries. Matte Black.

TWIN-TASK® 3AAA LASER LED



CHOOSE FROM C4®, 5 LEDS OR LASER.

	C4 LED	5 LED
LUMENS:	100	68
CANDELA:	2,000	800
DISTANCE:	90m	57m
RUN TIME:	2h 45m	5h 15m

Features a mode with piercing brightness and a hotspot for distance, plus a mode for ultra-bright area lighting and extended runtime. Also includes a red laser pointer. Unbreakable lens. IPX4-rated for water-resistance. O-ring sealed. 1 meter impact-resistance tested.

TWIN-TASK 3AAA LASER LED

BATTERY: (3) "AAA" alkaline

SIZE: 5.38" x 1.57" x 1.17"
(13.69 x 3.98 x 2.98 cm)

WEIGHT: 7.04 oz (200 g)

COLOR: Matte Black

51043 with alkaline batteries. Matte Black.

NON-RECHARGEABLE

TWIN-TASK[®] SERIES // STREAMLIGHT 2015

THEY'RE CALLED TWIN-TASK[®],
BUT THESE LIGHTS
ARE SO VERSATILE,
THEY SHOULD
BE CALLED... **ANY-TASK.**

TWIN-TASK[®] 1L LED



CHOOSE FROM C4[®], OR 3 LEDs.

	C4 LED	LED
LUMENS:	96	20
CANDELA:	2,117	200
DISTANCE:	92m	28m
RUN TIME:	2h 15m	13h

This compact, lightweight flashlight features two lighting modes: A C4[®] LED that provides a bright, even beam with a piercing hotspot for distance; and 3 ultra-bright LEDs for area lighting and extended run time. Unbreakable lens. IPX4-rated for water-resistance. O-ring sealed. 1 meter impact-resistance tested.

TWIN-TASK 1L LED

BATTERY: (1) 3V "CR123A" lithium


SIZE: 4.09" x 1.33" x .98"
(10.39 x 3.38 x 2.49 cm)

WEIGHT: 4.1 oz (115 g)

COLOR: Matte Black

51036 with lithium battery. Matte Black.

TWIN-TASK[®] 2L LED

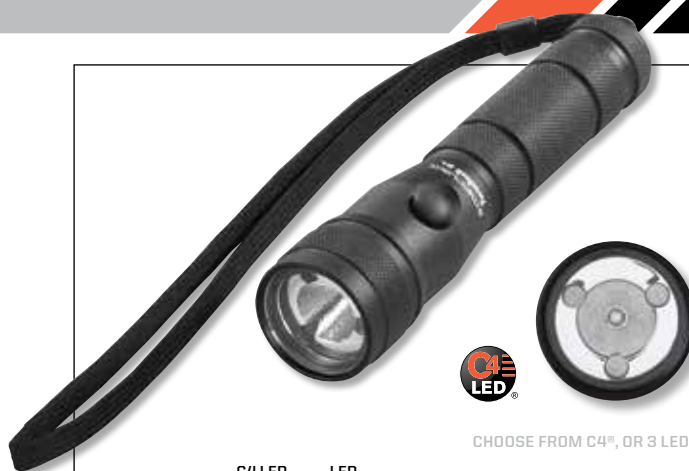

CHOOSE FROM C4[®], OR 3 LEDs.

	C4 LED	LED
LUMENS:	120	31
CANDELA:	2,480	375
DISTANCE:	100m	39m
RUN TIME:	4h	15h

The same great features as the Twin-Task[®] 1L LED with added brightness, run time and distance. Unbreakable lens. IPX4-rated for water-resistance. O-ring sealed. 1 meter impact-resistance tested.

TWIN-TASK 2L LED

BATTERY: (2) 3V "CR123A" lithium

SIZE: 5.43" x 1.33" x .98"
(13.79 x 3.38 x 2.49 cm)

WEIGHT: 5.44oz (152 g)

COLOR: Matte Black

51037 with lithium batteries. Matte Black.



TASK-LIGHT® 3AA LED

The long life of an LED with the longer range and brighter beam of a conventional high-powered light. Unbreakable lens. O-ring sealed for water-resistance. Drop-tested.

TASK-LIGHT 3AA LED

BATTERY: (3) "AA" alkaline

SIZE: 8.60" x 1.33" x .79"
(21.7 x 3.38 x 2.01 cm)

WEIGHT: 6.4 oz (180 g)

COLOR: Matte Black or
Titanium

51006 with alkaline batteries. Matte Black.

51016 with alkaline batteries. Titanium.



LUMENS:	95
CANDELA:	1,600
RUN TIME:	16h

NIGHT COM® LED

Choose from 3 lighting options: C4® LED for extreme brightness, night vision protection that meets or exceeds MIL-1472D, or ultra-bright red for use when night vision preservation is not needed. Unbreakable lens. O-ring sealed for weather resistance. Drop-tested.

NIGHT COM LED

BATTERY: (2) 3V "CR123A" lithium

SIZE: 5.43" x 1.33" x .98"
 (13.79 x 3.38 x 2.49 cm)

WEIGHT: 5.44 oz (152 g)

COLOR: Matte Black

51056 with lithium batteries. Red LEDs. Matte Black.



	C4 LED	LED
LUMENS:	105	2.5
CANDELA:	4,500	—
RUN TIME:	3h 30m	28h

LED - Indicator Type: Preserves complete dark adaptation per MIL-1472D (<0.05 lumens)

Three Modes:



1 LED
 Run Time
 130 hours



2 LEDs
 Run Time
 28 hours



C4®
 Run Time
 3.5 hours

NIGHT COM® UV

Choose a far-reaching, bright, white light or an ultraviolet light for detection of fraudulent documents and detecting engine/HVAC leaks. Unbreakable lens. IPX4-rated for water-resistance. 1 meter impact-resistance tested.

NIGHT COM UV

BATTERY: (2) 3V "CR123A" lithium

SIZE: 5.40" x 1.33" x .98"
 (13.7 x 3.38 x 2.49 cm)

WEIGHT: 5.44 oz (152 g)

COLOR: Matte Black

51046 with lithium batteries. Matte Black.



	HIGH C4 LED	LOW C4 LED
LUMENS:	115	50
CANDELA:	4,200	1,600
DISTANCE:	130m	80m
RUN TIME:	4h 15m	13h 30m

UV LEDs: 10 Hours of continuous run time

Two Modes:



C4®
 50,000 hour
 lifetime



6 LEDs
 (3) 365nm UV LEDs
 (3) 390nm UV LEDs



MULTI OPS®

An ultra-bright white light, or (5) UV LEDs for fluid detection, and a laser pointer all in one. IPX4-rated for water-resistance. All openings are O-ring or gasket sealed. 1 meter impact-resistance tested.

MULTI-OPS

BATTERY: (3) "AA" alkaline

SIZE: 5.38" x 1.57" x 1.17"
 (13.69 x 3.98 x 2.98 cm)

WEIGHT: 7.04 oz (200 g)

COLOR: Matte Black

51072 with alkaline batteries. Matte Black.



LUMENS:	50
CANDELA:	2,500
DISTANCE:	100m
RUN TIME:	4h 45m

C4 + UV LEDs: 4 Hours of continuous run time
 UV LEDs: 10 Hours of continuous run time

LASER OUTPUT: Useable laser range of 100+ feet when in LED/laser mode, and 100+ yards when in laser only mode.





SPECIALIZED TECHNOLOGY FOR SPECIALIZED JOBS.

STREAMLIGHT JR.® LED

Cutting edge technology makes this lightweight flashlight super-bright and super-convenient. Unbreakable lens. Regulated light output throughout battery life. IPX4-rated for water-resistance. All openings are O-ring sealed. 1 meter impact-resistance tested.

STREAMLIGHT JR. LED

BATTERY: (2) "AA" alkaline or lithium

SIZE: 6.5" x 1" x .73"
(16.51 x 2.54 x 1.85 cm)

WEIGHT: 4.1 oz (117 g)

COLOR: Black

71500	with alkaline batteries. Black.
71503	Nylon Holster
71510	Magnetic Clip Holder
99075	Rubber Helmet Strap

LUMENS:	85
CANDELA:	3,800
DISTANCE:	123m
RUN TIME:	4h



Magnetic
Clip Holder

Rubber Helmet
Strap

Nylon
Holster

STREAMLIGHT JR.® REACH LED

With its flexible cable and magnetic clip, you can put this handy light anywhere and see anything. Unbreakable lens. IPX4-rated for water-resistance. All openings O-ring sealed. 1 meter impact-resistance tested.

STREAMLIGHT JR. REACH LED

BATTERY: (2) "AA" alkaline

SIZE: 20" x .8" x .73"
(50.8 x 2.03 x 1.85 cm)

WEIGHT: 6.1 oz (173 g)

COLOR: Black

71600	with alkaline batteries. Black.
71510	Magnetic Clip Holder

LUMENS:	85
CANDELA:	1,600
DISTANCE:	80m
RUN TIME:	3h 15m



Magnetic
Clip Holder

NON-RECHARGEABLE

POCKET LIGHT SERIES // STREAMLIGHT 2015

**SURE, THEY'RE CALLED
POCKET LIGHTS
BUT REALLY THEY'RE GO-ANYWHERE,
DO-ANYTHING LIGHTS.**

CLIPMATE® USB

This multi-function light clips to pocket or cap for hands-free use. Recharges by plugging into USB port or optional AC wall adaptor. IPX4 water-resistant. 1 meter impact-resistance tested.

CLIPMATE USB

BATTERY: Lithium polymer cell

SIZE: 3.20" x 1.39" x .65"
(8.1 x 3.5 x 1.7 cm)

WEIGHT: 1.9 oz (53.8 g)

COLOR: Black



61125	Light only. Black.
61126	120V AC. Black.
22057	USB Cord
22058	120V AC Wall Adapter
61128	Clipmate USB Battery

LUMENS:	70
CANDELA:	500 5 (red)
DISTANCE:	44m
RUN TIME:	3.5h

Flexible, extension cable targets the beam where you need it

Dual LEDs: High-intensity white LED
Night vision red LED



EPU 5200 ELECTRONIC POWER UNIT

We've made it easier than ever to keep your USB flashlights and mobile devices powered up and ready. You can clip the electronic power unit to a vest and take it anywhere. It's lightweight, yet rugged and durable to stand up to almost anything. And it's also a flashlight! IPX4 water-resistant.

EPU 5200

BATTERY: Lithium ion cell pack

SIZE: 4.45" x 1.83" x 1.25"
(11.3 x 4.7 x 3.2 cm)

WEIGHT: 5.4 oz (153 g)

COLOR: Black

22600	with USB cord, nylon holster-Black
-------	------------------------------------

Charges most USB products with micro-USB input.

- 4+ full charges for Streamlight Stylus ProUSB, Clipmate USB and Double Clutch USB
- 2 full charges for Streamlight ProTac HL USB
- 1+ full charges for most smartphones and tablets



NEW FOR 2015

CLIPMATE®

This innovative little light rotates 360° and is equipped with 3 high-intensity LEDs.

CLIPMATE

BATTERY: (3) "AA" alkaline

SIZE: 3.52" x .85"
(8.94 x 2.16 cm)

WEIGHT: 2.4 oz (66.7 g)

COLOR: Yellow with three white LEDs;
Black with a choice of white or green LEDs



LUMENS:	27 (white)
RUN TIME:	40h

61100	Yellow with White LEDs and alkaline batteries
61101	Black with White LEDs and alkaline batteries
61102	Black with Green LEDs and alkaline batteries

THE LOGO™

Weighs less than half an ounce and has 3 light levels plus a blink mode that will flash for 45 hours. To conserve battery, it automatically turns off after 6 minutes in high, medium or low modes. Weather-resistant. 1 meter impact-resistance tested.

THE LOGO

BATTERY: (2) 3V CR2016 lithium coin cell

SIZE: 1.8" x 1.2" x .37"
(45.7 x 30.5 x 9.4 mm)

WEIGHT: .37 oz (10.7 g)

COLOR: Black



LUMENS:	10 (white)
RUN TIME:	45h on blink

73100	White LED. Black.
-------	-------------------

KEY-MATE®

One of the brightest, longest-running, most durable keychain lights. O-ring sealed for water-resistance.

KEY-MATE

BATTERY: (4) alkaline button cell

SIZE: 2.36" x .74" x .57"
(5.9 x 1.88 x 1.45 cm)

WEIGHT: .9 oz (25.4 g)

COLOR: Black or Titanium, white or green LED, and RealTree® Hardwoods® High Definition® (HD) Green with green LED

LUMENS: white led	10
LUMENS: green led	2.6
RUN TIME:	96h



72001	Black with White LED and batteries
72101	Titanium with White LED and batteries
72003	Black with Green LED and batteries
72203	Camo with Green LED and batteries
72016	Filter Combo - Black w/ White LED, Red & Green Filters, lanyard.
72030	4 pack Key-Mate Batteries
72025	Key-Mate Filter - Red
72026	Key-Mate Filter - Green
72027	Key-Mate Filter - Blue
72028	Key-Mate Filter - IR

Batteries



Colored & Infrared Lenses

STRION[®] LED

A powerful value that's perfect for the broadest range of lighting needs. IPX4-rated for water-resistance. Adjustable ring provides a sure-grip for easy one-handed operation. 2 meter impact-resistance tested.

STRION LED

BATTERY: Lithium-ion with on-board safety control circuit

SIZE: 5.9" x 1.25" x .95"
(14.99 x 3.18 x 2.41 cm)

WEIGHT: 5.2 oz (148 g)

COLOR: Pink

74350 with AC/12V DC-1 Holder. Pink.



For every pink Strion[®] LED sold, Streamlight will donate \$5 to the Breast Cancer Research Foundation.[®]



C4 LED With **[(STROBE)]**
Double tap switch to activate.

	HIGH	MEDIUM	LOW
LUMENS:	260	130	65
CANDELA:	10,000	5,000	2,500
DISTANCE:	200m	141m	100m
RUN TIME:	2h	4h	7h 30m

The Breast Cancer Research Foundation[®] is an independent 501 (c) (3) not-for-profit organization whose mission is to achieve prevention and a cure for breast cancer in our lifetime by providing critical funding for innovative clinical and genetic research at leading medical centers worldwide, and increasing public awareness about good breast health. For more information, visit www.bcrf.org.

PROTAC[®] HL

One of the brightest tactical personal carry lights of its size. Far-reaching beam. TEN-TAP[®] programming lets you choose the order of operating modes (high, low, strobe). IPX7-rated waterproof to 1 meter/30 minutes. 1 meter impact-resistance tested.

PROTAC HL

BATTERY: (2) 3V "CR123A" lithium

SIZE: 5.4" x 1.375" x 1.0"
(13.72 x 3.49 x 2.54 cm)

WEIGHT: 5.6 oz (158 g)

COLOR: Pink

88044 with lithium batteries and holster. Pink.



For every pink ProTac[®] HL sold, Streamlight will donate \$3 to the Breast Cancer Research Foundation.[®]



Nylon
Holster

HL **C4 LED** With **[(STROBE)]**
Double tap switch to activate.

	HIGH	LOW
LUMENS:	750	35
CANDELA:	18,300	900
DISTANCE:	270m	60m
RUN TIME:	1h 15m	18h

Strobe runs 2.5 hours

VANTAGE[®]

The solution to firefighters' hands-free lighting needs. Attaches easily to helmets and hard hats, and rotates 360°. Fits snugly against helmet to prevent snags. Includes a bright blue tail light so you can be seen from behind even in heavy smoke. Easy to operate with gloves. Fits both traditional and modern helmets.

VANTAGE

BATTERY: (2) 3V "CR123A" lithium

SIZE: 3.26" x 1.47" x 2.56"
(8.28 x 3.73 x 6.5 cm)

WEIGHT: 5.14 oz (145.7 g)

COLOR: Black

69157 Vantage LED Tactical Helmet Light. Red.



Dual direction,
easy access
on/off switch.

470nm ultra-bright
blue tail light LED.



LUMENS:	115
CANDELA:	7,000
DISTANCE:	167m
RUN TIME:	6h



NFPA Meets requirements of NFPA 1971-8.6 (2007); 500° heat resistance test
CE Meets applicable European Community Directives

Congress created the National Fallen Firefighters Foundation to lead a nationwide effort to honor America's fallen firefighters. Since 1992, the non-profit foundation has developed and expanded programs that fulfill that mandate. Their mission is to honor and remember America's fallen fire heroes and to provide resources to assist their survivors in rebuilding their lives. For more information, visit www.firehero.org.

NANO LIGHT®

This tiny, weatherproof light has a non-rotating snap hook for easy one-handed operation when attached to a keychain.

NANO

BATTERY: (4) alkaline button cell

SIZE: 1.47" x .51" x .43"
(3.73 x 1.3 x 1.09 cm)

WEIGHT: .36 oz (10 g)

COLOR: Black, Blue, Pink, Red, Orange or Coyote

For each color Nano Light sale, we donate \$1 to the organization associated with that light. Look below for information about each cause.

LUMENS: 10
RUN TIME: 8h



73001	Black with White LED
73002	COPS/Blue with White LED
73003	BCRF/Pink with White LED
73005	NFFF/Red with White LED
73006	BADF/Orange with White LED
73007	TMF/Coyote with White LED
73008	ADA/Red with White LED
61205	4 pack coin cell Nano Light Batteries

STREAMLIGHT CARES:

THE PRODUCT THAT ALLOWS YOU TO **SUPPORT CAUSES THAT MATTER.**



By purchasing this product you are helping to make a difference in the rebuilding of the lives of surviving families and affected co-workers of law enforcement officers killed in the line of duty. In addition to rebuilding lives, C.O.P.S. provides training to law enforcement agencies on survivor victimization issues and educates the public of the need to support the law enforcement profession and its survivors. For more information, visit www.nationalcops.org.



The Breast Cancer Research Foundation® is an independent 501 (c) (3) not-for-profit organization whose mission is to achieve prevention and a cure for breast cancer in our lifetime by providing critical funding for innovative clinical and genetic research at leading medical centers worldwide, and increasing public awareness about good breast health. For more information, visit www.bcrfcure.org.



Congress created the National Fallen Firefighters Foundation to lead a nationwide effort to honor America's fallen firefighters. Since 1992, the non-profit foundation has developed and expanded programs that fulfill that mandate. Their mission is to honor and remember America's fallen fire heroes and to provide resources to assist their survivors in rebuilding their lives. For more information, visit www.firehero.org.



The Buckmasters American Deer Foundation, (BADF), founded by Jackie Bushman was born from the desire to give back to the hunting community, starting with programs such as Project Venison and Hunters of Tomorrow. Buckmasters Chapters from across the country continue to give to those in need. For more information, visit www.buckmasters.com/resources/badf.aspx.



The Travis Manion Foundation honors and assists our nation's veterans, first responders, and the families of fallen heroes through various grants, scholarships, races, and The annual 9/11 Heroes Run. For more information, visit www.travismanion.org.



By purchasing this product, you are helping to make a difference in lives of those affected by diabetes. The mission of The American Diabetes Association is to prevent and cure diabetes and improve the lives of all people affected by diabetes. To learn more, please visit www.diabetes.org.

FOR EVERY CUSTOM NANO LIGHT® SOLD, STREAMLIGHT WILL DONATE \$1 TO THEIR RESPECTIVE ORGANIZATION.



**PROFESSIONAL-GRADE
ILLUMINATION TOOLS**



Streamlight, Inc.
30 Eagleville Road
Eagleville, PA U.S.A 19403-3996

www.streamlight.com // www.streamlightgear.com
(800) 523-7488 Toll-Free
(800) 220-7007 Fax
(610) 631-0600
(610) 631-0712 Fax



NFPA®



ISA
NATIONAL SUPPLY ASSOCIATION
Leading Supply Partners

