


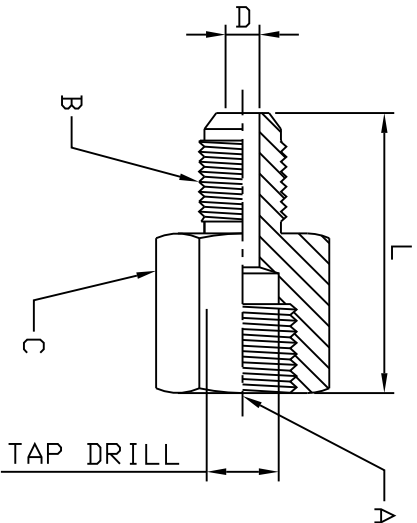

PART NUMBER	TUBE OD	B UN/UNF-2A	A NPTF	L	C	D	TAP DRILL	Working Pressure
28957	1/4	7/16-20	1/8-27	1.19	0.56	0.17	0.36	3250 psi
28958	1/4	7/16-20	1/4-18	1.40	0.75	0.17	0.36	3250 psi
28959	3/8	9/16-18	1/4-18	1.40	0.75	0.30	0.48	32580 psi
28960	3/8	9/16-18	3/8-18	1.40	0.88	0.30	0.48	3250 psi
28961	1/2	3/4-16	3/8-18	1.56	0.88	0.39	0.65	3250 psi
28962	1/2	3/4-16	1/2-14	1.66	1.13	0.39	0.65	3250 psi
28963	5/8	7/8-14	1/2-14	1.87	1.13	0.48	0.77	3250 psi
28964	3/4	1-1/16-12	3/4-14	2.06	1.38	0.61	0.94	2600 psi

ASTM: B-16

TEMP RANGE: -65 ° - 250 ° F

"This drawing contains proprietary and confidential information of Midland Metal Mfg., Co. and shall not be reproduced, copied, loaned, or submitted to outside parties for examination without our consent"

4			TOLERANCES ARE: DECIMALS: .X± 0.03 .XX± 0.01 .XXX± 0.005 ANGLES:± 1 ° FRACTIONS ± 1/8			Date:	10/21/03	UNIT:	INCH	Material:	CA360 BRASS
3						Drawn:	Rita Sue	Scale:			Part Title:
2						Checked:					MJIC * FNPT
1			A			Approved:		PROJECT		STRAIGHT ADAPTER	
NO.	PCA	Date	Revision			MIDLAND METAL MFG. CO. KANSAS CITY, MO				DWG. NO.	